


SpeedTouch PRO


Configurando como router PPPoA

1 - Acesse a página de configuração do modem, para acessar digite na barra de endereço, digite: **http://10.0.0.138**

Usuário: **keycode&senh@01** Senha: "**Deixa em branco**"

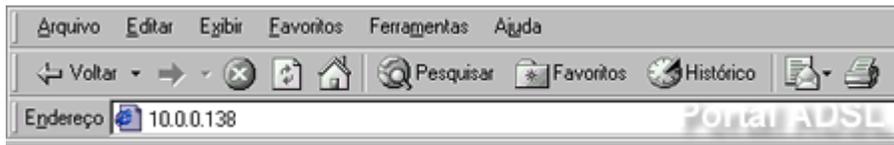

2 - Delete as configurações que estiverem em: **Bridge, PPTP, CIP, PPP e Phonebook**. Após deletar clique em **Save all**.

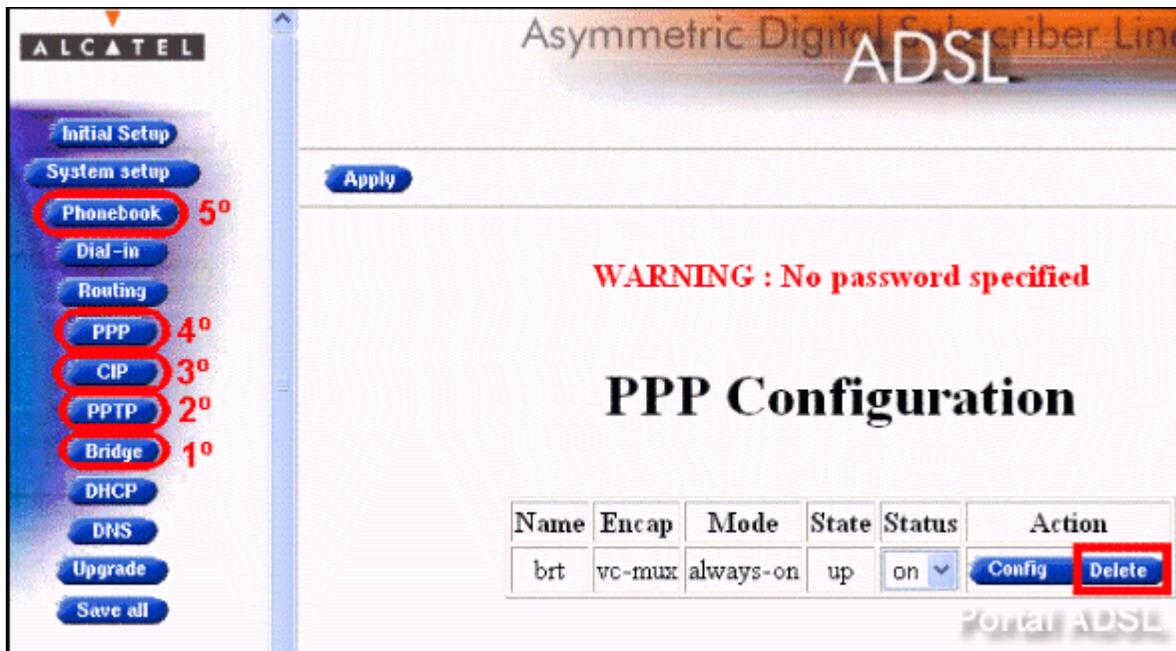

3 - Em **Phonebook**, **Name** digite um nome para configuração, **VPI** e **VCI** (fornecidos pela operadora), **Type** selecione: **ppp**.

Apply

WARNING : No password specified

Phonebook

Name	VPI	VCI	Type	Usage	Action
brt	:	32	ppp	configured	-

Use input fields below to add a new entry

Nome qualquer	0	35	ppp	-	Add
---------------	---	----	-----	---	------------

Portal ADSL

4 - Clique em **PPP**, **Add**, **Apply** e **Save all** para gravar configuração.

The screenshot shows a web-based configuration interface for PPP. On the left is a vertical menu with buttons for 'Initial Setup', 'System setup', 'Phonebook', 'Dial-in', 'Routing', 'PPP', 'CIP', 'PPTP', 'Bridge', 'DHCP', 'DNS', 'Upgrade', 'Save all', and 'Help'. The 'PPP' button is circled in red and labeled '1°'. The 'Save all' button is also circled in red and labeled '4°'. At the top of the main content area, an 'Apply' button is circled in red and labeled '3°'. The main content area is titled 'PPP Configuration' and contains a table with the following data:

Name	VPI	VCI	Type	Usage	Action
Nome qualquer	0	35	ppp	configured	Add

The 'Add' button in the table is circled in red and labeled '2°'. The text 'Portal ADSL' is visible in the bottom right corner of the interface.

5 - Clique em **Config.**

Asymmetric Digital Subscriber Line
ADSL

Apply Help

WARNING : No password specified

PPP Configuration

Name	Encap	Mode	State	Status	Action
brt	vc-mux	always-on	Down	-	Config Delete

Portal ADSL

6 - Preencher **User:** usuário@provedor.com.br, **Password:** senha. Depois, mude o Mode para **Always-on** clique em **Apply, Save all.**

Asymmetric Digital Subscriber Line
ADSL

Apply Help

WARNING : No password specified

Authentication

User : jsmonteiro@terra.com.br
Password : [REDACTED]

Routing (cannot be changed when link is up)

Connection Sharing: Everybody
Destination networks: All networks
Specific network: [REDACTED]
Address translation (NAT-PAT)
Primary DNS: none Secondary DNS: none

Options (cannot be changed when link is up)

Local IP: none Remote IP: none
Mode: always-on Idle time limit: [REDACTED]
 LCP echo (currently enabled)
 PAP (currently disabled)
 ACCOMP (currently enabled)

Portal ADSL

7 - Modem já foi configurado, em **PPP** mude o "State" de "Off" para "On", depois Atualize com "F5" no seu teclado e verifco o "State" **"UP"**

Asymmetric Digital Subscriber Line
ADSL

Apply Help

WARNING : No password specified

PPP Configuration

Name	Encap	Mode	State	Status	Action
brt	vc-mux	always-on	up	on	Config Delete

Portal ADSL

8 - Parabéns! Seu modem está configurado para acessar a Internet.