

**deco**<sup>™</sup> | Deco Voice X20  
AX1800 Mesh Wi-Fi 6 System with built-in Smart Speaker

# User Guide



# Contents

About This Guide .....	1	Shortcut .....	19
Appearance .....	2	Automation .....	21
Set Up Your Deco .....	3	HomeShield .....	25
Add More Decos .....	7	Upgrade Your Deco .....	26
Enable Alexa Voice Service .....	8	Wi-Fi Settings .....	27
Enable Bluetooth Connection .....	9	Blacklist .....	28
Dashboard .....	10	WPS .....	29
Check Deco Status .....	11	Weekly/Monthly Reports .....	30
Set Main Deco .....	12	Managers .....	31
Manage Connected Devices .....	13	Advanced Features .....	33
Sort Devices By Locations .....	14	FAQ .....	38
Create New Networks .....	15		
Remove/Reboot Deco .....	17		
Add Smart Devices .....	18		

# About This Guide

This guide provides a brief introduction to Deco Mesh Wi-Fi 6 System with Built-in Smart Speaker and the Deco app, as well as regulatory information. Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Deco experience.

## Conventions

In this guide, the following conventions are used:

Convention	Description
Deco	Stands for Deco Whole Home Mesh Wi-Fi System/ Unit.
<u>Underline</u>	Hyperlinks are in teal and underlined. You can click to redirect to a website or a specific section.
Teal	Key information appears in teal, including management page text such as menus, items, buttons and so on.
Note:	Ignoring this type of note might result in a malfunction or damage to the device.
Tips:	Indicates important information that helps you make better use of your device.

## More Info

- Specific product information can be found on the product page at <https://www.tp-link.com>.
- A Technical Community is provided for you to discuss our products at <https://community.tp-link.com>.
- Our Technical Support contact information can be found at the [Help](#) center of the Deco app and the [Contact Technical Support](#) page at <https://www.tp-link.com/support>.

## Speed/Coverage/Device Quantity Disclaimer

Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

## MU-MIMO Disclaimer

Use of MU-MIMO requires clients to also support MU-MIMO.

## IoT Compatibility Disclaimer

IoT compatibility refers only to smart devices that can be controlled via the Deco app. Other wireless devices can still connect to Deco for normal Wi-Fi use.

## Seamless Roaming Disclaimer

Clients need to support 802.11k/v/r and may require additional set up. Performance may vary depending on the client device.

## HomeShield Disclaimer

HomeShield includes the Free Basic Plan. Fees apply for the Pro Plan. Visit [tp-link.com/homeshield](https://www.tp-link.com/homeshield) for more information.



Use your phone, tablet or computer as a remote control for Spotify. Go to [spotify.com/connect](https://spotify.com/connect) to learn how. The Spotify Software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](https://www.spotify.com/connect/third-party-licenses).

# Appearance

Each Deco has an LED above the Deco logo to indicate the wireless network status, two RJ-45 Ethernet ports, a power slot, and a Reset button. The Action button, Mute button, Volume buttons and the Alexa Attention State LED on the top are provided to better control your Deco with voice.


See the explanation below:

## Wi-Fi Signal LED:

- Yellow pulse:**  
Deco is resetting.
- Yellow solid:**  
Deco is starting up.
- Blue pulse:**  
Deco is ready for setup.
- Blue solid:**  
Deco is setting up.
- White pulse:**  
Deco is upgrading firmware.
- White solid:**  
Deco is registered and all is well.
- Red pulse:**  
Deco is disconnected from main Deco.
- Red solid:**  
Deco has an issue.



## Volume-up Button



## Volume-down Button

**Mute Button:** Disable the microphone and you can not give Alexa a command.

**Action Button:** Wake Alexa, interrupt an Alexa response, or stop an alert.

**Alexa Attention State LED:** Present the personality and current activity of Alexa via a system of colors and animations. For details, refer to [Attention system states](#).

**Reset Button:** Press for 1 second and release to reset Deco to factory default settings. The light turning pulsing yellow indicates a successful reset.

**Ethernet Ports:** For connecting Deco to your modem, the Ethernet outlet or other internet devices.

**Power Slot:** For connecting Deco to the power socket via the provided power adapter.

# Set Up Your Deco

The intuitive Deco app guides you through an easy setup process that gets each unit up and running and all your devices connected and online. Follow the steps below to set up your Deco Mesh Wi-Fi 6 System with Built-in Smart Speaker.

## 1. Download and install the Deco app

Scan the QR code below or go to Google Play or Apple App Store to download the Deco app. Install the app on your Android or iOS smartphone or tablet.




or



## 2. Log in or sign up with TP-Link ID


Open the app. Use your TP-Link ID to log in. If you don't have a TP-Link ID, sign up first.

**Note:** If you forgot your login password, tap [Forgot Password?](#). The Deco app will guide you through the rest.

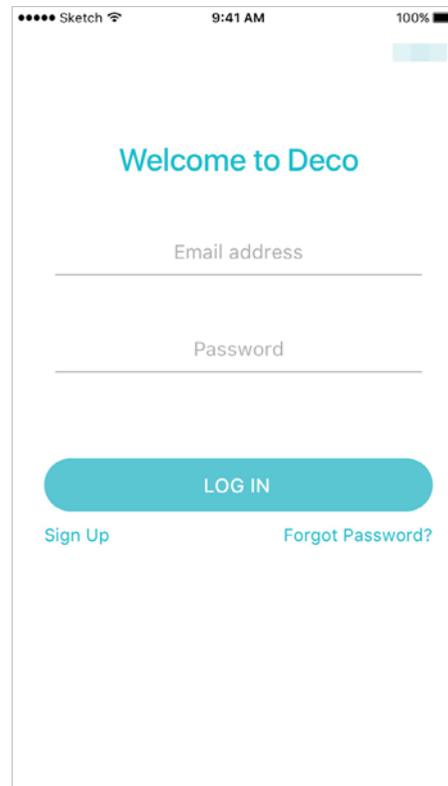

## 3. Identify your Deco


Choose your Deco model.

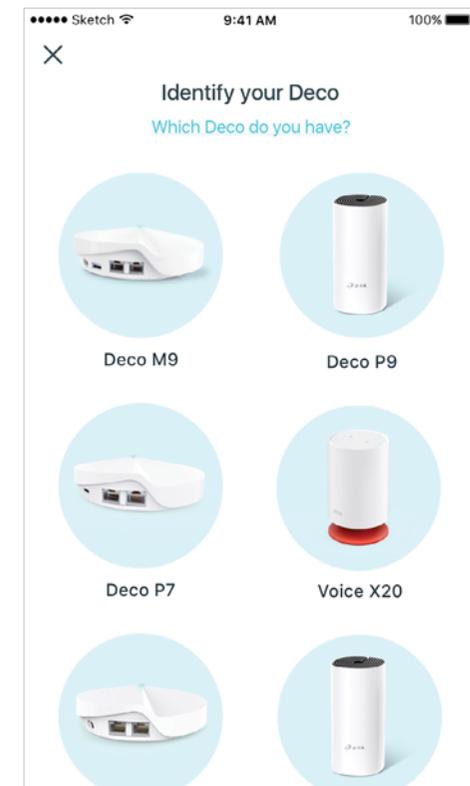

#### 4. Connect Deco to your modem


Power off your modem. Connect your Deco to the modem and power them both on.

If you don't have a modem, connect the Ethernet outlet directly to your Deco.

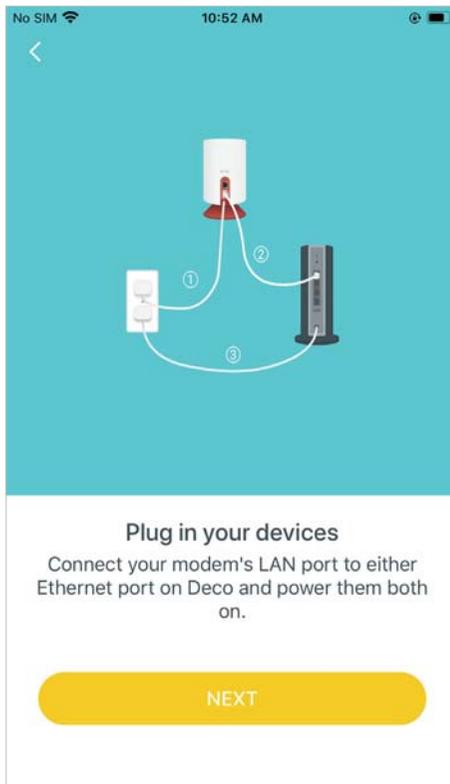


#### 5. Connect to the Deco's Wi-Fi

Wait until the Wi-Fi Signal LED pulses blue, then connect to the Deco's Wi-Fi using the default SSID printed on the product label.

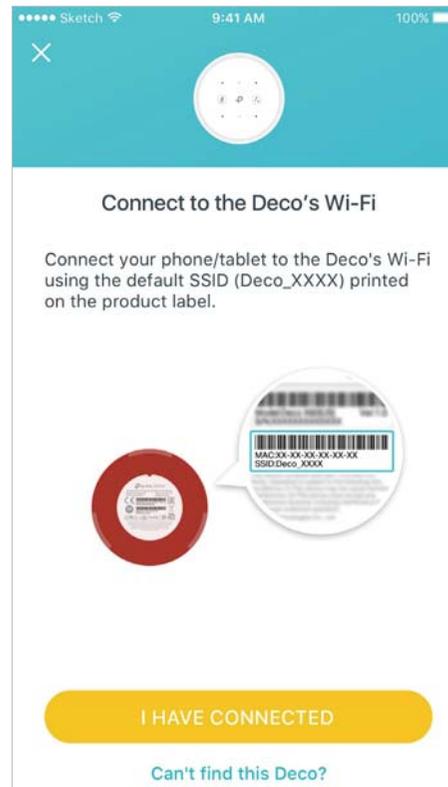

#### 6. Select a location

Select a location for this Deco. If its location is not listed, you can create a new one by choosing **Custom**. This will be the name of your Deco unit.

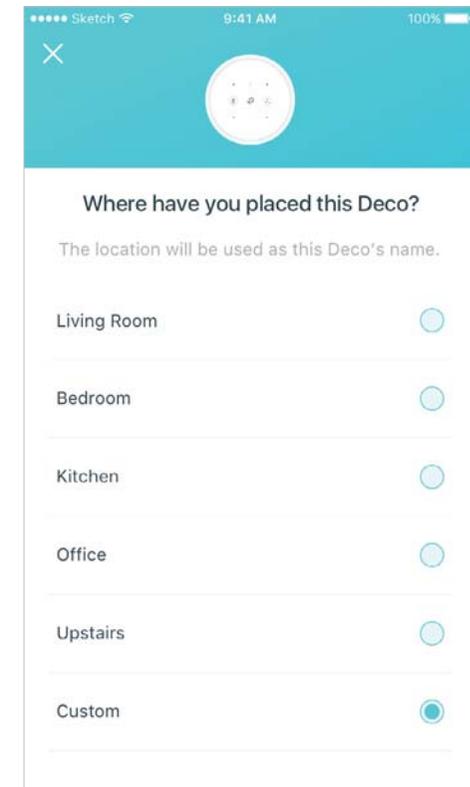

## 7. Create your Wi-Fi network

Set a network name and a password. These will be the name and password you use to connect your devices to Wi-Fi.

**Note:** If this page does not appear, follow app instructions to select your internet connection type. If you are not sure, contact your internet service provider.

No SIM 10:16 AM

×

### Create your Wi-Fi Network

This will be the name and password you'll use to access your network. Your password must be at least 8 characters.

Network Name  
Deco Voice

Password  
12345678

It is recommended to set a password using a combination of letters, numbers and symbols.

NEXT

## 8. Connect to your Wi-Fi network

Connect your device to the Deco's new Wi-Fi.

No SIM 10:24 AM

×

### Connect to your Deco Wi-Fi

Connect your phone/tablet to the Deco's Wi-Fi to continue the setup.

Network Name  
Deco Voice

Password  
12345678

CONNECT

## 9. Enable Alexa Voice Control

Sign in with your Amazon account to enable Alexa Voice Service. If you don't have an account, follow app instructions to create one.

**Tips:** You can also refer to [Enable Alexa Voice Service](#) to enable it after the setup if needed.

No SIM 10:25 AM

Skip



amazon alexa


Hi, I'm Alexa! Ready to get started with voice control?

To get started, sign in with your Amazon account.

SIGN IN WITH AMAZON ACCOUNT


## 10. Get started with your Alexa Voice Control

Alexa is enabled. Now you can say simple voice commands to it.

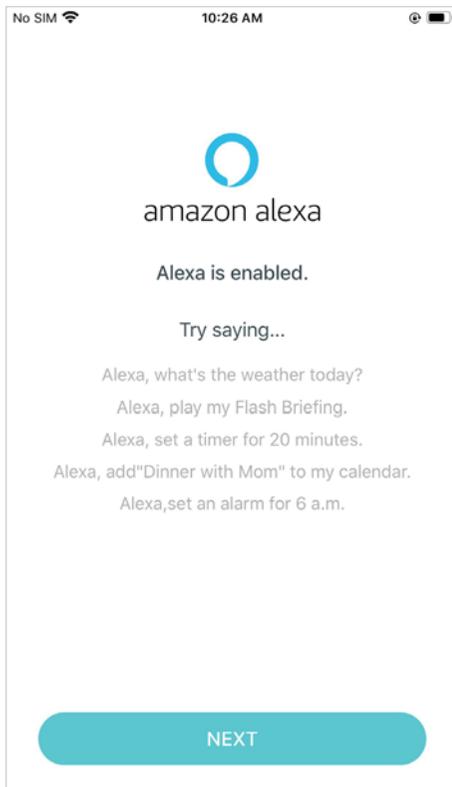

## 11. Setup complete


Your Deco network is now up. Connect all devices to the Deco network. You can also follow [Add More Decos](#) to add more Decos to expand the Wi-Fi coverage.

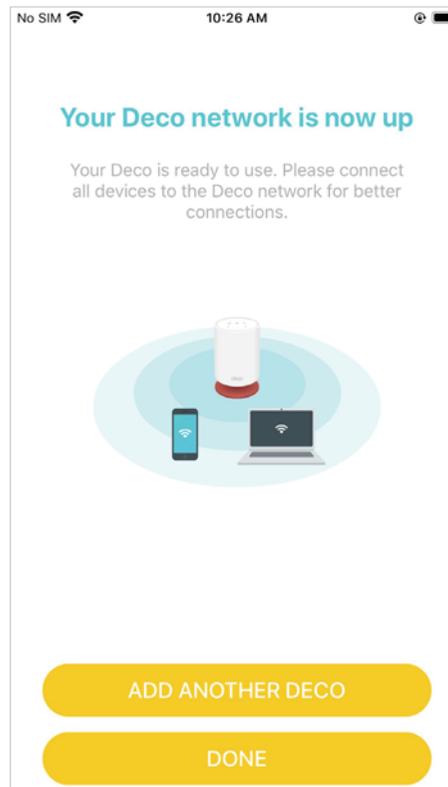


# Add More Decos

After created a Deco network, you can add more Deco units into the network to expand the Wi-Fi coverage and manage them conveniently on your Deco app.

1. In Overview, tap  > DECOS.

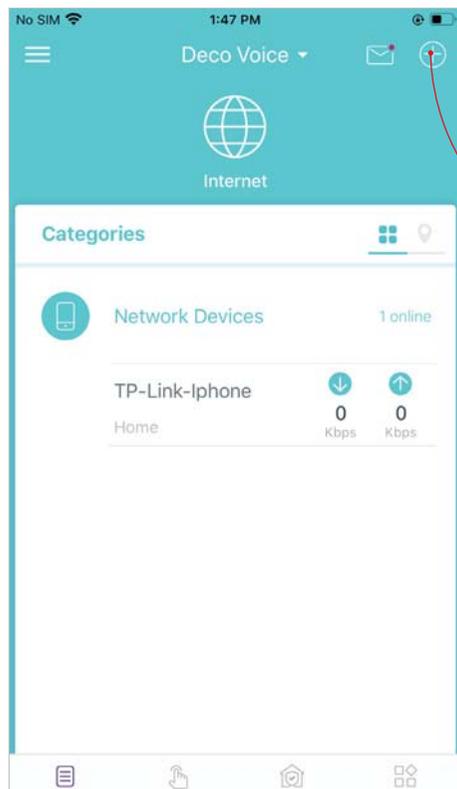

2. Select the Deco model you want to add, and follow app instructions to complete the setup.

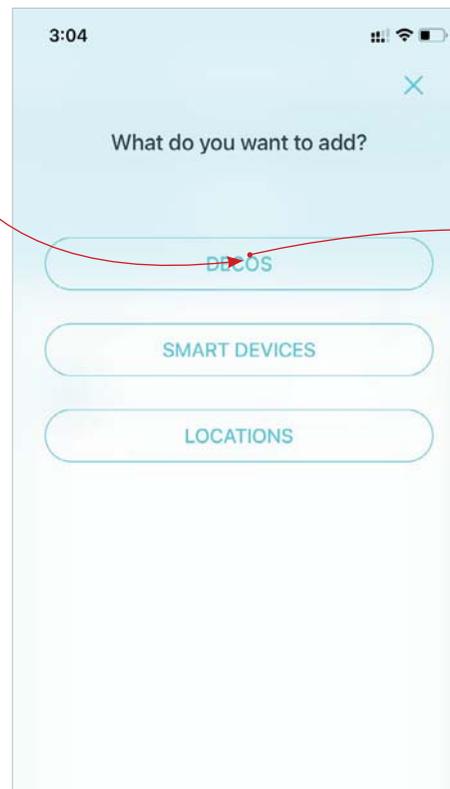

# Enable Alexa Voice Service




Enable the Alexa Voice Service and talk directly with Alexa through the microphone and speaker on your Deco. You can ask Alexa for help with everyday tasks and entertainment, like playing music, setting alarms, managing your Wi-Fi network, controlling your connected smart home devices, and access thousands of Alexa skills. After enabling the Alexa Voice Service, you can manage the sound settings, such as letting your Deco play a sound when you wake it up or when you give a command to it.

1. Swipe right on the Overview page to open the menu and tap [Alexa Voice Service](#).

2. Select a Deco unit and tap [Enable Now](#), then follow app instructions to enable Alexa Voice Service on this Deco.

3. Select the Deco unit with Alexa Voice Service enabled, then manage the sound settings as needed.

Note: You will need to sign in to your Amazon account to use Amazon Alexa with your Deco Voice.

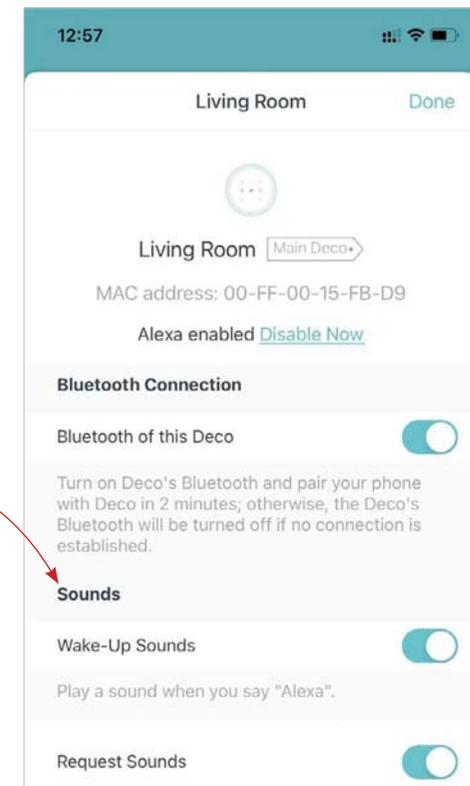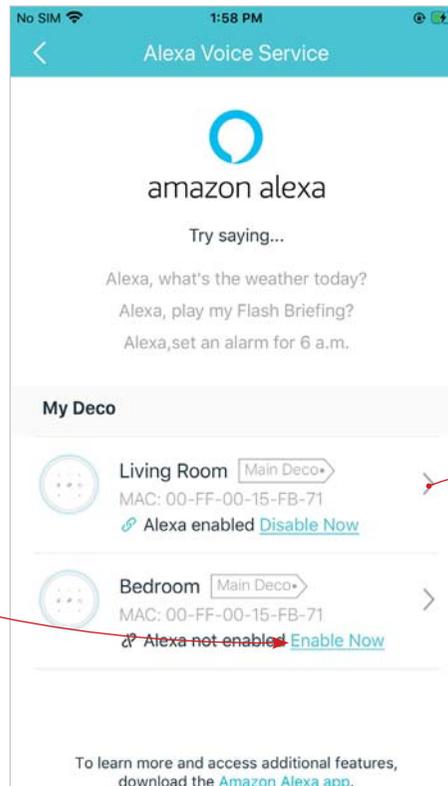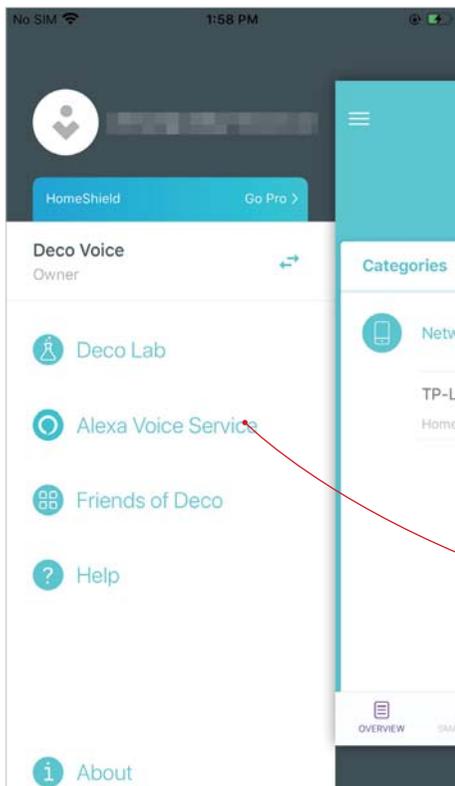




# Enable Bluetooth Connection

Enable Bluetooth connection on your Deco to enjoy more funtions. For example, connect your device to the Deco via Bluetooth to access music or media directly from your device.

1. Swipe right on the Overview page to open the menu and tap [Alexa Voice Service](#).

2. Select a Deco unit.


3. Enable the Bluetooth of this Deco.

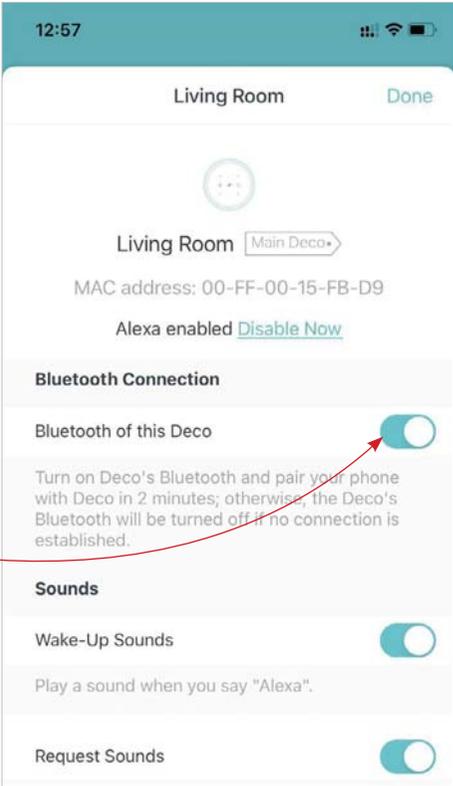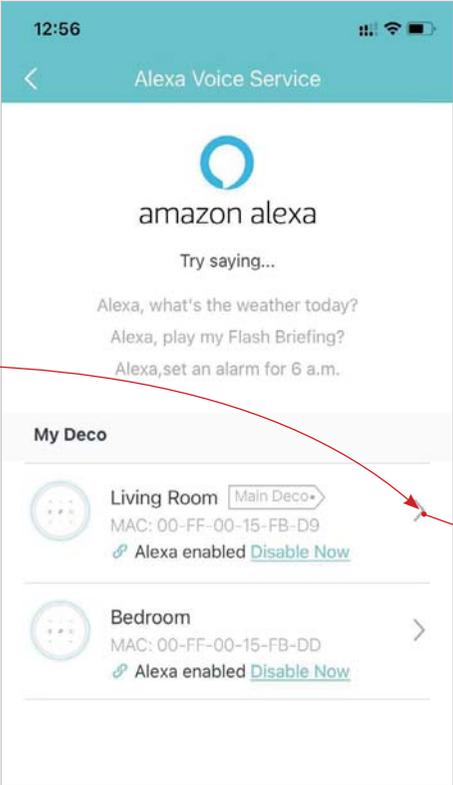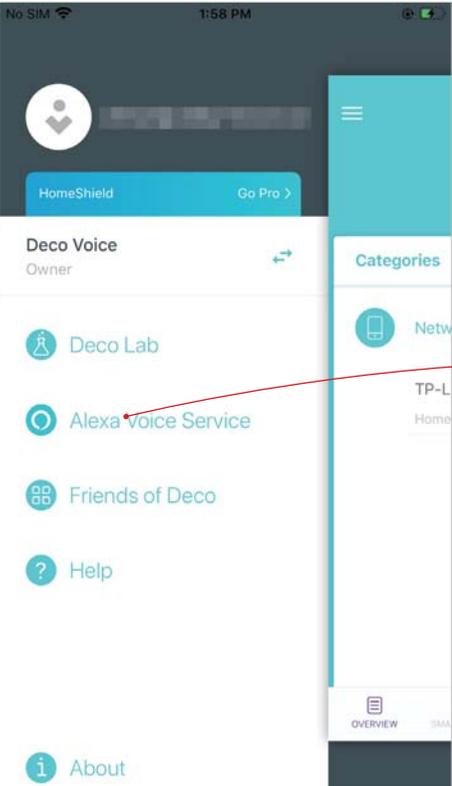


# Dashboard

After you successfully set up your Deco network, you will see the dashboard of the Deco app. Here you can get an overview of the network status, create shortcut and automation, customize your home network with enhanced security using a kit of features built to TP-Link HomeShield and set up various advanced features.


Tap  to get an overview of the network status

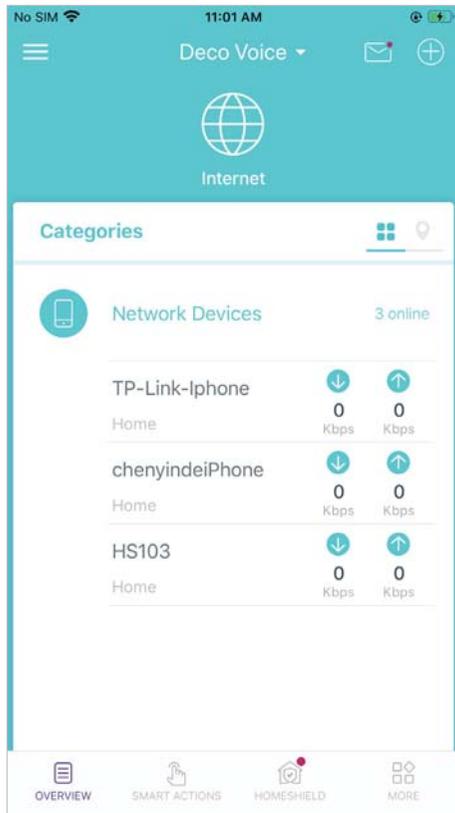


Tap  to create shortcut or set interactions between your smart devices

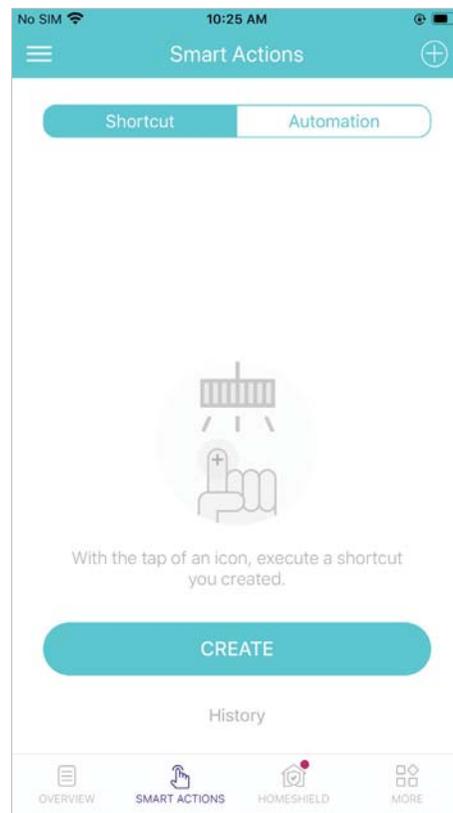

Tap  to enter the [HomeShield](#) page for enhanced security

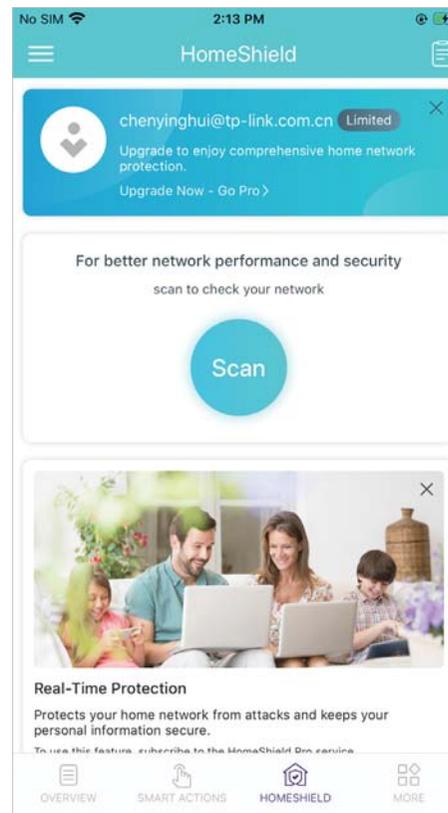





Tap  for more features

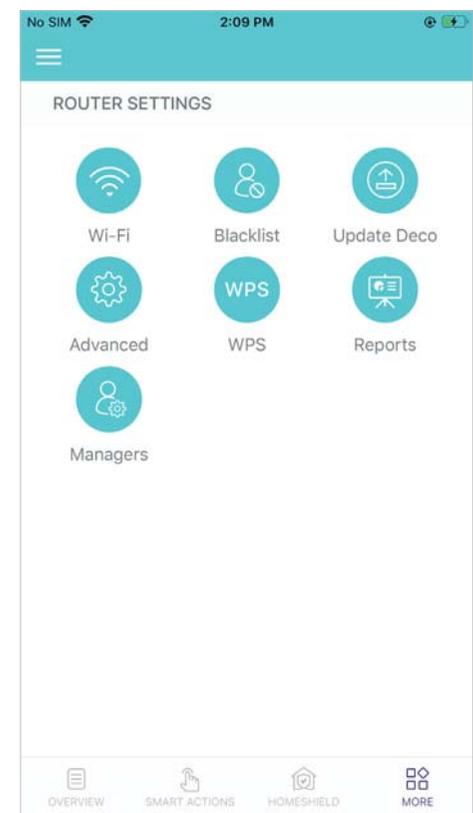

# Check Deco Status

In Overview, you can check the working status of all the Decos, check the details of each Deco unit, change the Deco location, and more.


1. Tap  to check all Decos' status
2. Tap a Deco unit to check the details
3. Tap the Deco unit to change or customize the location

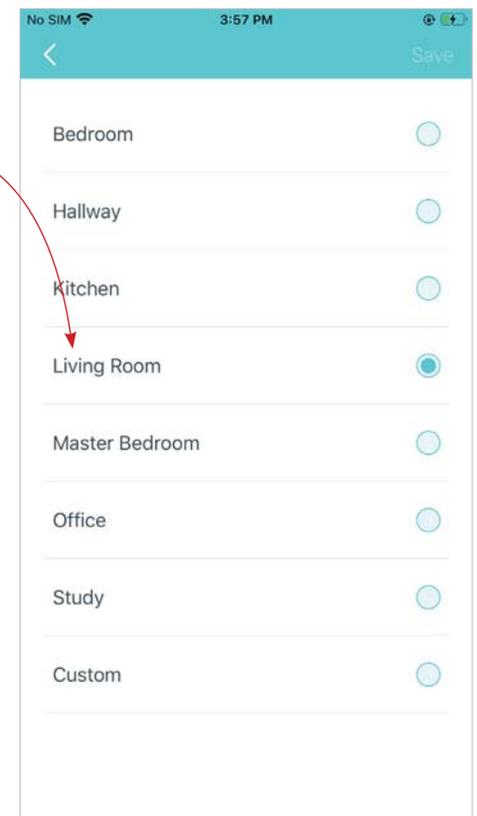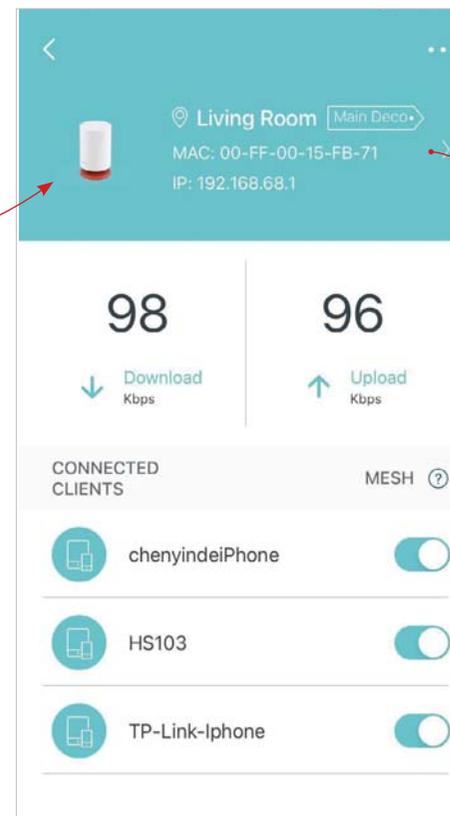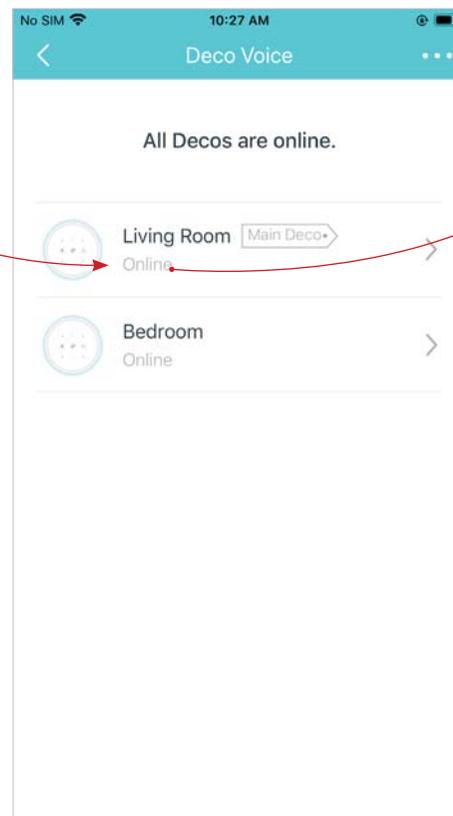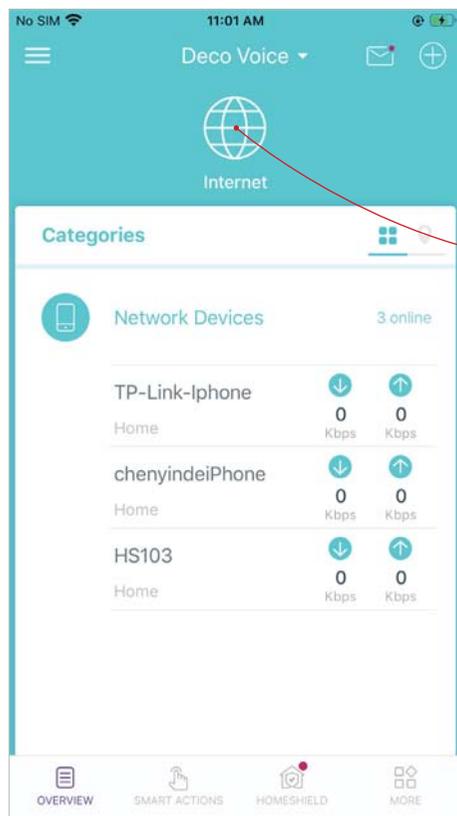


# Set Main Deco

After setup, you can replace the main Deco with any satellite Deco when needed. Follow the steps below.


1. In Overview, tap 

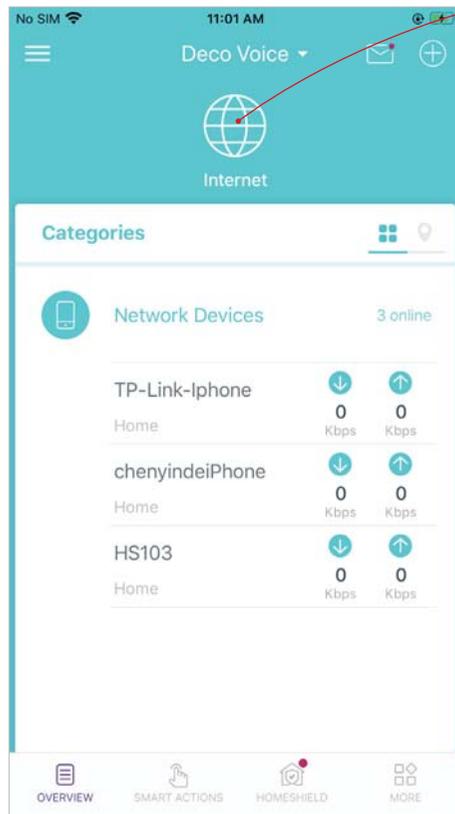

2. Tap  > [Set Main Deco](#)

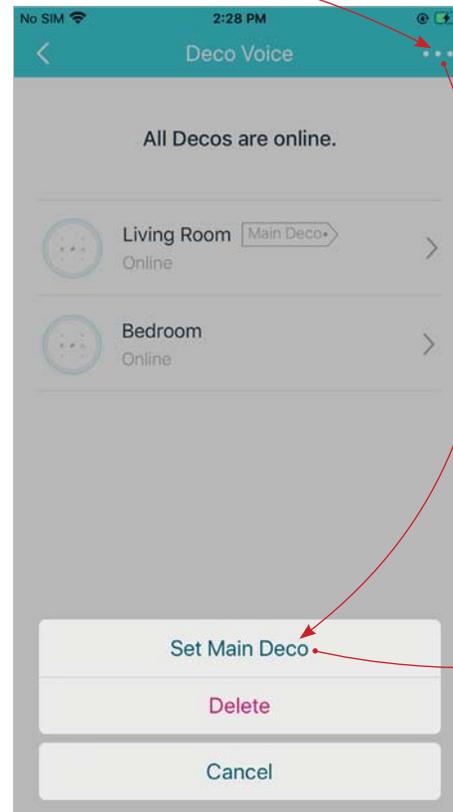

3. Choose a satellite Deco and follow app instructions to complete the settings

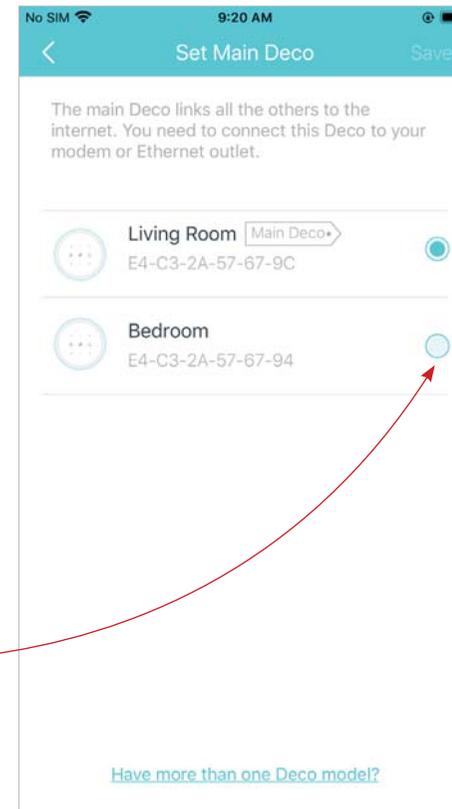





# Manage Connected Devices

In Overview, you can check the working status of all the connected devices, view the device details, and change the device settings.

1. Tap a client to check the details

2. Tap  to manage the device settings


3. Tap **Belongs to** to add a unique profile for the device and manage its online activities

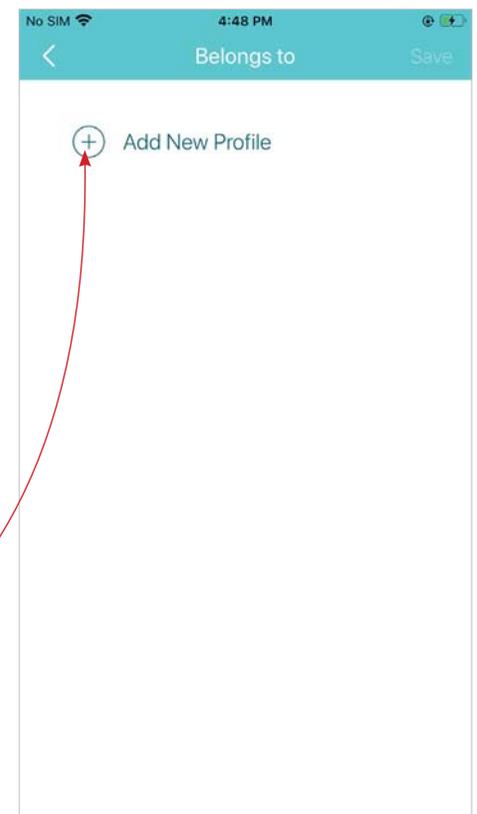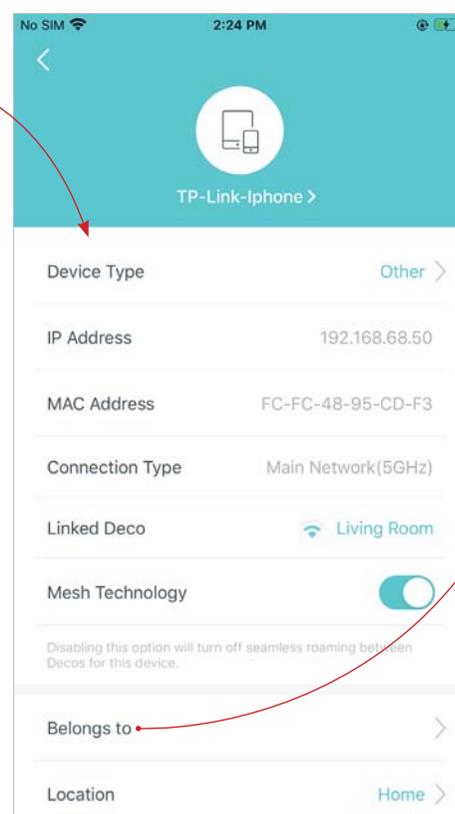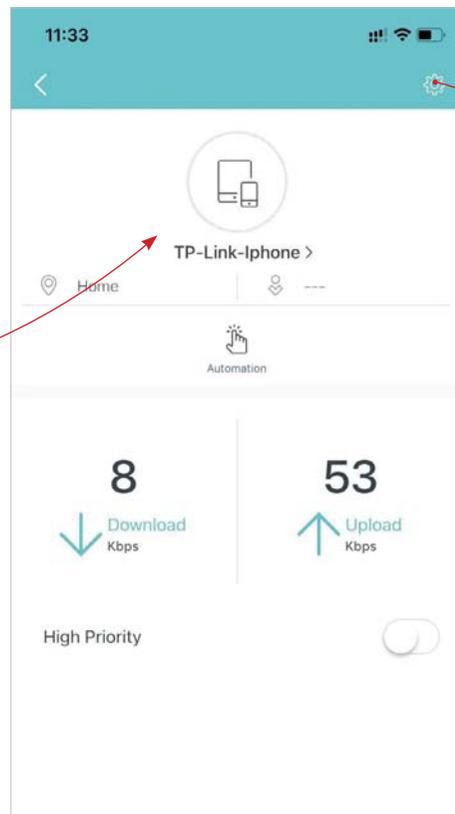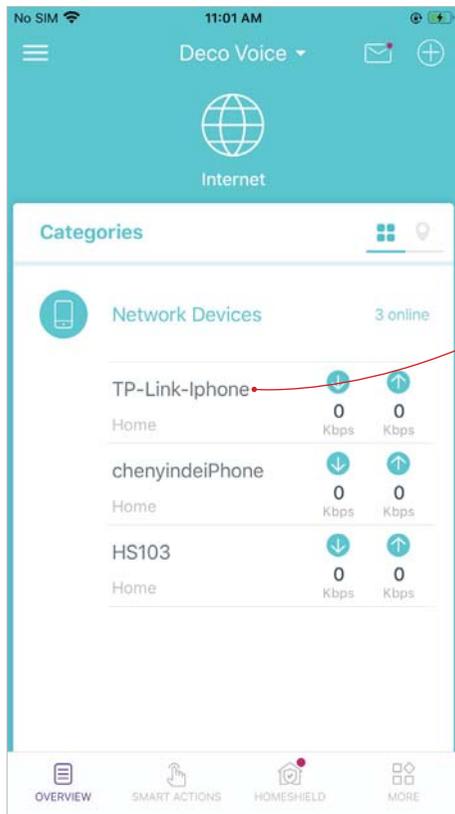

# Sort Devices By Locations

After adding your devices to the Deco network, you can sort them by customized locations so that device management can be more convenient and efficient. For example, you can add the lights, plugs, computer in your bed room to a location set as "Bed Room", so you can quickly find and manage these devices.

In Overview, tap  > LOCATIONS. Follow app instructions to sort your devices by location. Then you can manage your devices conveniently.

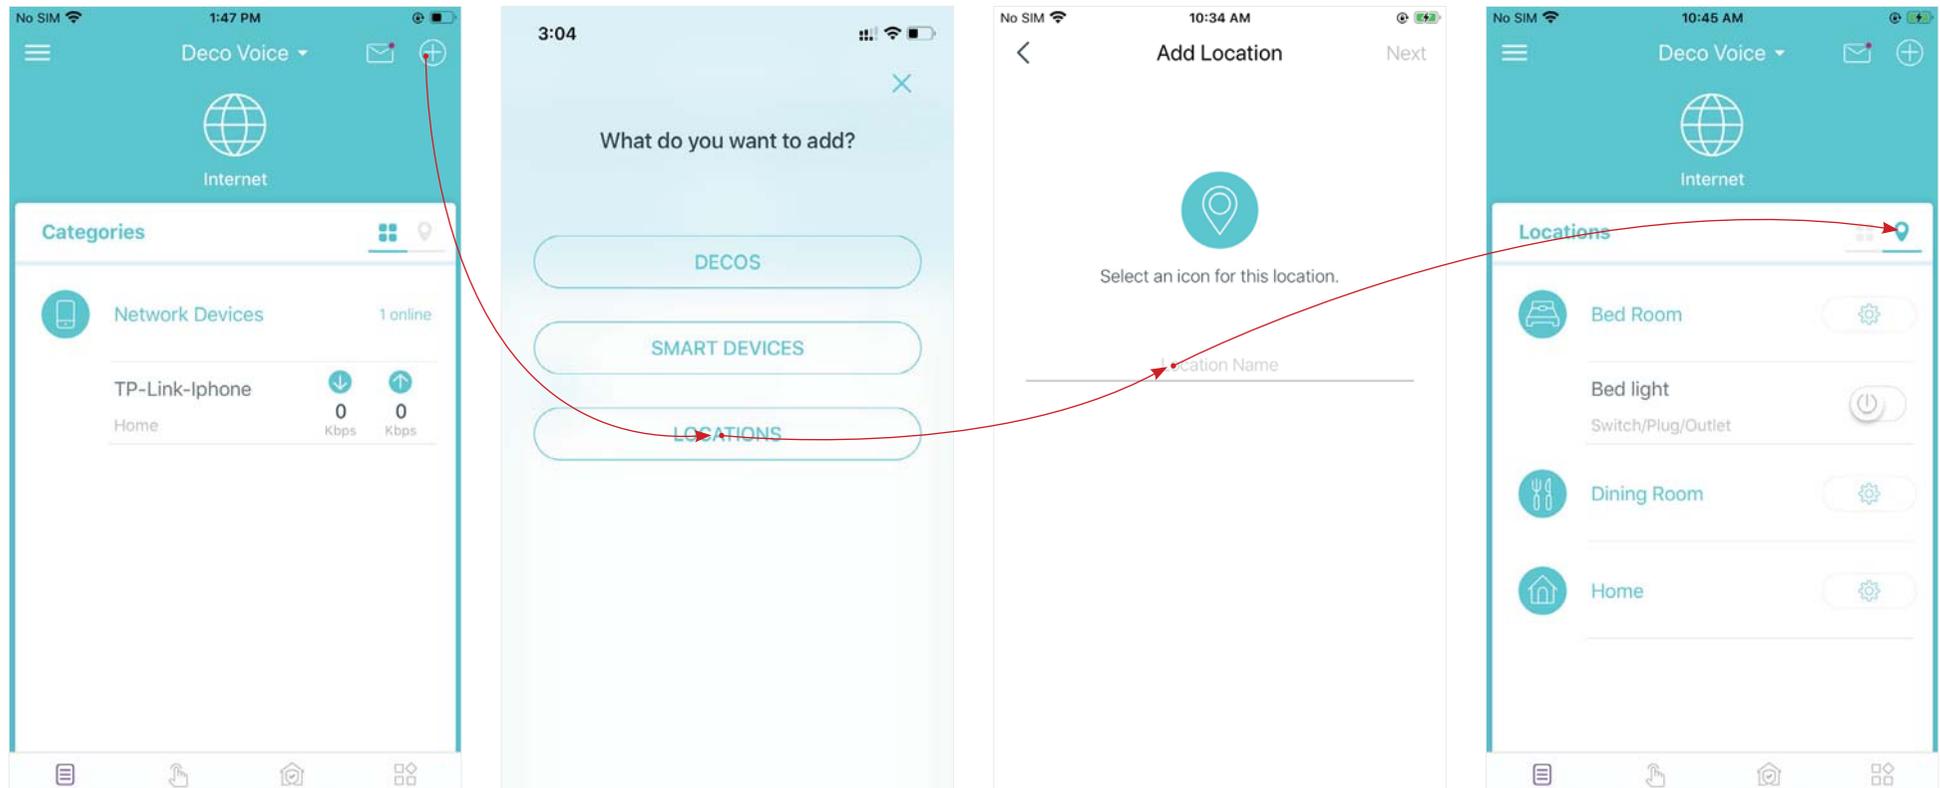


# Create New Networks

On the Deco app, you can create different Deco networks bound to your TP-Link ID and manage them conveniently from the Deco app with one account. You can also help family or friends manage their network on your Deco app. Two methods are provided as below to create a new network:

## Method 1. Create a new network from the Overview page

1. Tap  > [Create New Network](#)

2. Then follow the app instructions to complete the setup

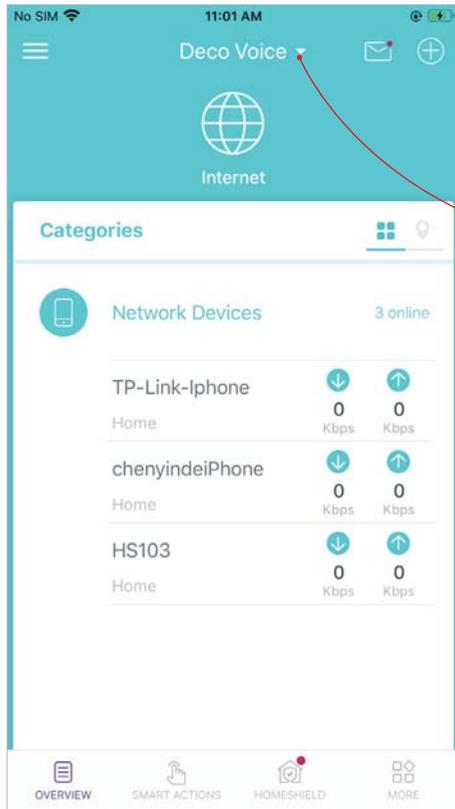


# Create New Networks


On the Deco app, you can create different Deco networks bound to your TP-Link ID, and manage them conveniently from the Deco app with one account. You can also help family or friends by managing their network on your Deco app. Two methods are provided as below to create a new network:

## Method 2. Create a new network from the Menu page


1. Tap  to open the [Menu](#)

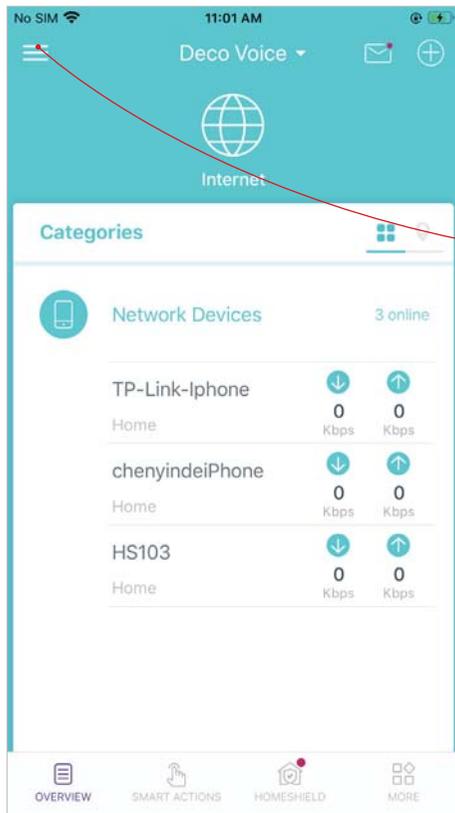

2. Tap  > [CREATE NEW NETWORK](#)

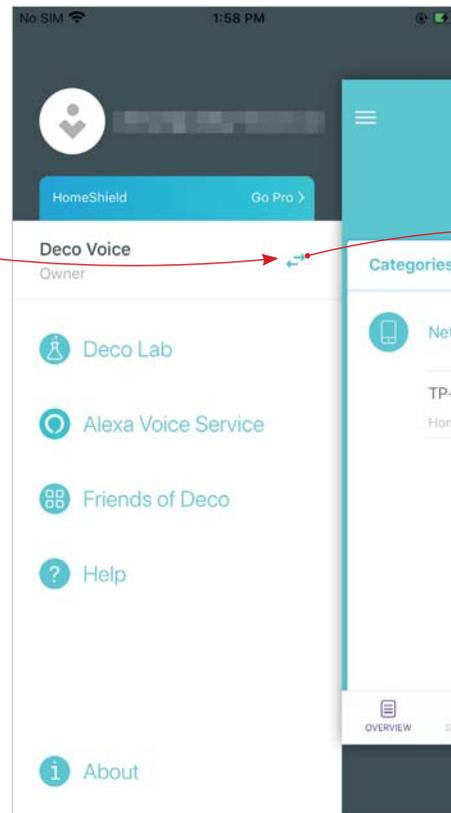

3. Follow app instruction to complete the setup

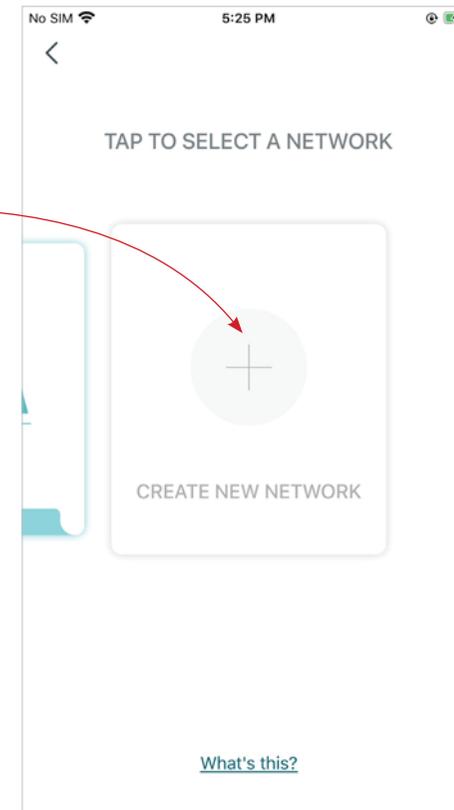

# Remove/Reboot Deco





You can remove or reboot your Deco easily on the Deco app. Follow the steps below.

1. In Overview, tap 

2. Select a Deco unit

3. Tap  to remove or reboot the Deco


Note: If the LED light of Deco does not turn pulsing blue after tapping **Remove**, press the Reset button on the Deco for 1 second and release to reset it.

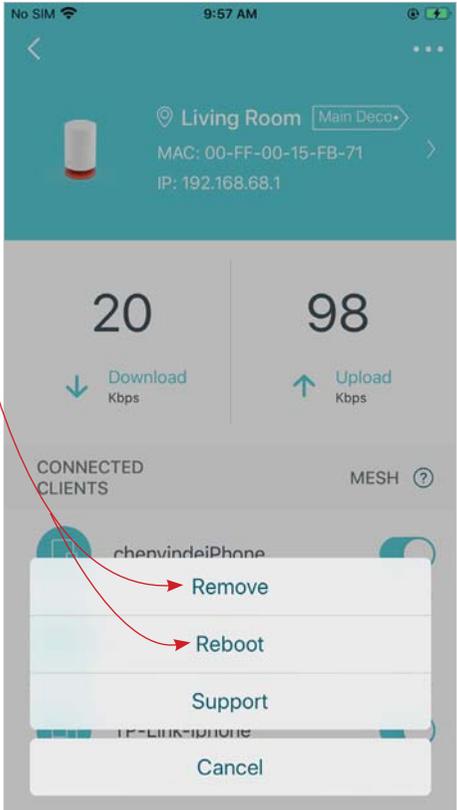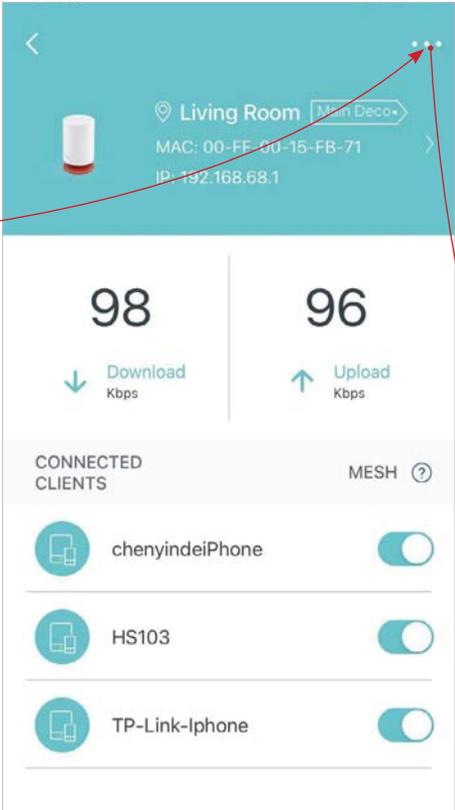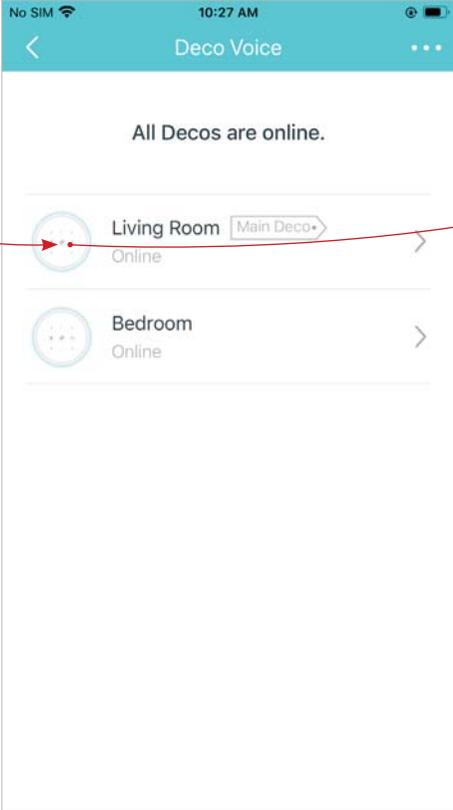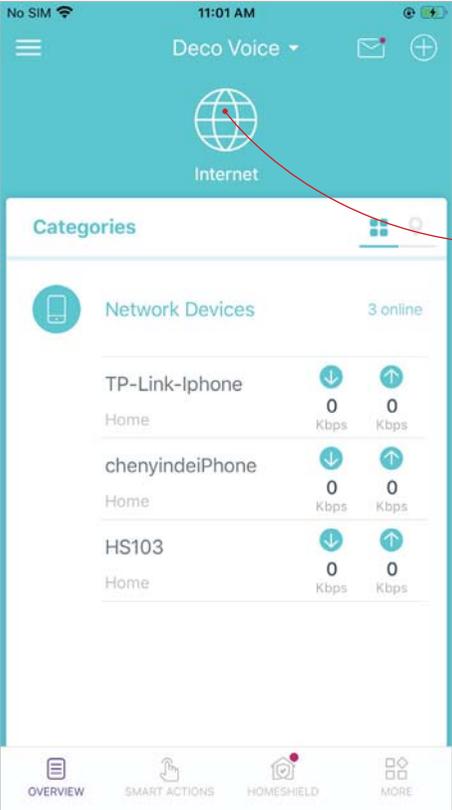

# Add Smart Devices

After created a Deco network, you can add your smart home devices to the network and manage them conveniently on your Deco app. You can also add smart home devices to create shortcuts or automations.

In Overview, tap  > SMART DEVICES. Follow app instructions to add your smart devices to the network.

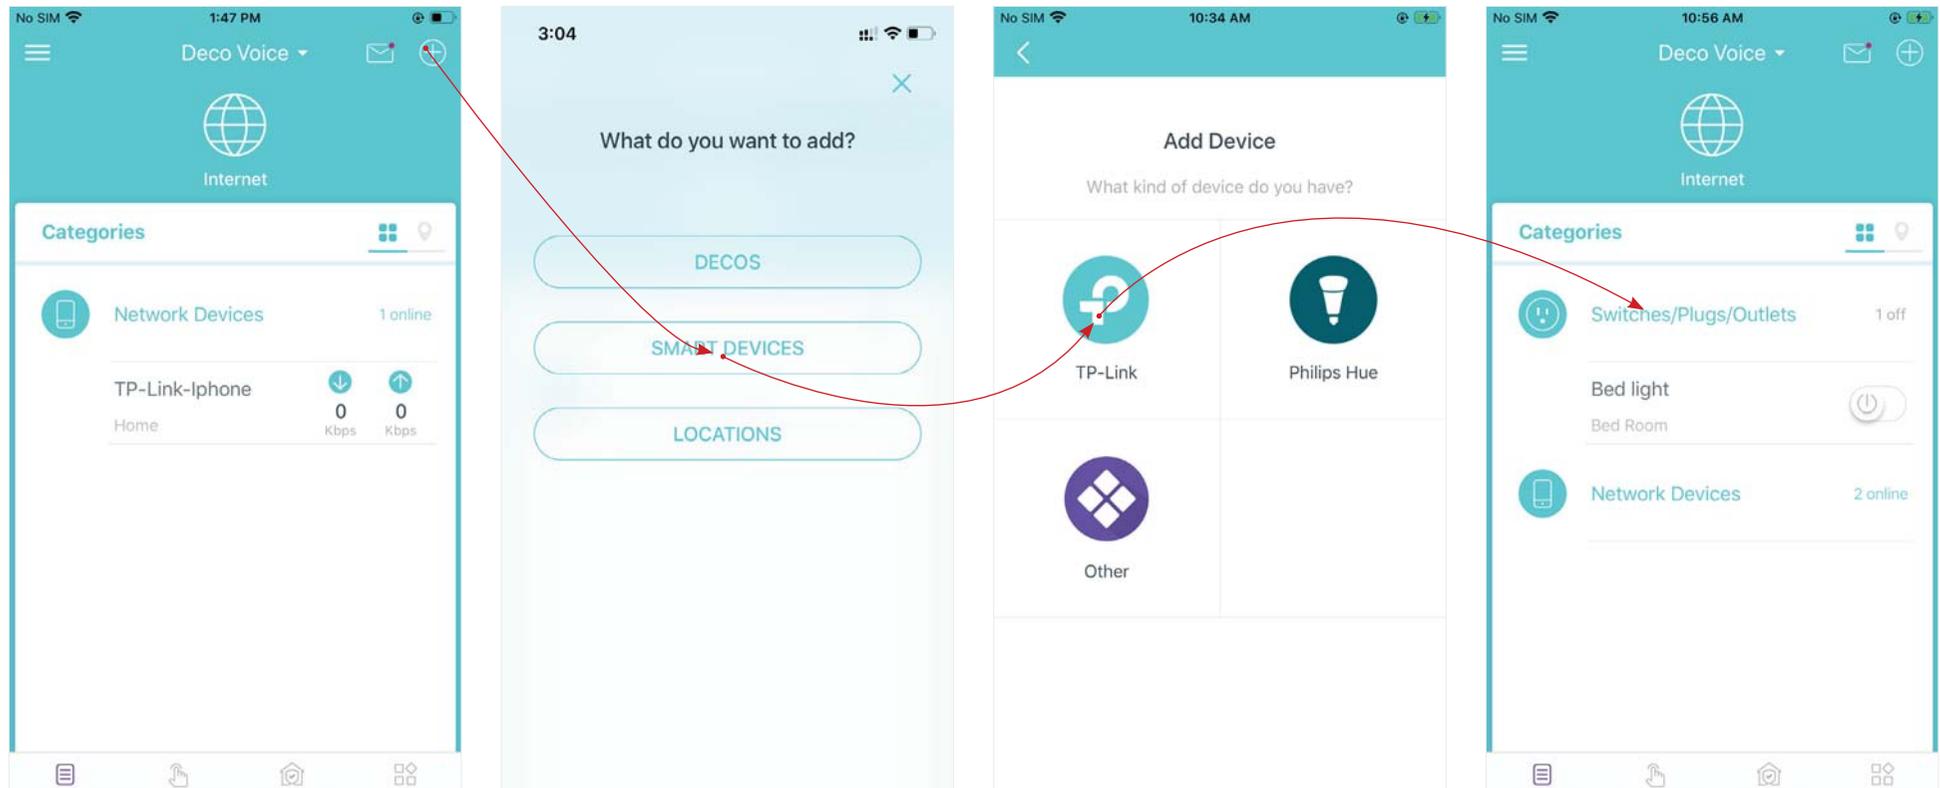


# Shortcut

Shortcut lets you achieve an action with a simple tap. For example, if you want to power on your living room smart plug at one tap, follow the steps belows.

■ Note: If you want to create shortcuts for your smart devices, follow [Add Smart Devices](#) to add the smart devices to the Deco network first.


1. Tap  > **Shortcut** > **CREATE**

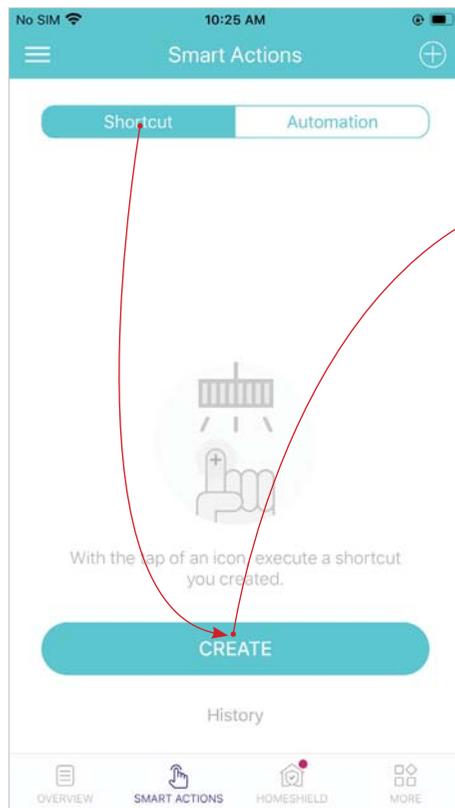


2. Add actions




3. Choose an action type

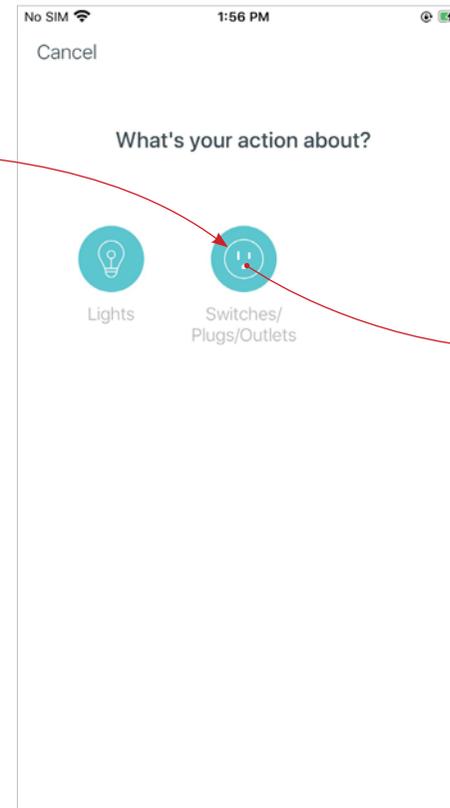


4. Choose the action device

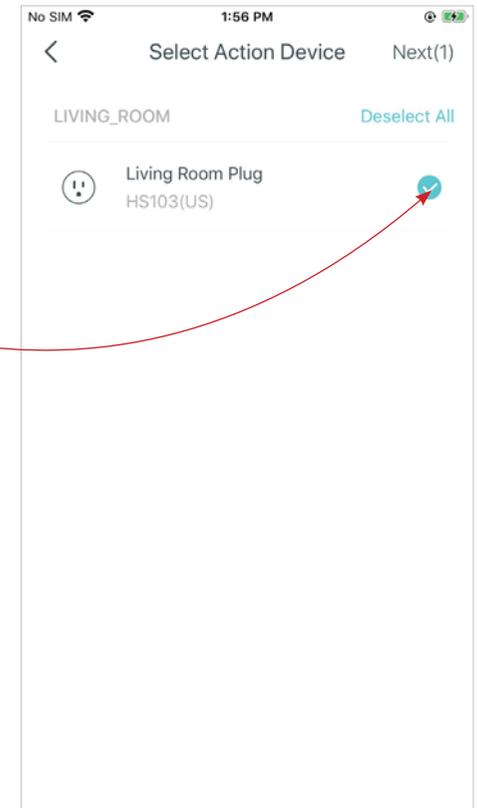


5. Set actions when executed

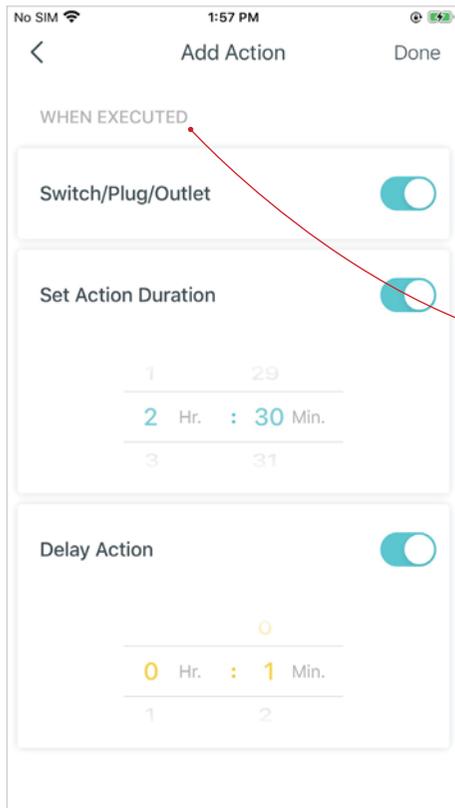

6. Select an icon and set a name for the shortcut to finish the settings

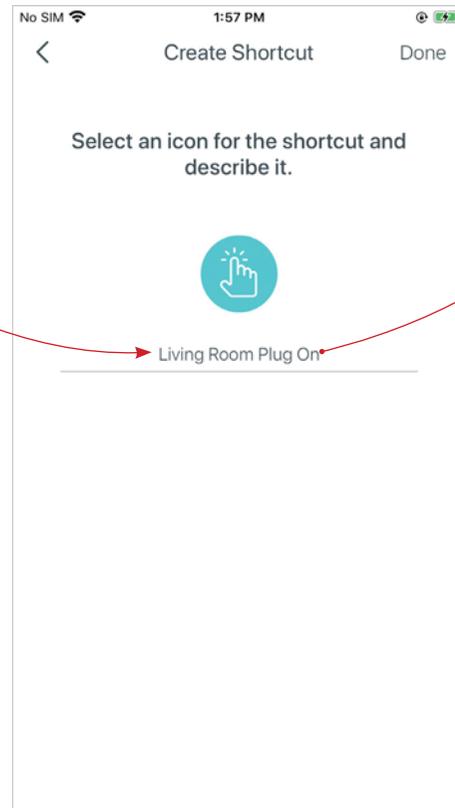

7. Tap the icon to execute the shortcut

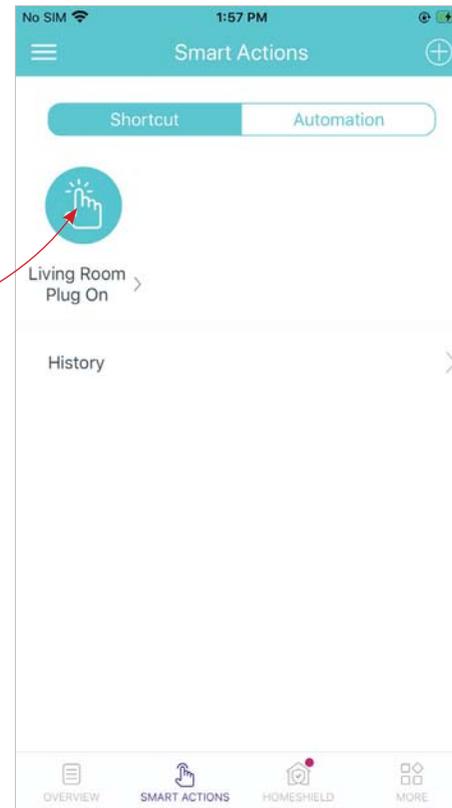

# Automation

Automation allows you to set interactions between your devices by adding triggers and actions. For example, when you get home and your smartphone is connected to the Deco network (which is a trigger), the smart plug in the living room automatically turns on (which is an action). Then the kettle plugged into the smart plug starts to boil water.

Take this example to show the setup steps as below. Follow the steps to create an automation.





**Note:** If you want to create automations for your smart devices, follow [Add Smart Devices](#) to add the devices to the Deco network first.

1. Tap  > [Automation](#) > [CREATE](#)

2. Set when the automation take effects

3. Add triggers


4. Select the trigger type

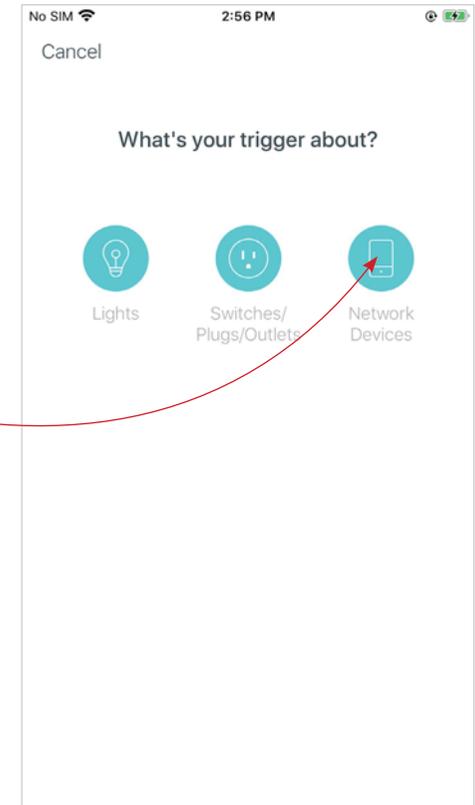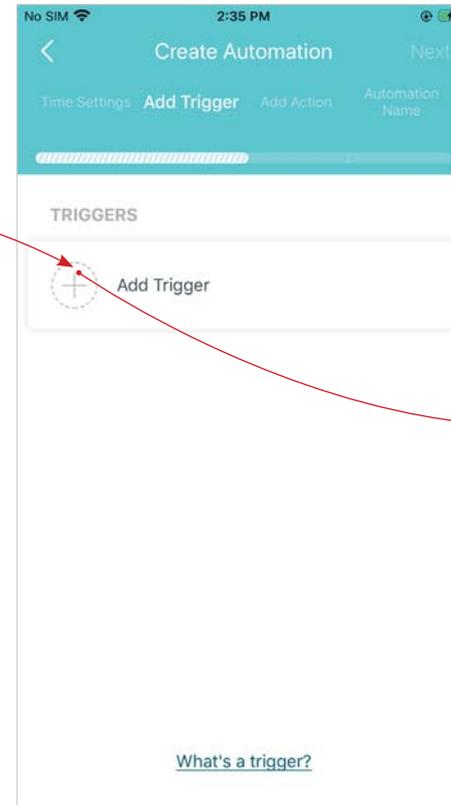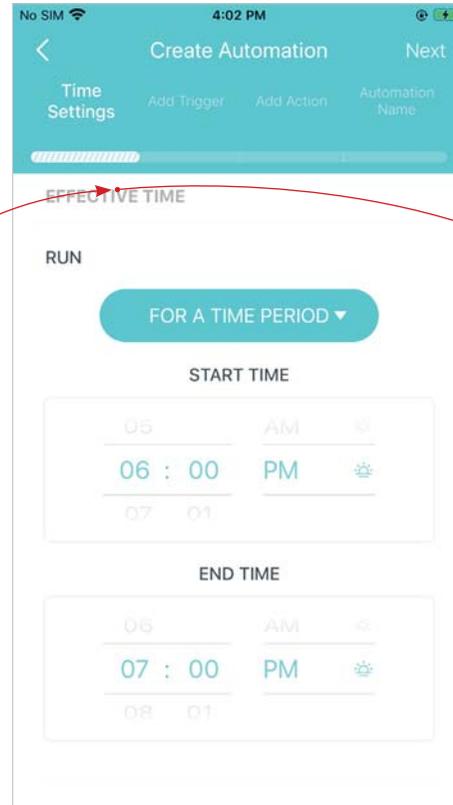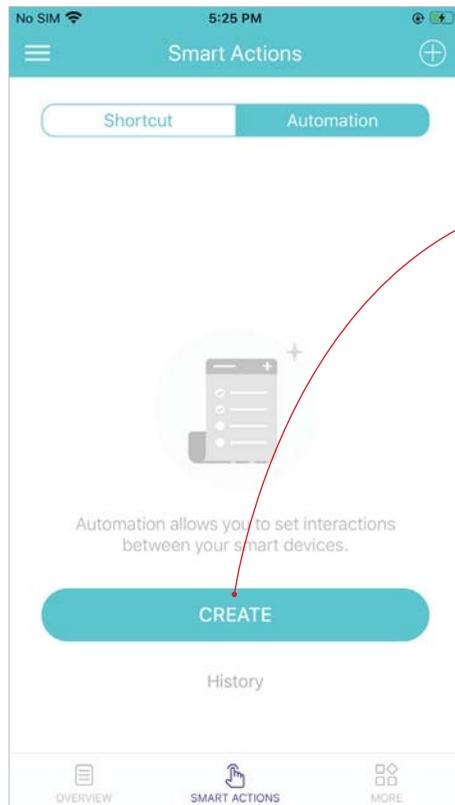


5. Select the trigger device and follow app instructions to set the trigger details

🔗 Tips: Before selecting the trigger and action devices, follow [Add Smart Devices](#) to add them into the Deco network first.


6. Add an action

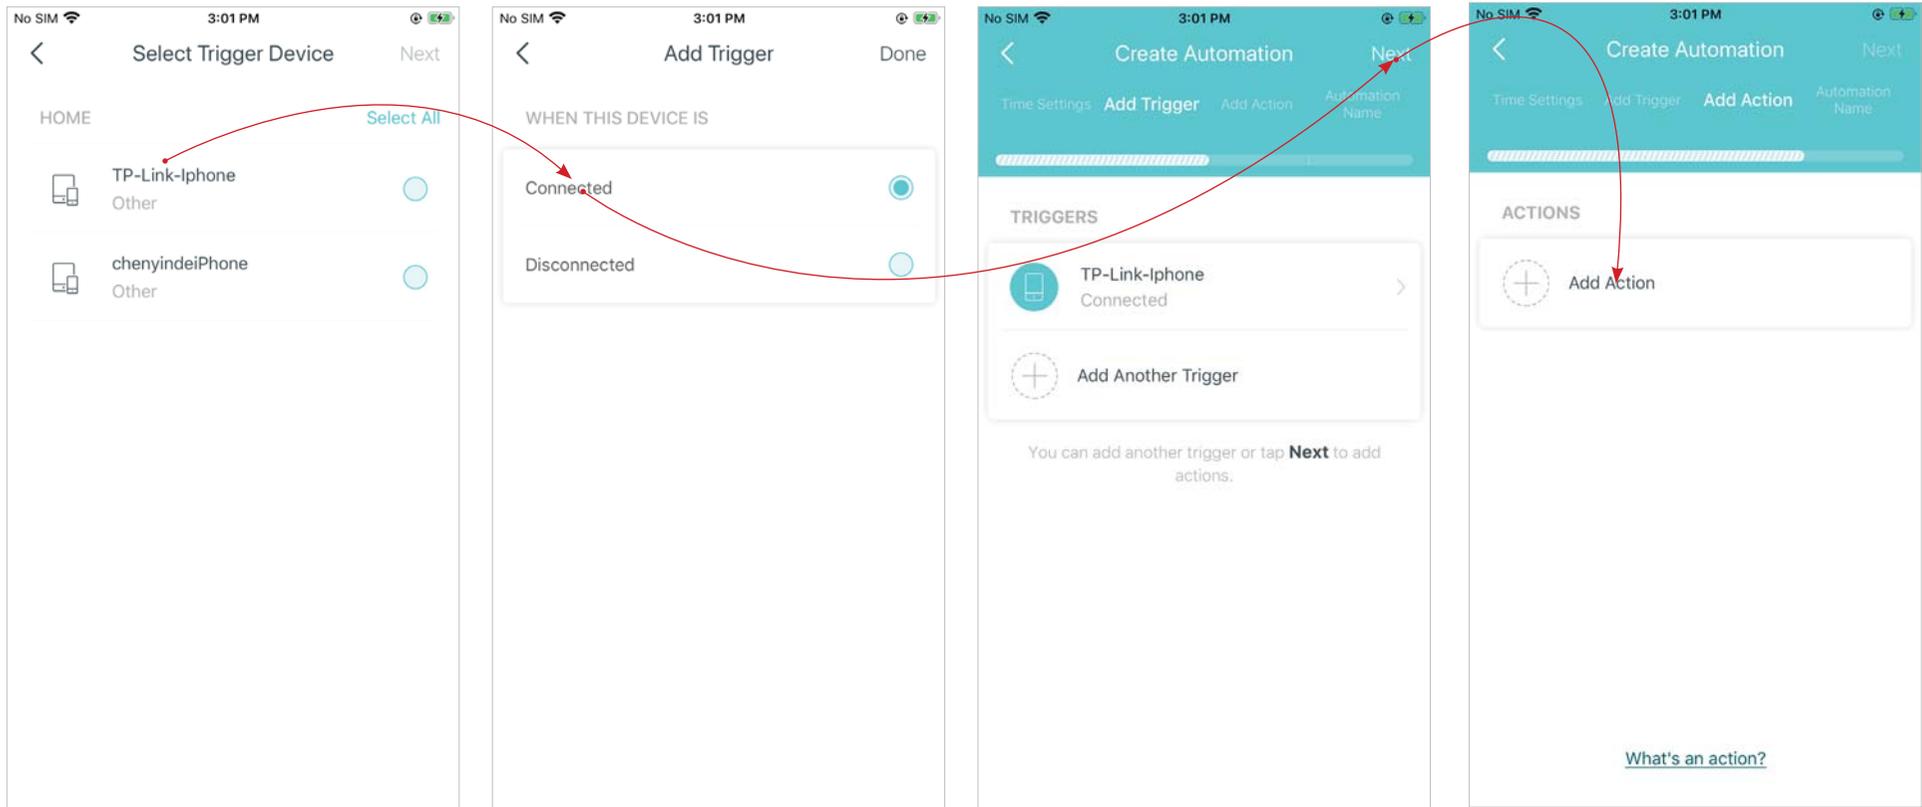


7. Select the action device and follow app instructions to set the action details.

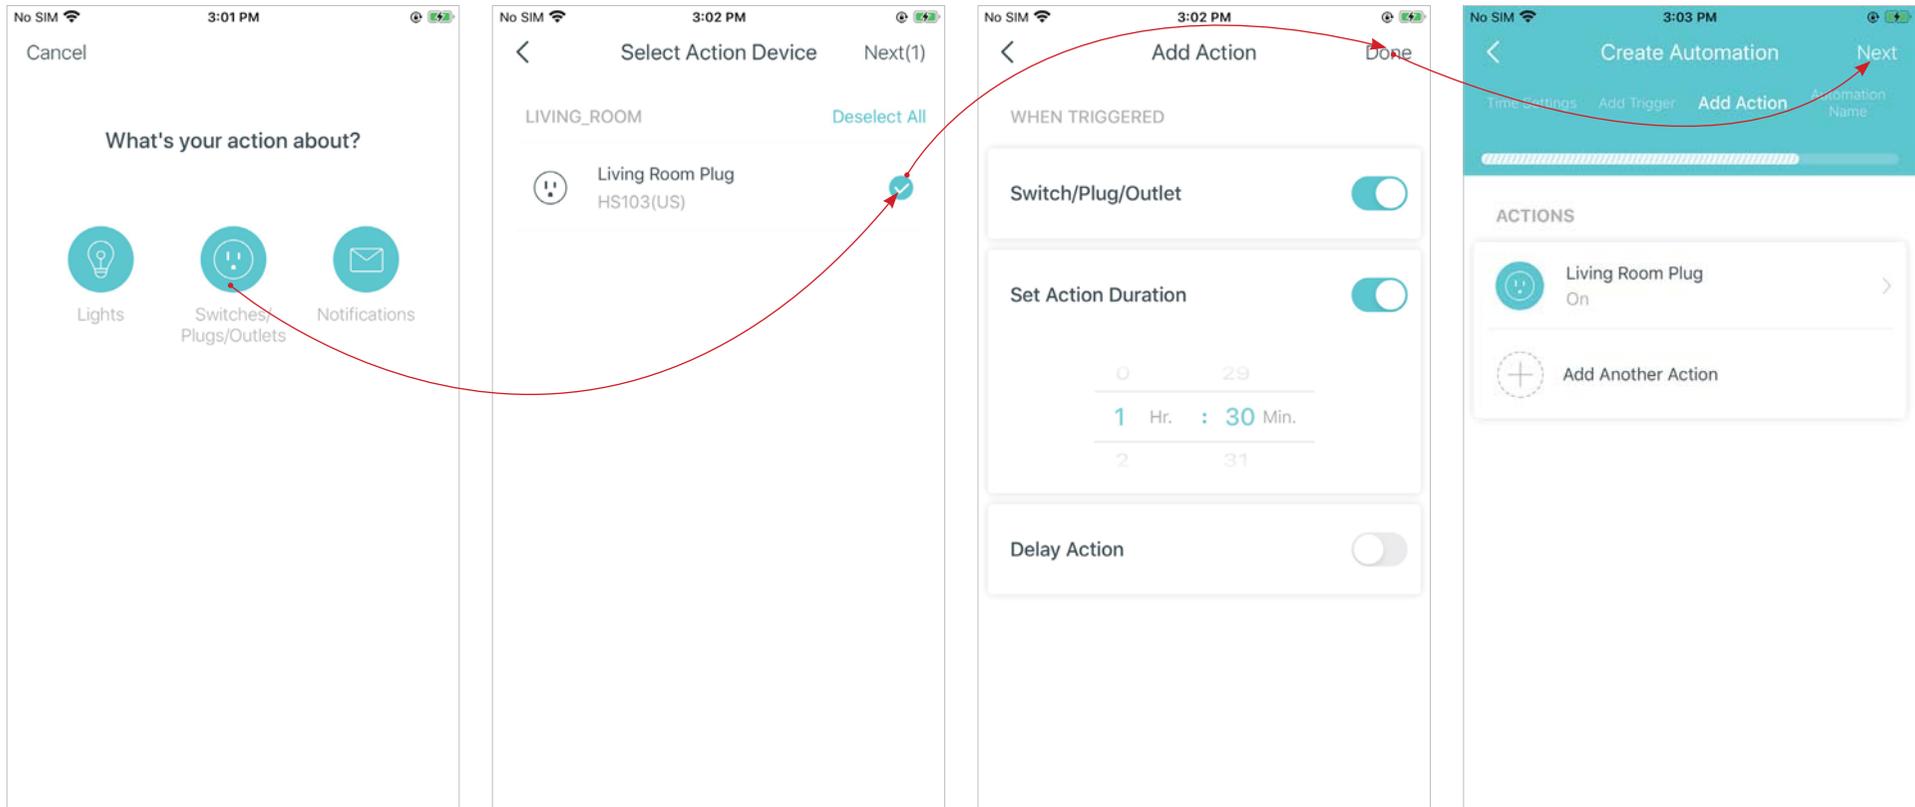

8. Set a name for the automation

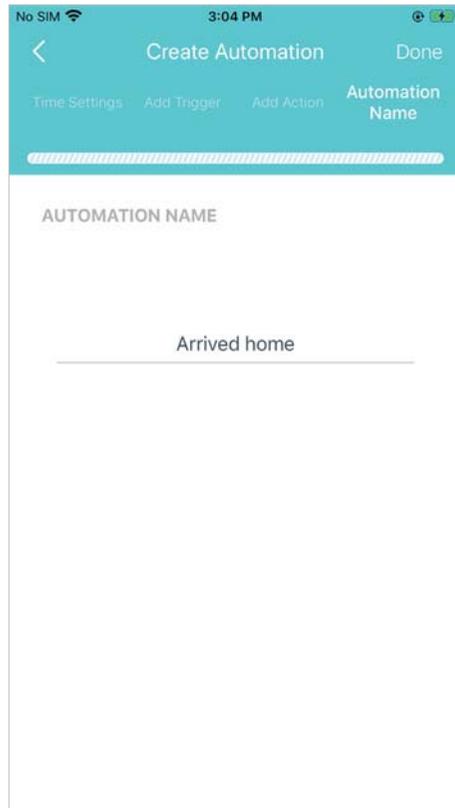


9. Automation setup completed. The automation will take effects when the trigger is executed.

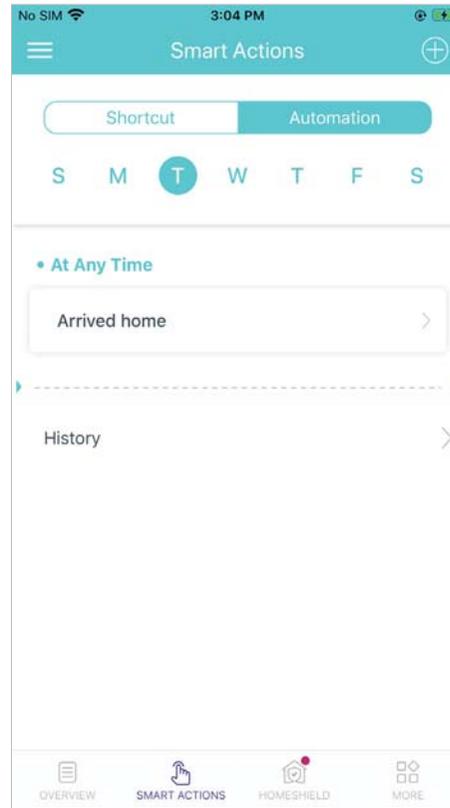

# HomeShield

Whether protecting your network from malicious attacks, managing your family's online activities, or prioritizing devices to get better performance, TP-Link HomeShield provides you a kit of basic (free) and Pro (charged) features to enhance your whole home network with enhanced security. An overview of HomeShield features are shown below.

- **What is HomeShield:** [tp-link.com/homeshield](http://tp-link.com/homeshield)
- **How to use HomeShield features and upgrade to HomeShield Pro:** go to the product support page at <https://www.tp-link.com> and refer to [TP-Link HomeShield User Guide](#).

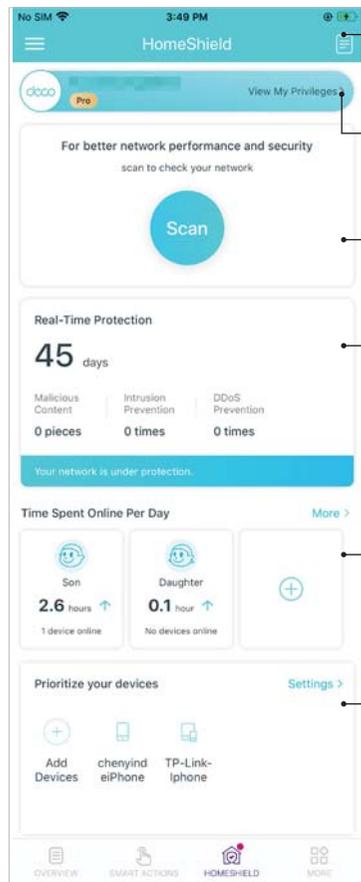

- **Weekly/Monthly Reports:** Review a weekly or a monthly list of usage, such as security threats, top visited contents, and more, to better manage your family's online activities.
- **HomeShield Pro Subscription:** To enjoy more features, you can upgrade to HomeShield Pro.
- **Scan:** Examine your network regularly to identify the potential risks, thus improving your network performance and security.
- **Real-Time Protection:** Real-Time Protection is for Pro users only. There are three ways to ensure your home network and your IoT devices remain safe: (1) block malicious websites, protect your home network and applications against external attacks and eliminate vulnerabilities; (2) prevent infected devices from sending sensitive information or security threats to clients outside your network; (3) identify IoT devices and immediately monitor their security performance once they join the network.
- **Parental Controls:** Create profiles for family members and specify the devices that belong to each. Set individualized parental controls including when and for how long each person can access the internet. Block inappropriate content and pause the internet if necessary.
- **QoS:** Prioritize the connection of a particular device for a set duration, such as a family member's laptop for one hour during a video call.




# Upgrade Your Deco

TP-Link is dedicated to improving product features and providing a better customer experience. An up-to-date firmware provides better and more stable network performance. Always update your Deco to the latest firmware version when prompted in the Deco app.

1. On the Deco app, tap  > Update Deco

2. Follow app instructions to update your Deco to the latest version

3. Enable **Auto Update** to allow your Deco to automatically update during the selected time

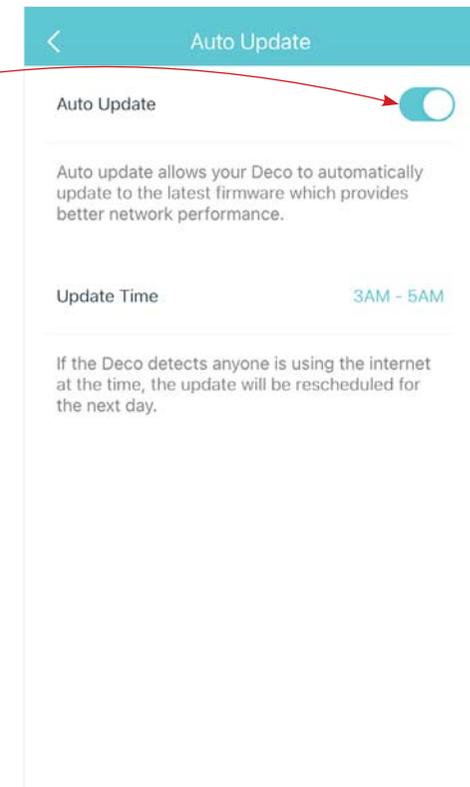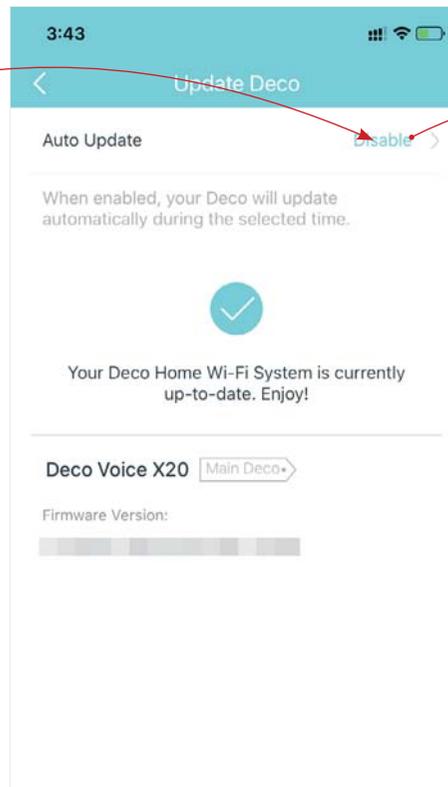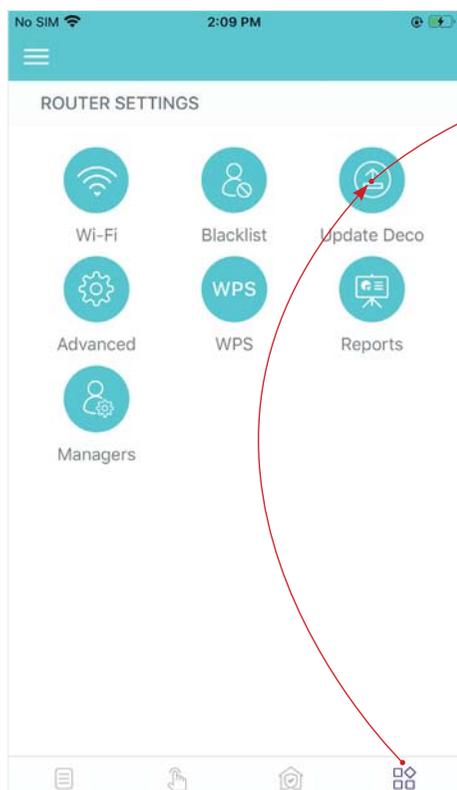

# Wi-Fi Settings





You can change the network name and password of your main network, create a separate network for guests to guarantee the security and privacy of your main network, and shake your device to share the network details easily with family and friends.

Tap  > Wi-Fi

Manage main network  
(eg. change your main network  
Wi-Fi name and password)

Enable guest network

Shake to share your network

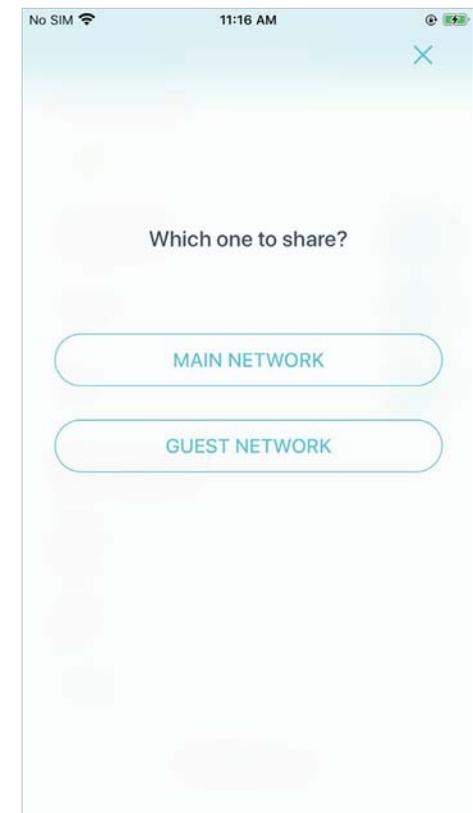
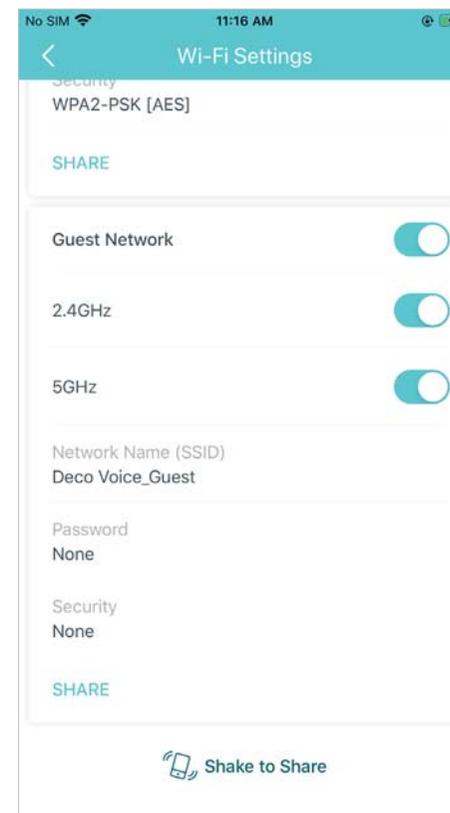
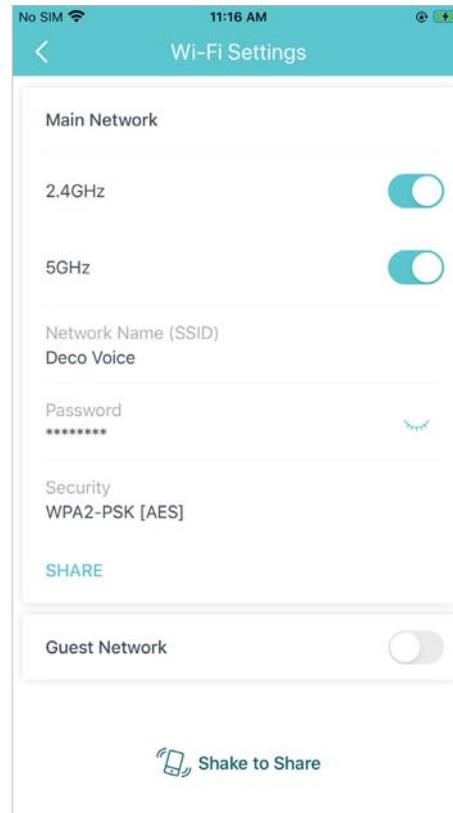
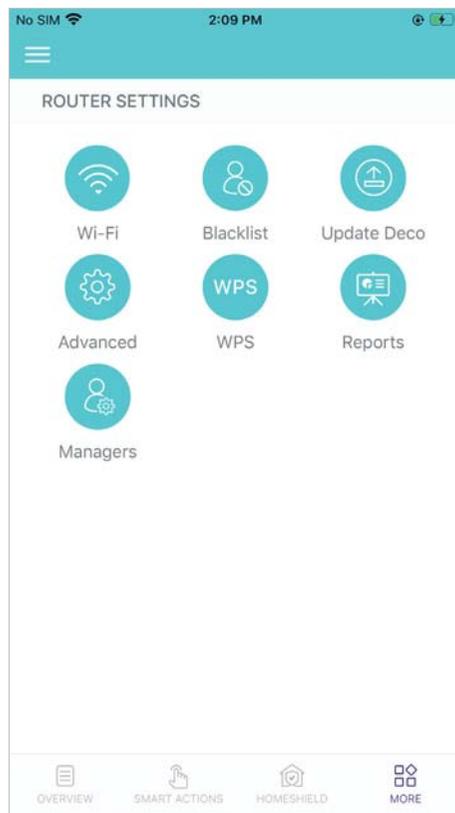


# Blacklist

Compile a blacklist to avoid devices added on the blacklist to access to your network, ensuring the safety of your personal information shared in the network.

Tap  > [Blacklist](#), and follow app instructions to add network clients or other devices to the blacklist.


Remove device from blacklist

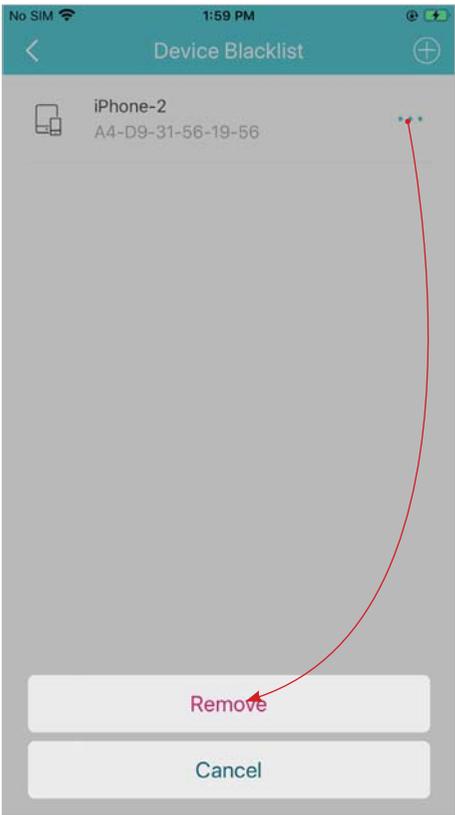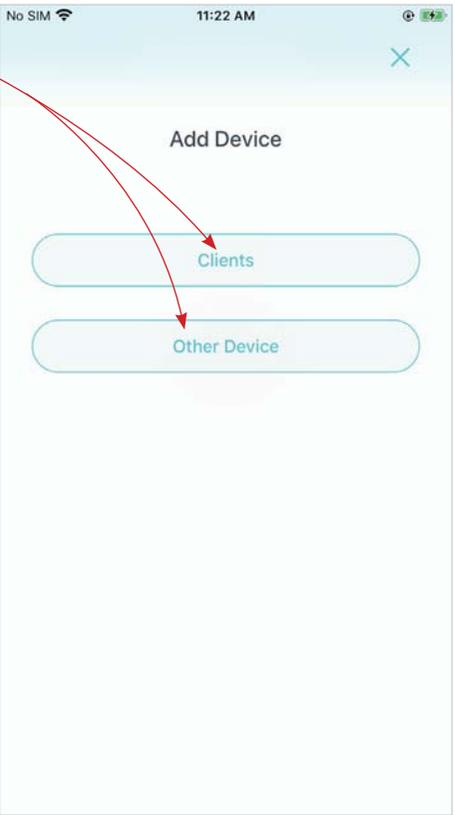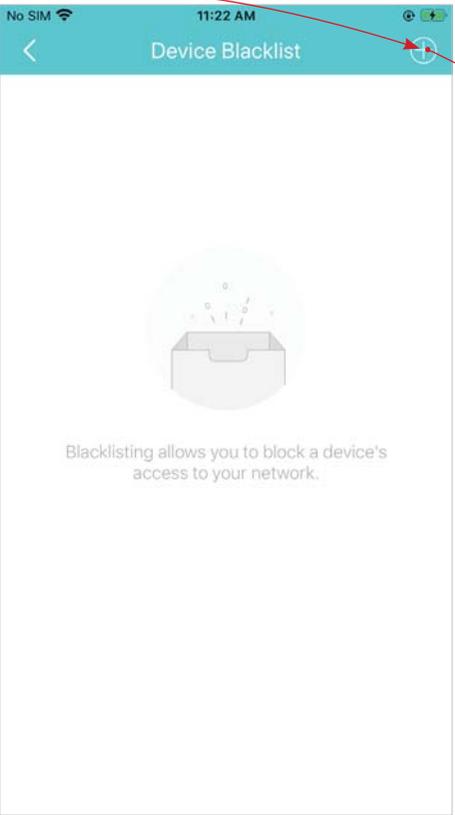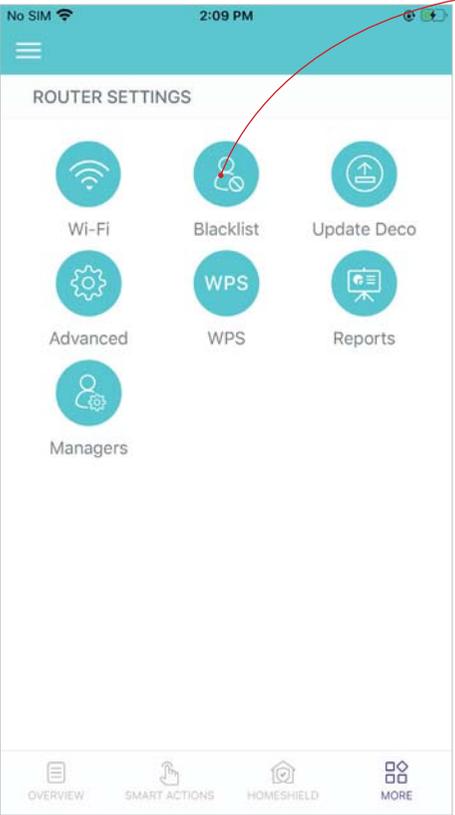


# WPS

WPS (Wi-Fi Protected Setup) helps you to quickly and securely connect a client to a network with a tap without entering any password.


1. Tap  > WPS

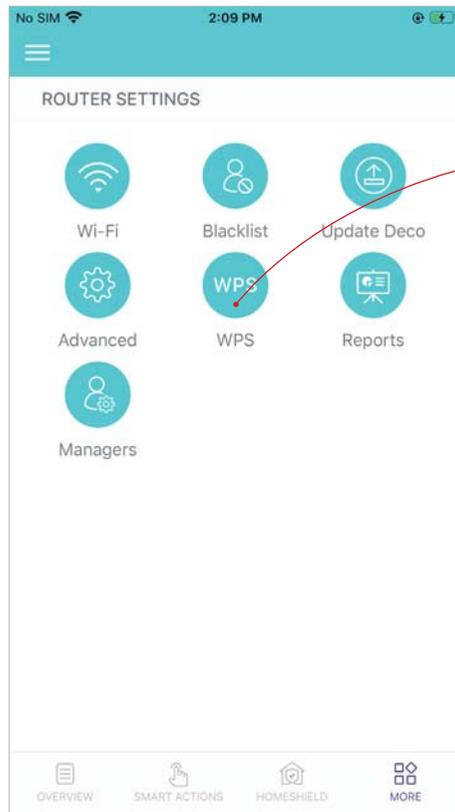

2. Tap the **WPS** icon on Deco app and then on your client

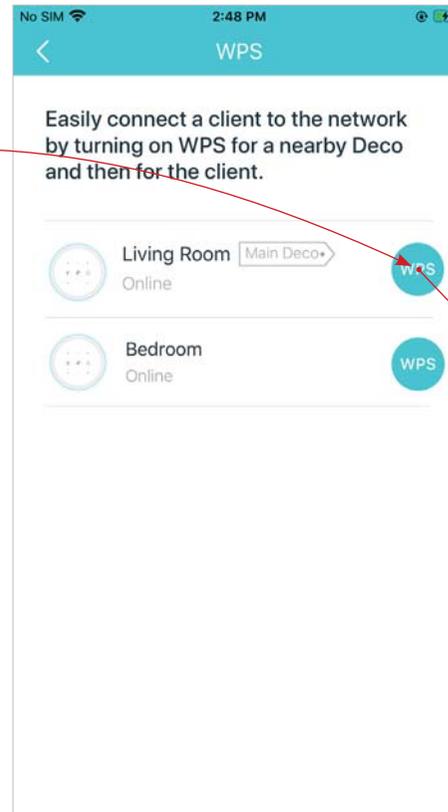

3. Your device has connected to the network successfully if shown as below

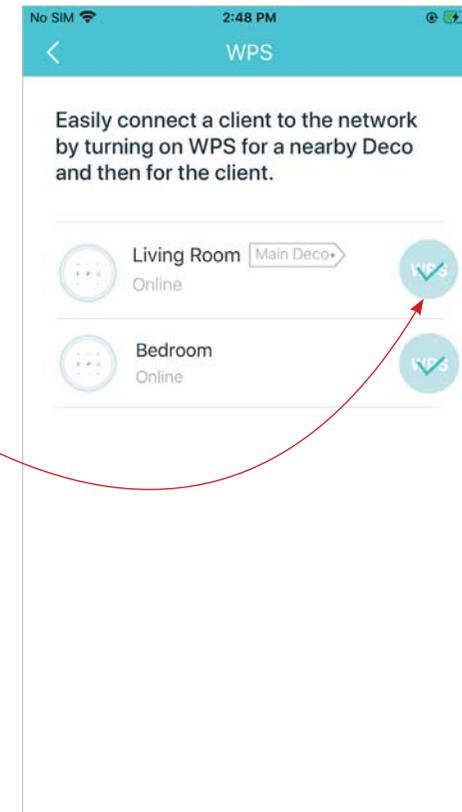




# Weekly/Monthly Reports

Review the weekly or monthly usage statistics, such as online traffic and online time ranking, internet usage statistics, security threats, network preventions, total connected network devices each day, and more.

Tap  > Reports

View weekly/monthly reports


Enable or disable monthly report

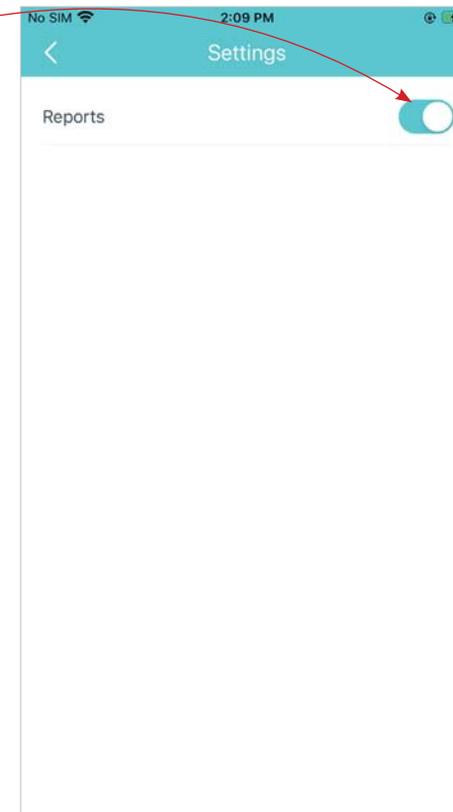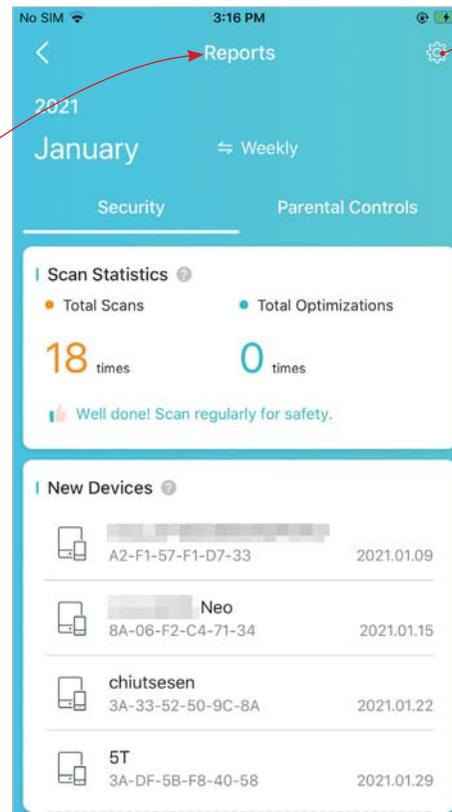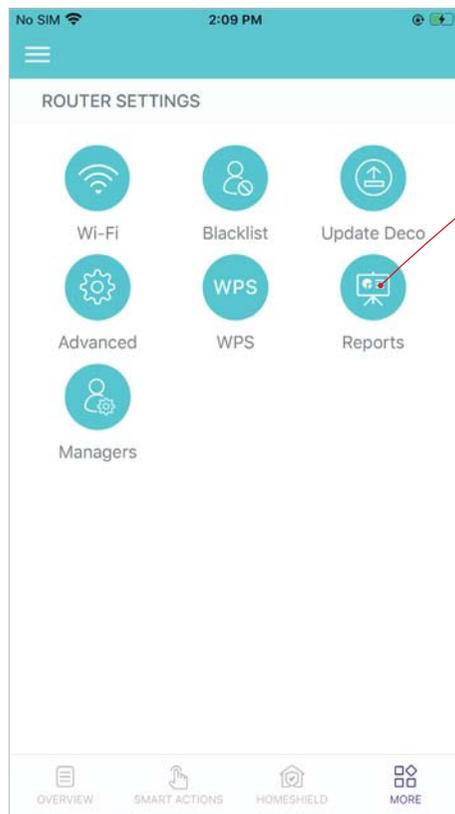


# Managers

Add friends and family members to help manage your network. Each manager should have their own TP-Link ID.


Tap  > [Managers](#), and follow app instructions to add other TP-Link ID account as manager.

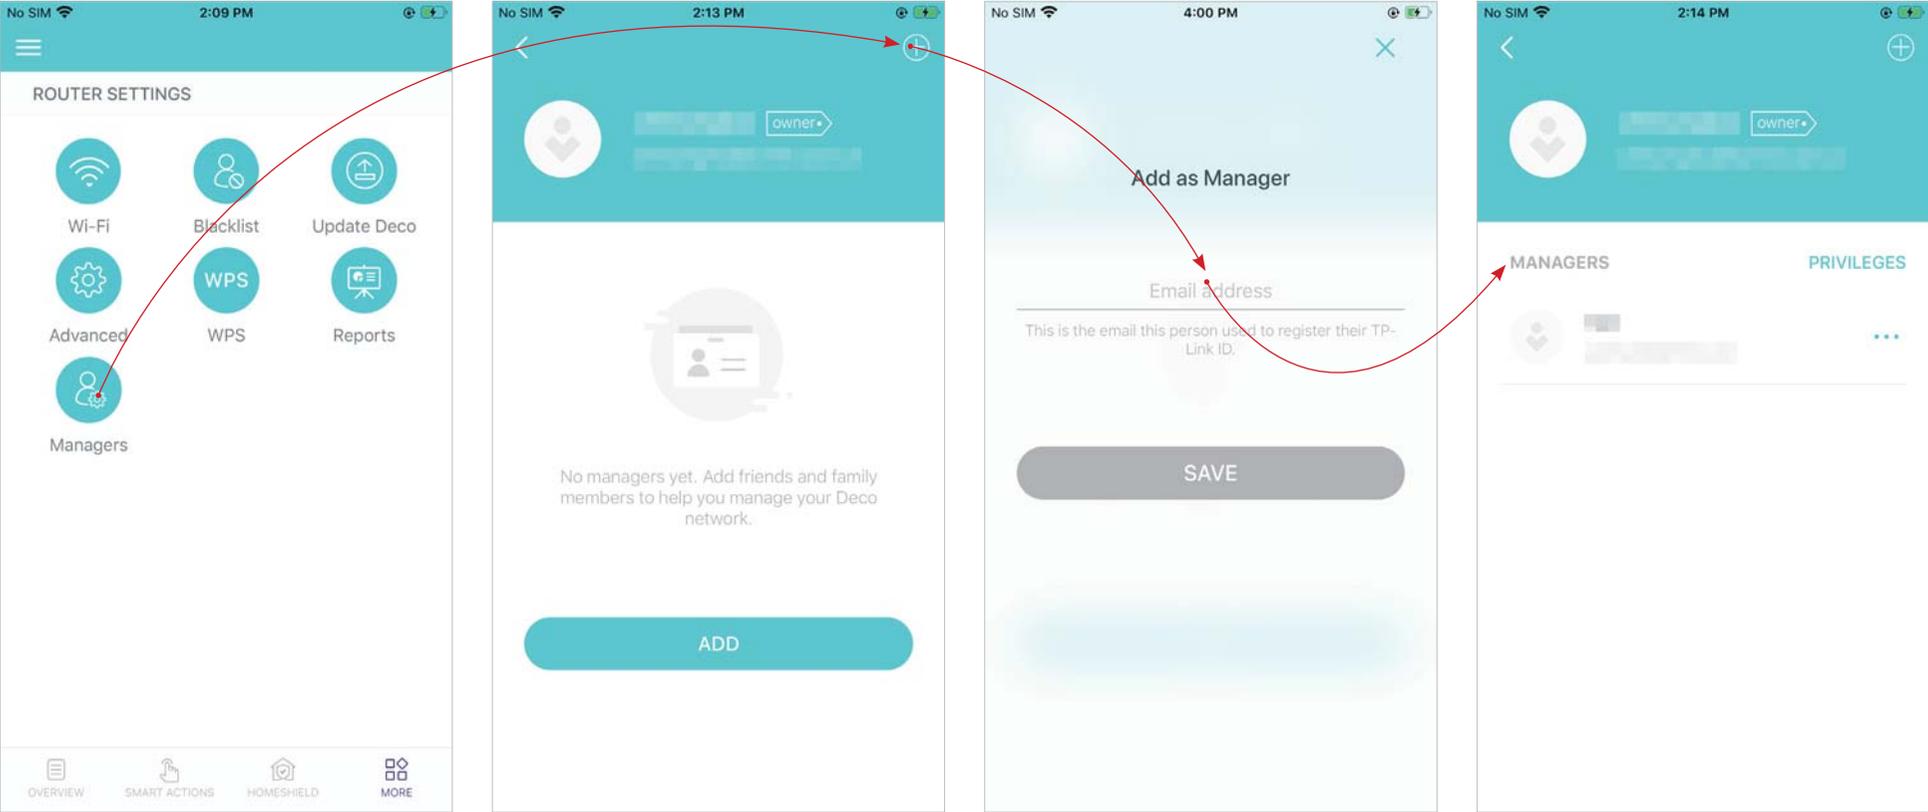

## Set privileges for managers

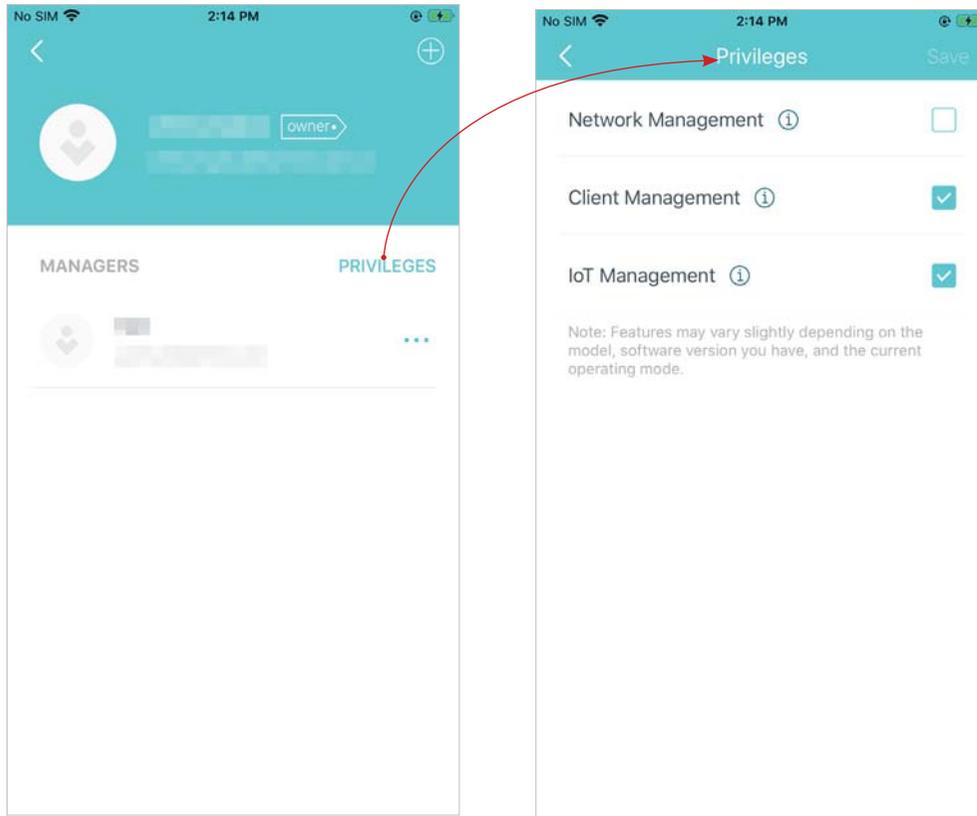

## Remove managers

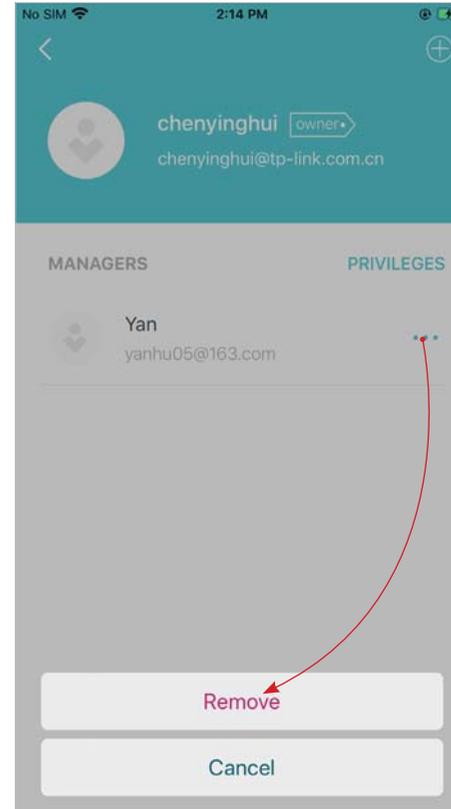

# Advanced Features





Additional features are available under the Advanced menu. You can modify WAN settings (IPv4 & IPv6), add IPv6 firewall rules, modify LAN IP, set up DHCP server, enable VLAN/IPTV/MAC Clone mode, reserve the same IP address for a specific device, set up port forwarding rules to make your local computers accessible to other devices over the internet, enable TP-Link DDNS, SIP ALG, fast roaming and beamforming, control Deco's LED, change the working mode, and configure the notification settings.

Tap  > [Advanced](#)


View IPv4 details or change the internet connection type

Enable IPv6 to set up an IPv6 internet connection


Add IPv6 firewall rules to allow specific devices to access the specified services

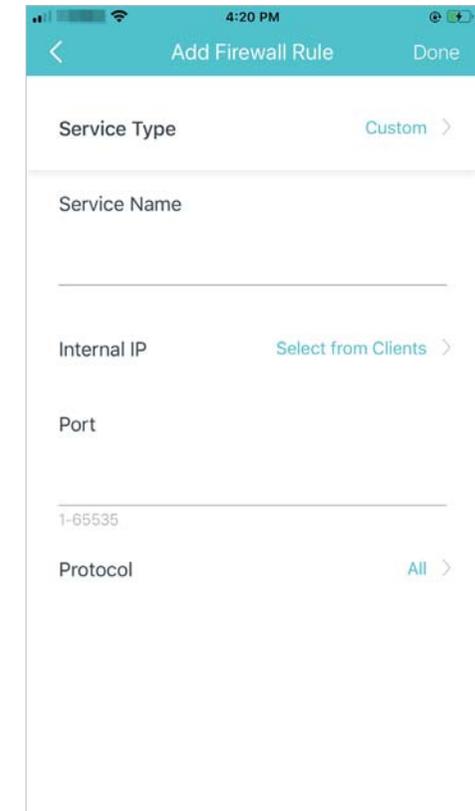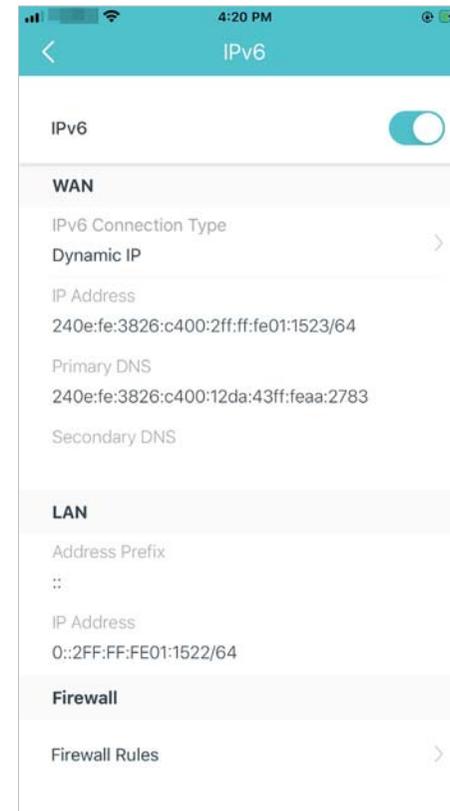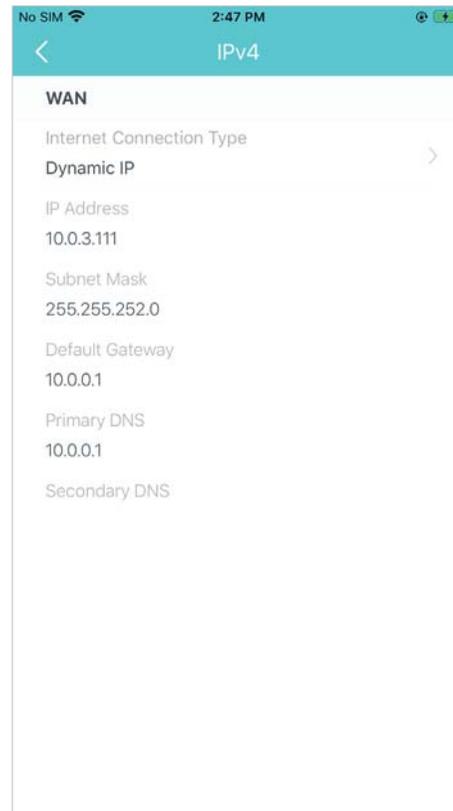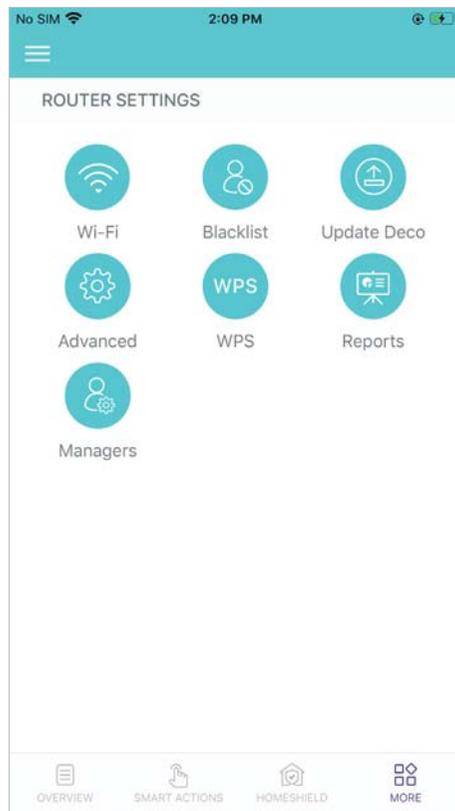


Modify LAN IP to avoid IP address conflict

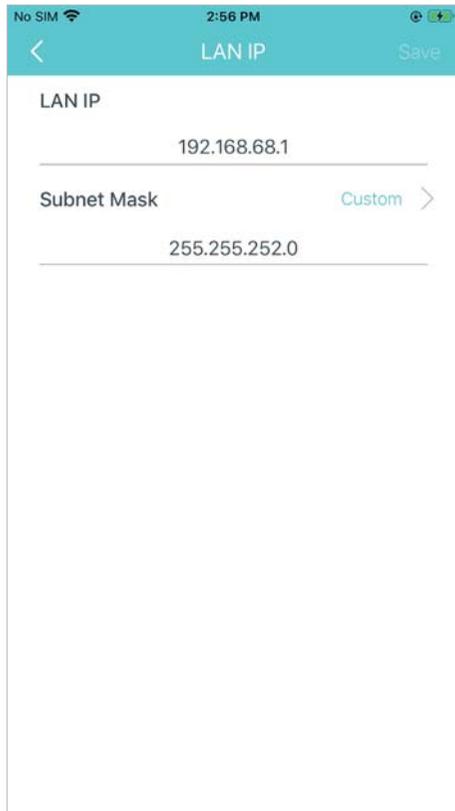

Change DHCP server settings

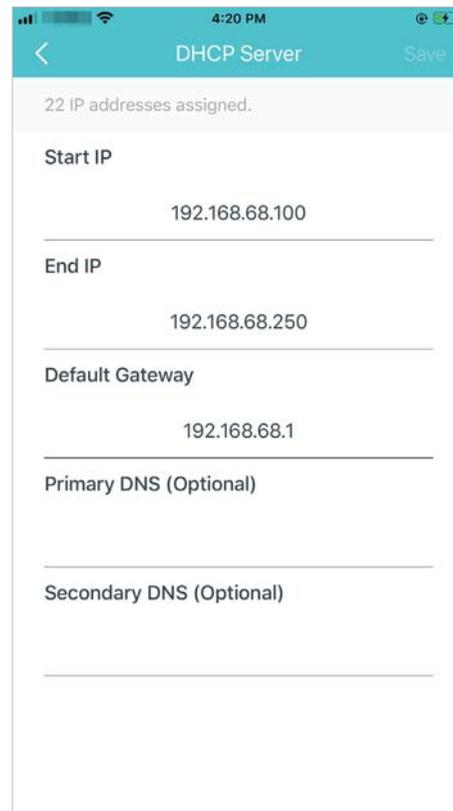


Enable IPTV/VLAN mode to support IPTV services

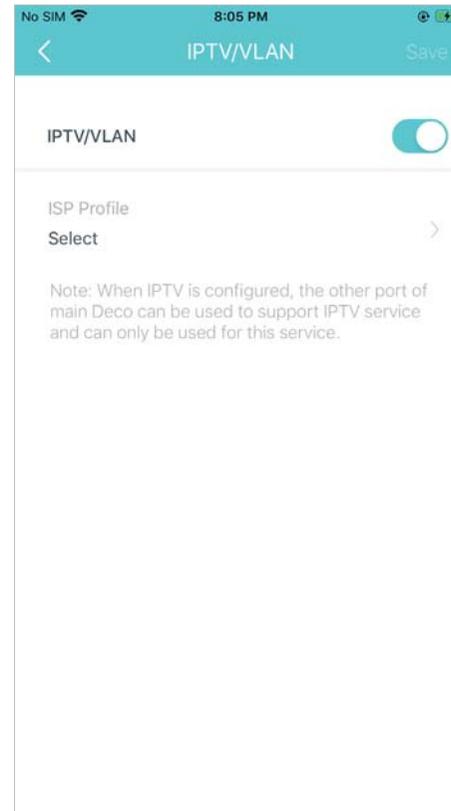

Enable MAC Clone if Deco fails to connect to the internet


Tip: For more about MAC Clone, refer to <https://www.tp-link.com/support/faq/2925/>

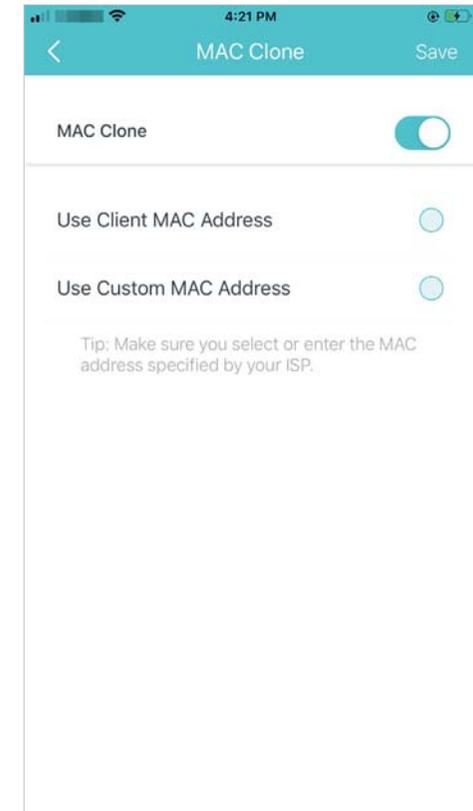


Reserve IP addresses for specific devices to recognize and manage the device more easily



Set up port forwarding rules to enable devices in your network accessible over the internet with safety

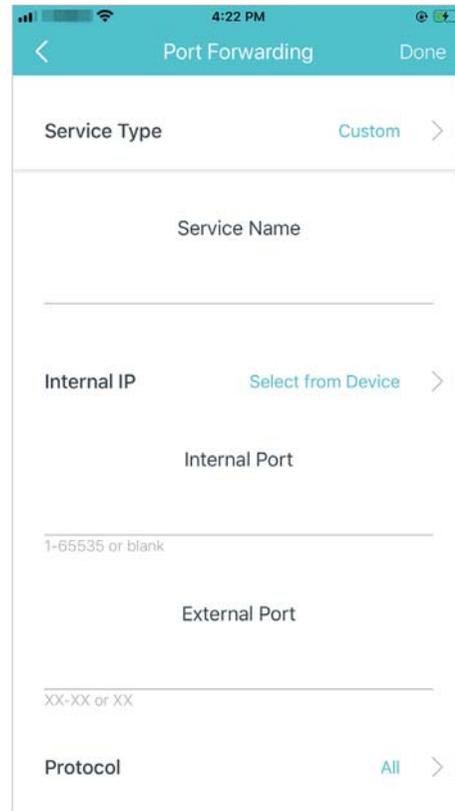


Register a TP-Link DDNS domain name to access your router and local servers using a domain name

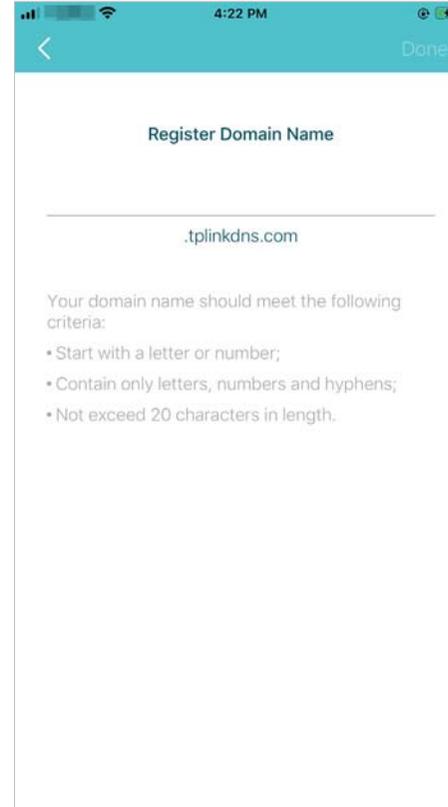


Enable SIP ALG to communicate with SIP (Session Initiation Protocol) servers via NAT




Enable UPNP to allow your local network to dynamically open ports for applications like gaming

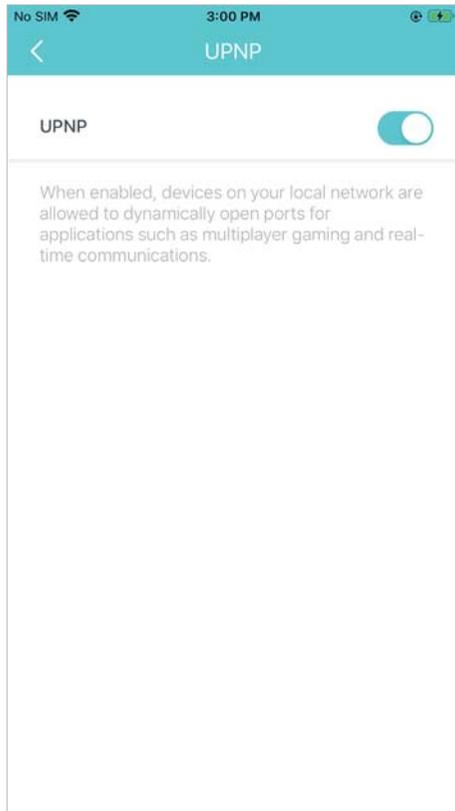


Enable Fast Roaming to allow your wireless devices to switch connection to different Decos

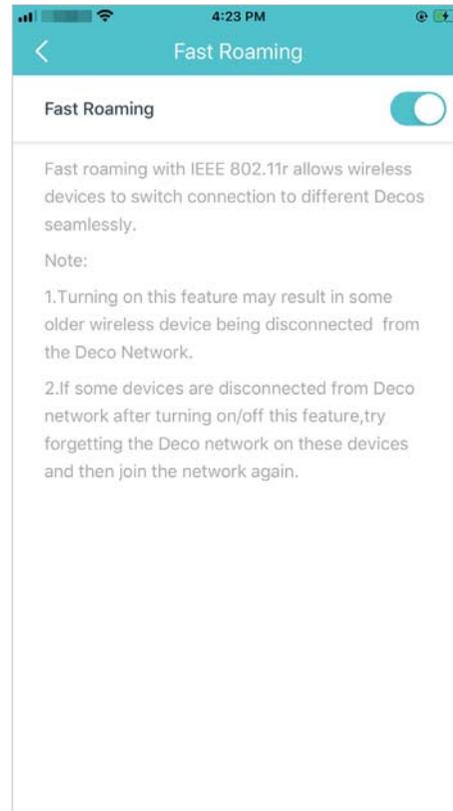


Enable Beamforming to concentrate Wi-Fi signal towards connected devices for stronger connections

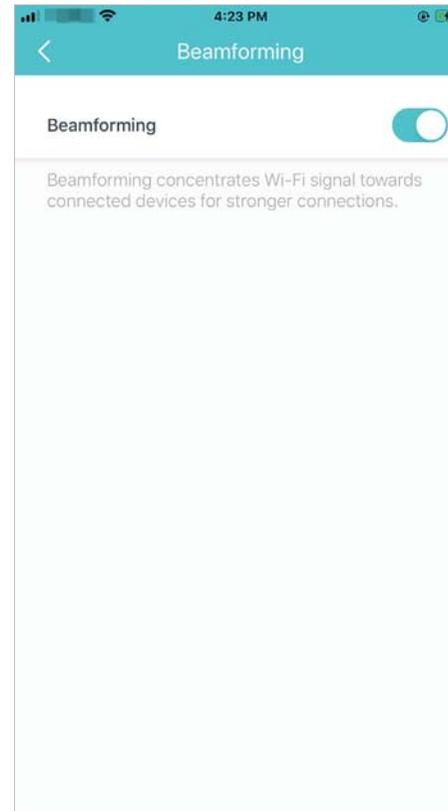

Toggle off LED to turn off the light on Deco. Configure the Night Mode to turn off the LED light at bedtime only

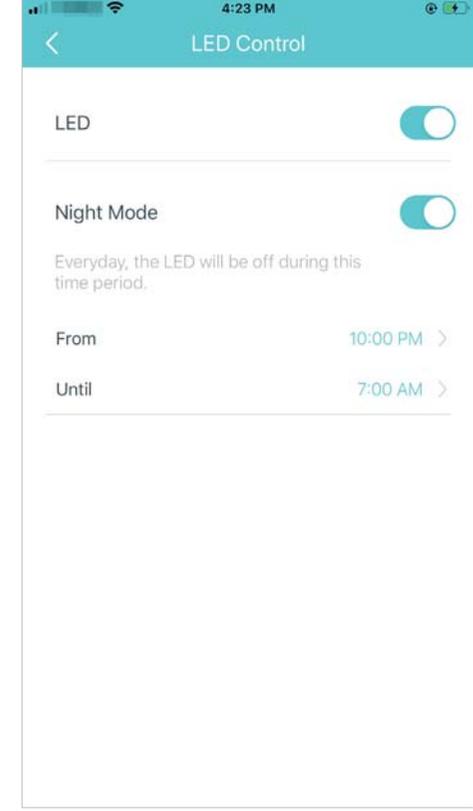


Select the time zone to get the accurate system time for time-related functions settings

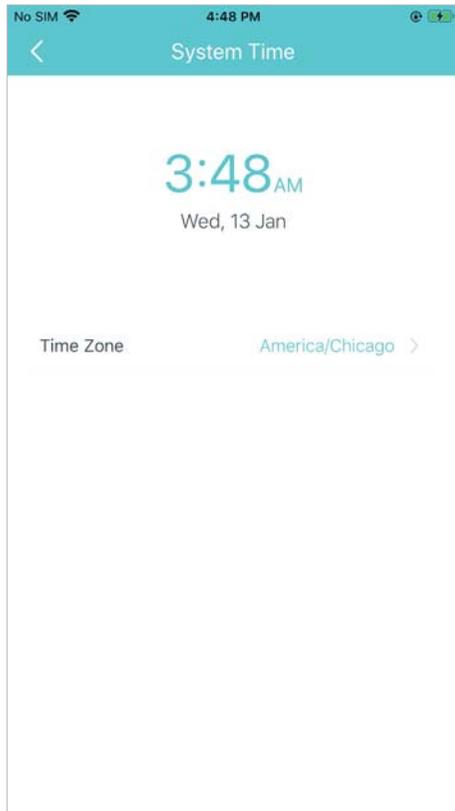


Change the operating mode


Note: When the Deco works in Access Point mode, advanced features such as IPv4, Address Reservation, Port Forwarding, and DHCP server are not available.

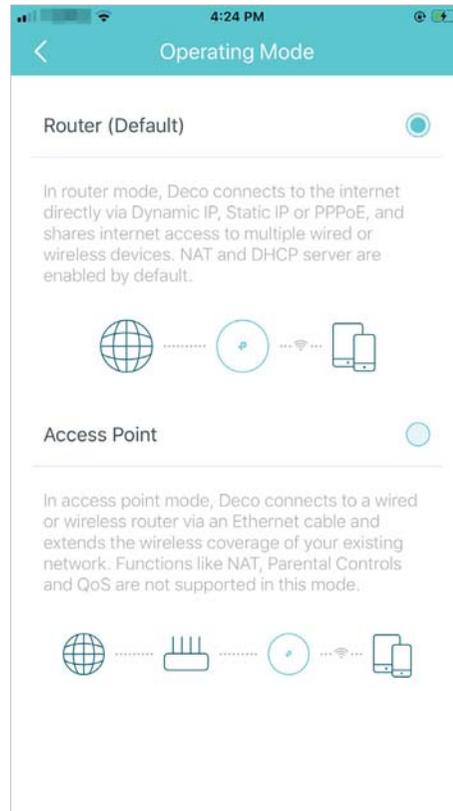

Set connection alerts to receive notifications once the clients connect to or disconnect from Deco

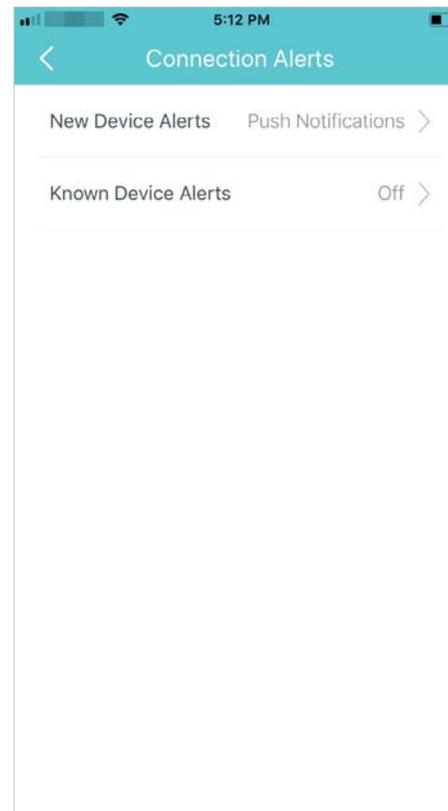

Set notifications to receive alerts in the notification bar

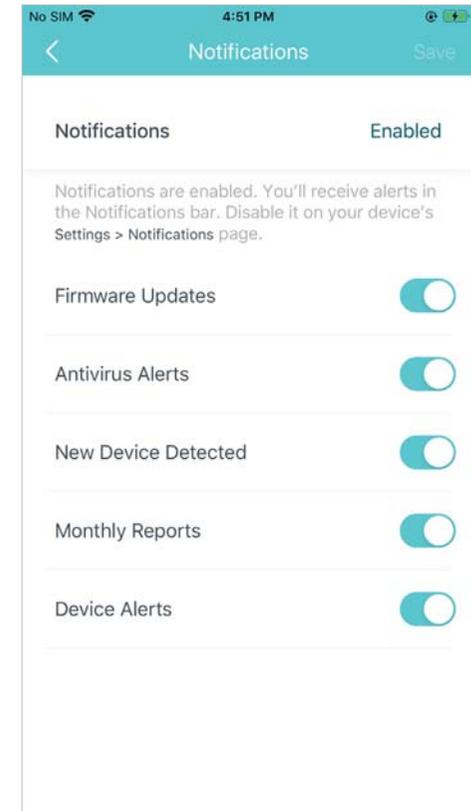

# FAQ

Solutions to common problems during setup or use are provided here for reference. Follow the steps in the provided link to solve your problem.

If problems still exist, contact us: <https://www.tp-link.com/support>

## **Q1. What should I do if I fail to configure the main Deco and get stuck on “We couldn't find Deco”?**

Refer to the guide <https://www.tp-link.com/support/faq/2239/> or follow the video <https://youtu.be/2HYuEYS9XJM>

## **Q2. What should I do if I fail to configure the satellite Deco and get stuck on “We couldn't find another Deco”?**

Refer to the guide <https://www.tp-link.com/support/faq/1447/> or follow the video <https://youtu.be/iVgDzoo16T4>

## **Q3. What should I do if I fail to configure the main Deco and get stuck on “Testing Internet Connection”?**

Refer to the video <https://youtu.be/OSUrGdWH-i0>

## **Q4. What should I do if my wireless devices cannot connect to Deco?**

Refer to the guide <https://www.tp-link.com/support/faq/2718/>

## **Q5. What should I do if Deco suddenly lost internet access?**

Refer to the guide <https://www.tp-link.com/support/faq/1454/>

## **Q6. How can I find a suitable spot for my Deco?**

Refer to the guide <https://www.tp-link.com//support/faq/1446/>

## **Q7. What can I do if the Deco app isn't working properly?**

Refer to the guide <https://www.tp-link.com/support/faq/1456/>

## FCC Compliance Information Statement



**Product Name:** AX1800 Mesh Wi-Fi 6 System with Built-in Smart Speaker

**Model Number:** Deco Voice X20

Component Name	Model
I.T.E POWER SUPPLY	T120150-2B4

### Responsible party:

**TP-Link USA Corporation, d/b/a TP-Link North America, Inc.**

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: [sales.usa@tp-link.com](mailto:sales.usa@tp-link.com)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

## **FCC RF Radiation Exposure Statement**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2021-3-31

## **FCC Compliance Information Statement**



**Product Name:** I.T.E POWER SUPPLY

**Model Number:**

T120150-2B4

**Responsible party:**

**TP-Link USA Corporation, d/b/a TP-Link North America, Inc.**

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: [sales.usa@tp-link.com](mailto:sales.usa@tp-link.com)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2021-3-31