

the IP address of the company network is the destination IP address, so here enters 172.30.30.1.

Subnet Mask: Determines the destination network with the destination IP address. If the destination is a single IP address, enter 255.255.255.255; otherwise, enter the subnet mask of the corresponding network IP. In the example, the destination network is a single IP, so here enters 255.255.255.255.

Gateway: The IP address of the gateway device to which the data packets will be sent. This IP address must be on the same subnet with the router's IP which sends out the data. In the example, the data packets will be sent to the LAN port of Router 2 and then to the Server, so the default gateway should be 192.168.0.2.

Interface: Determined by the port (WAN/LAN) that sends out the data packets. In the example, the data is sent to the gateway through the LAN port, so LAN should be selected.

Status: Determines the status of the entry. In the example, Enabled should be selected.

6. Click **OK** to save the settings.
7. Check the **System Routing Table** below. If you can find the entry you set, the static routing is set successfully.

System Routing Table				
ID	Destination Network	Subnet Mask	Gateway	Interface
1	172.30.30.1	255.255.255.255	192.168.0.2	LAN & WLAN
2	192.168.2.0	255.255.255.0	0.0.0.0	LAN & WLAN
3	192.168.0.0	255.255.255.0	0.0.0.0	LAN & WLAN

Done!

Open a web browser on your PC. Enter the company server's IP address to visit the company network.

12.6. Specify Wireless Settings

The router's wireless network names (SSIDs) and passwords, and security options are preset in the factory. The preset SSIDs and passwords can be found on the product label. You can customize the wireless settings according to your needs.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.

2. Go to [Basic](#) > [Wireless](#).

Wireless Settings

2.4GHz Wireless Network: Enable

Wireless Network Name (SSID): Hide SSID

Password:

5GHz Wireless Network: Enable

Wireless Network Name (SSID): Hide SSID

Password:

Save

To enable or disable the wireless function:

The wireless radio is enabled by default, if you want to disable the 2.4GHz, 5GHz wireless function, just clear the corresponding [Enable](#) checkbox.

To change the wireless network name (SSID) and wireless password:

Create a new SSID in [Wireless Network Name \(SSID\)](#) and customize the password for the network in [Password](#). The default SSID is TP-LINK_XXXX for 2.4GHz, TP-LINK_XXXX_5G for 5GHz, and the value is case-sensitive.

Note:

If you use a wireless device to change the wireless settings, you will be disconnected when the settings are effective. Please write down the new SSID and password for future use.

To hide SSID:

Select [Hide SSID](#), and your SSID will not broadcast. Your SSID won't display when you scan for local wireless network list on your wireless device and you need to manually join the network.

Advanced Settings:

Go to [Advanced](#) > [Wireless](#) > [Wireless Settings](#).

To change the working region for the router:

Select the **Region** from the drop-down list and click **Save**.

Note: Per FCC regulations, all Wi-Fi products marketed in the U.S. is locked to the U.S. region.

To use the smart connect function

The smart connect function helps devices run faster by assigning them to best wireless bands based on actual conditions to balance network demands.

1. Select the **Smart Connect** checkbox, and click **Save**.
2. Keep the default or set a new SSID and password, and click **Save**.

This SSID and password will be applied for 2.4GHz, 5GHz wireless networks.

The screenshot shows a web interface for configuring network settings. It is divided into two sections: 'Smart Connect' and 'Wireless'.

Smart Connect: A checkbox labeled 'Smart Connect:' is checked, with the word 'Enable' in green text to its right. A green 'Save' button is located to the right of this section.

Wireless: This section contains several settings:

- 'Wireless Radio:' has a checked checkbox and the word 'Enable' in green text.
- 'Wireless Network Name (SSID):' is a text input field containing 'TP-LINK_508B'. To its right is a checkbox labeled 'Hide SSID' which is unchecked.
- 'Security:' is a dropdown menu currently showing 'WPA/WPA2 Personal(Recommended)'.
- 'Version:' has three radio button options: 'Auto' (unchecked), 'WPA2-PSK' (checked and highlighted in green), and another 'Auto' (unchecked).
- 'Encryption:' has three radio button options: 'Auto' (unchecked), 'TKIP' (unchecked), and 'AES' (checked and highlighted in green).
- 'Password:' is a text input field containing '12345670'.
- 'Transmit Power:' has three radio button options: 'Low' (unchecked), 'Middle' (unchecked), and 'High' (checked and highlighted in green).

 A green 'Save' button is located at the bottom right of the 'Wireless' section.

To change the security option:

In the [Wireless](#) section, select an option from the [Security](#) dropdown list.

The router provides four security options, No Security, WPA/WPA2 - Personal (Recommended), WPA/WPA2 - Enterprise and WEP. We recommend you don't change the default settings unless necessary. If you select other options, configure the related parameters according to the help page.

In addition

- [Mode](#) - Select a transmission mode according to your wireless client devices. [802.11b/g/n mixed](#), [802.11g/n mixed](#) or [802.11n only](#) for [2.4GHz](#); and [802.11a/n/ac mixed](#), [802.11n/ac mixed](#) or [802.11ac only](#) for [5GHz](#). It is recommended to just leave it as default.
- [Channel Width](#) - Select a channel width (bandwidth) for the wireless network.
- [Channel](#) - Select an operating channel for the wireless network. It is recommended to leave the channel to [Auto](#), if you are not experiencing the intermittent wireless connection issue.
- [Transmit Power](#) - Select either [High](#), [Middle](#) or [Low](#) to specify the data transmit power. The default and recommended setting is [High](#).

12.7. Use WPS for Wireless Connection

Wi-Fi Protected Setup(WPS) gives consumers an easier approach to set up a security-protected Wi-Fi connection.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Advanced](#) > [Wireless](#) > [WPS](#) .

12.7.1. Set the Router's PIN

Router's PIN is enabled by default to allow wireless devices to connect to the router using the PIN. You can use the default one or generate a new one.

Note:


1. If you want to enable/disable the WPS feature, go to [System Tools](#) > [System Parameters](#) > [WPS](#), select or clear the [Enable WPS](#) check box.
2. PIN (Personal Identification Number) is an eight-character identification number preset to each router. WPS supported devices can connect to your router with the PIN. The default PIN is labeled on the bottom of the router.

12.7.2. Use the WPS Wizard for Wi-Fi Connections

1. Select a setup method:

- **Push Button (Recommended):** Click the [Connect](#) button on the screen. Within two minutes, push the WPS button on the client device.

- **PIN Code:** Enter the client's PIN, and click [Connect](#).

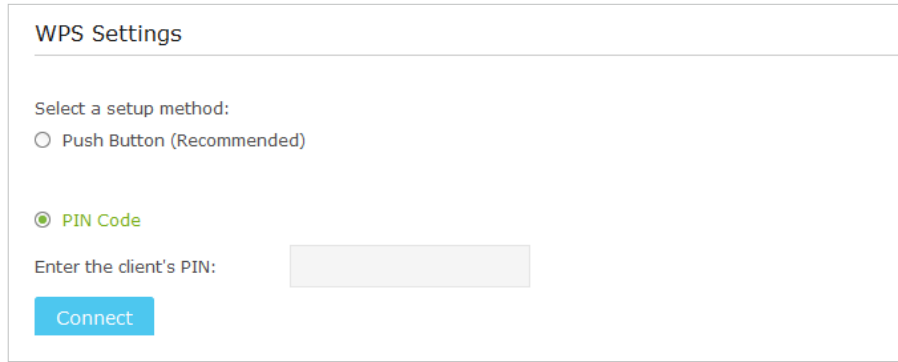

WPS Settings

Select a setup method:

Push Button (Recommended)

PIN Code

Enter the client's PIN:

Connect

2. **Success** will appear on the above screen and the WPS LED on the router will keep on for five minutes if the client has been successfully added to the network.

12. 8. Schedule Your Wireless Function

You can automatically turn off your wireless network at the time when you do not need the wireless connection.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced* > *Wireless* > *Wireless Schedule* page.
3. Select the 2.4GHz wireless network to configure. Toggle on the button to enable the Wireless Schedule feature.

Task Schedule
2.4GHz | 5GHz

Drag the schedule table to choose the period on which you need the wireless off automatically!
The Effective Time Schedule is based on the time of the Router. The time can be set in "System Tools -> Time Settings"

Enable Wireless Schedule:

	Sun.	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.
0:00							
1:00							
2:00							
3:00							
4:00							
5:00							
6:00							
7:00							
8:00							
9:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
24:00							

System Time

4. Set the time. Drag the cursor to cover the time area and click [Save](#) to make the settings effective. The selected time will be in green.

5. Repeat steps 3 and 4 to set time for 5GHz wireless networks.

Note:

1. If you just set time for one wireless band, the other wireless band is still always on, so set time for both of the two bands to schedule your whole wireless network.
2. The wireless LED (2.4GHz , 5GHz) will turn off if the corresponding wireless network is disabled.
3. The wireless network will be automatically turned on after the time period you set.

12.9. Set up a VPN Connection

VPN (Virtual Private Network) is a private network established across the public network, generally via the Internet. However, the private network is a logical network without any physical network lines, so it is called Virtual Private Network.

With the wide application of the Internet, more and more data are needed to be shared through the Internet. Connecting the local network to the Internet directly, though can

allow the data exchange, will cause the private data to be exposed to all the users on the Internet.


The VPN (Virtual Private Network) technology is developed and used to establish the private network through the public network, which can provides a secure communication to a remote computer or remote network, and guarantee a secured data exchange. IPSec is one of the major implementations of VPNs.

I want to:

Establish an IPSec VPN tunnel to connect two LANs via Internet so that the hosts in different remote LANs are able to communicate with each as if they are in the same LAN.

For example, I am the network administrator of a regional office, I need to let my office staff can visit the headquarter's servers and resources, and vice versa. I know that the router in my office and the device in headquarter both support IPSec VPN feature, so I decide to set up a VPN connection with the headquarter office.

The following diagram is a typical VPN topology. Here Site A refers to regional office's network (local network). And Site B refers to the headquarter's network (remote network) which I want to connect.

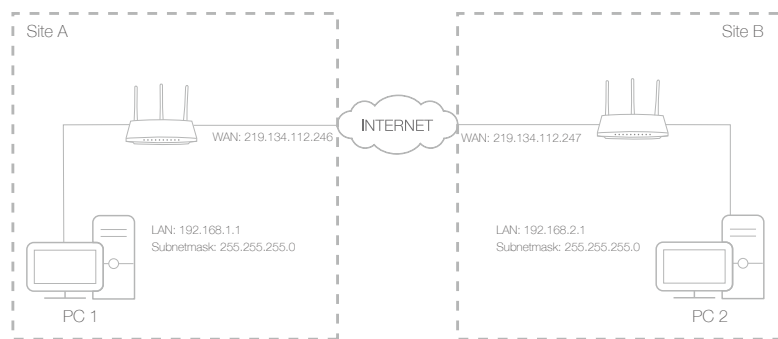

How can I do that?

1. Make sure of the topology you want to build and record site A (local network) and site B (remote network)'s LAN IP and WAN IP.
2. Configuration on site A (local network).
 - 1) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
 - 2) Go to *Advanced* > *Network* > *IPSec VPN* to open the configuration page. Click *Add* to set up a VPN tunnel.

IPSec Settings

Dead Peer Detection:

+ Add - Delete

<input type="checkbox"/>	Connection Name	Remote Gateway	Local Address	Remote Address	Status	Enable	Modify
--	--	--	--	--	--	--	--

IPSec Connection Name: VPN1

Remote IPSec Gateway (URL): 219.134.112.247 Site B's WAN IP

Tunnel access from local IP addresses: Subnet Address ▼

IP Address for VPN: 192.168.1.0 LAN IP range of Site A

Subnet Mask: 255.255.255.0

Tunnel access from remote IP addresses: Subnet Address ▼

IP Address for VPN: 192.168.2.0 LAN IP range of Site B

Subnet Mask: 255.255.255.0

Key Exchange Method: Auto(IKE) ▼

Authentication Method: Pre-Shared Key ▼

Pre-Shared Key: psk_key

Perfect Forward Secrecy: Enable ▼

Advanced

Cancel OK

- 3) In the **IPSec Connection Name** column, specify a name.
- 4) In the **Remote IPSec Gateway (URL)** column, Enter Site B's WAN IP address.
- 5) To configure **Site A's LAN**:

In the **Tunnel access from local IP addresses** column, here we take **Subnet Address** as an example. Then input the LAN IP range of Site A in the **IP Address for VPN** column, and input **Subnet Mask** of Site A.

- 6) To configure **Site B's LAN**:

In the **Tunnel access from remote IP addresses** column, here we take **Subnet Address** as an example. Then input the LAN IP range of Site B in the **IP Address for VPN** column, and input **Subnet Mask** of Site B.

- 7) Select the **Key Exchange Method** for the policy. We select **Auto(IKE)** here.

8) Enter the **Pre-Shared Key** for IKE authentication. Then keep **Perfect Forward Secrecy** enabled.


Note:

- The key should consist of visible characters without blank space.
- Make sure Site A and Site B use the same key.


9) Leave the **Advanced Settings** as default value. Then click **OK** to save.

3. Configuration on Site B (remote network). Refer to step 2 configuration on Site A and make sure that Site A and Site B use the same **Pre-shared keys** and **Perfect Forward Secrecy** settings.
4. The **Status** column will change to **UP** if the VPN connection has been set up successfully.
5. Check the VPN connection. You can ping site B' LAN IP from your computer in site A to verify that the IPsec VPN connection is set up correctly.

- Tips:** To check the VPN connection, you can do the following.
- a. On the host in Site A, press [**Windows Logo**] + [**R**] to open Run dialog. Input "**cmd**" and hit **OK**.

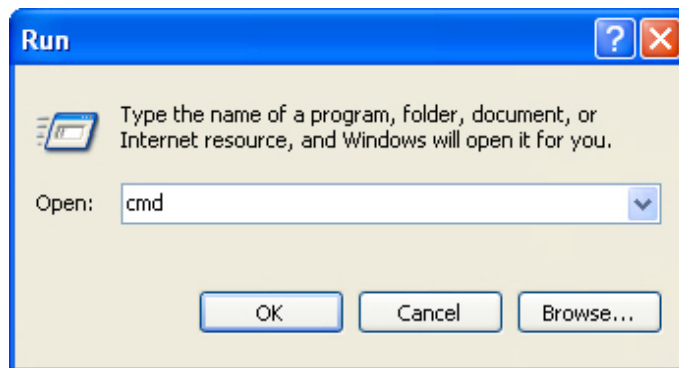

- b. In the CLI window, type in "ping 192.168.2.x" ("192.168.2.x" can be IP address of any host in Site B). Then press [**Enter**].

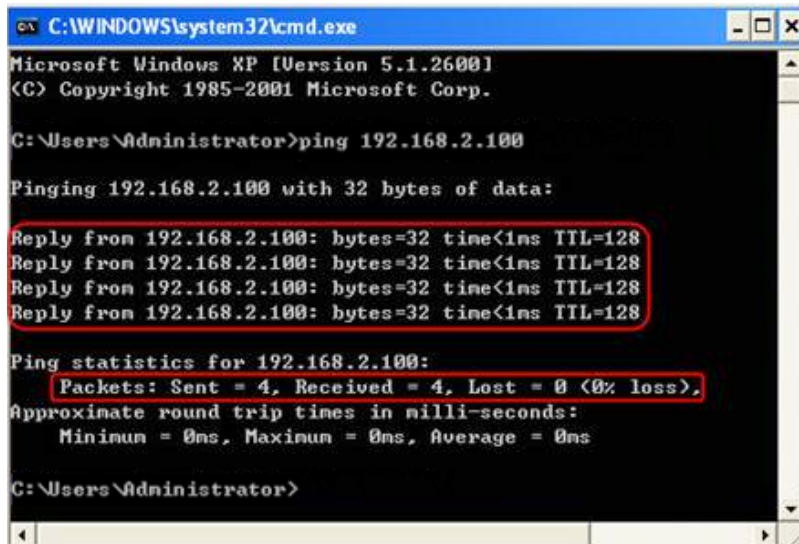

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Users\Administrator>ping 192.168.2.100

Pinging 192.168.2.100 with 32 bytes of data:

Reply from 192.168.2.100: bytes=32 time<1ms TTL=128
Reply from 192.168.2.100: bytes=32 time<1ms TTL=128
Reply from 192.168.2.100: bytes=32 time<1ms TTL=128
Reply from 192.168.2.100: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.2.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\Administrator>
```

If Ping proceeds successfully (gets replies from host in Site B), the IPSec connection is working properly now.

Done!

Now IPSec VPN is implemented to establish a connection.

Note:

1. The product supports a maximum of ten simultaneous connections.
2. If one of the site has been off line for a while, for example, if Site A has been disconnected, on Site B you need to click **Disable** and then click **Enable** after Site A back on line in order to re-establish the IPSec tunnel.

Chapter 13

Manage the Router

This chapter will show you the configuration for managing and maintaining your router.

This chapter includes the following sections:


- *Set Up System Time*
- *Test the Network Connectivity*
- *Upgrade the Firmware*
- *Backup and Restore Configuration Settings*
- *Change the Administrator Account*
- *Local Management*
- *Remote Management*
- *System Log*
- *SNMP Settings*
- *Monitor the Internet Traffic Statistics*
- *Control LEDs*

13.1. Set Up System Time

System time is the time displayed while the router is running. The system time you configure here will be used for other time-based functions like Parental Controls and Wireless Schedule. You can manually set how to get the system time.

Follow the steps below to set your system time.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Time Settings](#) page.

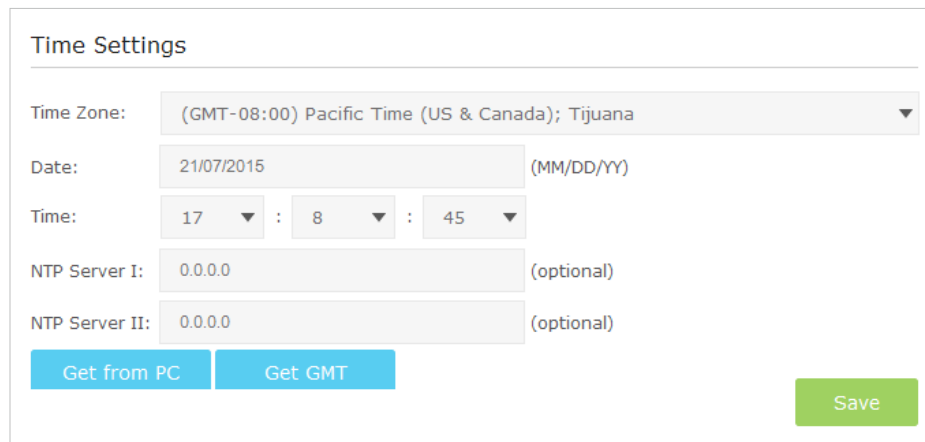

3. Configure the system time using the following methods :


Manually: Select your time zone and enter your local time.

Get from PC: Click this button if you want to use the current managing PC's time.

Get GMT: Click this button if you want to get time from the Internet. Make sure your router can access the Internet before you select this way to get system time.

4. Click [Save](#) to make your settings effective.

5. After setting the system time, you can set [Daylight Saving](#) time according to your needs. Tick the checkbox to enable [Daylight Saving](#), set the start and end time and then click [Save](#) to make the settings effective.

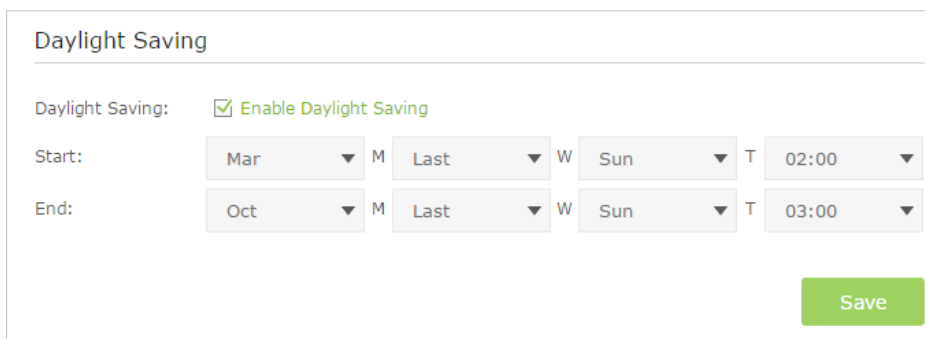

13.2. Test the Network Connectivity

Diagnostics is used to test the connectivity between the router and the host or other network devices.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced* > *System Tools* > *Diagnostics*.

3. Enter the information with the help of page tips:

- 1) Choose **Ping** or **Traceroute** as the diagnostic tool to test the connectivity;
 - **Ping** is used to test the connectivity between the router and the tested host, and measure the round-trip time.
 - **Traceroute** is used to display the route (path) your router has passed to reach the tested host, and measure transit delays of packets across an Internet Protocol network.
- 2) Enter the **Target IP Address/Domain Name** of the tested host.

4. Click **Start** to begin the diagnostics.

Tips:

Click **Advanced**, you can modify the packet count, packet size, test timeout time or max hop. It's recommended to keep the default value.

The figure below indicates the proper connection between the router and the Yahoo server (www.Yahoo.com) tested through **Ping**.

```

PING www.Yahoo.com (116.214.12.74): 64 data bytes
Reply from 116.214.12.74: bytes=64 ttl=50 seq=1 time=51.640 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=2 time=53.671 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=3 time=56.045 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=4 time=57.857 ms

--- Ping Statistic "www.Yahoo.com" ---
Packets: Sent=4, Received=4, Lost=0 (0.00% loss)
Round-trip min/avg/max = 51.640/54.803/57.857 ms
  
```

The figure below indicates the proper connection between the router and the Yahoo server (www.Yahoo.com) tested through **Traceroute**.

```

traceroute to www.Yahoo.com (116.214.12.74), 20 hops max, 38 byte packets
 1 219.133.12.1 (219.133.12.1) 19.556 ms 22.274 ms 22.024 ms
 2 113.106.38.77 (113.106.38.77) 30.115 ms 22.649 ms 20.931 ms
 3 * * *
 4 183.56.65.14 (183.56.65.14) 26.210 ms 29.428 ms 28.272 ms
 5 * 202.97.60.25 (202.97.60.25) 29.272 ms 25.461 ms
 6 202.97.60.46 (202.97.60.46) 27.335 ms 27.616 ms 28.272 ms
 7 202.97.60.149 (202.97.60.149) 22.805 ms 24.024 ms 24.711 ms
 8 202.97.6.30 (202.97.6.30) 47.610 ms 54.452 ms 61.137 ms
 9 r4105-s2.tp.hinet.net (220.128.6.110) 51.171 ms 50.515 ms 56.107 ms
10 220.128.11.190 (220.128.11.190) 60.950 ms 60.200 ms 60.419 ms

```

13.3. Upgrade the Firmware

TP-LINK is dedicated to improving and enriching the product features, giving you a better network experience. We will release the latest firmware at TP-LINK official website, you can download the latest firmware file from the [Support](#) page of our website www.tp-link.com and upgrade the firmware to the latest version.

Note:

1. Make sure the latest firmware file is matched with the hardware version (as shown in the webpage).
2. Make sure that you have a stable connection between the router and your computer. It is NOT recommended to upgrade the firmware wirelessly.
3. Make sure you remove any USB storage device connected to the router before the firmware upgrade to prevent data loss.
4. Backup your router configuration.
5. Do NOT turn off the router during the firmware upgrade.

Follow the steps to upgrade the firmware.

1. Download the latest firmware file for the router from our website www.tp-link.com.
2. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
3. Go to [Advanced](#) > [System Tools](#) > [Firmware Upgrade](#).
4. Click [Browse](#) to locate the downloaded new firmware file, and click [Upgrade](#).

5. Wait a few moments for the upgrading and rebooting.


13.4. Backup and Restore Configuration Settings

The configuration settings are stored as a configuration file in the router. You can backup the configuration file to your computer for future use and restore the router to a previous settings from the backup file when needed. Moreover, if necessary you can erase the current settings and reset the router to the default factory settings.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Backup & Restore](#).

To backup configuration settings:


Click [Backup](#) to save a copy of the current settings to your local computer. A '.bin' file of the current settings will be stored to your computer.

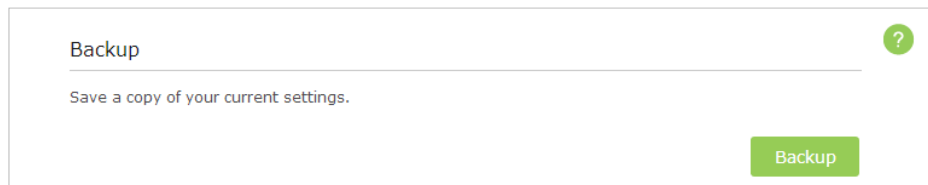

The screenshot shows a web interface for the 'Backup' function. At the top, the word 'Backup' is displayed in a light blue font. Below it, a horizontal line separates the title from the instruction: 'Save a copy of your current settings.' In the bottom right corner, there is a green button labeled 'Backup'. A small green circle with a white question mark is located in the top right corner of the interface area.

To restore configuration settings:

1. Click [Browse](#) to locate the backup configuration file stored on your computer, and click [Restore](#).

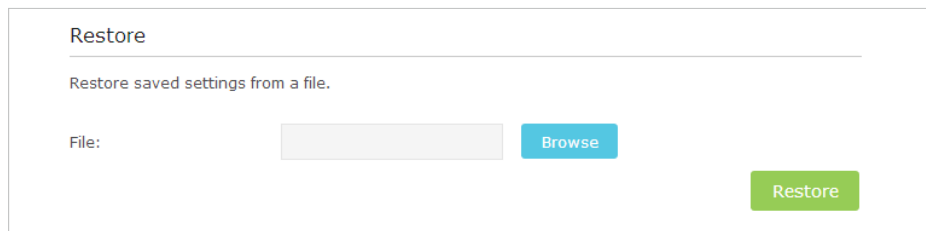

The screenshot shows a web interface for the 'Restore' function. At the top, the word 'Restore' is displayed in a light blue font. Below it, a horizontal line separates the title from the instruction: 'Restore saved settings from a file.' Underneath, there is a 'File:' label followed by a text input field and a blue button labeled 'Browse'. In the bottom right corner, there is a green button labeled 'Restore'.

2. Wait a few moments for the restoring and rebooting.

Note: During the restoring process, do not turn off or reset the router.

To reset the router to factory default settings:

1. Click [Factory Restore](#) to reset the router.



The screenshot shows a web interface for the 'Factory Default Restore' function. At the top, the words 'Factory Default Restore' are displayed in a light blue font. Below it, a horizontal line separates the title from the instruction: 'Revert all the configuration settings to their default values.' In the bottom right corner, there is a green button labeled 'Factory Restore'.

2. Wait a few moments for the reset and reboot.

Note:


1. During the resetting process, do not turn off or reset the router.

2. We strongly recommend you backup the current configuration settings before resetting the router.

13.5. Change the Administrator Account

The account management feature allows you to change your login username and password of the web-based management page.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router before.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) and complete the settings in [Account Management](#) section.

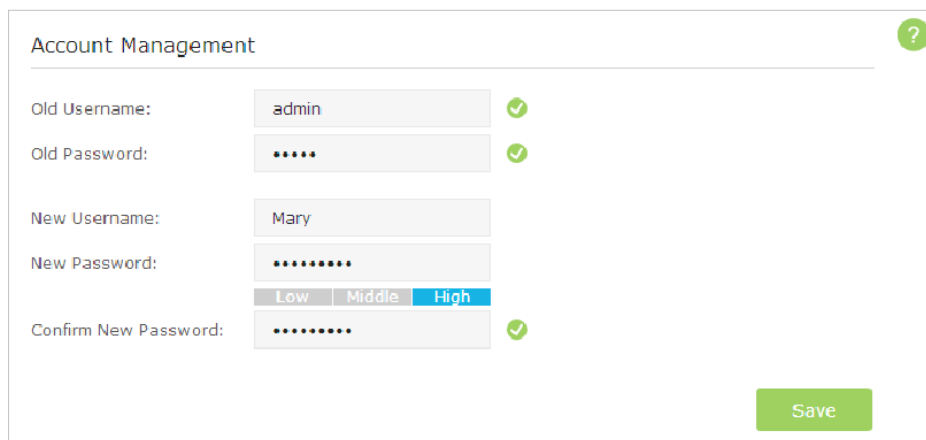

The screenshot shows the 'Account Management' web interface. It features a title bar with a question mark icon. Below the title, there are five input fields, each with a green checkmark to its right, indicating successful validation. The fields are: 'Old Username' with the value 'admin', 'Old Password' with masked characters, 'New Username' with the value 'Mary', 'New Password' with masked characters, and 'Confirm New Password' with masked characters. Below the 'New Password' field, there are three radio buttons for password strength: 'Low', 'Middle', and 'High', with 'High' selected. A green 'Save' button is located at the bottom right of the form.

3. Enter the old username and old password. Enter the new username and enter the new password twice (both case-sensitive). Click [Save](#).

Use the new username and password for the following logins.

13.6. Local Management

You can control the local devices' authority to manage the router via Local Management feature. By default all local connected devices are allowed to manage the router. You can also allow only one device to manage the router.

Follow the steps below to specify the local management.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) page. Locate the [Local Management](#) section.
3. Keep the [Port](#) as the default setting. Enter the IP address or MAC address of the local device to manage the router.

Note:

1. The IP address of the local device must be in the same subnet as the router's LAN IP address.
2. If you want that all local devices can manage the router, just leave the [IP/MAC Address](#) field blank.

The screenshot shows a web form titled "Local Management". It contains two input fields: "Port" with the value "80" and "IP/MAC Address" with the value "192.168.0.109". A green "Save" button is located at the bottom right of the form.

4. Click [Save](#) to make the settings effective. Now only the device using the IP address or MAC address you set can manage the router.

13.7. Remote Management

By default, the remote devices are not allowed to manage the router from the Internet. Follow the steps below to allow remote devices to manage the router.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) page. Locate the [Remote Management](#) section.

The screenshot shows a web form titled "Remote Management". It contains three fields: "Remote Management:" with a checked checkbox and the text "Enable", "Port:" with the value "80", and "IP/MAC Address:" which is empty. A green "Save" button is located at the bottom right of the form.

3. Tick the checkbox to enable [Remote Management](#).
4. Keep the [Port](#) as the default setting. Enter the IP address or MAC address of the remote device to manage the router.

Note: If you want that all remote devices can manage the router, just leave the [IP/MAC Address](#) field blank.

5. Click [Save](#) to make the settings effective. Now, only the device using the IP address or MAC address you set can log in to <http://router's Internet IP address:port number> (such as <http://113.116.60.229:80>) to manage the router remotely.

Tips:

1. You can find the Internet IP address of the router on [Basic](#) > [Network Map](#) > [Internet](#).
2. The router's Internet IP is usually a dynamic IP. Please refer to [Set Up a Dynamic DNS Service Account](#) if you want to log in to the router through a domain name.

13.8. System Log

System Log can help you know what happened to your router, facilitating you to locate the malfunctions. For example when your router does not work properly, you will need to save the system log and send it to the technical support for troubleshooting.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Click *Advanced* > *System Tools* > *System Log* page.

System Log

Type: ALL ▼

Level: Debug ▼

↻ Refresh
 ✖ Delete All

ID	Time	Type	Level	Log Content
1	1970-01-01 00:46:15	IGMP	Warning	V2 igmp router occured! Not matching ours V3.
2	1970-01-01 00:45:15	IGMP	Warning	V2 igmp router occured! Not matching ours V3.
3	1970-01-01 00:44:10	IGMP	Warning	V2 igmp router occured! Not matching ours V3.
4	1970-01-01 00:43:10	IGMP	Warning	V2 igmp router occured! Not matching ours V3.
5	1970-01-01 00:42:41	DHCPD	Notice	Recv REQUEST from 48:43:7C:B0:B4:ED
6	1970-01-01 00:42:39	DHCPD	Notice	Send OFFER with ip 192.168.0.100
7	1970-01-01 00:42:39	DHCPD	Notice	Recv DISCOVER from 48:43:7C:B0:B4:ED
8	1970-01-01 00:42:05	IGMP	Warning	V2 igmp router occured! Not matching ours V3.

⏪
1
2
3
4
5
6
7
8
⏩

Log Settings
Save Log

To view the system logs:

1. Select the log Type. Select **ALL** to view all kinds of logs, or select **IGMP** or **PPP** to view the specific logs.
2. Select the log Level and you will see the logs with the specific or higher levels.
3. Click **Refresh** to refresh the log list.

To save the system logs:

You can choose to save the system logs to your local computer or a remote server.

Click **Save Log** to save the logs in a txt file to your computer.

Click **Log Settings** to set the save path of the logs.

The screenshot shows the 'Log Settings' configuration interface. It is divided into two main sections: 'Save Locally' and 'Save Remotely'. Both sections have their respective checkboxes checked. The 'Save Locally' section includes a 'Minimum Level' dropdown menu currently set to 'Information'. The 'Save Remotely' section includes a 'Minimum Level' dropdown menu set to 'Warning', a 'Server IP' text field containing '192.168.1.100', a 'Server Port' text field containing '514', and a 'Local Facility Name' dropdown menu set to 'User'. At the bottom right of the form are two green buttons labeled 'Back' and 'Save'.

- **Save Locally:** Select this option to cache the system log to the router’s local memory, select the minimum level of system log to be saved from the drop-down list. The logs will be shown in the table in descending order on the System Log page.
- **Save Remotely:** Select this option to send the system log to a remote server, select the minimum level of system log to be saved from the drop-down list and enter the information of the remote server. If the remote server has a log viewer client or a sniffer tool implemented, you can view and analyze the system log remotely in real-time.

13.9. SNMP Settings

SNMP (Simple Network Management Protocol) has been widely applied in the computer networks currently, which is used for ensuring the transmission of the management information between two nodes. In this way, network administrators can easily search and modify the information on any node on the network. Meanwhile, they can locate faults promptly and implement the fault diagnosis, capacity planning and report generating.

An **SNMP Agent** is an application running on the router that performs the operational role of receiving and processing SNMP messages, sending responses to the SNMP manager, and sending traps when an event occurs. So a router contains SNMP “agent” software can be monitored and/or controlled by SNMP Manager using SNMP messages.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced* > *System Tools* > *SNMP Settings* page.

SNMP Settings

Simple Network Management Protocol(SNMP) allows management applications to retrieve status updates and statistics from the SNMP agent within this device.

Enable SNMP Agent:

Read Community:	public
Set Community:	private
System Name:	Router C3200
System Description:	C3200-K9 02.01.01.00000.0 Base 15000
System Location:	
System Contact:	
Trap Manager IP:	0.0.0.0

[Save](#)

- **Enable SNMP Agent:** Toggle On to enable the built-in SNMP agent that allows the router to operate as the operational role in receiving and processing of SNMP messages, sending responses to the SNMP manager, and triggering SNMP traps when an event occurs.
- **Read-only Community:** Displays the default public community string that protects the router from unauthorized access.
- **Set Community:** Displays the default read and write community string that protects the router from unauthorized changes.
- **System Name:** Displays the administratively-assigned name for this managed device.
- **System Description:** Displays the textual description of the managed device. This value should include the full name and version identification of the system's hardware type, software operating-system, and networking software.
- **System Location:** Displays the physical location of this device (e.g., telephone closet, 3rd floor).
- **System Contact:** Displays the textual identification of the contact person for this managed device, together with information on how to contact this person.
- **Trap Manager IP:** Displays the IP address of the host to receive the traps.

You are suggested to keep the default settings. Click [Save](#) to make the settings effective.

13. 10. Monitor the Internet Traffic Statistics

The Traffic Statistics page displays the network traffic of the LAN, WAN and WLAN sent and received packets, allows you to monitor the volume of Internet traffic statistics.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced* > *System Tools* > *Traffic Statistics*.
3. Toggle on *Traffic Statistics*, and then you can monitor the traffic statistics in *Traffic Statistics List* section.
 - 🔗 **Tips:** This function is enabled by default.

Traffic Statistics

Traffic Statistics: On

Traffic Statistics List

Refresh Reset All Delete All

IP Address/MAC Address	Total Packets	Total Bytes	Current Packets	Current Bytes	Modify
192.168.0.200/ 50-E5-49-1E-06-80	0	0	0	0	Refresh Delete
192.168.0.20/ 40-16-9F-BF-51-0C	1	594	0	0	Refresh Delete
192.168.0.155/ 00-14-78-43-45-45	1	346	0	0	Refresh Delete
192.168.0.1/ 00-0A-EB-13-09-19	1	594	0	0	Refresh Delete
192.168.0.123/ C4-E9-84-23-06-C6	1	594	0	0	Refresh Delete
192.168.0.4/ 00-0A-EB-13-01-02	2	412	0	0	Refresh Delete
192.168.0.100/ C8-85-50-5D-02-40	0	0	0	0	Refresh Delete
192.168.0.184/ C8-85-50-5D-02-40	0	0	0	0	Refresh Delete

< 1 2 >

Click [Refresh](#) to update the statistic information on the page.

Click [Reset All](#) to reset all statistic values in the list to zero.

Click [Delete All](#) to delete all statistic information in the list.

Click  to reset the statistic information of the specific device.

Click  to delete the specific device item in the list.

13. 11. Control LEDs

The router LEDs indicate router activities and behavior. You can turn on or turn off the router from the web-based management page.

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced* > *System Tools* > *System Parameters*.

3. In the **LED** section, enable the **Night Mode**.
4. Specify a time period according to your needs, and the LEDs will be off during the period.
5. Click **Save** to make the settings effective.

LED

Night Mode: Enable

Period of Night Time: : to : (HH:MM)

Note: The time is based on the time of the Router which can be set in "System Tools -> Time Settings"

[Save](#)

FAQ

Q1. What can I do if I forgot my wireless password?

The default password is labeled at the back of the router. If the password has been altered, please connect the router to the computer using a cable and follow the steps below:

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Basic* > *Wireless* to obtain your wireless password.

Q2. How to retrieve the username and password of the web management page?

The default username and password of the web management page are [admin](#) (in lower case). If the password has been altered, please follow the steps below:


1. Reset the router to factory default settings: Press and hold the Reset button for about 7 seconds and then release;
2. Visit <http://tplinkwifi.net>;
3. Enter [admin](#) (in lower case) as both username and password to login.

Note: You'll need to reconfigure the router to surf the Internet once the router is reset, and please mark down your new password for future use.


Q3. I cannot login to the router's web management page, what can I do?

This can happen for a variety of reasons, please try the methods below and try again.


1. Make sure the router connects to the computer correctly and the corresponding LED indicator(s) light up.
2. Make sure the IP address of your computer is configured as [Obtain an IP address automatically](#) and [Obtain DNS server address automatically](#).
3. Make sure the <http://tplinkwifi.net> you input is right.
4. Check your computer's settings:
 - 1) Go to *Start* > *Control Panel* > *Network and Internet*, and click [View network status and tasks](#);
 - 2) Click [Internet Options](#) on the bottom left;
 - 3) Click [Connections](#), select [Never dial a connection](#);

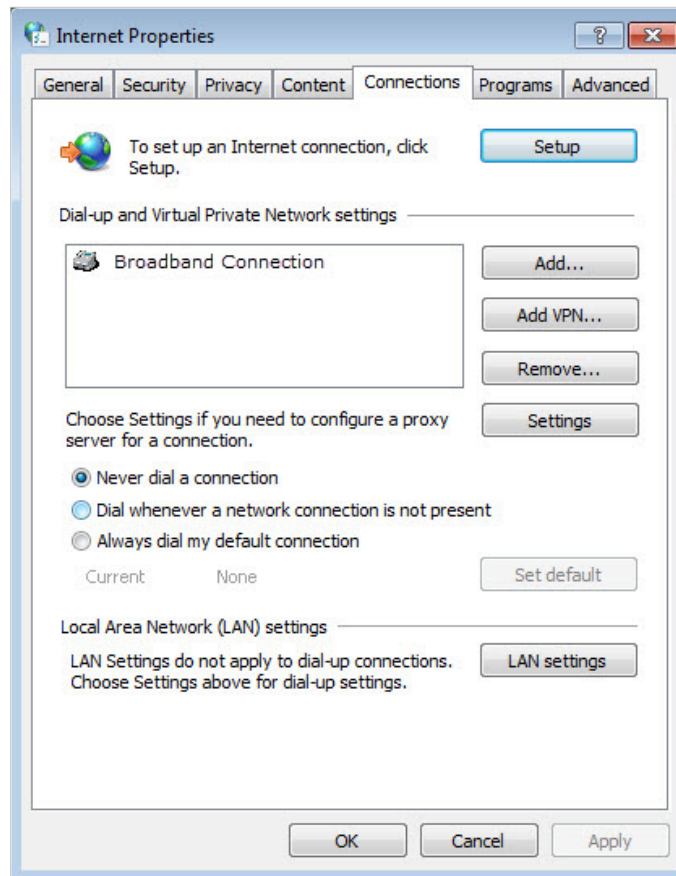

4) Click [LAN settings](#), deselect the following three options and click [OK](#);

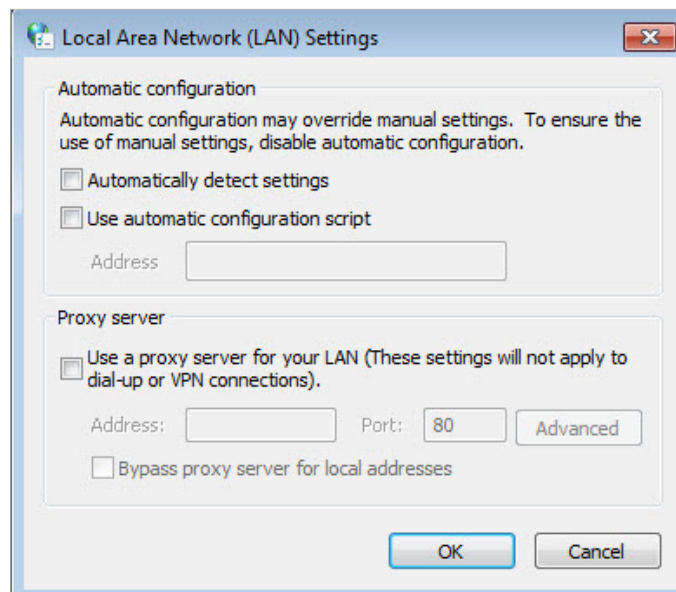

5) Go to [Advanced](#) > [Restore advanced settings](#), click [OK](#) to save the settings.

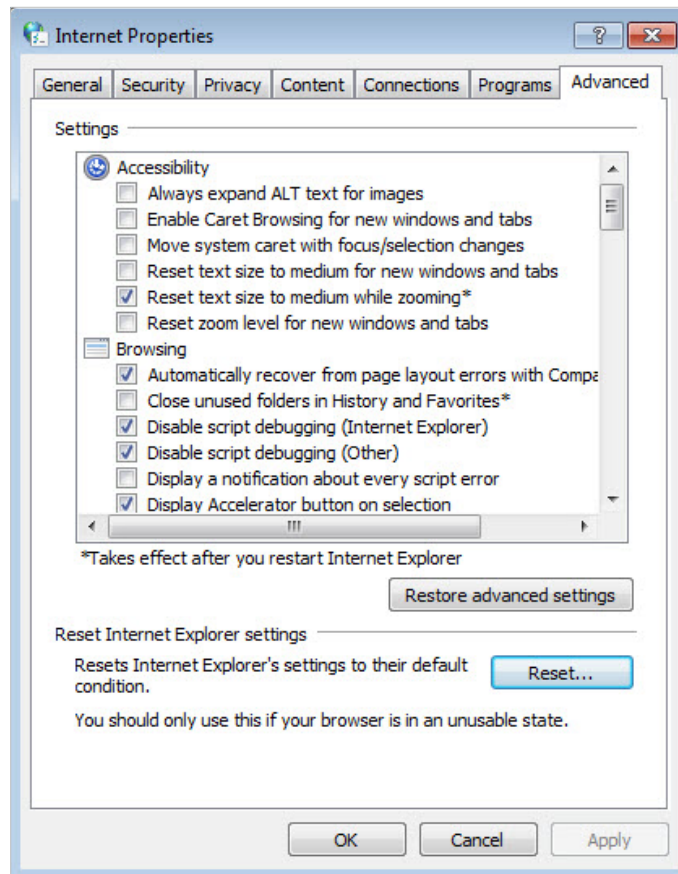

5. Change a web browser or computer and login again.

6. Reset the router to factory default settings: Press and hold the Reset button for about 7 seconds and then release.

Note: You'll need to reconfigure the router to surf the Internet once the router is reset.

Open a web browser and login again. If login still fails, please contact the technical support.

Q4. I cannot access the Internet even though the configuration is finished, what can I do?

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.

2. Go to *Advanced* > *Status* to check Internet status:

➤ **If IP Address is a valid IP address, please try the methods below and try again:**

Internet ✔ IPv4 IPv6	
MAC Address:	00-0A-EB-AC-88-16
IP Address:	59.40.0.91
Subnet Mask:	255.255.255.0
Default Gateway:	59.40.0.1
Primary DNS:	202.96.128.166
Secondary DNS:	202.96.134.133
Connection Type:	Dynamic IP

1. Your computer might not recognize any DNS server addresses, please manually configure DNS server.

- 1) Go to [Advanced](#) > [Network](#) > [DHCP Server](#);
- 2) Enter 8.8.8.8 as Primary DNS, click [Save](#).

🔗 **Tips:** 8.8.8.8 is a safe and public DNS server operated by Google.

DHCP Server ?

DHCP: Enable

IP Address Pool: -

Address Lease Time: minutes. (1-2880. The default value is 1440.)

Default Gateway: (Optional)

Primary DNS: (Optional)

Secondary DNS: (Optional)

[Save](#)

2. Power cycle the modem and the TP-LINK router.

- 1) Power off your modem and TP-LINK router, leave them off for 1 minute;
- 2) Power on your modem first, wait about 2 minutes until it get a solid cable or Internet light;
- 3) Power back TP-LINK router;
- 4) Wait another 1 or 2 minutes and check the Internet access.

3. Reset the router to factory default settings and reconfigure.


■ **Note:** You'll have to reconfigure the router to access the Internet once the router is reset.

- 1) Reset the router to factory default settings: press and hold the RESET button for about 7 seconds and then release;

2) Reconfigure the router with the help of [Quick Setup](#).

4. Please refer to [Upgrade the Firmware](#) to upgrade the firmware of the router.

➤ **If the IP Address is 0.0.0.0, please try the methods below and try again:**

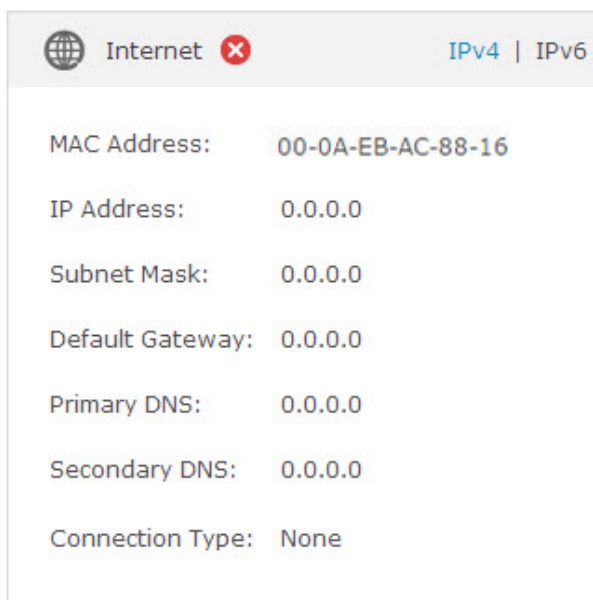


MAC Address:	00-0A-EB-AC-88-16
IP Address:	0.0.0.0
Subnet Mask:	0.0.0.0
Default Gateway:	0.0.0.0
Primary DNS:	0.0.0.0
Secondary DNS:	0.0.0.0
Connection Type:	None

1. Check the physical connection.

Make sure the physical connection between the router and the modem is proper.

2. Clone the MAC address of your computer.

- 1) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router;
- 2) Go to [Advanced](#) > [Network](#) > [Internet](#);
- 3) Choose an option to your need (Enter the MAC address if [Use Custom MAC Address](#) is selected), and click [Save](#).

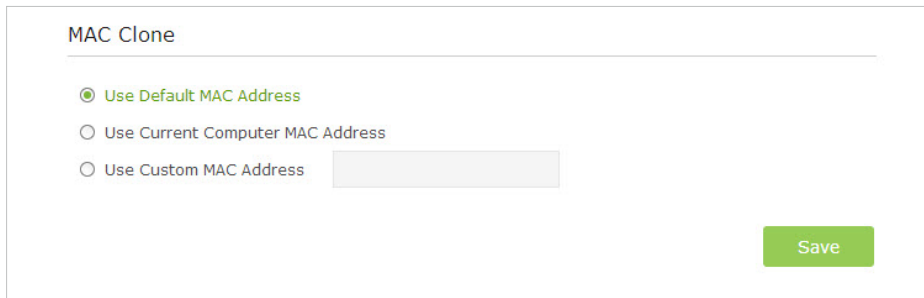

MAC Clone

Use Default MAC Address

Use Current Computer MAC Address

Use Custom MAC Address

[Save](#)

🔗 Tips:


- Some ISP will register the MAC address of your computer when you access the Internet for the first time through their Cable modem, if you add a router into your network to share your Internet connection, the ISP will not accept it as the MAC address is changed, so we need to clone your computer's MAC address to the router.
- The MAC addresses of a computer in wired connection and wireless connection are different.

3. Modify the LAN IP address of the router.

■ Note:

Most TP-LINK routers use 192.168.0.1/192.168.1.1 as their default LAN IP address, it may be conflicting with the IP range of your existent ADSL modem/router. If so, the router is not able to communicate with your modem and cause you can't access the Internet. To resolve the problem, we need to change the LAN IP address of the router to avoid such conflict, for example, 192.168.2.1.

- 1) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router;
- 2) Go to [Advanced](#) > [Network](#) > [LAN](#);
- 3) Modify the LAN IP address as the follow picture shows. Here we take 192.168.2.1 as an example;
- 4) Click [Save](#).

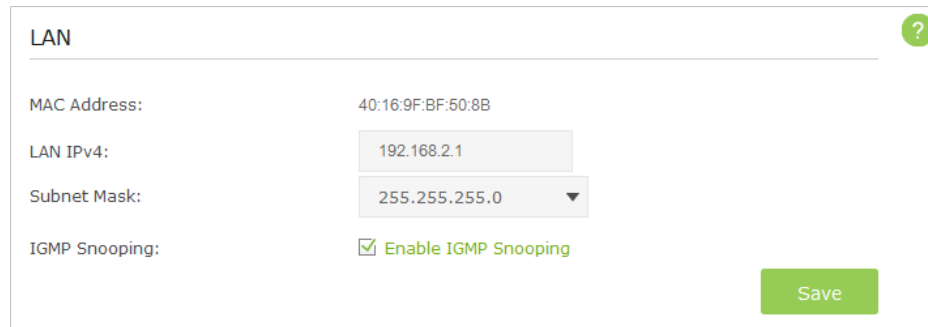

MAC Address:	40:16:9F:BF:50:8B
LAN IPv4:	192.168.2.1
Subnet Mask:	255.255.255.0
IGMP Snooping:	<input checked="" type="checkbox"/> Enable IGMP Snooping

Save

4. Power cycle the modem and the TP-LINK router.

- 1) Power off your modem and TP-LINK router, leave them off for 1 minute;
- 2) Power on your modem first, wait about 2 minutes until it get a solid cable or Internet light;
- 3) Power back TP-LINK router;
- 4) Wait another 1 or 2 minutes and check the Internet access.

5. Double check the Internet Connection Type.

- 1) Confirm your Internet Connection Type, which can be learned from the ISP;
- 2) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router;
- 3) Go to [Advanced](#) > [Network](#) > [Internet](#);
- 4) Select your [Internet Connection Type](#) and fill in other parameters with the help of page tips;
- 5) Click [Save](#).

WAN Interface

Internet Connection Type: Dynamic IP

IP Address: Dynamic IP

Subnet Mask: Static IP

Default Gateway: PPPoE

Renew Release

Advanced

MAC Clone

Use Default MAC Address

Use Current Computer MAC Address

Use Custom MAC Address

Save

6) Power cycle the modem and the TP-LINK router again.

3. Please refer to [Upgrade the Firmware](#) to upgrade the firmware of the router.
4. Check the TCP/IP settings on the particular device if all other devices can get Internet from the router.

If you've tried every method above but cannot access the Internet, please contact the technical support.

Q5. I cannot find my wireless network or I cannot connect the wireless network, what can I do?

➤ **If you fail to find any wireless network, please follow the steps below:**

1. Make sure the wireless function is enabled if you're using a laptop with built-in wireless adapter. You can refer to the relevant document or contact the laptop manufacturer.
2. Make sure the wireless adapter driver is installed successfully and the wireless adapter is enabled.

On Windows 7

- 1) If you see the message [No connections are available](#), it is usually because the wireless function is disabled or blocked somehow;
- 2) Clicking on [Troubleshoot](#) and windows might be able to fix the problem by itself.

On Windows XP

- 1) If you see the message [Windows cannot configure this wireless connection](#), this is usually because windows configuration utility is disabled or you are running another wireless configuration tool to connect the wireless;
- 2) Exit the wireless configuration tool(the TP-LINK Utility, for example);

- 3) Select and right click on [My Computer](#) on desktop, select [Manage](#) to open Computer Management window;
- 4) Expand [Services and Applications](#) > [Services](#), find and locate [Wireless Zero Configuration](#) in the Services list on the right side;
- 5) Right click [Wireless Zero Configuration](#), and then select [Properties](#);
- 6) Change [Startup type](#) to [Automatic](#), click on Start button and make sure the Service status is Started. And then click [OK](#).
- 7) Connect to wireless network.

➤ **If you can find other wireless network except your own, please follow the steps below:**

1. Check the wireless LEDs on your wireless router/modem;
2. Make sure your computer/device is still in the range of your router/modem, move closer if it is currently too far away;
3. Go to [Advanced](#) > [Wireless](#) > [Wireless Settings](#), and check the wireless router settings, double check your Wireless Network Name, make sure the Region is selected correctly and wireless is not hidden;

Note:

Different countries have different laws about wireless channel. For example, USA allows 2.4GHz channel from 1 to 11, while UK allows from 1 to 13. If you select the Region as UK or the Channel as 12/13 while you are in USA, your computer might not be able to pick up the signal.

The screenshot shows a 'Settings' window with a green question mark icon in the top right corner. The 'Region' is set to 'United States'. Under 'Smart Connect', the 'Smart Connect' checkbox is unchecked. The 'Wireless' section is active, showing '2.4GHz | 5GHz' options. The 'Wireless Radio' is checked and labeled 'Enable'. The 'Wireless Network Name (SSID)' is 'TP-LINK_508B' with a 'Hide SSID' checkbox. The 'Security' is set to 'WPA/WPA2 Personal(Recommended)'. The 'Version' is 'WPA2-PSK' (selected), with 'Auto' also available. The 'Encryption' is 'AES' (selected), with 'Auto' and 'TKIP' also available. The 'Password' is '12345670'. The 'Mode' is '802.11bgn mixed'. The 'Channel' is 'Auto'. The 'Channel Width' is 'Auto'. The 'Transmit Power' is 'High' (selected), with 'Low' and 'Middle' also available. There are two green 'Save' buttons, one in the 'Smart Connect' section and one at the bottom of the 'Wireless' section.

4. Connect to wireless network.

➤ **If you can find your wireless network but fail to connect, please follow the steps below:**

• Authenticating problem, password mismatch:

1. Sometimes it will ask you to type in a PIN number when you connect to the wireless network for the first time. This PIN number is different from the Wireless Password/Network Security Key, usually you can only find it on the back of your wireless router;



2. If you cannot find the PIN or PIN failed, you may choose [Connecting using a security key instead](#), and then type in the [Wireless Password/Network Security Key](#);

3. If it continues on saying [Network Security Key Mismatch](#), it is suggested to confirm the wireless password of your wireless router;

■ Note: Wireless Password/Network Security Key is case sensitive.

4. Connect to wireless network.

• Windows was unable to connect to XXXX /Can not join this network/Taking longer than usual to connect to this network:

1. Check the wireless signal strength of your network, if it is weak (1~3 bars), please move the router closer and try again;
2. Change the wireless Channel of the router to 1,6,or 11 to reduce interference from other networks;
3. Re-install or update the driver for your wireless adapter of the computer;
4. Connect to wireless network.

Specifications

Hardware	
Ethernet Ports	4 10/100/1000Mbps LAN Ports 1 10/100/1000Mbps WAN Port
USB Port	1 USB 3.0 Ports 1 USB 2.0 Ports
Button	WPS Button, Reset Button, Wireless On/Off Button, LED On/Off Button, Power On/Off Button
External Power Supply	12V/5A
Dimensions (W x D x H)	10.4x7.8x1.5 in. (263.8x197.8x37.3mm)
Antenna	Four external antennas (RF-SMA-F). 2.4G gain: 2 dBi / 5G gain: 3dBi.
Wireless	
Wireless Standards	IEEE 802.11ac/n/a 5GHz, IEEE 802.11ac/n/g/b 2.4GHz
Frequency	2.4GHz, 5GHz
Signal Rate	2166Mbps at 5GHz, 1000Mbps at 2.4GHz
Transmit Power	CE: <20dBm(2.4GHz), <23dBm(5GHz) FCC: <30dBm
Reception Sensitivity	5GHz: 11a 6Mbps: -91dBm; 11a 54Mbps: -73dBm; 11n HT20: -70dBm; 11n HT40: -69dBm; 11ac HT20: -66dBm; 11ac HT40: -61dBm; 11ac HT80: -58dBm 2.4GHz: 11g 54Mbps: -76dBm; 11n HT20: -73dBm; 11n HT40: -71dBm
Wireless Function	Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
Wireless Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryptions
Software	
WAN Type	Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
DHCP	Server, Client, DHCP Client List, Address Reservation
Quality of Service	WMM, Bandwidth Control
Port Forwarding	Virtual Server, Port Triggering, UPnP, DMZ
Dynamic DNS	DynDns, NO-IP
VPN Pass-Through	PPTP, L2TP, IPSec
VPN Server	Open VPN, PPTP VPN
Access Control	Parental Control, Local Management Control, Host list, Access Schedule, Rule Management
Firewall Security	DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
Protocols	Supports IPv4 and IPv6
USB Sharing	Supports Samba(Storage)/FTP Server/Media Server/Printer Server
Management	Access Control, Local Management, Remote Management
Guest Network	2.4GHz guest network x 1, 5GHz guest network x 1

Environment

Operating Temperature	0°C~40°C (32°F ~104°F)
Storage Temperature	-40°C~70°C (-40°F ~158°F)
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing

COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice. **TP-LINK**[®] is a registered trademark of TP-LINK TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK TECHNOLOGIES CO., LTD. Copyright © 2015 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved.

FCC STATEMENT



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

This device is restricted for indoor use.

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

RF Exposure Information

This device meets the EU requirements (1999/519/EC) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

National Restrictions

This device is intended for home and office use in all EU countries (and other countries following the EU directive 1999/5/EC) without any limitation except for the countries mentioned below:

Country	Restriction	Reason/remark
Belarus	Not implemented	
Norway	Implemented	This subsection does not apply for the geographical area within a radius of 20 km from the centre of Ny-Ålesund on Svalbard.
Italy	Implemented	This subsection does not apply for the geographical area within a radius of 20 km from the centre of Ny-Ålesund on Svalbard.
Russian Federation	Limited implementation	<ol style="list-style-type: none">1. SRD with FHSS modulation<ol style="list-style-type: none">1.1. Maximum 2.5 mW e.i.r.p.1.2. Maximum 100 mW e.i.r.p. Permitted for use SRD for outdoor applications without restriction on installation height only for purposes of gathering telemetry information for automated monitoring and resources accounting systems. Permitted to use SRD for other purposes for outdoor applications only when the installation height is not exceeding 10 m above the ground surface.1.3. Maximum 100 mW e.i.r.p. Indoor applications.2. SRD with DSSS and other than FHSS wideband modulation<ol style="list-style-type: none">2.1. Maximum mean e.i.r.p. density is 2 mW/MHz. Maximum 100 mW e.i.r.p.2.2. Maximum mean e.i.r.p. density is 20 mW/MHz. Maximum 100 mW e.i.r.p. It is permitted to use SRD for outdoor applications only for purposes of gathering telemetry information for automated monitoring and resources accounting systems or security systems.2.3. Maximum mean e.i.r.p. density is 10 mW/MHz. Maximum 100 mW e.i.r.p. Indoor applications.
Ukraine	Limited implementation	e.i.r.p. ≤100 mW with built-in antenna with amplification factor up to 6 dBi.

ATTENTION: Due to EU law, the country settings must be identical to the country where the device is operating (important due to non-harmonised frequencies in the EU).

Restricted for indoor use.

Canadian Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1) This device may not cause interference, and
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) l'appareil ne doit pas produire de brouillage;
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter (IC: 8853A-C3150/ Model: Archer C3150) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list (Specifications), having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC: 8853A-C3150/ Model: Archer C3150) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste (Specifications), et dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Caution:

- 1) The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- 2) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and

The high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

NCC Notice:

注意！

依據 低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性或功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通行；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信規定作業之無線電信。低功率射頻電機需忍受合法通信或工業、科學以及醫療用電波輻射性電機設備之干擾。

減少電磁波影響，請妥適使用。

BSMI Notice:

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 請不要私自打開機殼，不要嘗試自行維修本產品，請由授權的專業人士進行此項工作。

Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.



Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Safety Information

- When product has power button, the power button is one of the way to shut off the product; when there is no power button, the only way to completely shut off power is to disconnect the product or the power adapter from the power source.
- Don't disassemble the product, or make repairs yourself. You run the risk of electric shock and voiding the limited warranty. If you need service, please contact us.
- Avoid water and wet locations.
- Adapter shall be installed near the equipment and shall be easily accessible.
- The plug considered as disconnect device of adapter.
- CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.



- Use only power supplies which are provided by manufacturer and in the original packing of this product.

- Alert to service person

CAUTION

DOUBLE POLE / NEUTRAL FUSING

This product can be used in the following countries:

AT	BG	BY	CA	CZ	DE	DK	EE
ES	FI	FR	GB	GR	HU	IE	IT
LT	LV	MT	NL	NO	PL	PT	RO
RU	SE	SG	SK	TR	UA	US	

DECLARATION OF CONFORMITY

For the following equipment:

Product Description: AC3150 Wireless Dual Band Gigabit Router

Model No.: **Archer C3150**

Trademark: **TP-LINK**

We declare under our own responsibility that the above products satisfy all the technical regulations applicable to the product within the scope of Council Directives:

Directives 1999/5/EC, Directives 2004/108/EC, Directives 2006/95/EC, Directives 1999/519/EC, Directives 2011/65/EU

The above product is in conformity with the following standards or other normative documents

EN 300 328 V1.9.1

EN 301 489-1 V1.9.2 & EN 301 489-17 V2.2.1

EN 55022: 2010 + AC: 2011

EN 55024: 2010

EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013

EN 50385: 2002


EN 301 893 V1.8.1

EN50581: 2012

The product carries the CE Mark:

CE 1588 

Person responsible for making this declaration:

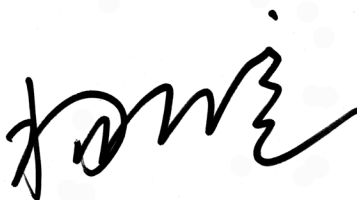

Yang Hongliang
Product Manager of International Business

Date of issue: 2015/11/12