

Quick Installation Guide


AC1900 Wireless Dual Band Gigabit
ADSL2+ Modem Router

Archer D9




1. Connecting the Hardware

1 Connect the splitter, computer and power adapter as follows. Then turn on the modem router.

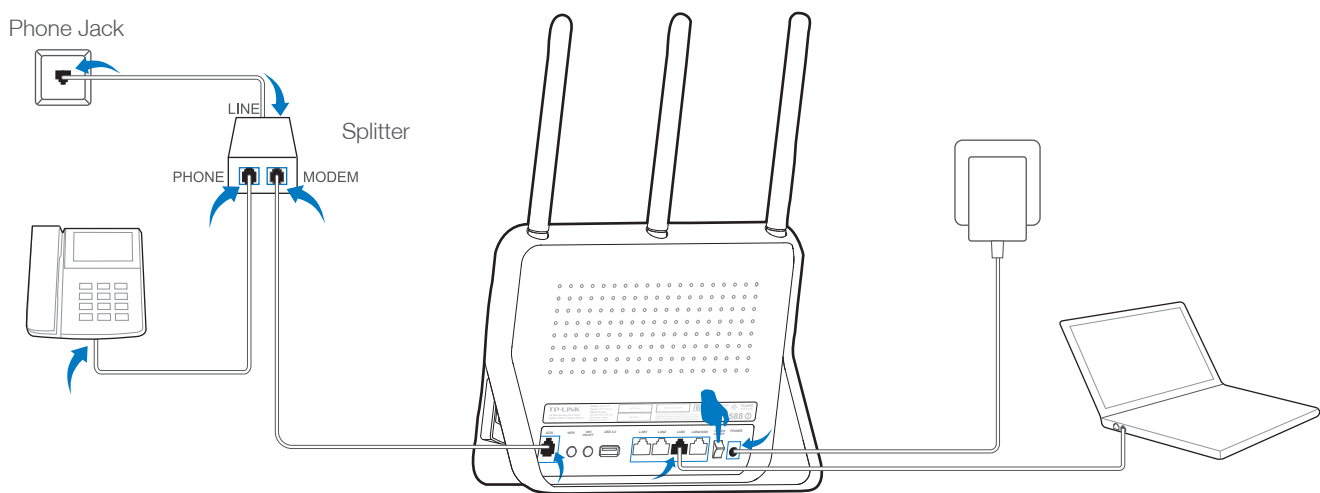

Note: If you don't need the phone service, just directly connect the ADSL port to the Phone Jack with a phone cable.

2 Check the following LED lights to ensure the hardware connection is correct.

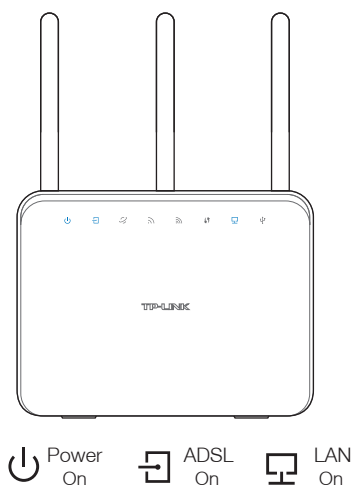


Note: Please wait for 1-2 minutes until the ADSL LED is on.

2. Configuring the Modem Router

Method 1 Via Web Browser

1 Connect your computer to the modem router (Wired or Wireless).

• Wired

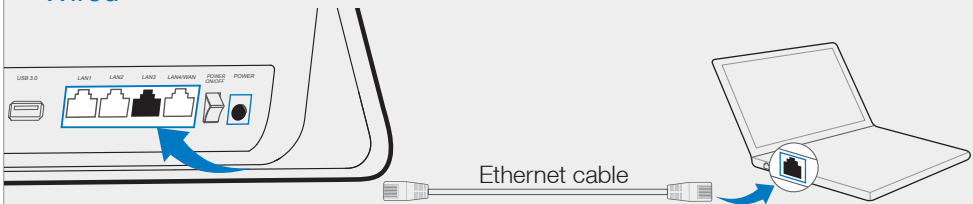

• Wireless


Connect wirelessly by using the default network name (SSID) and password on the product label printed on the bottom of the modem router.




2 Open a web browser on the computer and configure the modem router according to the following main clues.

a Enter **http://tplinkmodem.net** or **192.168.1.1** in the address bar. Type in **admin** for both the user name and password and click **OK**.


Note: If the login window does not appear, please refer to FAQ->Q1.

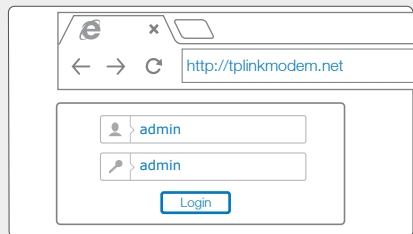


b Choose **Quick Setup** in the main menu and then click **Next** to start the configuration. Select your **Region** and **Time Zone** from the drop-down list, and then click **Next**.

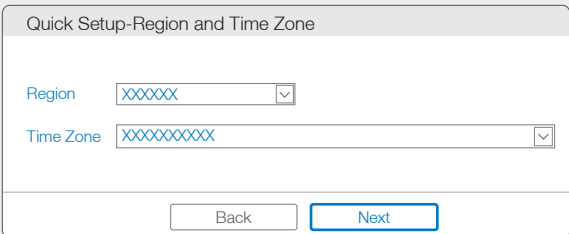


c Select **Yes** to auto detect your connection type and then click **Next** to continue.

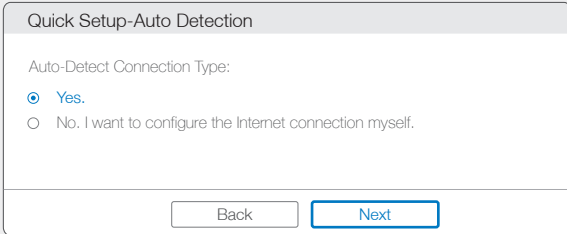


d Enter the parameters provided by your ISP and then click **Next**. Here we take **PPPoE** as an example.

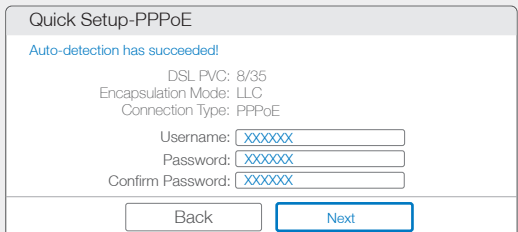

e Click **Next** to continue.
Note: You may rename your 2.4GHz/ 5GHz wireless network name and create your own password.

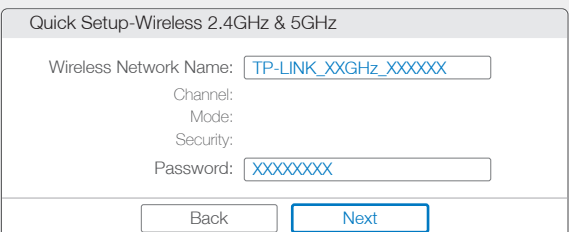

f Click **Save** and wait for your settings to take effect. Click **Finish** to complete the setup.

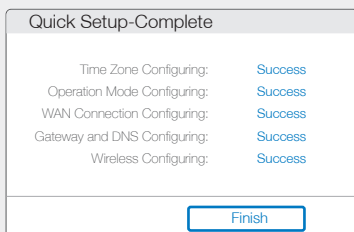


Now your wired and wireless devices can connect to the Internet !

Method 2 Via CD Setup Wizard


Note: If you are using a computer that cannot run the mini CD, please refer to Method 1 for configuration.

- a Insert the TP-LINK Resource CD into the CD-ROM drive.

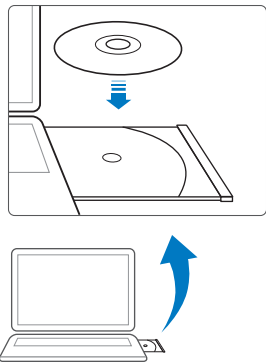


- b Choose your language and select Archer D9. Then click **Start Setup**. The Easy Setup Assistant will guide you through the setup process.

Note: If the main page does not display on your computer, browse the files on the CD and double click Autorun.exe.

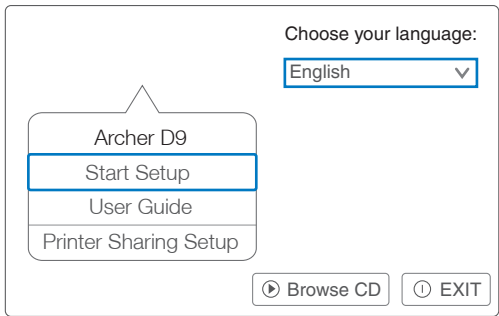

- c Click **FINISH** to complete the setup.

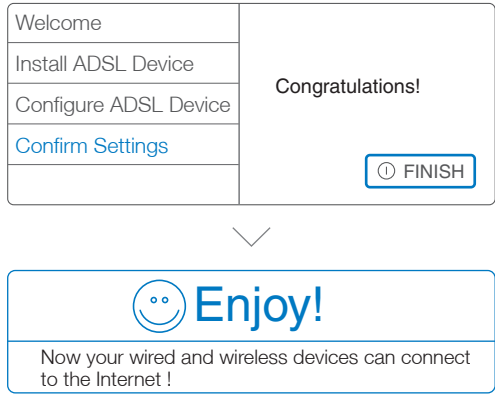

Tether App

After connecting to the Internet via Web Browser or via CD Setup Wizard, TP-LINK's Tether App lets you manage the modem router on smart devices. You can:

- View the information about clients.
- Block or Unblock client's access to the Internet.
- Use Parental Control to limit kid's access to the Internet.
- Configure some basic settings for the modem router.

Then, how to start?


- 1 Scan the QR code and download the TP-LINK Tether App from App Store or Google Play.
- 2 Ensure your smart device is wirelessly connected to the modem router.
- 3 Launch the Tether App, and enjoy the easy management of the modem router.



USB Features

The USB 2.0&3.0 ports can be used for media sharing, storage sharing and print sharing across your local network. You can also set up the FTP server to access your files remotely by connecting to the Internet.

Note: To learn more about the USB features, please visit <http://tp-link.com/app/usb>, retrieve Resource CD or simply scan the QR code.

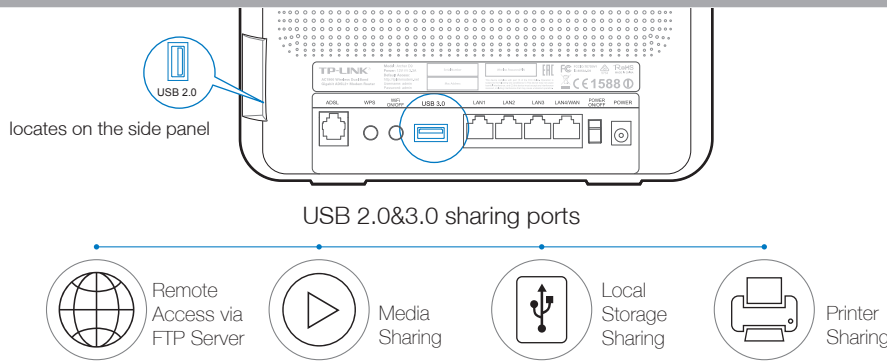

Frequently Asked Questions (FAQ)

Q1. What can I do if the login window does not appear?

- A1. If the computer is set to a static or fixed IP address, change it to obtain an IP address automatically.
A2. Verify <http://tplinkmodem.net> or 192.168.1.1 is correctly entered in the web browser and press Enter.
A3. Use another web browser and try again.
A4. Reboot your modem router and try again.
A5. Disable the network adapter used currently and then enable it again.


Q2. What can I do if I cannot access the Internet?

- A1. Check your cables and make sure they are all plugged in correctly, including the telephone line, Ethernet cables and power adapter.
A2. Check to see if you can log on to the Web-Management page of the modem router. The default address of the Web-Management page is <http://tplinkmodem.net> or 192.168.1.1. If you can, try the following steps. (If you can not, please set your computer to obtain an IP address automatically and then try to access the Internet again.)
A3. Consult your ISP and make sure all the VPI/VCI, Connection Type, account username and password are correct. If they are not, please replace them with the correct settings and try again.
A4. If you still cannot access the Internet, please restore your modem router to its factory default settings and reconfigure your modem router following the instructions in this QIG.
A5. Please contact our Technical Support if the problem still exists.

Q3. How do I restore the modem router to its factory default settings?

- A1. With the modem router powered on, press and hold down the RESET Button on the side panel of the modem router for approximately 8 seconds.
A2. Log on to Web Management page of the modem router, and go to System Tools->Factory Defaults, click Restore, then wait until the progress bar loading finished.

RESET Button Press & Hold 8 seconds



Q4. What can I do if I forget my password?

- **Web Management page password:**
Restore the modem router to its factory default settings and then use the default User Name 'admin' and Password 'admin' to log in.
- **Wireless Network password:**
A1. The factory default password can be found on the product label printed on the back of the modem router.
A2. If you have changed your password, log on to the modem router's Web Management page, go to Wireless>Wireless Security to obtain or reset your password.

Note: If your questions are not answered here, please refer to <http://www.tp-link.com/en/support/faq> and click Contact Technical Support for further assistance.

LED Indicators

	Name	Status	Indication
	(Power)	On Flashing Off	System start-up complete. System starting up or device updating. Power is off.
	(ADSL)	On Flashing Off	ADSL line is synchronized and ready to use. The ADSL negotiation is in progress. ADSL synchronization fails.
	(Internet)	On Off	The network is available with a successful Internet connection. There is no successful Internet connection or the modem router is operating in Bridge mode.
	(Wireless 2.4GHz)	On Off	The wireless 2.4GHz band is working properly. The wireless 2.4GHz band is disabled.
	(Wireless 5GHz)	On Off	The wireless 5GHz band is working properly. The wireless 5GHz band is disabled.
	(WPS)	On/Off Slow Flash	It turns on when a wireless device has been successfully connected to the network via WPS. After about 5 minutes, the WPS LED will turn off. A wireless device is trying to connect to the network via WPS. This process may take up to 2 minutes.
	(LAN)	On Off	At least one LAN port is connected . No LAN port is connected.
	(USB)	On Flash Off	The inserted USB device is identified and ready to use. A new USB device is being identified. No USB device is plugged in.