

Deploy Arista CloudEOS with Google Cloud Network Connectivity Center

Goal

In this deployment guide, we will show you how to connect the Arista CloudEOS Router to Google Cloud Network Connectivity Center (NCC), with the following high-level tasks.

- Deploy an Arista CloudEOS Router from the Google Cloud marketplace
- Create NCC Hub and Spokes using NCC's UI page
- Configure Arista CloudEOS and Google NCC to establish the BGP connection.
- Verify the BGP connection and routing information using Arista EOS CLI, CloudVision, and Google NCC's UI page

For more information about the Arista CloudEOS Router, see [here](#) and Arista CloudVision, see [here](#).

For more information about Google Network Connectivity Center, see [here](#).

Deployment Diagram

In the following diagram, we will focus on spoke-3's creation and connecting it to Google NCC. spoke-1 and spoke-2 are optional. They are pre-deployed to show that the CloudEOS router in spoke-3 can learn the other spokes' prefixes from NCC. CloudVision component is also optional, but it allows you to take advantage of Arista's real-time state-streaming telemetry capabilities and additional management functionalities.


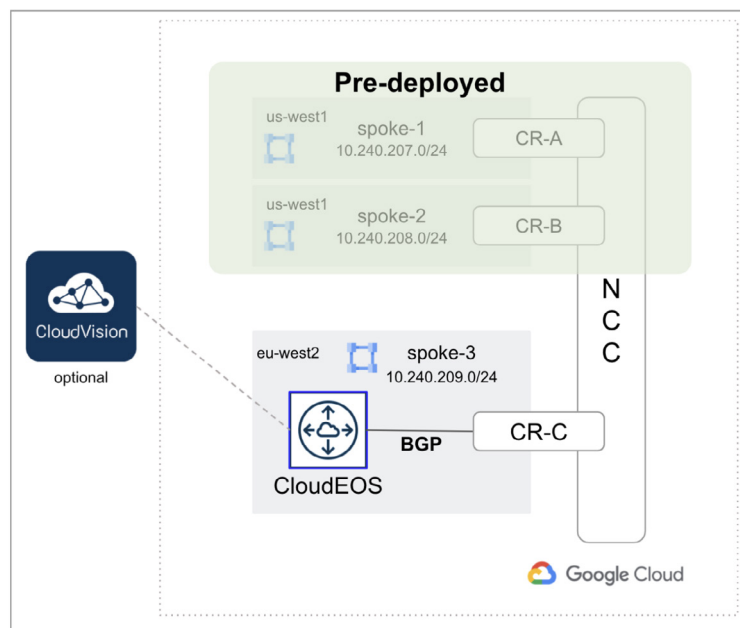



Figure: Connect Arista CloudEOS Router to Google Network Connectivity Center

Deployment Steps

1. In the Google Cloud marketplace, search Arista CloudEOS. Choose the licensing model based on your requirement. For this example, we used "Arista CloudEOS Router (BYOL)".

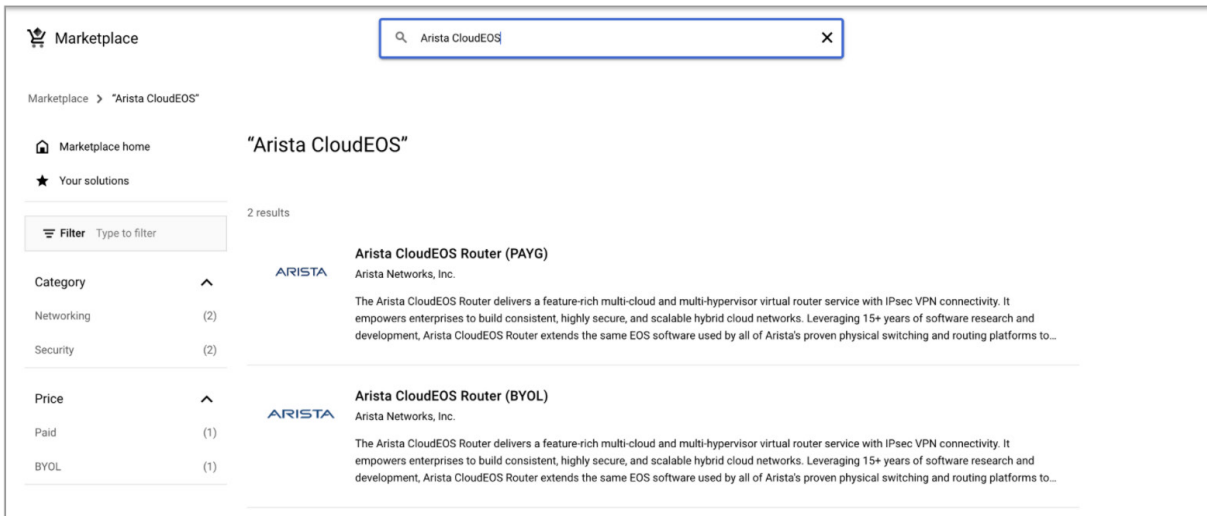

2. Click "Launch"

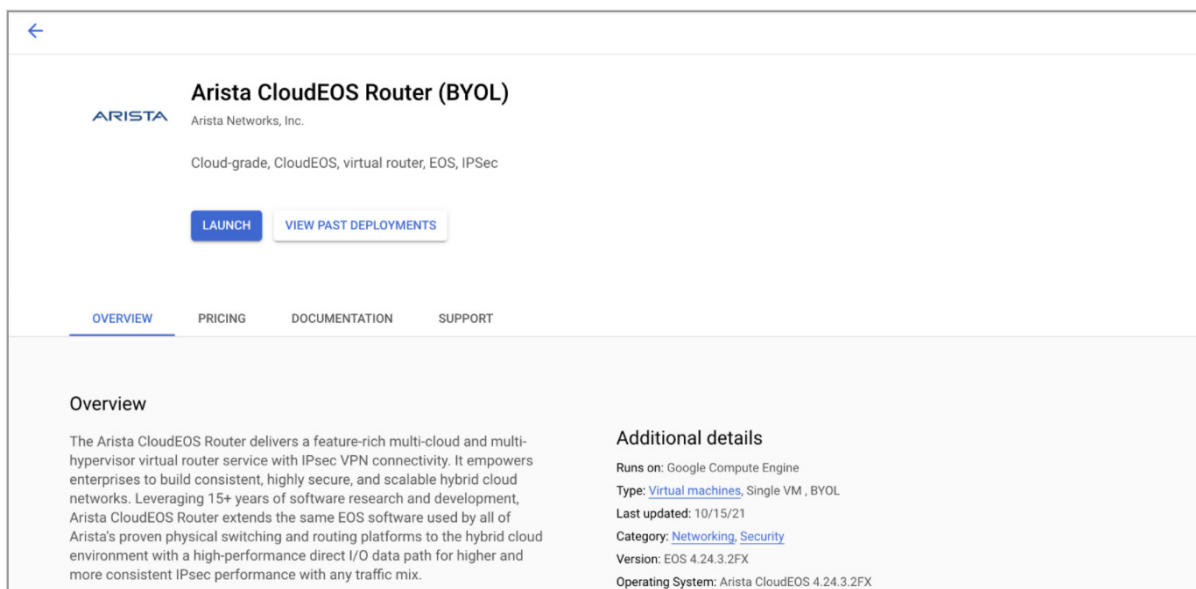

3. Fill out the following information, and click "Deploy"
- Deployment name: your deployment name
 - Zone: choose the google region/zone where the router will be deployed
 - Machine type: choose one of the following, N1-standard-4, N1-standard-8, and N1-standard-16
 - User name: set the user name for ssh login

- Ssh Key: the public key router will use for authentication, in such format: ssh-key XXXX username@host-name
- Boot disk-type: Standard Persistent Disk
- Boot disk size in GB: 17
- Network Interface
 - › Network: the VPC network where cloudeos router will be deployed
 - › Subnetwork: the VPC subnet where cloudeos will be deployed
 - › External IP: Ephemeral (which you can use for SSH and build a tunnel to on-prem cloudeos router for later use)

New Arista CloudEOS Router (BYOL) deployment

Deployment name
site-109-r14

Zone
europe-west2-a

Machine type

Machine family
GENERAL-PURPOSE COMPUTE-OPTIMIZED MEMORY-OPTIMIZED

Machine types for common workloads, optimized for cost and flexibility

Series
N1

Powered by Intel Skylake CPU platform or one of its predecessors

Machine type
n1-standard-4 (4 vCPU, 15 GB memory)

vCPU
4

Memory
15 GB

✓ CPU PLATFORM AND GPU

Arista CloudEOS Router (BYOL) overview
Product provided by Arista Networks Inc.

Launching a BYOL product

Arista CloudEOS Router (BYOL) is a BYOL (Bring Your Own License) product. Marketplace will deploy this product, but you are responsible for purchasing and managing the license directly from the provider

Arista CloudEOS Router (BYOL) usage fee (BYOL)	Varies
Google does not collect this license fee.	
Infrastructure fee	
VM instance: 4 vCPUs + 15 GB memory (n1-standard-4)	USD 178.70/mo
Standard Persistent Disk: 17GB	USD 0.82/mo
Sustained use discount	- USD 53.61/mo
Estimated monthly total	USD 125.90/mo
	+ BYOL license fee

New Arista CloudEOS Router (BYOL) deployment

Username
arista

SSH Key
ssh-rsa AAA... 53

Boot Disk

Boot disk type
Standard Persistent Disk

Boot disk size in GB
17

Networking

Network interfaces

Network interface

Network
site-107-wan

Subnetwork
site-109-wan-subnet

External IP
Ephemeral

DONE

ADD NETWORK INTERFACE

▼ MORE

DEPLOY

+ BYOL license fee

Software

Operating System
Arista CloudEOS(4.24.3.2FX)


Terms of Service

By deploying the software or accessing the service you are agreeing to comply with the [Arista Networks Inc. terms of service](#), [GCP Marketplace terms of service](#) and the terms of applicable open source software licenses bundled with the software or service. Please review these terms and licenses carefully for details about any obligations you may have related to the software or service. To the limited extent an open source software license related to the software or service expressly supersedes the GCP Marketplace Terms of Service, that open source software license governs your use of that software or service.


By using this product, you understand that certain account and usage information may be shared with Arista Networks Inc. for the purposes of financial accounting, sales attribution, performance analysis, and support.

Google is providing this software or service "as-is" and any support for this software or service will be provided by Arista Networks Inc. under their terms of service.

4. The router will take about 5 minutes to be created and boot up. After the router is up and running, log in to the router using the SSK key, and install the license if you choose the BYOL model. You don't need to install a license if you choose the PAYG model, the license is activated automatically.
5. Go back to Google Cloud Console, click "Network Connectivity Center" under Hybrid Connectivity, you will see the summary information about your NCC environment. A hub is already created. You can create a new hub if you don't see one.

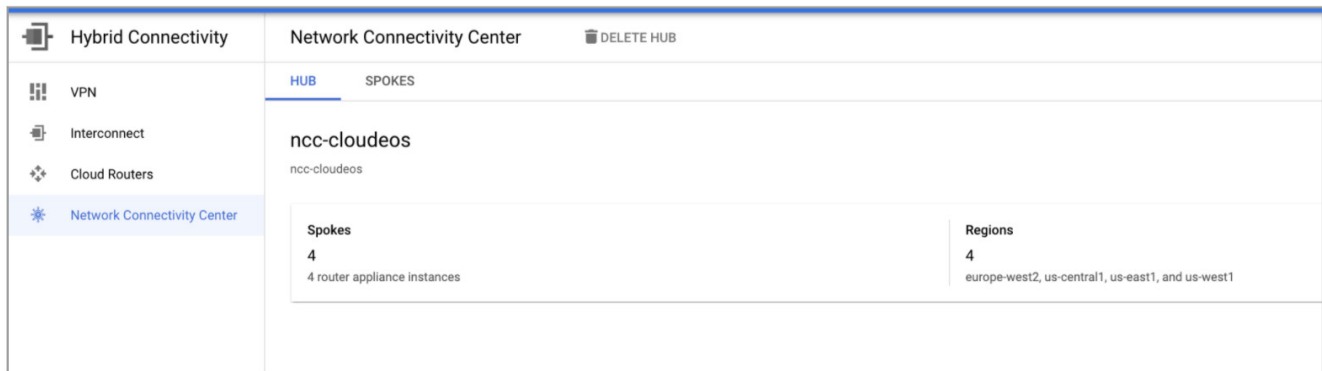

6. Click the tab "SPOKES", you will see all the spokes belonging to the same hub.

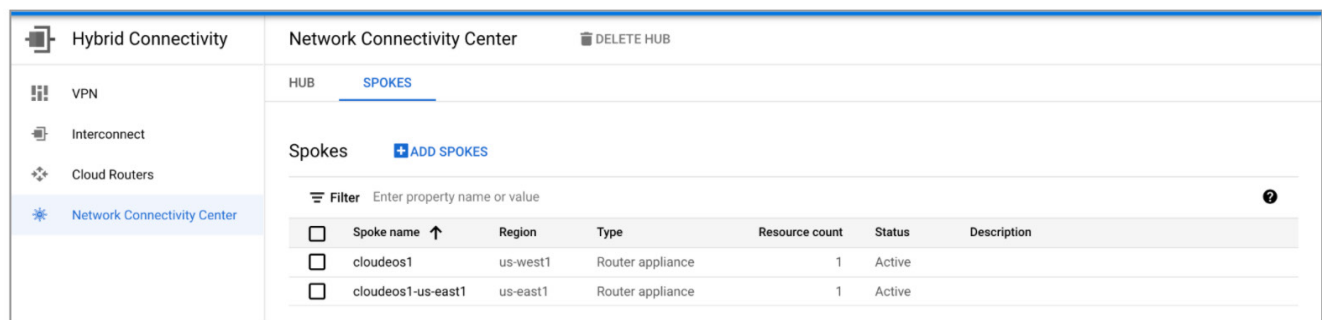

7. Click "ADD SPOKES" to add a new spoke, with the following information, and click "Create"
 - Spoke name: cloudeos-r14
 - Description: cloudeos-r14
 - Spoke type: Router appliance
 - Region: choose the region where the cloudeos router is deployed in the previous step
 - Attach instances to the spoke
 - › Instances: choose the cloudeos instance deployed in the previous step

Hybrid Connectivity
VPN
Interconnect
Cloud Routers
Network Connectivity Center

Add spokes to hub
Project ID
Hub name: ncc-cloudeos
Network: site-107-wan
Resources that can be attached to this hub need to come from one VPC network
Spokes
New spoke
Spoke name *: cloudeos-r14
Description: cloudeos-r14
Spoke type: Router appliance

Hybrid Connectivity
VPN
Interconnect
Cloud Routers
Network Connectivity Center

Add spokes to hub
Spoke type: Router appliance
Region *: europe-west2 (London)
Attach instances to the spoke
Router appliance instances enable connectivity to a VPC network and permit data transfer between on-premises sites. [Create instance](#)
Instances: site-109-r14-vm
+ ADD INSTANCE
CANCEL DONE
ADD SPOKE
CREATE

8. Now you can see the new spoke is being created as below

Hybrid Connectivity
VPN
Interconnect
Cloud Routers
Network Connectivity Center

Network Connectivity Center
DELETE HUB
HUB SPOKES
Spokes
ADD SPOKES
Filter Enter property name or value

☐	Spoke name ↑	Region	Type	Resource count	Status	Description
☐	cloudeos-r14	europe-west2	Router appliance	1	▲ Active	cloudeos-r14
☐	cloudeos1	us-west1	Router appliance	1	Active	
☐	cloudeos1-us-east1	us-east1	Router appliance	1	Active	

9. Click the newly created spoke to configure additional information. Click “CONFIGURE BGP SESSION”

Hybrid Connectivity

Spoke details [DELETE](#)

VPN

Interconnect

Cloud Routers

Network Connectivity Center

cloudeos-r14

Description
cloudeos-r14

Region
europe-west2

Router appliance VM instances [+ ADD INSTANCES](#) [REMOVE INSTANCES](#)

☐	Name	IP address	Cloud router	BGP session name	Cloud router BGP IP	BGP peer IP
☐	xxx-site-109-r14-vm	10.240.209.2				

[CONFIGURE BGP SESSION](#)

[CONFIGURE BGP SESSION](#)

10. Configure the Google Cloud Router BGP info

- Create New router
- Name: ncc-cr-c
- Description: ncc-cr-c
- Network: xxx-site-107-wan
- Region: europe-west2 (the region where cloudeos is deployed in the previous step)
- Google ASN: 64597
- BGP peer Keepalive interval: 20
- Advertised routes: create customer routes, advertise all subnets visible to cloud router (choose this so, on Google Cloud Router page, you can view all subnets that Google Cloud Router advertises to CloudEOS router)

Configure Cloud Router and BGP sessions

1 Cloud Router

Google Cloud Router dynamically exchanges routes between your Virtual Private Cloud (VPC) and on-premises networks by using Border Gateway Protocol (BGP)

☐ Use existing

☒ Create new router

Name *

ncc-cr-c

Lowercase letters, numbers, hyphens allowed

Description

ncc-cr-c

Network

xxx-site-107-wan

Region

europe-west2

Google ASN *

64597

BGP peer keepalive interval

20 seconds

Advertised routes

Routes

☐ Advertise all subnets visible to the Cloud Router (Default)

☒ Create custom routes

Advertise all subnets

☒ Advertise all subnets visible to the Cloud Router

11. Configure the first BGP session information, and Click "SAVE AND CONTINUE"

- Name: cloudeos-r14-bgp-1
- Peer ASN: 65109 (CloudEOS Router's ASN)
- Cloud Router BGP IP: 10.240.209.3 (Google Cloud Router's IP used for BGP Peering)
- BGP Peer IP: 10.240.209.2 (unchangeable, the CloudEOS Router's IP used for BGP Peering)
- BGP Peer: enabled

The screenshot shows the Google Cloud Platform console with the 'Configure Cloud Router and BGP' dialog open. The 'Cloud Router' tab is selected, showing details for 'cloudeos-r14' in the 'europe-west2' region. The 'BGP sessions' tab is active, displaying a table with two sessions. The first session, 'cloudeos-r14-bgp-1', is highlighted. The 'Create BGP session' modal is open, showing the following configuration:

- Name:** cloudeos-r14-bgp-1
- Peer ASN:** 65109
- Advertised route priority (MED):** (empty)
- Cloud Router BGP IP:** 10.240.209.3
- BGP peer IP:** 10.240.209.2
- BGP peer:** ☒ Enabled
- ADVERTISED ROUTES, BIDIRECTIONAL FORWARDING DETECTION (BFD):** (expanded)

The 'SAVE AND CONTINUE' button is visible at the bottom of the modal.

12. Configure the second BGP session information (for redundancy), and Click "SAVE AND CONTINUE"

- Name: cloudeos-r14-bgp-2
- Peer ASN: 65109 (CloudEOS Router's ASN)
- Cloud Router BGP IP: 10.240.209.4 (Google Cloud Router's IP used for BGP Peering)
- BGP Peer IP: 10.240.209.2 (unchangeable, the CloudEOS Router's IP used for BGP Peering)
- BGP Peer: enabled

The screenshot shows the Google Cloud Platform console with the 'Configure Cloud Router and BGP' dialog open. The 'Cloud Router' tab is selected, showing details for 'cloudeos-r14' in the 'europe-west2' region. The 'BGP sessions' tab is active, displaying a table with two sessions. The second session, 'cloudeos-r14-bgp-2', is highlighted. The 'Create BGP session' modal is open, showing the following configuration:

- Name:** cloudeos-r14-bgp-2
- Peer ASN:** 65109
- Advertised route priority (MED):** (empty)
- Cloud Router BGP IP:** 10.240.209.4
- BGP peer IP:** 10.240.209.2
- BGP peer:** ☒ Enabled
- ADVERTISED ROUTES, BIDIRECTIONAL FORWARDING DETECTION (BFD):** (expanded)

The 'SAVE AND CONTINUE' button is visible at the bottom of the modal.

13. Now you can verify the Cloud Router and two BGP sessions configured as the following, and click "CREATE"

Configure Cloud Router and BGP sessions

✓

Cloud Router

Google Cloud Router dynamically exchanges routes between your Virtual Private Cloud (VPC) and on-premises networks by using Border Gateway Protocol (BGP)

2

BGP sessions

Two BGP sessions are needed for router appliance redundancy

	BGP session name	Cloud Router BGP IP	BGP peer IP	
1	cloudeos-r14-bgp-1	10.240.209.3	10.240.209.2	EDIT BGP SESSION
2	cloudeos-r14-bgp-2	10.240.209.4	10.240.209.2	EDIT BGP SESSION

CREATE

CANCEL

14. After the creation, you can see the following BGP information

Hybrid Connectivity

VPN

Interconnect

Cloud Routers

Network Connectivity Center

← Spoke details

DELETE

cloudeos-r14

Description

cloudeos-r14

Region

europe-west2

Router appliance VM instances

ADD INSTANCES

REMOVE INSTANCES

☐	Name	IP address	Cloud router	BGP session name	Cloud router BGP IP	BGP peer IP
☐	▼ ■ ■ ■ site-109-r14-vm	10.240.209.2	ncc-cr-c			
				cloudeos-r14-bgp-1	10.240.209.3	10.240.209.2
				cloudeos-r14-bgp-2	10.240.209.4	10.240.209.2

15. Log in to the CloudEOS router using the SSH key and configure the following BGP configurations

```

router bgp 65109
  neighbor 10.240.209.3 remote-as 64597
  neighbor 10.240.209.3 maximum-routes 12000
  neighbor 10.240.209.4 remote-as 64597
  neighbor 10.240.209.4 maximum-routes 12000
!
address-family ipv4
  neighbor 10.240.209.3 activate
  neighbor 10.240.209.4 activate

```

16. Now you should be able to verify the BGP status on the CloudEOS router using EOS CLI. The following shows that the two BGP sessions are established and 6 prefixes are learned from Google's Cloud Router.

```

site-109-r14(config-router-bgp-af)# show ip bgp summary
BGP summary information for VRF default
Router identifier 10.240.209.2, local AS number 65109
Neighbor Status Codes: m - Under maintenance
Neighbor      V  AS      MsgRcvd  MsgSent  InQ  OutQ  Up/Down  State  PfxRcd  PfxAcc
10.240.209.3  4  64597    14       10     0     0 00:02:18 Estab   6       6
10.240.209.4  4  64597    13       13     0     0 00:01:55 Estab   6       6

```

17. You can also check the IP routing table on the CloudEOS router

```

site-109-r14(config-router-bgp-af)#show ip route


VRF: default
Codes: C - connected, S - static, K - kernel,
       O - OSPF, IA - OSPF inter area, E1 - OSPF external type 1,
       E2 - OSPF external type 2, N1 - OSPF NSSA external type 1,
       N2 - OSPF NSSA external type2, B - BGP, B I - iBGP, B E - eBGP,
       R - RIP, I L1 - IS-IS level 1, I L2 - IS-IS level 2,
       O3 - OSPFv3, A B - BGP Aggregate, A O - OSPF Summary,
       NG - Nexthop Group Static Route, V - VXLAN Control Service,
       DH - DHCP client installed default route, M - Martian,
       DP - Dynamic Policy Route, L - VRF Leaked,
       RC - Route Cache Route

Gateway of last resort:
DH      0.0.0.0/0 [254/0] via 10.240.209.1, Ethernet1

B E     10.0.101.0/24 [200/334] via 10.240.209.1, Ethernet1
B E     10.240.107.0/24 [200/334] via 10.240.209.1, Ethernet1
B E     10.240.207.0/24 [200/434] via 10.240.209.1, Ethernet1
B E     10.240.208.0/24 [200/389] via 10.240.209.1, Ethernet1
C       10.240.209.0/24 is directly connected, Ethernet1
B E     192.168.1.0/24 [200/334] via 10.240.209.1, Ethernet1

```

18. (Optional) If you have Arista CloudVision, you can also onboard the CloudEOS Router onto CloudVision, and you can see similar routing information and more valuable information from a historical perspective for troubleshooting and visibility. If you don't have Arista CloudVision, you can register it at <https://www.arista.io/cv>. More information about CloudVision can be found [here](#).

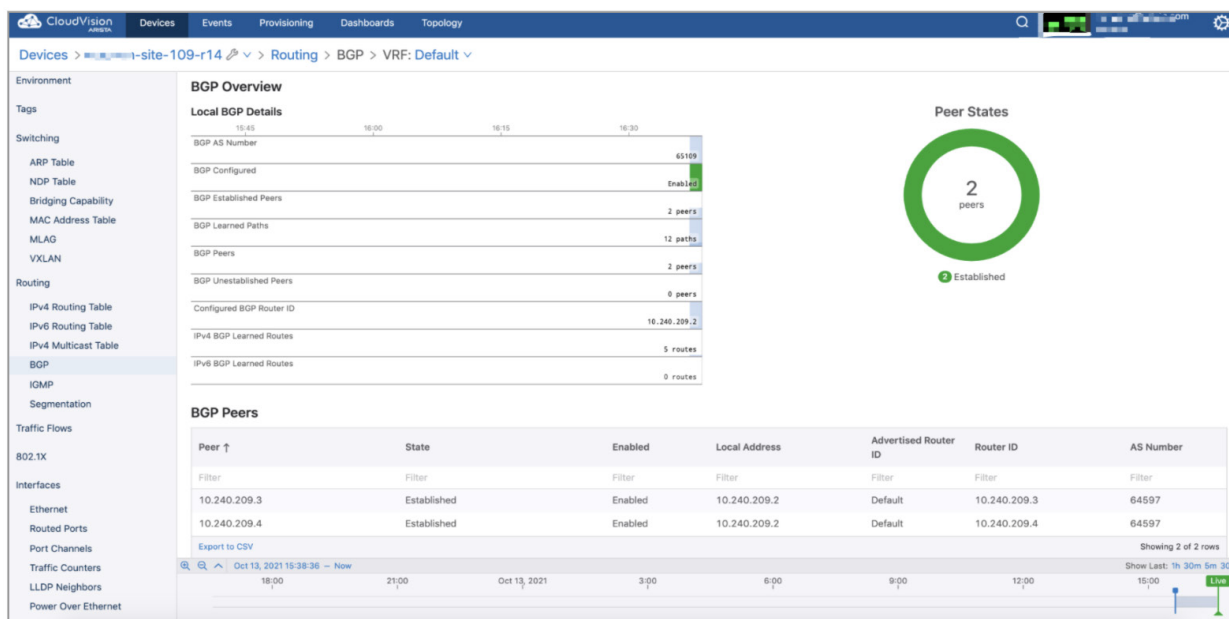

CloudVision **Devices** Events Provisioning Dashboards Topology

Devices > site-109-r14 > Routing > IPv4 Routing Table > VRF: Default

Related pages: compare against 30m ago and compare against 1hr ago

Type	Prefix ↑	Next hops	Metric	Preference
dhcp	0.0.0.0/0	10.240.209.1 (Ethernet1)	0	254
martian	0.0.0.0/8	Directly Connected	0	1
eBGP	10.0.101.0/24	10.240.209.1 (Ethernet1)	334	200
eBGP	10.240.107.0/24	10.240.209.1 (Ethernet1)	334	200
eBGP	10.240.207.0/24	10.240.209.1 (Ethernet1)	434	200
eBGP	10.240.208.0/24	10.240.209.1 (Ethernet1)	389	200
Connected	10.240.209.0/24	Directly Connected (Ethernet1)	1	0
Receive Broadcast	10.240.209.0/32	CPU	0	0
Receive	10.240.209.2/32	CPU	0	0
Receive Broadcast	10.240.209.255/32	CPU	0	0
martian	127.0.0.0/8	Directly Connected	0	1
martian	127.0.0.1/32	Directly Connected	0	1

Routing Table Changes

- 127.0.0.1/32 modified Oct 13, 2021 16:37:07
- 10.0.101.0/24 modified Oct 13, 2021 16:37:07
- 192.168.1.0/24 modified Oct 13, 2021 16:37:07
- 10.240.107.0/24 modified Oct 13, 2021 16:37:07
- 10.240.207.0/24 modified Oct 13, 2021 16:37:07
- 10.240.208.0/24 modified Oct 13, 2021 16:37:07
- 10.240.209.0/24 modified Oct 13, 2021 16:37:07
- 10.240.209.0/32 modified Oct 13, 2021 16:37:07

19. Go back to Google Cloud Console, under “Hybrid Connectivity” -> “Cloud Router”, you can view the BGP session status on Cloud Router

Hybrid Connectivity

Cloud Routers [CREATE ROUTER](#) [REFRESH](#) [DELETE](#)

Get real-time analytics with Network Intelligence Center

Use Network Intelligence Center for comprehensive monitoring and troubleshooting. [Learn more](#)

- ✓ Visualize your network resources
- ✓ Diagnose and prevent connectivity issues
- ✓ View packet loss and latency metrics
- ✓ Keep your firewall rules strict and efficient

[GO TO NETWORK INTELLIGENCE CENTER](#) [REMIND ME LATER](#)

Filter Enter property name or value

Name ↑	Network	Region	Google ASN	Interconnect	Connection	BGP sessions	Logs
☐ ncc-cr-a	site-107-wan	us-west1	64599	-	site-107-r10-vm	☒ cloudeos-1-bgp-peer-a-0 ☒ cloudeos-1-bgp-peer-a-1	View
☐ ncc-cr-b	site-107-wan	us-east1	64598	-	site-108-r13-vm	☒ cloudeos-1-bgp-peer-a-0	View
☐ ncc-cr-c	site-107-wan	europa-west2	64597	-	site-109-r14-vm	☒ cloudeos-r14-bgp-1 ☒ cloudeos-r14-bgp-2	View

20. Click the Cloud Router “ncc-cr-c” created in the previous step, you can see more details like advertised subnets and BGP configurations

Hybrid Connectivity

VPN

Interconnect

Cloud Routers

Network Connectivity Center

Router details

EDIT

DELETE

ncc-cr-c

Description

ncc-cr-c

Network

site-107-wan

Region

europa-west2

Google ASN

64597

BGP peer keepalive interval

20 seconds

Advertised route configuration

BGP sessions will advertise these routes if no other configuration is specified

Advertisement mode

Custom

Advertise all available subnets

Yes

Advertised IP ranges

SUBNETS

CUSTOM IP RANGES

Subnet	Region	IP range	Advertised IP range
site-107-wan-subnet	us-west1	10.240.207.0/24	10.240.207.0/24
site-108-wan-subnet	us-east1	10.240.208.0/24	10.240.208.0/24
site-109-wan-subnet	europa-west2	10.240.209.0/24	10.240.209.0/24

Hybrid Connectivity

VPN

Interconnect

Cloud Routers

Network Connectivity Center

Router details

EDIT

DELETE

Advertised IP ranges

SUBNETS

CUSTOM IP RANGES

Subnet	Region	IP range	Advertised IP range
site-107-wan-subnet	us-west1	10.240.207.0/24	10.240.207.0/24
site-108-wan-subnet	us-east1	10.240.208.0/24	10.240.208.0/24
site-109-wan-subnet	europa-west2	10.240.209.0/24	10.240.209.0/24

BGP sessions

Router appliance BGP sessions

Name	Peer ASN	Cloud Router BGP IP	BGP peer IP	Router appliance instance	Advertised route priority	Advertisement mode	Bidirectional
cloudeos-r14-bgp-1	65109	10.240.209.3	10.240.209.2	site-109-r14-vm		Default	Disable
cloudeos-r14-bgp-2	65109	10.240.209.4	10.240.209.2	site-109-r14-vm		Default	Disable

NAT gateways

ADD NAT GATEWAY

EQUIVALENT REST

Summary

Now you have completed the steps of creating and connecting the Arista CloudEOS Router to the Google Cloud Network Connectivity Center. You can repeat the steps to create other spokes to connect more Google Cloud regions or configure your on-prem CloudEOS routers to build the overlay tunnel back to your existing network.

Santa Clara—Corporate Headquarters

5453 Great America Parkway,
Santa Clara, CA 95054

Phone: +1-408-547-5500

Fax: +1-408-538-8920

Email: info@arista.com

Ireland—International Headquarters

3130 Atlantic Avenue
Westpark Business Campus
Shannon, Co. Clare
Ireland

Vancouver—R&D Office

9200 Glenlyon Pkwy, Unit 300
Burnaby, British Columbia
Canada V5J 5J8

San Francisco—R&D and Sales Office 1390

Market Street, Suite 800
San Francisco, CA 94102

India—R&D Office

Global Tech Park, Tower A & B, 11th Floor
Marathahalli Outer Ring Road
Devarabeesanahalli Village, Varthur Hobli
Bangalore, India 560103

Singapore—APAC Administrative Office

9 Temasek Boulevard
#29-01, Suntec Tower Two
Singapore 038989

Nashua—R&D Office

10 Tara Boulevard
Nashua, NH 03062



Copyright © 2021 Arista Networks, Inc. All rights reserved. CloudVision, and EOS are registered trademarks and Arista Networks is a trademark of Arista Networks, Inc. All other company names are trademarks of their respective holders. Information in this document is subject to change without notice. Certain features may not yet be available. Arista Networks, Inc. assumes no responsibility for any errors that may appear in this document. October 21, 2021