

Systems Reference Library

IBM 1130 Functional Characteristics

This manual provides basic programming and operating information for the 1130 Computing System. The functional aspects of the System are explained in detail, and the operational characteristics are described in terms of program instructions, input/output operations, and Central Processing Unit console displays and functions. Intended as a reference manual, the material presented assumes some prior knowledge of stored program computers.



PREFACE

Intended primarily as a reference tool, this manual presents information on a level that requires a minimum of prior knowledge of stored-program computers. Some of the terms used in the following pages, however, may be unfamiliar to the inexperienced. To avoid lessening the value of the book as a reference tool, explanations of terms are confined to the context of their use.

The IBM publication, Introduction to IBM Data Processing Systems (Form F22-6517) provides an excellent introduction to the stored-program computer.

This manual (Form A26-5881-2) is a reprint of the previous edition incorporating the following Technical Newsletters.

<u>Form No.</u>	<u>Pages</u>	<u>Date</u>
N26-0156	33 and 34	May 13, 1966
N26-0143	41, 42, and 42.1 to 42.8	July 25, 1966

Copies of this and other IBM publications can be obtained through IBM Branch Offices.

This manual was prepared by the IBM Systems Development Division, Product Publications, Dept. 455, Bldg. 014, San Jose, California 95114. Send comments concerning the contents of this manual to this address.

CONTENTS

INTRODUCTION	1	IBM 1132 Printer	39
FUNCTIONAL CHARACTERISTICS	2	Functional Description	39
Core Storage	2	Programming	40
Data Format	2	APPENDIX A. NUMBER SYSTEMS	42
Instruction Formats	3	Number Concept	42
Registers	4	Number Conversions	46
Arithmetic Functions	5	Fixed-Point and Two's Complement Notation	49
Effective Address Generation	6	APPENDIX B. REFERENCE SUMMARY	51
OPERATION	7	I/O Device Codes and Interrupt Levels	51
Load and Store Instructions	7	I/O Function Codes and Modifiers	51
Arithmetic Instructions	9	IOCC Format	51
Shift Instructions	10	Reserved Core Storage Locations	51
Branch Instructions	11	Value Ranges - Double Precision Word	51
Input/Output Operations	13	Value Ranges - Single Precision Word	51
Execute I/O	14	AND, OR, EOR, Operations	52
Interrupt	15	BSC Condition Codes	52
Disk Storage	16	Double Precision Data Word Format	52
Description	19	Effective Address Computation	52
Programming Disk Storage	21	Instruction Codes and Execution Times	52
Console	22	Long Instruction Format	52
Console Printer Functional Description	23	Short Instruction Format	52
Printer Programming	24	Single Precision Data Word Format	52
Keyboard Functional Description	24	Tag Bit Codes	52
Keyboard Programming	26	APPENDIX C. DEVICE STATUS WORD	53
Console Display Panel	26	APPENDIX D. POWER OF TWO TABLE	54
Console Entry Switches	28	APPENDIX E. CHARACTER CODES	55
Console Function Switches and Lights	28	APPENDIX F. DECIMAL/HEXADECIMAL CONVERSION TABLE-INTEGERS	57
IBM 1442 Card Read-Punch	30	APPENDIX G. DECIMAL/HEXADECIMAL CONVERSION CHART-FRACTIONS	59
Functional Description	30	INDEX	64
Operating Procedures	30		
Programming	33		
IBM 1134 Paper Tape Reader and IBM 1055 Paper Tape Punch	35		
Functional Description	35		
Description of Operation	36		
Programming	36		
IBM 1627 Plotter	37		
Operation	38		
Programming	38		



The IBM 1130 Computing System provides the capacity and versatility to accomplish the engineering and scientific computations that formerly were possible only with large computer systems. The 1130 fulfills the "general purpose" requirements of these areas with computing power well above previous systems in the same cost range. The 1130 Computing System can also handle supporting commercial data processing applications.

The design of the 1130 System is oriented to the operator. Only a minimum of training and experience with computing systems is necessary to make the 1130 usable by engineering and research personnel for solutions to problems in individual projects. In addition, programs and programming systems, supplied by IBM, relieve the user of detailed programming and provide for the statement of problems in familiar language.

The compact, easily-operated 1130 System features the IBM 1131 Central Processing Unit (CPU) with core storage capacity of 4096 or 8192 16-bit words. An additional 512,000 words of storage is available on-line with the disk storage feature of the 1131 Model 2. Disk storage provides random or sequential access to data. The interchangeable disk cartridge places the required information at the disposal of the system and allows virtually unlimited off-line storage capacity. The CPU also includes a con-

sole with data displays and switches for operator control, a keyboard for data entry, and a console printer.

The basic 1130 System consists of the CPU and either the IBM 1442 Card Read-Punch or the IBM 1134 Paper Tape Reader and the IBM 1055 Paper Tape Punch. To either of these configurations can be added: disk storage, additional (4096 words) core storage (total 8192), an IBM 1627 Plotter, and the IBM 1132 Printer. Paper tape or card units not already a part of the basic system can also be added.

The IBM 1130 Computing System applications are varied and include some aspect of every industrial, financial, and governmental operation. In the aerospace, construction, engineering, and fabrication and assembly industries, the 1130 can be used for complex mathematical problems, operation analysis and scheduling, estimating, equipment and machine design, simulation, and job cost analysis.

In the processing industries, blending formulas, material balance, material evaluation, forecasting, and unit operations are a few of the applications suitable for the 1130.

Also, in many areas of the transportation, marketing, financial, insurance, utilities, and distribution fields, the 1130 System provides capability not previously available in a system of its size.

FUNCTIONAL CHARACTERISTICS

The ability of the IBM 1131 Central Processing Unit to ask for and accept input data, perform the calculations required, and produce the output results desired, is due to the many functional elements of the machine. Each of these elements is explained in this section, and from these descriptions the CPU emerges as the sum of its parts — the nerve center of the computing system.

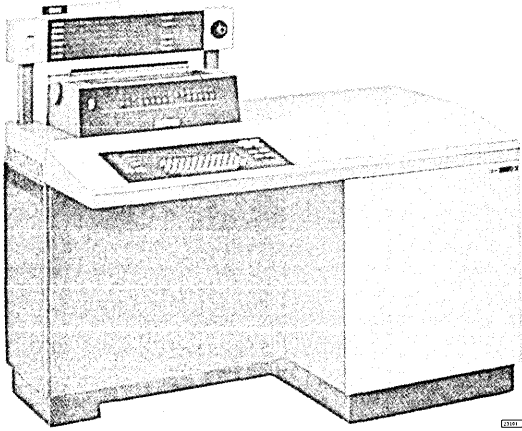


Figure 1. IBM 1131 Central Processing Unit *

The descriptions that follow concern the storage of data and program instructions, the formats in which data and instructions are stored and used, functions of CPU registers, the fundamental arithmetic operations and how they are performed, and the aspects of addressing core storage and attached input/output (I/O) units.

CORE STORAGE

The 1131 main storage uses magnetic cores for data and program instruction storage. Core storage capacity is 4096 16-bit words; an additional 4096 words are available as a special feature. Each 16-bit word has 2 additional bits, called Parity bits, which are used for internal data checking only.

The main storage memory cycle (the time required to place a word in core storage or retrieve it from core storage) is 3.6 μ sec.

*NOTE: The illustrations in this manual have a code number in the lower corner. This is a publishing control number and is not related to the subject matter.

Addressing

Each 16-bit word in core storage is locatable through an address that specifies the position of the word. Addresses range from 0000 to 4095 or 8191, according to the capacity installed. The high-order address is contiguous with the low-order address, which provides for "wrap-around" addressing. This means that in sequential processing of addresses, 4095 or 8191 is followed by 0000 without further specification by the CPU.

Reserved Storage Locations

The following are core storage decimal addresses reserved for specific purposes and not available for general data storage.

Tag Bits	Core Storage Address	Description
00	--	Displacement
01	0001	Index Register 1
10	0002	Index Register 2
11	0003	Index Register 3
--	0008 - 0013	Interrupt Addresses
--	0032 - 0039	Printer Scan Field

20246

The use of each of the foregoing addresses is described in the appropriate subsequent section of this manual.


DATA FORMAT

Data in the 1131 CPU is in fixed-point binary form. Each number is treated as a signed integer; positive numbers are in true binary with a sign of 0, and negative numbers must be stored and operated upon in 2's complement form with a sign bit of 1. Complementing is done by inverting each bit of the number (including the sign bit) and adding 1 to the low-order bit. The following example illustrates this.


```

Positive number           0001101001001100
Inverted                  1110010110110011
Add 1                      1
Resulting negative number 1110010110110100
    
```

Data is stored as either a single precision word or a double precision word. A single precision data word comprises 16 bits; bit positions are numbered 0 to 15 from left to right. The high-order bit (0) is the sign position.



The largest base-10 (decimal) values of single precision words are +32,767 and -32,768. A double precision data word contains 32 bits, and is composed of two sequential single precision words. The high-order bit (0) is the sign position.

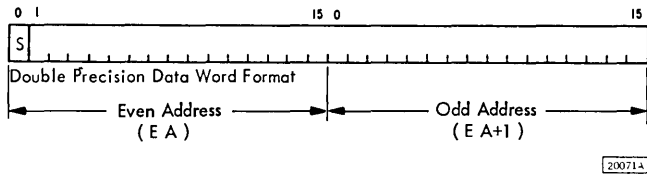

A double precision data word is addressed by the leftmost word, which must have an even address.

The highest base-10 values of double precision data words are +2,147,483,647 and -2,147,483,648. The largest positive number ($2^{31}-1$) is one less than the largest negative number (2^{31}) because the sign (0 for plus, 1 for minus) is, arithmetically, part of the number.

All CPU storage is in binary form, and internal addressing and console displays are in 16-bit binary notation. Because of the ease of operation with 16-bit words in the hexadecimal number system (base-16), all programming systems for the IBM 1130 Computing System use this notation. Figures 2 and 3 show comparable values of decimal and hexadecimal number systems. Space obviously does not permit a complete listing; therefore, the value of each power of 2 through $2^{15}-1$ and $2^{31}-1$ are shown. The binary and hexadecimal number systems are described in Appendix A. Tables for conversion of decimal and hexadecimal numbers are in Appendix F. Hexadecimal numbers greater than the range of the table can be converted to decimal numbers by multiplying their factors. For example, 2 and 10 are factors of 20. As shown in the conversion table, the decimal equivalents of these two hexadecimal factors are 2 and 16. Their product is, of course, 32 which is the decimal equivalent of hexadecimal 20.

INSTRUCTION FORMATS


Program instructions in the 1130 System are in either short or long format.

Positive Binary Values	Powers of 2	Absolute Values		Negative Binary Values
		Decimal Notation Base-10	Hexadecimal Notation Base-16	
Bit Positions 0123 4567 8901 2345	11 1111			Bit Positions 11 1111 0123 4567 8901 2345
0000 0000 0000 0000	-	0	0	No negative zero
0000 0000 0000 0001	0	1	1	1111 1111 1111 1111
0000 0000 0000 0010	1	2	2	1111 1111 1111 1110
0000 0000 0000 0100	2	4	4	1111 1111 1111 1100
0000 0000 0000 1000	3	8	8	1111 1111 1111 1000
0000 0000 0001 0000	4	16	10	1111 1111 1111 0000
0000 0000 0010 0000	5	32	20	1111 1111 1110 0000
0000 0000 0100 0000	6	64	40	1111 1111 1100 0000
0000 0000 1000 0000	7	128	80	1111 1111 1000 0000
0000 0001 0000 0000	8	256	100	1111 1111 0000 0000
0000 0010 0000 0000	9	512	200	1111 1110 0000 0000
0000 0100 0000 0000	10	1,024	400	1111 1100 0000 0000
0000 1000 0000 0000	11	2,048	800	1111 1000 0000 0000
0001 0000 0000 0000	12	4,096	1,000	1111 0000 0000 0000
0010 0000 0000 0000	13	8,192	2,000	1110 0000 0000 0000
0100 0000 0000 0000	14	16,384	4,000	1100 0000 0000 0000
0111 1111 1111 1111	-	32,767	7,FFF	1000 0000 0000 0001
No positive equivalent	15	32,768	8,000	1000 0000 0000 0000

200721

Figure 2. Value Ranges, Single Precision Word

Short Instruction Format



OP (Operation) Code. These five bits specify the operation performed. Specific operations are described in the OPERATION section of this manual.

F (Format). The F bit controls the instruction format. A zero (0) indicates a short instruction format, a one (1) designates a long instruction format.

T (Tag). These two bits specify the instruction counter or index register (XR) to be used for Effective Address generation.

Displacement. The data contained in these eight bits is added to the data in the instruction counter or index register specified by the tag bits to form the Effective Address (EA). (The EFFECTIVE ADDRESS GENERATION section of this manual describes this and other aspects of address modification.) If the displacement amount is negative it is in 2's complement, and the sign, in bit position 8, is maintained in the resulting high-order position when the Displacement is expanded to 16 bits for address modification.


NOTE: Displacement bits have other uses; for example, bits 8 and 9 are used as shift modifiers, etc.

Positive Binary Values		Powers of 2	Absolute Values		Negative Binary Values	
Bit Positions 11 1111 1111 2222 2222 2233 0123 4567 8901 2345 6789 0123 4567 8901			Decimal Notation Base - 10	Hexidecimal Notation Base - 16	Bit Positions 11 1111 1111 2222 2222 2233 0123 4567 8901 2345 6789 0123 4567 8901	
0000 0000 0000 0000 0000 0000 0000 0000	1	0	0	No negative zero		
0000 0000 0000 0000 0000 0000 0000 0001	0	1	1	1111 1111 1111 1111 1111 1111 1111 1111	1111 1111 1111 1111	
0000 0000 0000 0000 0000 0000 0000 0010	1	2	2	1111 1111 1111 1111 1111 1111 1111 1110	1111 1111 1111 1110	
0000 0000 0000 0000 0000 0000 0000 0100	2	4	4	1111 1111 1111 1111 1111 1111 1111 1100	1111 1111 1111 1100	
0000 0000 0000 0000 0000 0000 0000 1000	3	8	8	1111 1111 1111 1111 1111 1111 1111 1000	1111 1111 1111 1000	
0000 0000 0000 0000 0000 0000 0001 0000	4	16	10	1111 1111 1111 1111 1111 1111 1111 0000	1111 1111 1111 0000	
0000 0000 0000 0000 0000 0000 0010 0000	5	32	20	1111 1111 1111 1111 1111 1111 1110 0000	1111 1111 1110 0000	
0000 0000 0000 0000 0000 0000 0100 0000	6	64	40	1111 1111 1111 1111 1111 1111 1100 0000	1111 1111 1100 0000	
0000 0000 0000 0000 0000 0000 1000 0000	7	128	80	1111 1111 1111 1111 1111 1111 1000 0000	1111 1111 1000 0000	
0000 0000 0000 0000 0000 0001 0000 0000	8	256	100	1111 1111 1111 1111 1111 1111 0000 0000	1111 1111 0000 0000	
0000 0000 0000 0000 0000 0010 0000 0000	9	512	200	1111 1111 1111 1111 1111 1110 0000 0000	1111 1110 0000 0000	
0000 0000 0000 0000 0000 0100 0000 0000	10	1,024	400	1111 1111 1111 1111 1111 1100 0000 0000	1111 1100 0000 0000	
0000 0000 0000 0000 0000 1000 0000 0000	11	2,048	800	1111 1111 1111 1111 1111 1000 0000 0000	1111 1000 0000 0000	
0000 0000 0000 0000 0001 0000 0000 0000	12	4,096	1,000	1111 1111 1111 1111 1111 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0000 0000 0010 0000 0000 0000	13	8,192	2,000	1111 1111 1111 1111 1110 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0000 0000 0100 0000 0000 0000	14	16,384	4,000	1111 1111 1111 1111 1100 0000 0000 0000	1111 1100 0000 0000	
0000 0000 0000 0000 1000 0000 0000 0000	15	32,768	8,000	1111 1111 1111 1111 1000 0000 0000 0000	1111 1000 0000 0000	
0000 0000 0000 0001 0000 0000 0000 0000	16	65,536	10,000	1111 1111 1111 1111 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0000 0010 0000 0000 0000 0000	17	131,072	20,000	1111 1111 1111 1110 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0000 0100 0000 0000 0000 0000	18	262,144	40,000	1111 1111 1111 1100 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0000 1000 0000 0000 0000 0000	19	524,288	80,000	1111 1111 1111 1000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0001 0000 0000 0000 0000 0000	20	1,048,576	100,000	1111 1111 1111 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0010 0000 0000 0000 0000 0000	21	2,097,152	200,000	1111 1111 1110 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 0100 0000 0000 0000 0000 0000	22	4,194,304	400,000	1111 1111 1100 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0000 1000 0000 0000 0000 0000 0000	23	8,388,608	800,000	1111 1111 1000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0001 0000 0000 0000 0000 0000 0000	24	16,777,216	1,000,000	1111 1111 0000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0010 0000 0000 0000 0000 0000 0000	25	33,554,432	2,000,000	1111 1110 0000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 0100 0000 0000 0000 0000 0000 0000	26	67,108,864	4,000,000	1111 1100 0000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0000 1000 0000 0000 0000 0000 0000 0000	27	134,217,728	8,000,000	1111 1000 0000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0001 0000 0000 0000 0000 0000 0000 0000	28	268,435,456	10,000,000	1111 0000 0000 0000 0000 0000 0000 0000	1111 0000 0000 0000	
0010 0000 0000 0000 0000 0000 0000 0000	29	536,870,912	20,000,000	1110 0000 0000 0000 0000 0000 0000 0000	1110 0000 0000 0000	
0100 0000 0000 0000 0000 0000 0000 0000	30	1,073,741,824	40,000,000	1100 0000 0000 0000 0000 0000 0000 0000	1100 0000 0000 0000	
0111 1111 1111 1111 1111 1111 1111 1111	-	2,147,483,647	7F,FFF,FFF	1000 0000 0000 0000 0000 0000 0000 0001	1000 0000 0000 0001	
No positive equivalent	31	2,147,483,648	80,000,000	1000 0000 0000 0000 0000 0000 0000 0000	1000 0000 0000 0000	

200731

Figure 3. Value Ranges, Double Precision Word

Long Instruction Format



The first eight bit positions of the long instruction are the same as the short format. The remaining bit positions of this double precision word are used as follows.

IA (Indirect Address). A zero indicates a direct address (contained in the second word). A 1-bit in this position designates an indirect address, which is described in the EFFECTIVE ADDRESS GENERATION section.

Modifier Bits. Bit positions 9 through 15 have various uses as modifiers and are described under the applicable instructions.

Address. These 16 bits contain the address which may be used in its current form or modified by indirect addressing and/or EA modification.

REGISTERS

The CPU has auxiliary storage areas, called registers, that are used to store data during the performance of operations directed by the stored program. Each register has a distinct purpose and is concerned with a specific type of data. Closely interrelated, they provide the CPU with the necessary functions to provide the results required.

Index Registers

Index registers are located in core storage and are used to contain data added to an instruction to provide an effective address. In a short instruction, the

amount in the displacement field of the instruction is added to the amount in the index register specified by the tag bits (6 and 7). The result becomes the effective address used by the instruction in the operation specified by the OP code. These operations and the functions of the EA are explained more fully in the OPERATION section.

<u>Register Number</u>	<u>Instruction Code in Bits 6 and 7</u>	<u>Core Storage Location</u>
1	01	0001
2	10	0002
3	11	0003

Machine Registers

The ten registers in the CPU are basic to the system and are functional elements of the CPU. Each register operates as necessary to enable the CPU to provide the results specified by the program. The abbreviation for each register name is the designation by which it is usually identified.

ACC (Accumulator). This 16-bit register contains the result of an arithmetic operation. It can be loaded from or stored in core storage, shifted right or left, and otherwise manipulated by specific arithmetic and logical instructions.

EXT (Accumulator Extension). This 16-bit register is the low-order extension of the ACC. It is used during multiply and divide operations, shifting of the ACC and EXT, and double-word arithmetic.

TAR (Temporary Accumulator). This 16-bit register is the image of the ACC and is used to store the contents of the ACC during effective address computation.

AFR (Arithmetic Factor Register). This 16-bit register holds one operand during arithmetic and logical operations. (The other operand is provided by the ACC.)

SBR (Storage Buffer Register). This 16-bit register is the buffer between the CPU and core storage, and every word of data transferred into or out of core storage passes through the SBR.

SAR (Storage Address Register). This 14-bit register contains the address pertaining to each reference to a core storage word.

IAR (Instruction Address Register). This 14-bit register holds the address of the next sequential instruction.

OP (Operation Register). This 5-bit register holds the OP code of the instruction being performed.

TAG (Operation Tag Register). This 3-bit register contains the F and T bits of the instruction. It controls the instruction length and selects the index register.

CCC (Cycle Control Counter). This 6-bit register is used primarily to count CPU cycles and control shift operations.

ARITHMETIC FUNCTIONS

The arithmetic functions of the 1131 CPU are addition, subtraction, multiplication, and division. Results of arithmetic operations are algebraic. The correct sign is maintained as part of each operation.

Data is stored in the CPU in binary form; positive quantities have a plus sign (0) in the high-order position of the word and negative quantities have a minus sign (1) in the high-order position. Negative numbers are stored and operated upon in 2's complement form.

Addition and subtraction can be done in either single or double precision. Multiplication operates with single precision multiplier and multiplicand and provides a double precision product. In division, the dividend is double precision and the divisor and quotient are single precision.

Each arithmetic operation is described in detail under the specific program instruction in the OPERATION section.

Indicators

The two indicators associated with the ACC are the Overflow and Carry indicators. Each can be turned on irrespective of the other. The conditions of the indicators are explained under each instruction.

Carry Indicator. The Carry indicator is ON if the last position shifted out of the high-order position of the ACC contains a 1-bit. This indicator is reset for each add, subtract, or shift-left operation; it facilitates multiple precision (beyond double word) arithmetic.

Overflow Indicator. This indicator is turned on by an add, subtract, or divide operation when the result exceeds the capacity of the ACC or by a Load Status instruction in which the word at the EA has a one in

bit position 15. The Overflow indicator can be turned off only by program test, a Store Status instruction, or a Load Status instruction in which the word at the EA has a zero in bit position 15.

EFFECTIVE ADDRESS GENERATION

As has been noted previously, the location of a 16-bit single precision word or a 32-bit double precision word is denoted by a binary address. The range of addresses, expressed in decimal numbers, is 0000 through 4095 or 8191. Most of the program instructions, which are explained in the OPERATION section, instruct the CPU to obtain the data at a specified location and perform a certain operation on it. For example, an Add instruction could say, in effect, add the amount stored at location 1904 to the amount in the accumulator and leave the result in the accumulator.

The location 1904 is the effective address of the data referred to by the instruction.

It is part of the versatility of the 1131 CPU that the address in the instruction being executed can be modified as a specific occasion requires. As the result of a particular computation, for example, one of several courses may be indicated. Computation of the effective address of the location of the next instruction or of the next data worked on allows the CPU to proceed according to the predetermined course of action. The factors involved in computing the effective address are described in the following paragraphs.

Short Instruction

The short instruction displacement field contains the amount that is added to a specified figure to achieve the EA (effective address). The Tag bits of the instruction designate the other factor. See Figure 4.

IAR. Tag bits of 00 indicate that the displacement is added to the IAR to form the effective address. The

	F = 0 (Direct Addressing)	F = 1, IA = 0 (Direct Addressing)	F = 1, IA = 1 (Indirect Addressing)
T = 00	EA = Disp + IAR	EA = Add	EA = C/Add
T = 01	EA = Disp + XR1	EA = Add + XR1	EA = C/Add + XR1
T = 10	EA = Disp + XR2	EA = Add + XR2	EA = C/Add + XR2
T = 11	EA = Disp + XR3	EA = Add + XR3	EA = C/Add + XR3

Disp = Contents of Displacement field of instruction.
 Add = Contents of Address field of instruction.
 C = Contents of Location specified by Add or Add + XR.

20111B

Figure 4. Determination Effective Address

IAR contains the address of the next or immediately following instruction.


Index Registers. The three Index registers can also be used to modify the displacement to form the effective address. Tag bits of 01, 10, or 11 designate Registers 1, 2, or 3. Again, the contents of the specified register, added to the displacement, form the effective address.

Long Instruction

Long instructions are modified in much the same way as short instructions with the added versatility of indirect addressing. See Figure 4.

Direct Addressing. In the long instruction, a direct address is indicated by a 0 in the IA field. The effective address is governed by the contents of the Tag field. Tag bits of 00 indicate that the Address field of the instruction contains the effective address, which requires no modification. Tag bits of 01, 10, or 11 specify that the contents of the Address field are added to Index Register 1, 2, or 3, respectively, to form the EA.

Indirect Addressing. A 1-bit in the IA field of the instruction signifies that addressing is indirect, i.e., the Address field of the instruction contains the address of the location in memory that contains the EA significant to the accomplishment of the instruction. The indirect address can be the contents of the Address field of the instruction (T = 00), or it can be modified by being added to an index register (T = 01, 10, or 11). As an example (Figure 5), the indirect address is 0914. The CPU goes to that address and finds the contents of the location to be 2719. The EA, then, is 2719. This provides one more level of modification of a given address and provides more versatility in programming for variations to the main line program.

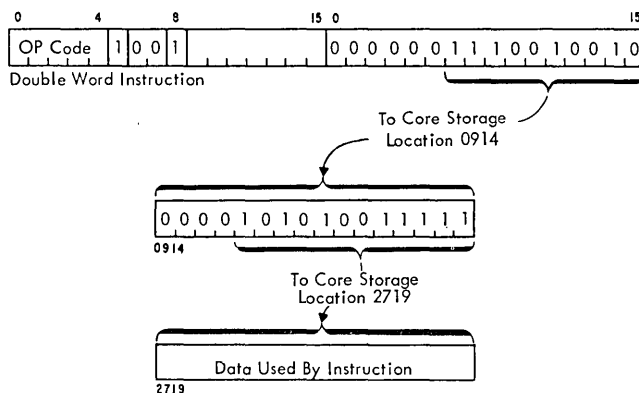

20114A

Figure 5. Indirect Addressing

The IBM 1130 instruction set (Figure 6) comprises 24 individual instructions divided into five classes. Modifications of these instructions enable additional operations. In the descriptions that follow, the name of the instruction is followed by the mnemonic symbols, the binary representation of the operation code, and execution times.

LOAD AND STORE INSTRUCTIONS

Load ACC (LD-11000)

The contents of the memory location specified by the EA replace the contents of the ACC. The contents of the memory location are unchanged.

The Carry and Overflow indicators are not affected.

Load Double (LDD-11001)

The contents of the memory locations specified by the EA and EA + 1 are loaded into the ACC and EXT, respectively. This instruction provides a double-word load for use with double-word arithmetic. The EA must be even for correct operation. If the EA is odd, the contents of that location are loaded into both the ACC and EXT. The contents of the memory location are not changed.

Carry and Overflow indicators are not affected.

Store Accumulator (STO-11010)

The contents of the ACC replace the contents of the memory location specified by the EA. The contents of the ACC are not changed.

The Carry and Overflow indicators are not affected.


Store Double (STD-11011)

The contents of the ACC and EXT replace the contents of the memory locations specified by the EA and EA + 1. This instruction provides a double-word store for use with double-word arithmetic. The EA must be even for correct operation. If the EA is odd, the contents of the ACC are stored at the EA and the contents of the EXT are not stored. The contents of the ACC and EXT are not changed.

The Carry and Overflow indicators are not affected.

Load Index (LDX-01100)

The contents of the register specified by the Tag bits of the instruction are replaced by the data specified. In the short instruction (F = 0), the register is loaded with the Displacement. In the long instruction (F = 1) the register is loaded with the Address (IA = 0) or the contents of the memory location specified by the Address (IA = 1).



20078

A Tag of 00 results in an unconditional branch to the address loaded into the IAR.

The Carry and Overflow indicators are not affected.

Store Index (STX-01101)

The contents of the register specified by the Tag bits are stored in the memory location specified by the EA. (See the table under Load Index for Tag bit codes.) The contents of the register are not changed.

The Carry and Overflow indicators are not affected.

Store Status (STS-00101)

The status of the Carry and Overflow indicators are stored in bits 14 and 15, respectively, of the word at the EA. Bits 0-7 of the storage word remain unchanged; bits 8-13 are reset to zeros. The status of each indicator is reflected by storing a 1-bit if the indicator is ON and a 0 if the indicator is OFF.

The Carry and Overflow indicators are reset as a result of the operation.

NOTE: The word in memory in which the status of the indicators is stored is normally the next Load Status instruction, the description of which follows.

Load Status (LDS-00100)

This instruction is always in the short format (F=0). The Carry and Overflow indicators are set to the

Instruction	Mnemonic	Binary OP Code	Execution Times (in microseconds)							
			Single Word (F = 0)				Double Word (F = 1)			
			T = 00		T = 01, 10, or 11		T = 00		T = 01, 10, or 11	
			Avg. ^①	Max.	Avg.	Max.	Avg. ^①	Max. ^①	Avg. ^①	Max. ^①
Load and Store										
Load ACC	LD	11000	7.6	-	11.2	-	10.8	-	14.8	-
Load Double	LDD	11001	11.2	-	14.9	-	14.4	-	18.0	-
Store ACC	STO	11010	7.6	-	11.2	-	10.8	-	14.8	-
Store Double	STD	11011	11.2	-	14.9	-	14.4	-	18.0	-
Load Index	LDX	01100	4.5	-	7.2	-	7.2	-	11.8	-
Store Index	STX	01101	7.6	-	11.2	-	11.8	-	15.4	-
Load Status*	LDS ⑦	00100	3.6	-	3.6	-	-	-	-	-
Store Status	STS	00101	7.6	-	11.2	-	10.8	-	14.8	-
Arithmetic										
Add	A	10000	8.0	13.0	11.7	16.6	11.2	16.2	15.3	20.3
Add Double	AD	10001	12.2	22.0	15.8	25.6	15.3	25.2	19.3	29.5
Subtract	S	10010	8.0	13.0	11.7	16.6	11.2	16.2	15.3	20.3
Subtract Double	SD	10011	12.2	22.0	15.8	25.6	15.3	25.2	19.3	29.5
Multiply	M	10100	25.7	40.0	29.3	43.6	29.3	43.6	32.9	47.2
Divide	D	10101	76.0	150.8	79.6	154.4	79.6	154.4	83.2	150.0
And	AND	11100	7.6	-	11.2	-	10.8	-	14.8	-
Or	OR	11101	7.6	-	11.2	-	10.8	-	14.8	-
Exclusive Or	EOR	11110	7.6	-	11.2	-	10.8	-	14.8	-
Shift Left* Modifier Bits 8 & 9:										
Shift Left ACC	00 SLA ⑦	00010	}	③	-	④	-	-	-	-
Shift Left ACC and EXT	10 SLT ⑦	00010								
Shift Left and Count ACC	01 ⑧ SLCA ⑦	00010								
Shift Left and Count ACC and EXT	11 ⑧ SLC ⑦	00010								
Shift Right* Modifier Bits 8 & 9:										
Shift Right ACC	00 or 01 SRA ⑦	00011	}	⑤	-	⑥	-	-	-	-
Shift Right ACC and EXT	10 SRT ⑦	00011								
Rotate Right	11 RTE ⑦	00011								
Branch										
Branch and Store IAR	BSI	01000	7.6	-	11.2	-	10.8 ^②	-	14.8	-
Branch or Skip on Condition	BSC	01001	3.6	-	3.6	-	7.2 ^②	-	11.2	-
Modify Index and Skip	MDX	01110	4.5	9.9	11.2	16.2	18.5	23.4	18.5	23.4
Wait*	WAIT ⑦	00110 ⑨	3.6	-	3.6	-	-	-	-	-
Input/Output										
Execute I/O	XIO ⑩	00001	11.2	-	14.8	-	14.8	-	18.4	-

* Valid in short format only

NOTES:

- | | | | |
|---|------------------------------------------------------------------------|----|---------------------------------------------------------------------------------------------|
| 1 | Indirect addressing, where applicable, adds 3.6 μsec to execution time | 6 | $N > 16: 7.2 + .45(N-19)$
$N < 16: 7.2 + .45(N-4)$
where N=number of position shifted |
| 2 | If branch is taken | 7 | Indirect addressing not allowed |
| 3 | $3.6 + .45(N-4)$ | 8 | If T=00, functions as SLA or SLT |
| 4 | $7.2 + .45(N-4)$ | 9 | All unassigned OP codes are defined as Wait operations |
| 5 | $N > 16: 3.6 + .45(N-19)$
$N < 16: 3.6 + .45(N-4)$ | 10 | If XIO Read or Write, add 3.6 μsec |

Figure 6. 1130 Instruction Set and Execution Times

conditions indicated by bits 14 and 15, respectively, of the instruction. A 1 sets the indicator to the ON condition; a 0 sets it to the OFF condition.

The Carry and Overflow indicators are set according to the bits in positions 14 and 15.

NOTE: The Load Status instruction is the word in memory in which the status of the indicators is stored by the previous (Store Status) instruction.

ARITHMETIC INSTRUCTIONS

Add (A-10000)

The contents of the memory location specified by the instruction are added algebraically to the contents of the ACC. Negative data is in 2's complement form. The sum replaces the contents of the ACC. The contents of the memory location remain unchanged.

The Overflow indicator is turned on if the sum is greater than the capacity of the ACC, $2^{15}-1$ or -2^{15} . If the indicator is ON when the overflow occurs, it is not changed.

The Carry indicator is set by a carry out of the high-order bit position of the ACC. The Carry indicator is dynamic and is conditioned for each ADD instruction.

Add Double (AD-10001)

The contents of the memory locations at EA and EA + 1 are added algebraically to the contents of the ACC and EXT. Negative data is in 2's complement form. This instruction provides double-word addition in which the ACC and EXT are considered as one 32-bit accumulator. The sum replaces the contents of the ACC and EXT; the contents of the memory locations are not changed. The EA must be even for correct operation. If the EA is odd, the contents of that location are added to both the ACC and EXT.

The Carry and Overflow indicators are affected as in the Add instruction (for the two word result, or course).

Subtract (S-10010)

The contents of the memory location specified by the instruction are directly subtracted from the contents of the ACC. The result replaces the contents of the ACC. The contents of the memory location are not changed.

The Carry and Overflow indicators are affected as in the Add instruction. The Carry indicator, if on, reflects a borrow condition.

Subtract Double (SD-10011)

The contents of the memory locations at EA and EA + 1 are subtracted from the contents of the ACC and EXT. This instruction provides double-word subtraction in which the ACC and EXT are considered one 32-bit accumulator. The difference replaces the contents of the ACC and EXT; the contents of the memory location are not changed. The EA must be even for correct operation. If the EA is odd, the contents of that location are subtracted from both the ACC and EXT.

The Carry and Overflow indicators are affected in the same way as in the Subtract instruction.

Multiply (M-10100)

The contents of the memory location specified by the instruction (the multiplicand) is multiplied algebraically by the contents of the ACC (multiplier). The 32-bit product replaces the contents of the ACC and EXT. Bit 15 of the EXT is the low-order bit, and bit 0 of the ACC is the high-order bit. Contents of the memory location are unchanged.

The Carry and Overflow indicators are not affected.

NOTE: The largest product that can be developed is 2^{30} , which results from multiplier and multiplicand of -2^{15} .

Divide (D-10101)

The contents of the ACC and EXT are considered a 32-bit, double word dividend, divided by the contents of the memory location specified by the instruction. The quotient replaces the contents of the ACC and the remainder, which carries the sign of the dividend, is placed in the EXT.

The Overflow indicator is turned ON by an attempt to divide by zero or by a quotient overflow, which occurs when the quotient exceeds the range of -2^{15} to $2^{15}-1$. An overflow causes the ACC and EXT to be left in an undefined state.

Logical AND (AND-11100)

The contents of the memory location specified by the instruction are ANDed, bit-by-bit, with the contents of the ACC; the results replace the contents of the ACC. The contents of the memory location remain unchanged.

The AND operation compares each bit position of two words (fields) and places a 1-bit in the result field (ACC) position if both fields contain a 1-bit in that position. The table that follows illustrates the

four possible bit combinations in the same bit position of two ANDed words.

Memory	ACC	Result
0	0	0
0	1	0
1	0	0
1	1	1

The Carry and Overflow indicators are not affected.

Logical OR (OR-11101)

The contents of the memory location specified by instruction are ORed, bit-by-bit, with the contents of the ACC. The results replace the contents of the ACC; the contents of the memory location are unchanged.

The OR operation compares each bit position of two words (fields) and places a 1-bit in that position of the result field (ACC) if either field contains a 1-bit in that position. The table that follows illustrates the four possible bit combinations in the same bit position of the two ORed fields.

Memory	ACC	Result
0	0	0
0	1	1
1	0	1
1	1	1

The Carry and Overflow indicators are not affected.

Logical Exclusive OR (EOR-11110)

The contents of the memory location specified by the instruction are exclusive-ORed, bit-by-bit, with the contents of the ACC. The result replaces the contents of the ACC; the contents of the memory location are unchanged.

The exclusive-OR operation compares each bit position of two words (fields) and places a 1-bit in that position of the result field (ACC) if either field, but not both, contains a 1-bit in that position. The table that follows illustrates the four possible bit combinations in the same bit position of the two exclusive ORed fields.

Memory	ACC	Result
0	0	0
0	1	1
1	0	1
1	1	0

The Carry and Overflow indicators are not affected.

SHIFT INSTRUCTIONS

All shift operations are in the short format (F=0) only. Each of the three Shift Right and four Shift Left instructions is defined by bits 8 and 9 of the basic Shift Right and Shift Left instructions. Except for the Shift Left and Count instructions, the number of positions shifted is controlled by the field specified by the Tag bits, as shown by the table that follows. (XR is the abbreviation for index register.)

Tag Bits	Shift Controlled By Low-Order Six Bits
00	Displacement
01	XR1
10	XR2
11	XR3

If the shift count is zero in the control field addressed, the instruction performs as a No-OP, and the Carry indicator is not affected.

Shift Left ACC (SLA-00010)

Bits 8 & 9 = 00

The ACC is shifted left the number of positions specified by the shift count, and vacated (low-order) bit positions are set to 0. The EXT is not affected.

The condition of the Carry indicator is determined by the contents of the last bit position shifted out of the ACC. The Carry indicator is turned ON by a 1-bit in the last position shifted out of the high-order position of the ACC; it is turned OFF by a 0. The Overflow indicator is not affected.

Shift Left ACC and EXT (SLT-00010)

Bits 8 & 9 = 10

The ACC and EXT are shifted left (as a 32-bit double word) the number of positions specified

by the shift count, and vacated bit positions are set to 0.

The Carry and Overflow indicators are affected as in the Shift Left ACC instruction.

Shift Left and Count ACC (SLCA-00010)

Bits 8 & 9 = 01

Tag bits of 00 cause this instruction to be executed the same as a Shift Left ACC instruction. Tag bits of 01, 10, or 11 cause the six low-order bits of the designated register to be transferred to the CCC (Cycle Control Counter) as a shift count. The count is decremented by one for each position the ACC is shifted to the left. The shift is terminated by a 1-bit being shifted into the high-order position of the ACC or the CCC being decremented to zero. The decremented count is loaded into the six low-order positions of the index register. Bit positions 0-7 of the index register are not affected.

The Carry indicator is turned ON if the shift is terminated by a 1-bit in the high-order of the ACC. It is turned OFF if the shift is terminated by the CCC being decremented to zero. If a 1-bit in the high-order position of the ACC coincides with the CCC being decremented to zero, the Carry indicator is turned OFF.

The Overflow indicator is not affected.

NOTE: If the count (n) is decremented to zero, a shift left n positions has occurred. If the count is initially zero or if the sign bit is initially a 1 bit, the instruction performs as a No-op.

Shift Left and Count ACC and EXT (SLC-00010)

Bits 8 & 9 = 11

This instruction is the same as the Shift Left and Count ACC instruction, except that both the ACC and EXT are shifted. The high-order bits of the EXT are shifted into the low-order positions of the ACC, and the vacated low-order positions of the EXT are set to zero.

The Carry and Overflow indicators are the same as for the Shift Left and Count ACC instruction.

Shift Right ACC (SRA-00011)

Bits 8 & 9 = 00 or 01

The ACC is shifted right logically the number of positions specified by the shift count. Low-order bits shifted out are lost; high-order positions vacated are set to zeros. The EXT is not affected.

The Carry and Overflow indicators are not affected.

Shift Right ACC and EXT (SRT-00011)

Bits 8 & 9 = 10

The ACC and EXT are shifted right arithmetically (as a 32-bit double word) the number of positions specified by the shift count. The value of the sign-bit (position 0 of the ACC) is entered in all vacated positions. Low-order bits of the EXT are shifted out and lost.

The Carry and Overflow indicators are not affected.

Rotate Right ACC and EXT (RTE-00011)

Bits 8 & 9 = 11

The ACC and EXT are shifted right (as a 32-bit double word) the number of positions specified by the shift count. In effect, a continuous loop is formed, so that the high-order positions of the ACC pick up the bits shifted out of the low-order positions of the EXT. For example, if the shift count is three, all positions of the ACC and EXT shift three positions to the right, and the values of EXT bit positions 13, 14, and 15 are put in ACC bit positions 0, 1, and 2.

The Carry and Overflow indicators are not affected.

BRANCH INSTRUCTIONS

Branch instructions provide the means for departing from a sequential series of instructions, by testing to determine if a stated condition or combination of conditions exists, and returning to the point from which the departure was made.

Branch or Skip on Condition (BSC-01001)

Six separate conditions of the ACC can be tested by placing a 1-bit in the appropriate bit position of the instruction. The bit positions and corresponding conditions tested for are contained in the table that follows.

<u>Bit Position</u>	<u>Condition</u>
15	Overflow indicator OFF
14	Carry indicator OFF

<u>Bit Position</u>	<u>Condition</u>
13	ACC contents even
12	ACC positive, not zero
11	ACC negative
10	ACC zero

The contents of the ACC are not changed by testing.

Short Instruction Format (F = 0)

If any one of the conditions specified by the instruction is true, the program skips over the next word in memory and goes to the second word in sequence. This means that a BSC instruction in the short format must always be followed by a short-format instruction. If an instruction in the long format were to follow, a skip would send the program to the second word of the instruction, and a programming error would result.

If none of the conditions is true, the next sequential instruction is executed.

If bit positions 10 through 15 contain zeros (no condition tested), the instruction performs as a No-Op.

Long Instruction Format (F = 1)

When none of the conditions specified is true, the program branches to the EA. If any one of the conditions is true, the next sequential instruction is executed.

If no condition is specified, the program branches to the EA. This allows the long format of the BSC instruction to be used as an unconditional branch. An explanation of the computation of the EA is contained in the section, Effective Address Generation. When this instruction specifies an indirect address (IA = 1), it enables a return to the program routine from which the CPU departed to accomplish a subroutine. This is accomplished by making the indirect address in this instruction identical to the EA of the Branch and Store IAR instruction that effected the branch.

Programming Note. When an interrupt request has been detected by a priority level, the program is directed to service the request by interrupting. During the servicing, all interrupt requests of equal or lower status are effectively constrained from interrupting while the servicing of the higher priority is in progress. However, if a request is detected for a higher priority level than is presently in progress, the

program is immediately interrupted again. This is frequently called Nesting of Interrupts.

At the completion of servicing any level of interrupt, it is necessary to signal the priority hardware to reset the priority-status of the highest level that is on. This reset permits lower priority requests, including those that may have been temporarily constrained but recorded, to be accepted once again by the CPU. This is effected by making Bit 9 = 1 in this instruction. This programmed recognition of waiting interrupts should not be confused with a normal subroutine linkage back to a mainline program in which Bit 9 should be set to zero.

The BSC is a conditional instruction, and when Bit 9 = 1, the interrupt level is reset only when the branch or skip occurs.

Indicators

The Overflow indicator is reset when tested by the BSC instruction; the Carry indicator is not reset by testing.

Branch and Store IAR (BSI-01000)

The BSI instruction can be used in either the short or long format.

Short Instruction Format (F = 0)

The contents of the IAR (the location of the next sequential instruction) are stored at the EA of the BSI instruction. The IAR is then set to the EA + 1, which becomes the location of the next instruction executed. For example, assume that the BSI instruction is at memory location 0500 and that the EA generated is 0600. Execution of the BSI instruction stores 0501 at memory location 0600 and branches to 0601, which is the location of the next instruction.

Long Instruction Format (F = 1)

In the long format, the BSI instruction branches conditionally under the same circumstances as the BSC instruction. The conditions to be tested are designated by bit placement in Bits 10-15, as shown by the table in the description of the BSC instruction. If none of the conditions is true, the contents of the IAR are stored at the EA and execution of the instruction proceeds as described for the short format. If one or more of the conditions is true, the next sequential instruction is executed.

Indicators

In the short format, the Carry and Overflow indicators are not affected; in the long format, the Overflow indicator is reset when tested. The Carry indicator is not reset.

Modify Index and Skip (MDX-01110)

This instruction can be used to modify an index register, the IAR, or the contents of a word in memory. Except as noted, a skip occurs only if the index register or memory word being modified changes sign or is zero after modification.

A skip causes the program to skip over the next word in memory and go to the second word in sequence. This means that an MDX instruction must always be followed by an instruction in the short format. If a long-format instruction were to follow, a skip would send the program to the second word of the instruction, and a programming error would result.

Short Instruction Format (F = 0)

The expanded Displacement is added to the register specified by the Tag bits of the instruction, according to the table that follows. The displacement is expanded to 16 bits by duplicating the sign bit 8 positions to the left in the resulting high-order position.

<u>Tag Bits</u>	<u>Operation</u>
00	Displacement added to IAR
01	Displacement added to XR1
10	Displacement added to XR2
11	Displacement added to XR3

When the Tag bits of the instruction are 00, the MDX instruction becomes a branch, a skip, or a No-Op. Since the IAR contains the address of the next instruction, a Displacement value of zero merely sends the CPU to the next instruction; a positive value of one results in a skip; and any other value results in a branch to the modified address in the IAR. (The Displacement can also be negative.)

Long Instruction Format (F = 1)

Modification is accomplished according to the contents of the Tag and IA fields of the instruction. If the Tag is 00, independent of the IA bit, the expanded Displacement (bits 8 through 15 of the first word of the instruction) is added to the contents of the memory location specified by the Address field of

the instruction. The displacement is expanded to 16 bits by duplicating the sign bit 8 positions to the left in the resulting high-order position. If the Tag bits are not 00, the IA bit becomes the controlling factor, as shown below.

IA Bit = 0. The contents of the Address field of the instruction are added to the index register (XR) specified by the Tag bits:

T = 01	XR1
T = 10	XR2
T = 11	XR3

IA Bit = 1. The contents of the memory location specified by the Address are added to the designated index register, according to the Tag bit values noted above.

Indicators

The Carry and Overflow indicators are not affected.

Wait (WAIT-00110 and Undefined OP Codes)

This instruction is in the short format only. The operation of the CPU stops in a wait condition and can be restarted manually or by the detection of an interrupt. A manual restart causes resumption of the program with the next sequential instruction; an interrupt causes resumption at a point determined by the interrupt branch operation. Cycle sharing operations continue in the wait condition.

The Carry and Overflow indicators are not affected.

INPUT/OUTPUT OPERATIONS

The IBM 1130 Computing System offers a variety of I/O devices. The Keyboard for input and the Console Printer for output are standard on the IBM 1131 CPU (Central Processing Unit), Models 1 and 2. In addition, the 1131 Model 2 provides the large capacity and random-access availability of data inherent in disk storage. The following attached units offer a wide diversity of I/O media:

- IBM 1134 Paper Tape Reader
- IBM 1055 Paper Tape Punch
- IBM 1132 Printer
- IBM 1442 Card Read-Punch
- IBM 1627 Plotter

The programmed operation of each of these units is described in succeeding sections. The

operating procedures that have to do with the mechanical functioning of the devices are covered in the publication, IBM 1130 Computing System, Input/Output Units (Form A26-5890).

EXECUTE I/O (XIO-00001)


This instruction can be in either the short or long format, and operation is the same, except for the inherent differences in the manner in which the EA is generated, and the fact that the long format can have either a direct or indirect address.

The effective address is the memory location of the first word of the I/O Control Command (IOCC); EA + 1 is the location of the second word of the IOCC.

The contents of the ACC, if significant, must be stored prior to execution of the XIO instruction because the ACC is used in the analysis of the IOCC.

Input/Output Control Command

The format of the IOCC follows.

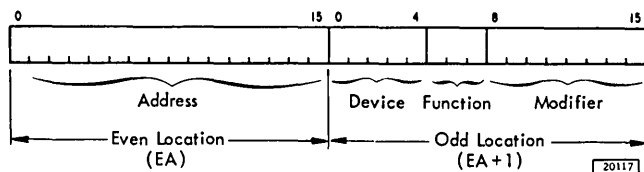

Address

The use of this 16-bit field depends on the function and the device specified.

Device

This 5-bit field identifies the I/O device.

00010	1442 Card Read-Punch
00110	1132 Printer
00100	Disk storage
00101	1627 Plotter
00011	1134 Paper Tape Reader, 1055 Paper Tape Punch
00001	Console Keyboard, Console Printer
00111	Console Entry Switches

Function

The primary I/O functions are specified by the 3-bit function code:

- 000 - Not used
- 001 - Write
This code is used to transfer a single word from storage to an I/O unit. The address of the storage location is provided by the Address field of the I/O Control Command.
- 010 - Read
This code is used to transfer a single word from an I/O unit to storage. The address of the storage location is provided by the Address field of the I/O Control Command.
- 011 - Sense Interrupt
This code is used only on Level 4 and causes the ACC to be loaded with the Interrupt Level Status Word (ILSW) for Level 4.
- 100 - Control
This code causes the selected device to interpret the Modifier field as a specific control action.
- 101 - Initiate Write
This code provides the ability to initiate a WRITE operation on a device or unit which will subsequently make data transfers from storage via a Data Channel.
- 110 - Initiate Read
This code provides the ability to initiate a READ operation from a device or unit which will subsequently make data transfers to storage via a Data Channel.
- 111 - Sense Device
This code loads the ACC with the DSW (Device Status Word) for the device specified in the IOCC. The status indicators are reset by specifying modifier bits as follows: Bit 15 for the highest level to which the device is connected, Bit 14 for the next highest level, and so on.

Modifier

This portion of the command provides additional information for the device and function specified.

INTERRUPT

The Interrupt facility provides an automatic branch from the normal program sequence based upon an external condition. A maximum of six interrupt levels are available with the 1130 Computing System. They are assigned as follows:

<u>Level</u>	<u>Device</u>
0	1442 Card Read-Punch (column read, punch)
1	1132 Printer
2	Disk Storage
3	1627 Plotter
4	1442 (operation complete); Keyboard/Console Printer; 1134 Paper Tape Reader; 1055 Paper Tape Punch
5	Console (Program Stop switch)

Interrupt Philosophy

Because of the number of types of interrupt requests, it is not always possible to cause a branch to a unique address for each interrupt condition. For the same reason, it is frequently not desirable to cause one branch for all interrupt requests and require the program to determine the individual request(s) requiring service. Therefore, it is expedient to group the many individual request lines into a lesser number of priority levels. This accomplishes two very important functions: First, it allows all interrupt requests common to a specific device to have the privilege of interrupting immediately if the only requests waiting or being serviced are of a lower priority level. Service is returned to the initial request only after all higher level requests have been serviced. Second, since a unique branch can be defined for each interrupt priority level, it is possible to combine many interrupt requests on a common priority level and therefore use a common interrupt subroutine to service many requests.

There are two important operating characteristics of the 1130 interrupt system: (1) when more than one request line is connected to any priority level, it is necessary, by programming means, to identify the individual request(s) causing the priority level to be energized; (2) the first request that causes an interrupt prevents future requests on the same or lower priority levels from interrupting until the completion of servicing the first interrupt is signaled by a "branch out" operation. (See Branch or Skip on Condition-BSC.)

Interrupts that occur on the same level for which an interrupt is being serviced can be detected and acknowledged before the branch out operation is executed.

Program Operation


An interrupt may be recognized by the CPU at the completion of any program instruction. It is initiated by the basic interrupt control, which forces execution of a CPU-generated Branch and Store IAR (BSI) instruction. The indirect address of the generated BSI instruction is in location 8-13, corresponding to the level of interrupt. This location should contain the address of the location in the interrupt routine where the IAR is to be stored.

As defined by the BSI instruction description, the IAR is stored at the EA (effective address) and program execution is resumed with the Branch to the EA + 1. It is the responsibility of the interrupt subroutine to store all data and/or index registers that are used by the routine, and to restore the same registers prior to departing from the subroutine. (See the description of BSC.)

Several devices can request an interrupt on level 4. It thus becomes necessary for the program to determine the requesting device. This is accomplished by issuing an XIO instruction with a Function of Sense Interrupt.

The Sense Interrupt function is decoded and sent to all I/O devices, along with the current interrupt level being serviced. Each device that is requesting service on level 4 will have a bit appear in the ILSW that is loaded into the Accumulator, provided that level 4 is being serviced. The Sense Interrupt command will therefore produce meaningful results only if executed in a program sequence that is a result of interrupt level 4, and before a Branch Out command is executed in this routine.

Interrupt Level Status Word

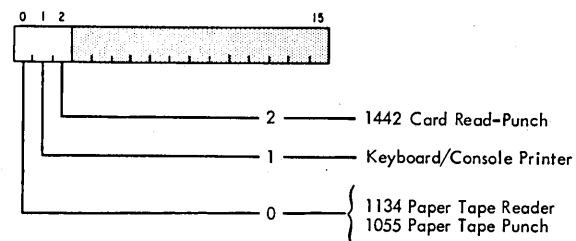

20292 A

Although a 16-bit ILSW could exist for each priority level, only level 4 uses the ILSW in the 1130 System.

Each device with an interrupt request signal assigned to priority level 4 is given a particular bit position in its ILSW to indicate its interrupt request status, a 1-bit if ON and 0 if OFF. The status indicator(s) in the device(s) is not affected by the sensing of the ILSW. It is possible for a device to contain several conditions which may cause an interrupt on the same interrupt level. When this condition exists, the interrupt conditions are logically ORed to become a single interrupt. The identification of the interrupting condition within the device is accomplished by sensing the Device Status Word (DSW) as discussed in subsequent paragraphs.

Interrupt Identification

Following loading of ILSW 4 in the ACC (accomplished by an XIO-Sense Interrupt instruction), the Shift Left and Count instruction is used to facilitate examination of the ILSW. First, an index register is loaded with a quantity which corresponds to the number of request signals connected to interrupt priority level 4, followed by the Shift Left and Count instruction (SLC). The resulting count in the Index register is unique and corresponds to the first non-zero bit of the ILSW in the Accumulator. (It is also possible to execute a Shift Left and Count of both the ACC and EXT. Refer to the SLC Instruction Description.) The SLC is followed by a Branch or Skip on Condition instruction (BSC) utilizing the F = 1 format with IA = 1, indexed with the result of the SLC. This provides, in conjunction with a branch table, a unique branch for each non-zero bit of the ILSW.

After the device causing an interrupt has been identified from data in the ILSW, it is necessary to determine the indicator(s) within the particular device causing the interrupt. This is accomplished by issuing a subsequent XIO Sense Device instruction with an area assignment corresponding to that of the device being interrogated. The Status indicators are reset after the information has been loaded in the ACC, if a bit is present in position 15 of the modifier. If a device can initiate interrupts on more than one interrupt level, the indicators are reset by specifying modifier bits as follows: Bit 15 for the highest level to which the device is connected, Bit 14 for the next highest level, and so on.

The data in the ACC is now referred to as the DSW (Device Status Word).

Device Status Word

The DSW contains one bit of information for each indicator within the device. These usually fall into three categories, (1) error or exception interrupt conditions, (2) normal data or service-required interrupts, and (3) routine status conditions.

Programming Note. When an interrupt request has been detected by a priority level, the program is directed to service the request by interrupting. During the servicing, all interrupt requests of equal or lower status are effectively constrained from interrupting while the servicing of the higher priority is in progress. However, if a request is detected for a higher priority level than is presently in progress, the program is immediately interrupted again. This is frequently called Nesting of Interrupts.

At the completion of servicing any level of interrupt, it is necessary to signal the priority hardware to reset the priority-status of the highest level that is on. This reset permits lower priority requests (including those that may have been temporarily constrained, but recorded) to be accepted once again by the CPU. The reset is accomplished by a BSC instruction with Bit 9 = 1. This programmed recognition of waiting interrupts should not be confused with a normal subroutine linkage back to a mainline program in which Bit 9 should be set to zero.

The BSC is a conditional instruction, and when Bit 9 = 1, the interrupt level is reset only when the branch or skip occurs.

Figure 7 shows a typical procedure for recognizing interrupts.

DISK STORAGE

Disk storage provides the IBM 1130 Computing System with low-cost random or sequential access data storage. On-line data capacity is 512,000 words; off-line capacity is virtually unlimited because the interchangeable disk cartridge is easily removed and replaced with another. Thus, the large storage capacity, comparable to that of magnetic tape, coupled with the unique advantage of random access, affords the 1130 Computing System great flexibility in the handling of engineering, scientific, industrial, and commercial programs.

Sample Interrupt Recognition Procedure

Ref. No.	Memory Address	Contents of Location at Memory Address	Contents of IAR
1	0500-0501	XXX F T A	0502
2	None	BSI 1001	0008
3	0008	0600	
4	0600	0502	0601
5	0601-0602	XXX F T A	0603
<hr/>			
6	0729-0730	BSC 1001 1000000	0600
7	0600	0502	0502
8	None	BSI 1001	0012
9	0012	1500	
10	1500	0502	1501
11	1501-1502	XXX F T A	1503
<hr/>			
12	2300-2301	XIO 1000	4100
13	4100	011	2302
14	2302	LDX 001	000011
15	2303	SLCA 00100	000010
16	2304-2305	BSC 10110	2305
17	2306	2500	
18	2307	2600	2600
19	2308	2700	
20	2600-2601	XXX F T A	2602
<hr/>			
21	2800-2801	XIO 1000	4102
22	4102	00001111	2802
23	3200-3201	BSC 1001 1000000	1500
24	1500	0502	0502
25	0502-0503	XXX F T A	0504

The notes that follow are numbered to correspond to the reference numbers in the procedure. Each reference number cited in text is circled, e.g., ①, to avoid confusion with numbers necessary to the procedure, such as memory addresses.

In the registers, instructions, and data words, only the necessary 0-bits and 1-bits are shown. Op codes are shown in alphabetic symbols, and decimal numbers are used to identify memory locations. Binary notation, where used, is obvious. IAR, ACC, and XR1 are shown only where needed for understanding of the operation.

1. Mainline program instruction. During execution of this instruction, the I442 initiates a card read interrupt.
2. At the conclusion of the ① instruction, the CPU blocks the next program instruction and interposes a CPU-generated BSI to start the Level 0 Interrupt procedure.
3. IA of the Level 0 BSI is 0008; the EA at 0008 is 0600.
4. The IAR (0502) is stored at the EA (0600); the IAR is then loaded with the EA + 1 (0601).
5. First instruction of the Level 0 interrupt subroutine. The subroutine must store the status of each register, all data, etc., that could be altered by execution of the subroutine. Before leaving the subroutine, the program must restore all registers, data, etc., to the condition that existed when the interrupt occurred.
6. The last instruction of the interrupt subroutine is a BSC instruction with a Bit-9 value of 1, which resets the priority status so that interrupts of equal or lower priority can be recognized. If no interrupt is waiting, return to the interrupted program is effected by the IA(0600) of the BSC being equal to the EA of the CPU-generated BSI that initiated the interrupt routine, ②. The BSC is shown as an unconditional branch (Bits 10-15 = 0); the branch could have been conditional, i.e., the branch executed only if conditions specified by Bits 10-15 were true.

NOTE: The term interrupted program is used to designate either the main program being executed or an interrupt subroutine of lower priority. For example, the ① instruc-

Figure 7. Sample Interrupt Recognition Procedure, Part I

tion could be in a routine to service a console printer-keyboard, Level 4 interrupt. Thus, the mainline program can be thought of as a routine with no priority, to which the CPU returns when no interrupts are waiting.

7. The EA (0502) is the location of the next mainline program instruction and is loaded into the IAR.
8. To illustrate an interrupt with a low priority occurring while a higher priority interrupt is being serviced, we assume that the console printer-keyboard initiated a Level 4 interrupt while the card read interrupt was being serviced. We assume that no Level 0, 1, 2, or 3 interrupts are waiting and that the Level 4, CPU-generated BSI can now be interposed, as in ② for Level 0.
9. The IA (0012) of the BSI is the memory location assigned to Level 4 interrupts and contains the EA (1500).
10. The IAR is stored at the EA (1500) and then loaded with EA+1 (1501).
11. First instruction of Level 4 subroutine. See ⑤. Last housekeeping instruction takes subroutine to 12.
12. The XIO instruction EA (4100) is the memory location of the IOCC. The IAR contents remain at 2302 because the IOCC controls an I/O device and is not a sequential program instruction.
13. The IOCC function code of 011 (Sense Interrupt) causes the ILSW for Level 4 to be loaded into the ACC.
14. XR1 is loaded with a quantity equal to the number of response signals connected to the ILSW.
15. SLCA instruction is terminated when the 1-bit associated with the console printer-keyboard interrupt is shifted into the high order position of the ACC. XR1 is reduced by one.
16. BSC instruction address is modified by XR1 (+2) to form the IA (2307). A bit in the 0-position of the ILSW (paper tape reader and paper tape punch) results in an XR1 of 3 and an IA of 2308. A bit in the 2-bit position (card read-punch) results in an XR1 of 1 and an IA of 2306.
17. An IA of 2306 has the EA 2500, which is the memory location of the first instruction of the Card Read-Punch interrupt subroutine.
18. An IA of 2307 has the EA 2600, which is the memory location of the first instruction of the Console Printer-Key-board interrupt subroutine.
19. An IA of 2308 has the EA 2700, which is the memory location of the first instruction of the Paper Tape Reader and Paper Tape Punch interrupt subroutine.
20. First instruction of housekeeping sequence for Console Printer-Key-board subroutine.
21. The XIO instruction EA (4102) is the memory location of the console printer-keyboard IOCC.
22. The IOCC Sense Device function code (111) causes the DSW of the console printer-keyboard (00001) to be loaded into the ACC. The 1-bit in position 15 causes the response to be reset. The example shows 1-bits in positions 2 and 3 of the ACC (DSW), which indicate that the operator initiated an interrupt request on the keyboard and that the console entry switches are to be read. A programmed subroutine determines the cause of the interrupt (Bit 2) and the interrupting device (Bit 3). A routine then follows that reads the data into memory, accomplishes any housekeeping required, and releases the CPU, as shown in ⑬.
23. Procedure is the same in ⑥ and ⑦. The IA (1500) of the BSC instruction is equal to the EA of the CPU-generated BSI instruction that initiated the interrupt; see ⑧, ⑨, and ⑩.
24. The EA (0502), located at 1500, is loaded into IAR.
25. The instruction at 0502 is the next one to be executed in the mainline program. See ① for previous mainline instruction.

Figure 7. Sample Interrupt Recognition Procedure, Part II

System programs, object programs, subroutines, and often-used table data can be stored in the same removable disk cartridge and a specific computation accomplished by mounting the cartridge and feeding the variable data into the 1131 CPU. This simplifies problem solving and increases the throughput of the System.

DESCRIPTION

Disk storage for the 1130 System is contained in the CPU cabinet and is connected to the CPU by a high-speed data channel. It is composed of two components: the disk and drive assembly and the access mechanism.

Disk Assembly

The disk assembly (Figure 8) is a single disk drive, completely enclosed in a protective housing, or cartridge. The recording medium is an oxide-coated disk that provides two surfaces for the magnetic recording of data. When mounted in the CPU enclosure, the disk drive rotates at the rate of 1500 revolutions per minute.

Access Mechanism

The disk storage access mechanism has two horizontal arms. Each arm has a magnetic read/write head, and each head is positioned to read or write on the corresponding disk surface as the access arms straddle the disk in the manner of a large tuning fork. The entire assembly moves horizontally forward and backward, so that the heads have access to the entire recording area.

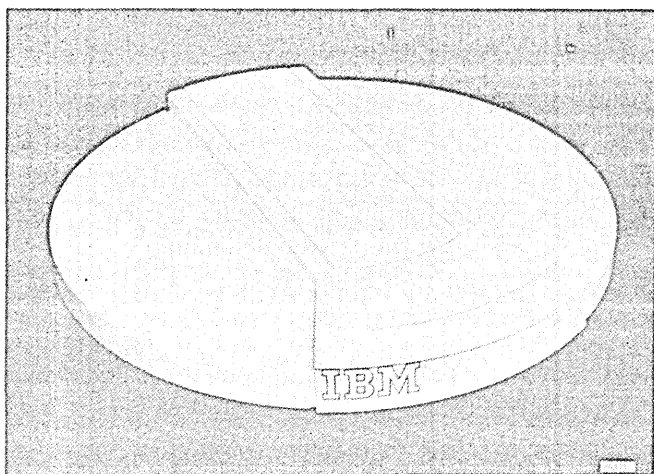


Figure 8. Disk Assembly Cartridge


The access mechanism is positioned automatically, at the home position (outside cylinder) when the disk cartridge is inserted.

Disk Organization and Capacity

The access mechanism is moved back and forth by program instructions and can be placed in any one of 200 positions, from a point near the periphery of the disk to a point near the center of the disk. At each position, the heads can read or write in a circular pattern on both surfaces of the disk, as it revolves. These circular patterns of data are called tracks. The track on the upper surface of the disk and the corresponding track on the lower surface, both of which can be read or written while the access mechanism is in the same position, are called a cylinder. Figure 9 shows the innermost and outermost cylinders of two tracks each. To complete the picture, the 198 intermediate cylinders, or pairs of tracks, should be visualized; they were omitted for the sake of clarity of the diagram.

For convenience in transferring data between the CPU core storage and disk storage, each track is divided into four equal segments called sectors. Sectors are numbered by the cylinder, from 0 through 7, as shown in Figure 10. Sectors 0 - 3 divide the upper surface track, and Sectors 4 - 7, the lower. A sector contains 321 data words and is the largest segment of data that can be read or written with a single instruction.

In the programs and programming systems provided by IBM, e. g., the Monitor System and its programs, the first word of a 321-word sector is used for cylinder sector number.

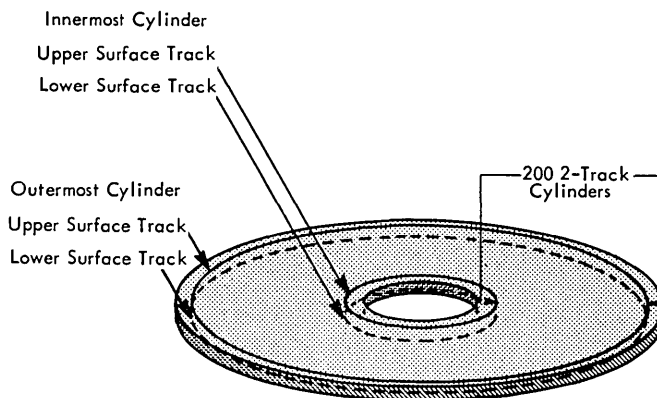

NOTE: The thickness of the disk has been greatly exaggerated in order to show the relative positions of the upper and lower surface tracks.

20254

Figure 9. Disk Storage Cylinder Schematic

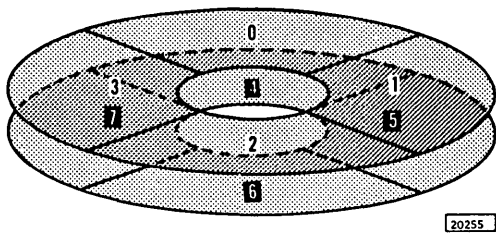


Figure 10. Disk Storage Sector Numbers

Therefore, the first word of the sector can not be used by the programmer if the Assembler program or other components of the Monitor System are to be used.

A disk storage word comprises 16 data bits and four check and space bits.

Table 1 shows the organizational components of disk storage. Note that capacities are based on the 320-word sector.

Timing

Timing considerations of disk storage operation involve three elements: access time, reading and writing data, and the time during which the CPU is tied up.

Access. The access mechanism moves in increments of two cylinders at the rate of 15 ms per increment. Thus, in the formula that follows, the number of cylinders (N) must be even. (The next higher even number is used if an odd number of cylinders is specified.) During the 20 ms stabilization period that follows the last incremental movement, a Read or Write instruction can be given and will be started at the end of the stabilization period.

$$\text{Access time (ms)} = 7.5(N) + 20$$

Table 1. Disk Storage Data Organization

	No of.	Per	Word	Sector	Track	Cylinder	Disk
Bits			16	5,120	20,480	40,960	8,192,000
Data Words				320	1,280	2,560	512,000
Sectors					4	8	1,600
Tracks						2	400
Cylinders							200

Read/Write. Reading or writing of data in disk storage is at the rate of 27.8 μ sec per word. Average rotational delay time is 20 ms, based on 1500 rpm, or 40 ms per revolution. Thus, a sector can be read or written in an average of 30 ms. Although there are no timing considerations for head switching, there are programming considerations in consecutive sector operations because there is an interval of over 420 μ sec between sectors; the interval is increased by 27.8 μ sec for each word less than 321 read or written.

A full cylinder of eight 321-word sectors can be read or written in 100 ms because the rotational delay is required for only the first sector.

CPU Time. An interrupt in a disk storage operation occurs only at the end of the Seek or Read/Write operation. This means that once the instruction is initiated, disk storage operation is virtually independent of the CPU. As data is being read or written, a cycle is literally "stolen" from the CPU operation in progress every 27.8 μ sec for the transmission of the next word. Thus, except for the normal instruction times, the CPU is busy only 14 ms of the 100 ms required to read or write a full cylinder. The remaining 86 ms are available for other program operations.

Data Checking

Data is checked on each transmission between core storage and disk storage. The number of bits of each word is divided by four as the word leaves core storage, and the number of bits necessary to make the division even (Modulo 4) is added to the end of the word. The Modulo 4 test is performed again each time a word is written in disk storage or read from it. A word that is not Modulo 4 causes the Data Check bit to be set in the disk storage DSW.

Procedure for Changing the Disk Storage Cartridge


1. Turn off the disk drive motor with the power switch adjacent to the disk mechanism.
2. Open the hinged cover of the disk storage drive enclosure.
3. Pull down on the release/lock handle and remove the cartridge. An interlock prevents removal of the cartridge until the disk has stopped spinning.
4. Another cartridge can be installed by simply inserting it into the aperture. The access mechanism read/write heads are automatically positioned as the cartridge is inserted.

5. Raise the access release/lock handle to lock the cartridge in place.
6. Close the cover of the disk storage drive enclosure and start the disk drive motor. An interlock prevents the motor from starting unless the cartridge is correctly inserted and the disk is in place. The disk reaches ready status in approximately 90 seconds.

PROGRAMMING DISK STORAGE

I/O Control Command (IOCC)

Initiate Read (110)

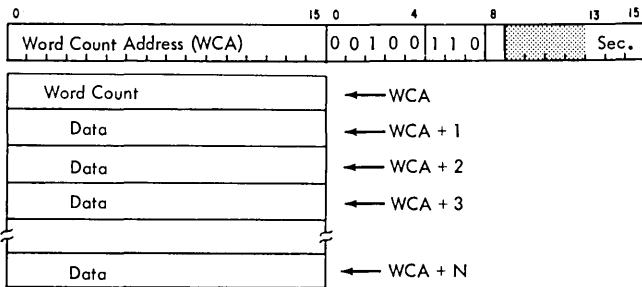

This instruction causes the number of words specified by the Word Count to be read from the disk storage sector identified by Modifier bits 13-15. The Address word of the instruction contains the WCA (Word Count Address), and Modifier bit 8 determines whether the command is a Read instruction (0) or a Read-Check instruction (1).

A full sector, 321 words, is the maximum transmission with one instruction. Succeeding sectors, or parts of sectors, require an Initiate Read instruction for each one.

An Operation-Complete interrupt occurs when the number of words in the Word Count has been transmitted.


Read Instruction (Bit 8 = 0). Beginning with the first word of the indicated sector, data is read into core storage location WCA + 1 and ascending addresses. The Word Count, which is stored at the location specified by the WCA, controls the number of words transmitted and, consequently, the number of core storage locations occupied by the disk storage data. For example, assume that a Word Count of 152 is stored at WCA 1000. The 152 words read from disk storage would be stored at addresses 1001 through 1152.

The programmer must be aware of the core storage locations required for incoming disk storage data so that useful data is not written over and lost.

Read-Check Instruction (Bit 8 = 1). Data is read from disk storage, as in the Read instruction, and

the number of bits of each word is checked for Modulo 4. If the division for any word is not even, the Data Check indicator bit is set in the disk storage DSW. Neither disk storage nor core storage is affected by the Read-Check instruction.


Initiate Write (101)

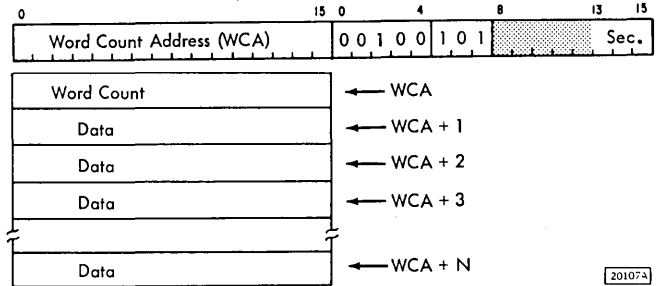

This instruction causes the number of words specified by the word Count to be written in disk storage, beginning at the first word of the sector indicated by Modifier bits 13-15. The Address word of the instruction contains the address of the Word Count (WCA). The data is transmitted from core storage location WCA + 1 and ascending addresses. A full sector, 321 words, is the maximum transmission with one instruction. Succeeding sectors, or parts of sectors, require an Initiate Write instruction for each one.

An Operation-Complete interrupt occurs when the number of words in the Word Count has been transmitted.

Control (100)




This instruction causes the access mechanism to move in increments of two cylinders for the number of cylinders specified by the Address word of the instruction. If the number of cylinders is odd, the first increment consists of one cylinder.

Modifier bit 13 controls the direction of movement: a 0 moves the access mechanism forward (toward the center of the disk); a 1 moves it backward.

When the access mechanism has moved the number of cylinders specified, an Operation-Complete interrupt occurs.

NOTE: Cylinders do not carry an identifying number. It is the responsibility of the program, therefore, to maintain the necessary information relative to the position of the access mechanism. A Control command which specifies an access motion of zero cylinders is treated as a No-op and does not result in an Operation Complete interrupt.

Sense Device (111)



This instruction causes the Device Status Word (Figure 11) of disk storage to be read into the ACC. All indicators are reset if Modifier bit 15 is a 1.

Interrupt

Operation Complete. This is the only interrupt associated with disk storage, and is turned on at the end of a Read, Read-Check, or Write operation. It is also turned on when the access mechanism has reached the designated cylinder during a Control instruction.

Indicators

Operation Complete. This indicator is turned on at the end of a Read, Read-Check, Write, or Control (access movement) operation. It is turned off by a Sense Device instruction with Modifier bit 15 set to one.

Disk Busy. This indicator is on during execution of a disk storage instruction. It is turned off when the operation is complete.

Error Check. This indicator is turned on when a parity (Modulo 4) error is detected during a Read, Read-Check, or Write instruction. It is turned off by a Sense Device instruction with Modifier bit 15 set to one.

Disk Not Ready. This indicator is on when disk storage is not ready to receive an instruction, which

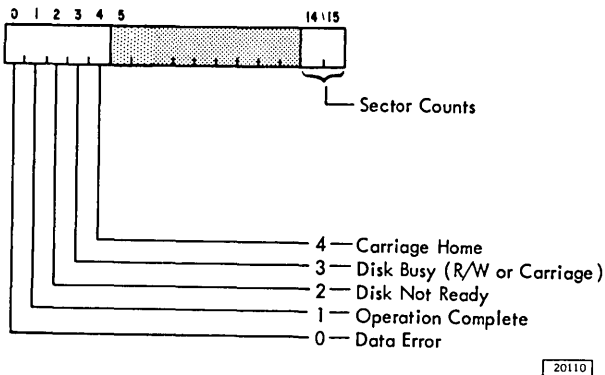


Figure 11. Disk Storage Device Status Word

means that the disk is busy or has not reached ready status.

Carriage Home. This indicator is on when the access mechanism is at the Home position (Cylinder 00).

Sector Count. These bits represent the sector number, to Modulo 4, of the next sector available for reading or writing. Thus, the quantity represented by the bits is the sector number on the upper track.

Programming Considerations

Disk Organization

It is important in planning a routine for loading disk storage that the cylinder concept be taken into consideration. Related data should be grouped in the same cylinder, when possible, to eliminate unnecessary seek operations. Therefore, when disk addresses are assigned to a group of related data, the disk locations made available should be limited to the number required, plus an expansion factor. The most frequently used data should be stored in the low-numbered cylinders to minimize seek time.

Customer Error Correction Routines

In the event that an error is detected by the CPU circuitry, it is recommended that the following procedure be executed:

1. Re-seek the cylinder upon which the error was detected.
2. Re-execute the operation in which the error occurred.

This procedure should be executed from three to ten times prior to establishing the occurrence of a disk error.

CONSOLE

The Console (Figure 12) is an integral part of the IBM 1131 Central Processing Unit and consists of the input keyboard, console printer, display panel, function switches and lights and Console Entry switches.

While the keyboard and console printer are usually considered as one unit, control of each of them by the operator and by the stored program is discrete. For this reason, the functional description and programmed operation of each unit is considered separately in the sections that follow.

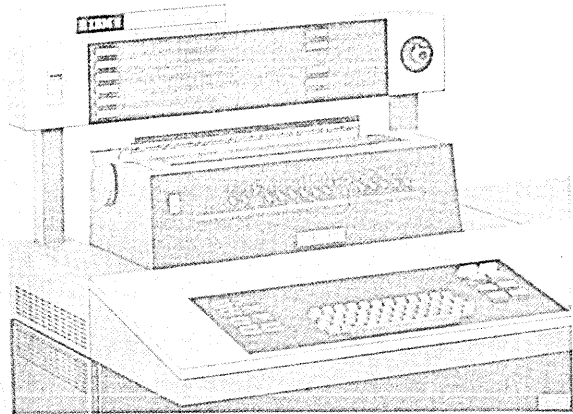



Figure 12. 1131 Console

CONSOLE PRINTER FUNCTIONAL DESCRIPTION

The console printer provides output at a maximum rate of 15.5 characters per second. Data to be printed is transferred from core storage to the console printer by direct program control.

Data characters and control characters (space, tabulate, etc.), are sent to the console printer by means of the Write command. Because control characters and data characters are sent in the same manner, the message to be printed contains a mixture of data characters and control characters in the sequence necessary to give the desired formatted output.

The character format within a core storage word to be transmitted to the console printer is:

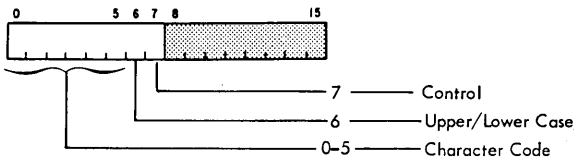

1364a-3

Each word transmitted to the console printer contains one data character or one control character.

Data Coding

Data to be printed is coded by the program into the console printer code. Figure 13 shows the characters which can be printed by the standard print element.

The data-character code also contains (in B6) the information as to whether the character is an upper-

Character Code Bits						U/L Case		Ctrl
B0	B1	B2	B3	B4	B5	B6=0 LC	B6=1 UC	B7
0	0	1	1	1	1	A	A	0
0	0	0	1	1	0	B	B	0
0	0	0	1	1	1	C	C	0
0	0	1	1	0	0	D	D	0
0	0	1	1	0	1	E	E	0
0	0	0	1	0	0	F	F	0
0	0	0	1	0	1	G	G	0
0	0	1	0	0	1	H	H	0
0	0	1	0	0	0	I	I	0
0	1	1	1	1	1	J	J	0
0	1	0	1	1	0	K	K	0
0	1	0	1	1	1	L	L	0
0	1	1	1	0	0	M	M	0
0	1	1	1	0	1	N	N	0
0	1	0	1	0	0	O	O	0
0	1	0	1	0	1	P	P	0
0	1	1	0	0	1	Q	Q	0
0	1	1	0	0	0	R	R	0
1	0	0	1	1	0	S	S	0
1	0	0	1	1	1	T	T	0
1	0	1	1	0	0	U	U	0
1	0	1	1	0	1	V	V	0
1	0	0	1	0	0	W	W	0
1	0	0	1	0	1	X	X	0
1	0	1	0	0	1	Y	Y	0
1	0	1	0	0	0	Z	Z	0
1	1	1	1	1	1	1	(0
1	1	0	1	1	0	2	+	0
1	1	0	1	1	1	3	<	0
1	1	1	1	0	0	4]	0
1	1	1	1	0	1	5)	0
1	1	0	1	0	0	6	;	0
1	1	0	1	0	1	7	*	0
1	1	1	0	0	1	8	'	0
1	1	1	0	0	0	9	=	0
1	1	0	0	0	1	0		0
1	1	0	0	0	0	#	=	0
1	0	1	1	1	1	/	=	0
1	0	0	0	0	1	-	?	0
1	0	0	0	0	0	,	:	0
0	1	0	0	0	1	&	>	0
0	1	0	0	0	0	\$!	0
0	0	0	0	0	1	@	%	0
0	0	0	0	0	0	.	¢	0

20085

Figure 13. Console Printer Character Coding

case (UC) shift or lower-case (LC) shift character. The printer shifts automatically as required for each data character.

A printer Write command is modified by the B7 position of the output character word. If B7 equals one, the Write command to the printer is interpreted as a control function. If B7 equals zero, the Write command is interpreted as a print function.

The codes for console printer Control functions are shown in Figure 14.

Function	0	1	2	3	4	5	6	7	8	15
Carrier Return	1	0	0	0	0	0	0	0	1		
Tabulate	0	1	0	0	0	0	0	0	1		
Space	0	0	1	0	0	0	0	0	1		
Backspace	0	0	0	1	0	0	0	0	1		
Shift to Red*	0	0	0	0	1	0	0	1			
Shift to Black*	0	0	0	0	0	1	0	1			
Line Feed	0	0	0	0	0	0	1	1			

* May be done concurrently with any other function.

20090A

Figure 14. Console Printer Control Functions


PRINTER PROGRAMMING

The console printer operates in the 1130 System under direct program control.

I/O Control Commands (IOCC)

The console printer is addressed by a 5-bit device code in the IOCC, 00001.


Write (001)



20084A

This command causes bits 0-7 of the word at the core storage location specified by the Address to be sent to the printer for printing or control.

Sense Device (111)




20088A

This command causes the keyboard/console printer Device Status Word to be placed in the ACC. Figure 15 shows only those bits which relate to the console printer. Modifier bit 15 on specifies that all keyboard/console printer responses are to be reset.

Interrupts

There is only one interrupt associated with the console printer attachment.

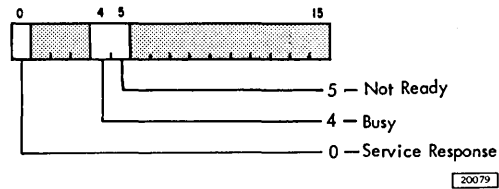

20079

Figure 15. Console Printer Device Status Word

Service Response. This interrupt occurs each time the console printer has completed printing the data and/or the control operation required by the last word transmitted by the Write command.

Indicators

The following indicators are entered into the CPU by a Sense Device command.


Not Ready. When off, this indicates that the printer is properly loaded with forms, has dc power, and is not busy. It is necessary that the program always determine that the Not Ready indicator is off before a Write command is given. If a Write command is given while Not Ready is on, loss of information will probably occur. No indication is given of this loss.

Busy. When on, this indicates that the console printer is in the process of typing a character or executing a control and therefore should not be given a Write command. The Busy line is active from the time data is sent to the printer until the printer has completed the action required.

KEYBOARD FUNCTIONAL DESCRIPTION

The input speed of the keyboard (Figure 16) is limited only by the speed of the operator. Keyboard entries are not automatically printed unless the CPU is programmed to provide an output of the entry on the printer. The keyboard emits a coded character for each key struck by the operator. These characters are related to IBM card coding. (See Appendix E. Character Code Chart). Striking the A character key places bits in positions 0 and 3 of the CPU word; striking the I character key places bits in positions 0 and 11 of the word; striking a 9 character places a bit in position 11 of the word; etc.

Keyboard Data Format

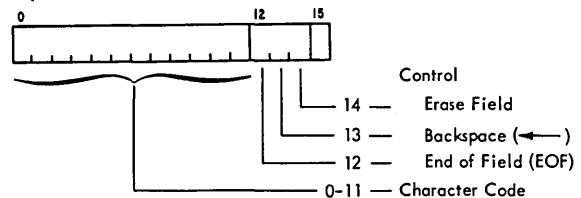

20301

The two-position Console/Keyboard switch indicates to the program the desired source of the console input data, either the keyboard or the console entry switches.

Keyboard Function Keys

Interrupt Request. This key initiates a keyboard restore and causes an interrupt in the CPU.

End of Field (EOF). When the CPU reads in response to this key, a word containing a 12 bit only is placed in memory. Analysis of this word allows the program to determine that no further characters are to be sent in this message.

Backspace (-). When the CPU reads in response to this key, a word containing a 13 bit only is placed in memory. Analysis of this word allows the program to determine that the last character received is to be replaced by the next character to be entered.

Erase Field. When the CPU reads in response to this key, a word containing a 14 bit only is placed in memory. Analysis of this word allows the program to determine that the message being entered is to be deleted and replaced by a corrected message.

Mode. There are two mode keys: Numeric (upper case shift) and Alphabetic (lower case shift). These keys place the keyboard in the indicated mode. The

keyboard remains in the selected mode until changed. If the numbers or symbols which appear on the top portion of the keys are desired, the keyboard must be placed in Numeric mode.

Restore. This key allows the operator to restore the keys if they should become locked.

Keyboard Light

Keyboard Select. This light comes on when the CPU has performed a Control command. This light goes off when a Read command is performed.

Operating Procedure

The following procedure describes a typical use of the keyboard (manual start).

1. The operator presses the Interrupt Request key which initiates a Request interrupt and places the keyboard in a Restore status.
2. The CPU honors the Request interrupt and determines that the Keyboard is the device that caused the interrupt.
3. The CPU issues a Control command to select the keyboard. When the keyboard is selected, the Select light is turned on to signal the operator that a character can be entered.

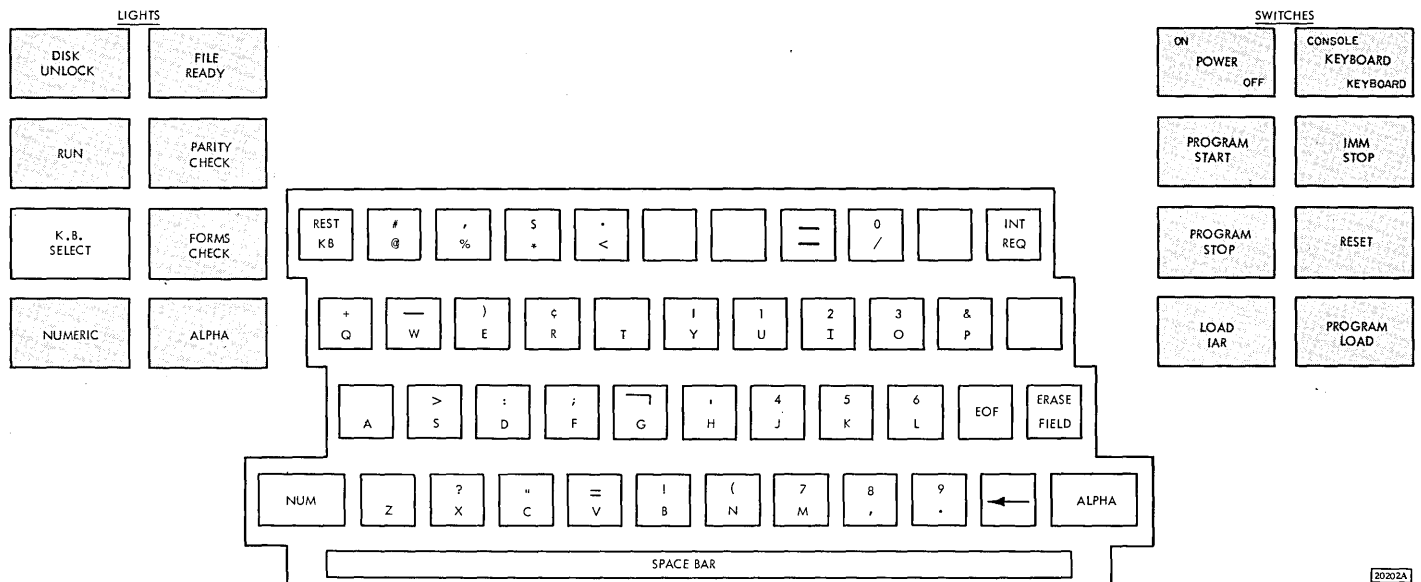


Figure 16. 1131 Console Keyboard

4. When a character key is pressed, the keyboard initiates a Service interrupt to the CPU.
5. In response to the Service interrupt, the CPU performs a Read command which enters the character into core storage and removes the keyboard from the selected status.
6. Before another character can be entered, the CPU stored program must issue another Control command to select the keyboard.

NOTE: When the request is initiated by the stored program, the operation is the same, beginning at Step 3.

If the CPU performs a Read command when the keyboard is not selected, no bits are entered.


KEYBOARD PROGRAMMING

The keyboard operates under direct program control of the 1130 Computing System.

I/O Control Commands (IOCC)


The keyboard is addressed by the same Device code used by the console printer, 00001.

Read (010)




This command enters a single input character from the keyboard into the core storage location specified by the Address of the IOCC.

Sense Device (111)



This command reads the keyboard/console printer Device Status Word into the ACC. Figure 17 shows only those bits associated with the keyboard. Modifier bit 15 on specifies that all keyboard/console printer responses are to be reset.

Control (100)



This command places the keyboard in a Select status so that a character can be entered.

Interrupts

The two interrupts associated with the keyboard are assigned to the same level of priority.

Interrupt Request. This interrupt is initiated by the Request key located on the keyboard.

Keyboard Response. This interrupt signals that a character key has been pressed and that a character is ready to be entered into core storage.

CONSOLE DISPLAY PANEL

The contents of the registers within the computer are displayed on the console panel (Figure 18) by means of small incandescent lights. Each bit in each register position is represented by a light. The light is on when the bit which it represents is present in the word displayed. The Mode switch selects the operating mode of the system.

Indicator Displays

Instruction Address Register (IAR). The Instruction Address register is one row of 14 indicator lamps. Each lamp displays the status of one bit position in the IAR.

Storage Address Register (SAR). The Storage Address register is one row of 14 indicator lamps. Each lamp displays the status of one bit position in the SAR.

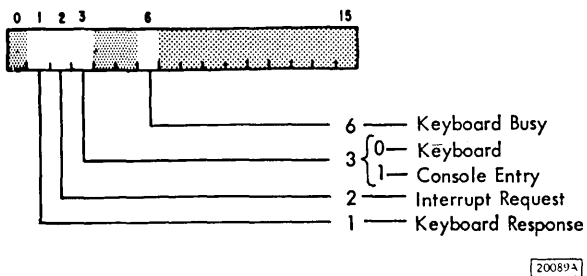


Figure 17. Keyboard Device Status Word

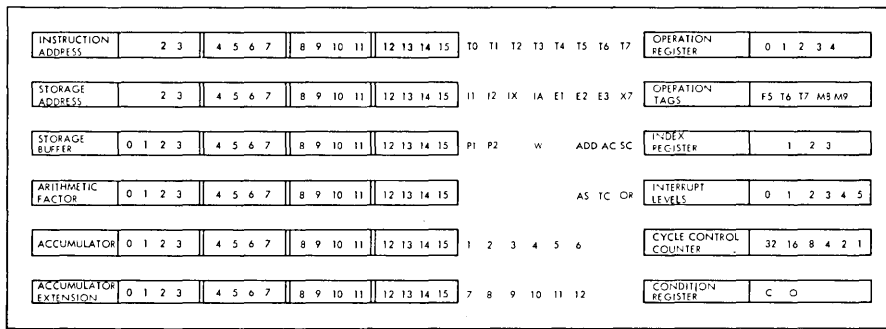


Figure 18. Console Panel

Storage Buffer Register (SBR). One row of 16 indicator lamps. Each lamp indicates the status of one bit position in the SBR. At the end of each machine cycle the SBR reflects the bits that were read into core storage on the cycle just completed.

Arithmetic Factor Register (AFR). One row of 16 indicator lamps. Each lamp indicates the status of one bit position in the AFR.

Accumulator Register (ACC). One row of 16 indicator lamps. Each lamp indicates the status of one bit position in the ACC.

Accumulator Extension Register (EXT). One row of 16 indicator lamps. Each lamp indicates the status of one bit position in the EXT.

Clock Timer (T). One row of eight indicator lamps. These lamps indicate the last clock step completed.

Machine Cycle. One row of seven indicator lamps. These lamps indicate the type of machine cycle in process when in Single Step mode. They indicate the machine cycle just completed when in any other mode.

Control Functions. Two rows of three indicator lamps. These lamps indicate the status of the following functions: Add, Arithmetic Control, Shift Control, Accumulator sign, Accumulator Carry, and Zero Remainder.

CE Lights. Two rows of six indicator lamps. Each lamp can be wired by a CE to give a visual indication of any status condition in the machine.

Operation (OP) Register. One row of five indicator lamps. These lamps indicate the operation in process when in Single Step mode or Single Machine Cycle mode. They indicate the operation just completed when in any other mode.

Operation Tags. One row of five indicator lamps. These lamps indicate the status of the Format, Tag, and Modifier bits of the instruction shown in the operation register.

Interrupt in Process. One row of six indicator lamps. These lamps indicate the Interrupt level being serviced.

Cycle Control Counter. One row of six indicator lamps. These lamps indicate the binary value contained in the shift counter.

Condition Register. One row of two indicator lamps. These lamps indicate the status of the Carry indicator and the Overflow indicator.

Parity (2). These two indicators reveal which half of the word contains the parity error when one occurs.

Wait OP. This indicator is on when the CPU is in a wait condition.

X7. This indicator is off when "cycle steal" is operating.

Mode Switch

The Mode switch (Figure 19) selects one of seven operating modes.

Single Step (SS). With the Mode switch set to SS, each depression and release of the Start key causes the 1131 clock to advance one step, e.g., from T1 to T2.

Single Memory Cycle (SMC). With the mode switch set to SMC, each depression of the Start key causes the 1131 to advance one machine cycle (for example, from I-1 to I-2).

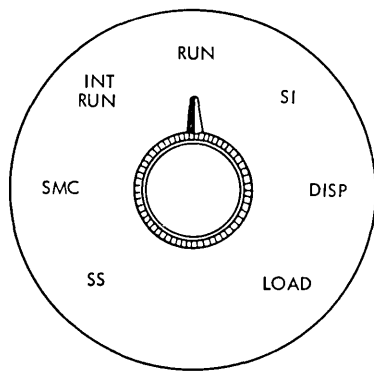


Figure 19. Console Mode Switch

Interrupt Run (INT RUN). With the mode switch set to INT RUN, a level 5 interrupt occurs after each mainline program instruction is completed. This is a convenient device for program trace routines.

Program Run (RUN). With the mode switch set to its normal position, RUN, pressing the Start key causes the 1131 to advance through its stored program.

Single Instruction (SI). With the mode switch set to SI, each depression of the Start key causes the 1131 to interpret and execute a single instruction.

Display Core Storage (DISP). With the mode switch set to DISP, pressing the Start key will display (in the SBR) the core storage word at the location specified by the address in the Instruction Address register (IAR), and advances the IAR.

Load Core Storage (LOAD). With the mode switch set to LOAD, pressing the Start key will load the data from the Console Entry switches into core storage at the location specified by the address in the IAR, and advances the IAR.

CONSOLE ENTRY SWITCHES

These 16 toggle switches are used to set up data or instructions to be entered into core storage. Each switch represents a bit position in a 16-bit word. The procedures that follow provide for entering the information from the CES (Console Entry switches) by means of manual control, keyboard interrupt, or XIO instruction.

Manual Entry. This procedure causes the bits set in the CES to be loaded into the word at the core

storage address in the IAR.

1. Set the Mode switch to Load.
2. Set the CES to the core storage address where the data is to be stored.
3. Press the Load IAR switch.
4. Set the data word in the CES.
5. Press the Start key.

Keyboard Interrupt. This procedure requires an interrupt subroutine to service a Level 4 interrupt.

1. Set the Console/Keyboard switch to Console.
2. Press the keyboard Interrupt Request key.
3. A Level 4 interrupt occurs, and the Keyboard DSW is loaded into the ACC by a Sense Device instruction.
4. DSW bit 3 was set to 1 by the Console/Keyboard switch. This indicates to the interrupt subroutine that the CES should be read by the XIO Read instruction.
5. Return to the main line program is by the regular method of a BSC instruction with Modifier bit 9 set to one.

XIO Read Instruction. The settings of the CES can be read by an XIO Read instruction at any time during a stored program routine. The Device code of the instruction is set to 00111.

CONSOLE FUNCTION SWITCHES AND LIGHTS

These switches and lights are located on both sides of the keyboard (Figure 20).

Function Lights

Forms Check. This indicator is turned on when the last form has been detected by the Console Printer forms contact.

Keyboard Select. This indicator is turned on by a programmed instruction (XIO Control) that requests input data from the keyboard.

Parity Check. This indicator is turned on when a parity error (even number of bits) is detected in either half of the word read out of storage.

Alphabetic. This lamp indicates that the keyboard is in alphabetic (lower case) shift. The letters and

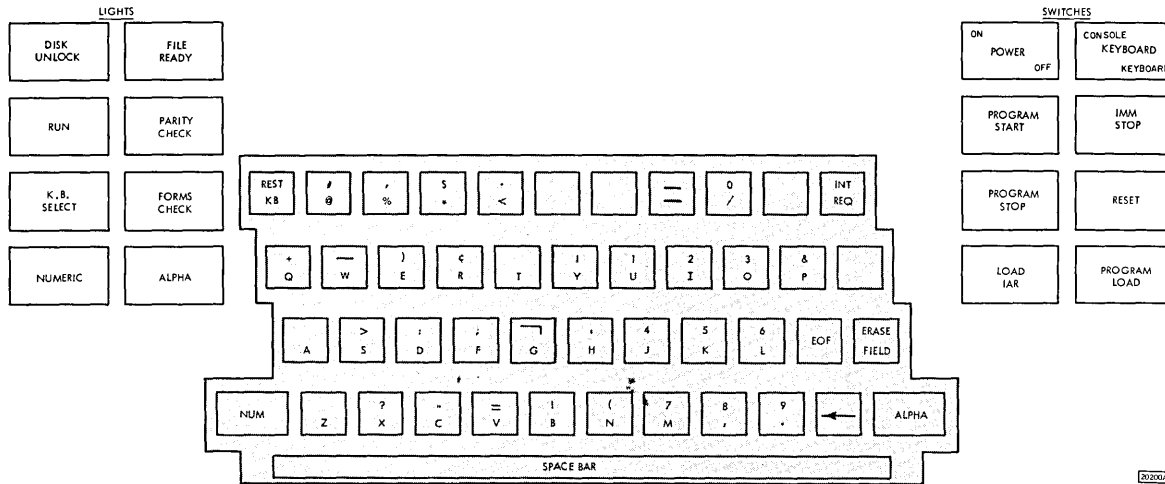


Figure 20. Console Function Lights and Switches

symbols which appear in the bottom portion of the keyboard character keys can be entered when the keyboard is in alphabetic shift.

Numeric. This lamp indicates that the keyboard is in numeric (upper case) shift. The letters and symbols which appear on the top portion of the keyboard character keys can be entered only when the keyboard is in numeric shift.

File Ready. This indicator is on when disk storage is available for reading or writing.

Disk Unlock. This indicator is on when the disk cartridge may be removed from the drive.

Run. This indicator is on when the CPU is in operation and the meter is running.

Function Switches

Parity Run/Stop. This two position toggle switch is set to STOP if the programmer wishes the program to stop when a parity error is detected. When this switch is set to RUN, the program will continue to run even if a parity error is detected.

Console/Keyboard. This two position toggle switch sets bit position 3 in the Keyboard DSW, which indicates to the program the desired source of the console input data (either the Keyboard or the Console Entry switches). See the preceding Console Entry switches and the DSW for the Sense Device (111) command (Figure 17).

Program Start. Pressing this pushbutton switch causes the machine to take one clock step or machine cycle and continue to take additional cycles if required by the setting of the mode switch.

IMM Stop. Pressing this pushbutton switch causes an immediate stop of the processor interrupt, although the I/O devices will finish their present cycle. Data from the 1132, the 1442, or disk storage will be lost if they are operating at the time the Stop key is pressed. A complete program restart is normally required.

Program Stop. Pressing this switch causes a level 5 interrupt. After the program has satisfied all interrupts for levels 0 through 4 (all I/O devices except the console) it enters a routine for level 5. Because the console is the only unit on level 5, the DSW for the console can be sensed without interrogating the interrupt level status word. The program stop bit in the DSW should be used to branch the program to a wait loop that causes the CPU and I/O units to cycle down to a stop and blocks all mainline operations until the console operator intervenes. This indicator is reset by pushing the program start key.

Reset. Pressing this pushbutton switch (effective only when out of Run mode or stopped) resets all I/O and machine registers, cycle and control triggers, and status indicators.

Load IAR. Pressing this pushbutton switch places the status of the 16 Console Entry switches in the IAR. The console Mode switch must be set to Load position.

Program Load. Pressing this pushbutton switch loads the first card or paper tape record into core storage, beginning at 0000.

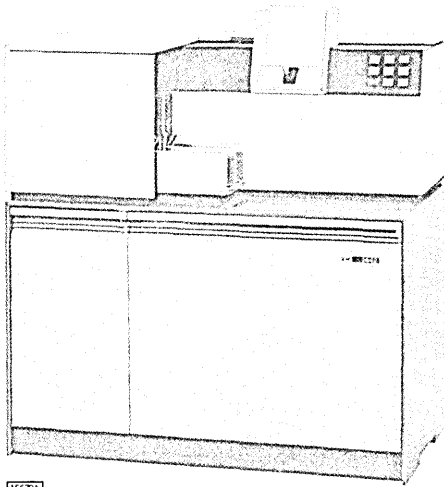


Figure 21. IBM 1442 Card Read-Punch

IBM 1442 CARD READ-PUNCH

The IBM 1442 Card Read-Punch (Figure 21), Model 6 or Model 7, provides card input/output for the IBM 1130 Computing System.

Card Read-Punch operations are under direct program control.

FUNCTIONAL DESCRIPTION

The IBM 1442 Card Read-Punch is a single unit that processes cards serially, column-by-column, from a single supply hopper. All cards first pass the read station, then the punch station. This permits each card to be read, punched, or read and punched. Reading and punching cannot occur simultaneously, however, because of the difference in operating speeds.

Maximum machine speeds are:

Card Reading:	Model 6, 300 cards per minute
	Model 7, 400 cards per minute
Card Punching:	Model 6, 80 columns per second
	Model 7, 160 columns per second

Maximum reading rates are attained only when successive Start-Read commands arrive early enough to re-energize the read clutch before the clutch latch point is reached. To accomplish this, successive Start-Read commands must arrive within 35 milliseconds (25 ms Model 7) after the End-Card interrupt is given by the Card Read-Punch. If a Start-Read

command does not arrive within this time, the maximum reading rate becomes 285 cards per minute (cpm) for Model 6 and 375 cpm for Model 7.

Punching rates depend on the position of the card when the last column is punched. The punching speed ranges are:

Model 6 - 49 cpm to 255 cpm
Model 7 - 90 cpm to 340 cpm

The approximate time required to process a single card is:

Model 6 - 12.5 ms + 12.5 ms per card column spaced or punched.
Model 7 - 6.5 ms + 6.5 ms per card column spaced or punched.

Data Coding

The Card Read-Punch reads and punches IBM card image only. Any code translation required must be done by the stored program. As shown in Figure 22, the twelve rows (12-9) in a card column correspond to the 0-11 bits, respectively of a core storage word. A 1-bit represents a punched hole; a 0-bit represents a card position not punched. Thus, the word in Figure 22 contains 1-bits in bit-positions 0 and 3 to represent the "A" read from the card. For output, a 1-bit results in a hole punched in the related position of the card read column.

A special Load mode is initiated by pressing the Program Load key on the 1130 Console. In the Load mode, data is split (Figure 23), as it enters core storage, to form the load program.

OPERATING PROCEDURES

Before any operation can begin, the Card Read-Punch must be placed in the "Ready Condition." With power on and cards in the hopper, the Start key is pressed. This feeds the first card into position at the read station (Figure 24).

Card Feeding

Card reading or punching may begin after the initial feed cycle (run in).

A constant-speed drive moves the cards through the serial path during a feed cycle. A feed cycle is initiated by a Control command of Feed cycle or Start-Read or Punch (if no card is positioned at the punch station). The feed cycle does three things.

1. It moves a card from the punch station to the stacker.

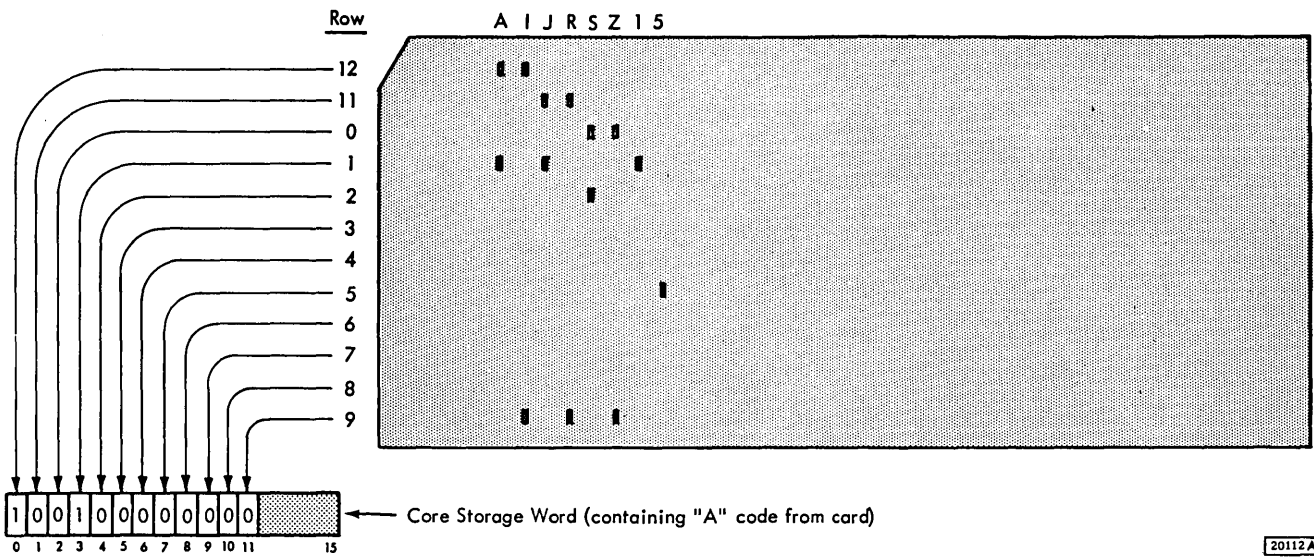


Figure 22. Normal Mode Read

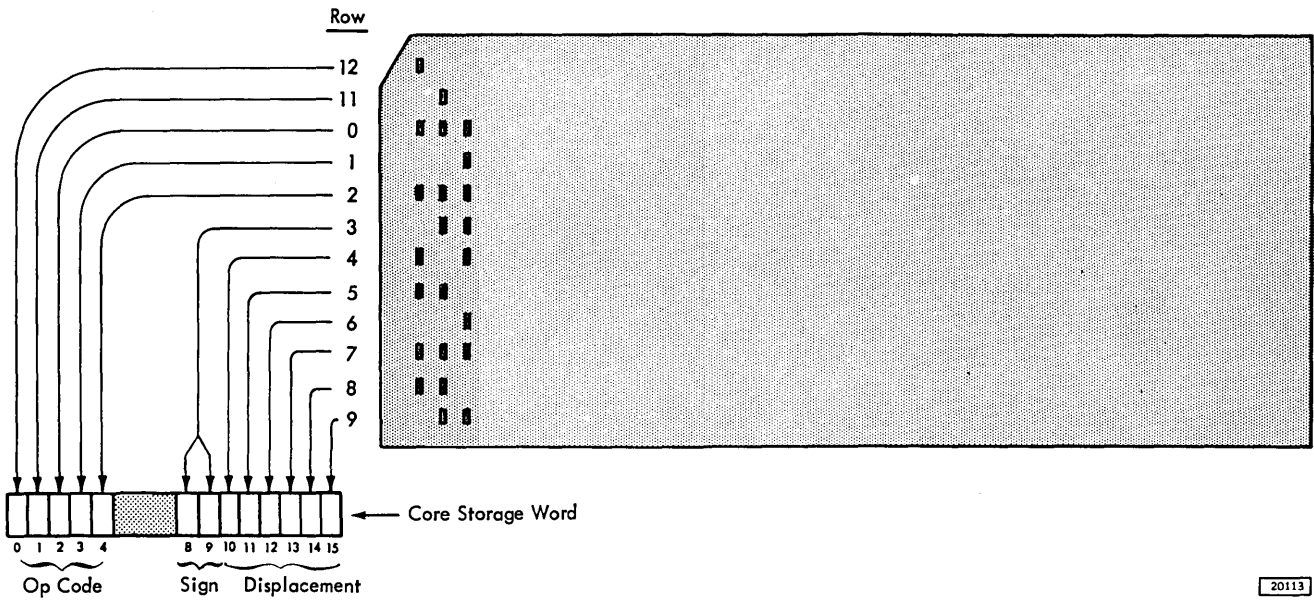


Figure 23. Load Mode Read

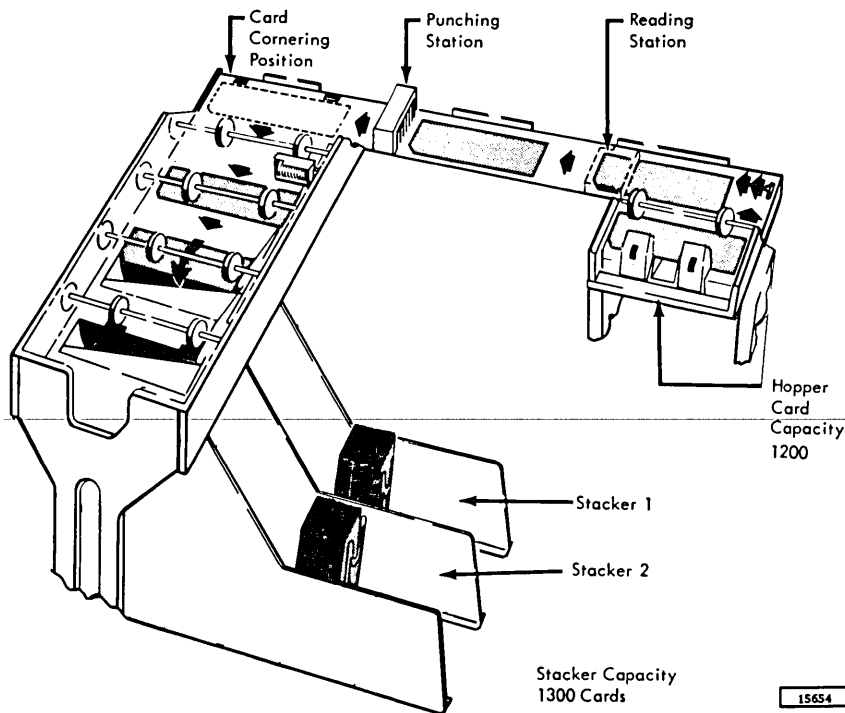


Figure 24. 1442 Card Path Schematic

2. It moves a card through the read station and places it in the punch station with column 1 under the punches.
3. It moves a card from the hopper to the read station.

An incremental drive moves the card through the punch station for punching.

When the hopper is emptied, the operator can either reload the hopper and continue operations or he can initiate a last-card sequence.

Program Load

Program load can be initiated by pressing the Program Load key on the 1130 Console after a system reset and the "run in" cycle of a load card. This "Load" mode causes the load-card data to be placed in 80 consecutive memory positions beginning at memory position 00000, then causes the CPU to go to memory position 00000 for its next instruction.

Card Reading

A Control (Start-Read) command initiates card reading. This command causes columns 1-80 of the card to be read in one continuous motion of the card. Each column of data is read, checked, and placed in a buffer register. A Read Response interrupt is given

for each column read. Checking is accomplished automatically by reading each column twice and comparing the results bit-by-bit. This read-check-interrupt process continues until all 80 columns have been read. An Operation Complete interrupt is given after all 80 columns have been read. The Last Card indicator will be on if the card read is the last card in the deck.

Card Punching

A Control (Start-Punch) command initiates card punching. As each column passes the punch station a Punch Response interrupt is given.

Automatic checking is accomplished by comparing the punch check echo data with the single-character punch buffer, which contains the character from the CPU. Each column punched is checked at the same time that the Punch Response interrupt is given for the data of the next column to be punched.

The card motion and punching process continues until the punch data word contains a one in the 12-bit position (punch data is in bits 0-11). When this end-punch bit is detected, the Card Read-Punch punches that column, moves to the next column, and gives an Operation Complete interrupt. No more Punch Response interrupts are given. All punching on the card must be completed at one time.

A feed cycle is necessary to eject a punched card to the stacker, and can be initiated by a Control command.

Programming Note. A Control command specifying Start Punch results in a feed cycle if it has not been preceded by a Control command specifying Feed Cycle or Read Card.

Last Card Sequence

When the hopper becomes empty during a feed cycle, the Card Read Punch is taken out of Ready status. The operator may continue processing cards by loading more cards into the hopper and pressing the Start key or he may initiate a last-card sequence by pressing the Start key without loading more cards in the hopper.

If the last-card sequence is to be entered, the program determines this by testing the Last Card indicator in the Device Status Word. This indicator is turned on when the last card passes the read station.

When the Start key is pressed without cards in the hopper, the 1442 is placed in the Ready condition and allows two more feed cycles to be taken.


PROGRAMMING

The IBM 1442 Card Read Punch operates under the direct program control of the CPU.

I/O Control Commands


The Card Read Punch is addressed by the 5-bit Device code, 00010

Read (010)



This command causes a card column image to be entered from the Card Read Punch into the core storage location specified by the Address.


Write (001)



This command causes the data in the memory location specified by the Address of the IOCC to be trans-

mitted and punched as a card column image in the card.

Control (100)




This command causes the Card Read Punch to accomplish the function specified by the Modifier.

Modifier bits that have significance are:

- Bit 14 Feed cycle - causes all cards in the feed path to advance one station. There are no Read Column Response interrupts.
- Bit 13 Start Read - causes the card to move through the read station. As each column is read and checked, the Card Read Punch initiates a Read Column Response interrupt.
- Bit 15 Start Punch - starts the punching operation and initiates a Punch Response interrupt. If a card is not at the punch station, a card will feed past the read station without data entering the system.
- Bit 8 Stacker Select - causes the card leaving the punch area to enter the alternate stacker. This control applies only to the next card leaving the punch station.

Modifier bits B14, B13, and B15 of a Control command should not be used in combination with each other.

Sense Device (111)



This command directs the Card Read Punch to place its Device Status Word (Figure 25) into the CPU ACC. Modifier bit 15 on resets responses for level 0; modifier bit 14 on for level 4.

Interrupts

The three interrupts associated with the Card Read Punch are divided into two groups.

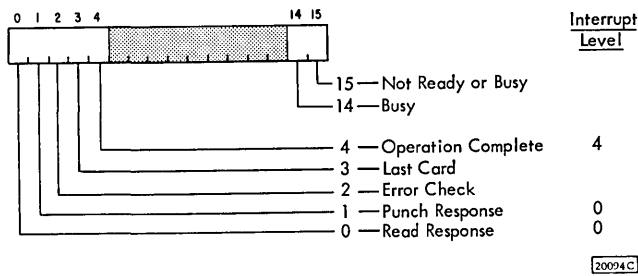


Figure 25. 1442 Device Status Word

Level 0 Interrupt

Read Response. This interrupt signals that a column of data is ready to be entered into main storage. This interrupt request must be serviced within 800 μ sec for the 1442 Model 6 and 700 μ sec for the 1442 Model 7. Time from Initiate Read to first Read Column Request interrupt is 28.4 msec for the Model 6 and 23.8 msec for the Model 7.

Punch Response. This interrupt signals that a column of data must be transmitted from the CPU within 1000 μ sec for the 1442 Model 6 and 300 μ sec for the Model 7. Time from the Start Punch instruction to the first Punch Column Response interrupt varies from 1.22 ms to 12.5 ms on the Model 6 and 1.56 to 6.25 ms on the Model 7.

Level 4 Interrupt

Operation Complete. This interrupt occurs after a card has been read. It indicates that column 80 of the card has passed the read station. This interrupt occurs 20.6 ms after column 80 for the Model 6 and 15.4 ms after column 80 for the Model 7.

This interrupt also occurs after the last column to be punched has been punched and checked with the punch drive stopped. This will occur 12.5 ms after the terminating Write function for the Model 6 and 6.25 ms after the terminating Write function for the Model 7.

This interrupt is forced if a hopper check, feed check in the Punch Station, transport error, or feed clutch error occurs while the 1442 is busy. This interrupt is also forced if a read registration check or punch check occurs. No subsequent reading or punching can be done in the card which caused the error regardless of the column in which the error occurred.

There is no time limit on the request for service of this interrupt.

Indicators

Not Ready. This indicator shows that the 1442 is either busy or is not in a ready condition. When

the 1442 is not ready, manual intervention is required to ensure that the following conditions are met.

1. Power On.
2. Card registered at Read Station (initially).
3. Cards are in hopper or last-card sequence is in progress.
4. Stacker not full.
5. Feed-Check light off (no card jam or feed failure conditions).
6. If the Stop key has been pressed, the Start key must have been subsequently pressed.
7. Chip box not full or removed.

Busy. The Busy indicator indicates that a command cannot be initiated because an operation is already in progress.

Last Card. This indicator shows that column 80 of the last card has passed the read station and the hopper is empty, and will be on when the Operation Complete Interrupt occurs.

Error Check. Indicates that any of seven error conditions exists in the 1442. Any of the seven error conditions remove the 1442 from the ready condition; the 1442 can be reset only by depressing the Non-Process Run Out key while the hopper is empty.

The error conditions are:

1. **Read Registration Check.** Indicates that a read error has occurred. This can result from incorrect registration of the card or failure of the first and second reading of the column to compare equal. When this error is detected, an Operation Complete interrupt is forced and column interrupts are terminated.
2. **Punch Check.** Indicates that a punching error has been detected. When this error is detected, an Operation Complete interrupt is forced and column interrupts are terminated.
3. **Hopper.** Indicates card failed to pass properly from the hopper to the read station. See Programming Note below.
4. **Transport.** Indicates a jam in the stacker. See Programming Note below.
5. **Feed Check - Read Station.** Indicates a card failed to eject from the read station.
6. **Feed Check - Punch Station.** Indicates a card improperly positioned at the punch station. See Programming Note below.
7. **Feed Clutch.** Indicates the 1442 took a feed cycle that was not called for. See Programming Note below.

Programming Note. Error indicator is not turned on

until after the operation complete interrupt is given. An exception to this is an XIO Start Punch operation requiring an automatic feed cycle. If another operation is initiated before the error indicator is turned on, these errors force an operation complete interrupt although no reading or writing has taken place. An XIO Start Punch requiring an automatic feed cycle is treated as two operations: (1) feed cycle (2) punch operation.

IBM 1134 PAPER TAPE READER AND IBM 1055 PAPER TAPE PUNCH

The IBM 1134 Paper Tape Reader and the IBM 1055 Paper Tape Punch (Figures 26 and 27) provide paper tape input/output for the IBM 1130 Computing System.

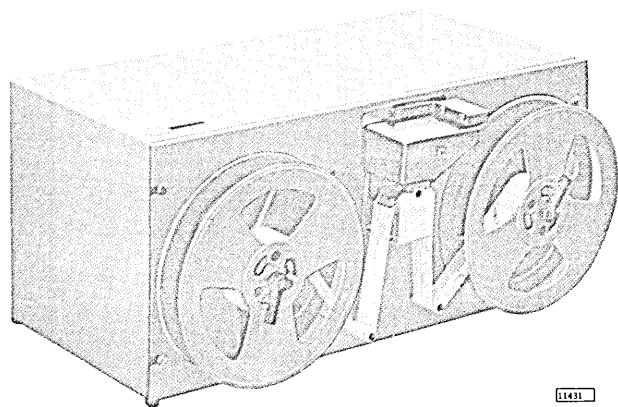


Figure 26. IBM 1134 Paper Tape Reader

FUNCTIONAL DESCRIPTION

The 1134 and 1055 operate under direct program control.

The 1134 Paper Tape Reader reads one-inch eight-track paper tape at a maximum rate of 60 columns per second (cps).

The 1055 Paper Tape Punch punches one-inch eight-track paper tape at a maximum punching rate of 14.8 cps.

Character Code

The 1134 Paper Tape Reader reads input data into the core storage as an image of the holes in the tape. One paper tape character is read into each addressed

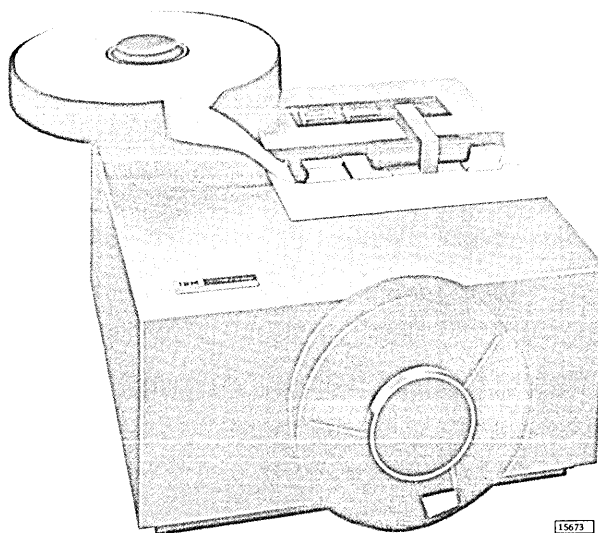


Figure 27. IBM 1055 Paper Tape Punch

core storage location. Any code translation must be made by programming. (See Appendix E.)

Figure 28 indicates which bits of the word correspond to the respective holes in the paper tape read by the 1134.

The 1055 Paper Tape Punch punches data as an image of the data contained in the core storage word on a character-to-character basis as shown in Figure 28.

Special data-character and control-character (feed code, etc.) coding and recognition must be handled by the stored program.

Program Load

An 1130 System that does not have a 1442 Card Read-Punch will have the Program Load feature added to the paper tape reader. This feature operates by means of design logic rather than program control. Four-bit paper tape characters are automatically assembled into 4-character groups to form 16-bit data words. The Program Load feature then loads these words into core storage beginning at location 0000.

Only tape channels 4, 3, 2, and 1 are used. When a channel 5 punch is encountered, program loading stops; the IAR is reset to zero; and program control begins at 0000.

Characters	→	First	Second	Third	Fourth
Tape Channels	→	4321	4321	4321	4321
Bits	→	0 1 2 3	4 5 6 7	8 9 10 11	12 13 14 15

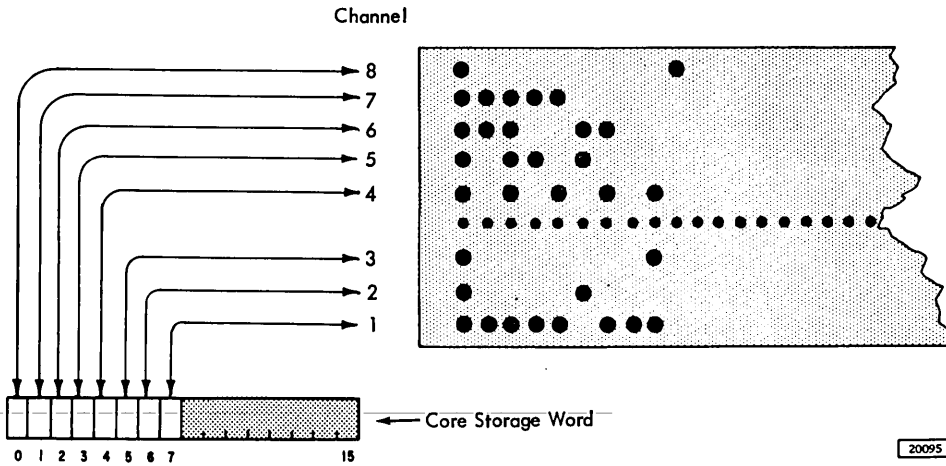


Figure 28. Paper Tape/Core Storage Word Format

DESCRIPTION OF OPERATION

Paper Tape Reader

A Control command initiates the reading of data from the 1134. This command moves the paper tape the character position and loads the character which was at the read station into an input buffer. At the time the buffer has been loaded with data, an interrupt is initiated signaling the program that information is available for reading into the core storage position specified by the Address word of a subsequent Read (Paper Tape) command.

The elapsed time from the execution of the Control (Read Paper Tape) command until the interrupt is initiated is approximately 500 μ s. To maintain the 60 cps operating speed of the 1134, the Read command must be given with 15 ms after the interrupt so that another Control (Read Paper Tape) command can be executed to energize the reader clutch preparatory to reading the next character.

Paper Tape Punch

Execution of a command initiates the punching of data onto the 1055. The execution of the Write command starts the punch, and the data in the core storage position specified by the Address word is punched into the tape. Each core storage word contains one paper tape character to be punched in the tape.

PROGRAMMING


The IBM 1134 Paper Tape Reader and the IBM 1055 Paper Tape Punch operate under direct

program control with the exception of the paper tape Program Load feature.

I/O Control Commands (IOCC)

The 1134 and 1055 are addressed by the same 5-bit Device code, 00011.


Read (010)



This command reads one character from paper tape into core storage.


The Address word specifies the location in core storage where the tape character is to be stored.

Write (001)



This command writes one character from core storage to the paper tape punch. The Address word specifies the location in core storage where the tape character is stored.


Control (100)



This command must be given prior to each character to be read from the 1134. Execution of

this command causes: (1) one character to enter the paper tape reader buffer, and (2) the tape to be advanced one column. A Reader Service Response interrupt is initiated to indicate that a character from paper tape can be read into the core storage location specified by a subsequent Read (Paper Tape) command.

Sense Device (111)



This command is used to enter the Device Status Word (Figure 29) into the ACC. Modifier bit 15 on, indicates that the responses are to be reset.

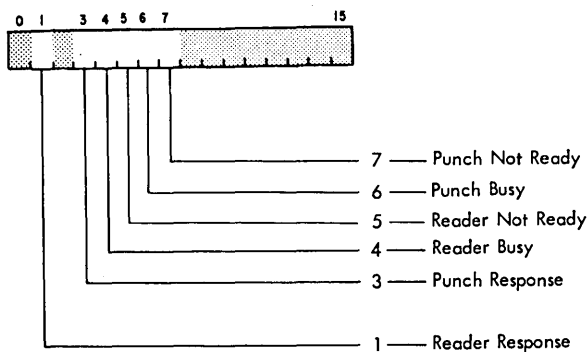


Figure 29. Paper Tape Device Status Word

Interrupts

Reader Response. This interrupt occurs when the reader has completed the execution of a Control command. This interrupt indicates to the CPU that a character is available to be entered into core storage.

Punch Response. This interrupt occurs when the punch has completed punching as directed by the execution of a Write command. It indicates that the punch can accept the next command.

Indicators

The following indicators can be entered into the ACC by a Sense Device command.

Punch Not Ready. This indicator is on when tape is not feeding freely from the tape spool, when the tape pressure roll holder is not down and holding the tape against the feed wheel, or when

tape is not present. Manual intervention is required to clear these conditions. The indicator is also on if the punch is "busy." (See Punch Busy indicator.)

This indicator should always be tested by the program before a Write command is given. If a Write command is given while this indicator is on, loss of information will probably occur. No indication is given of this loss.

Reader Not Ready. This indicator is on when the tape tension switch is open. This condition exists when the paper tape is broken or not feeding freely. Manual intervention is required to clear these conditions. This indicator is also on if the reader is "busy." (See Reader Busy indicator.)

The program should test this indicator before a Read command is given. If a Read command is given while this indicator is on, erroneous data can be read into core storage. No valid indication can be given as to whether the data read is correct or incorrect.

Punch Busy. This indicator is on for the total time the punch is mechanically engaged and punching a character (68 ms). During this time the punch should not be sent another Write command.

Reader Busy. This indicator is on from the time a Control command (Start Paper Tape Reader) is given until data is available. A Reader Response interrupt signals that data is available.

IBM 1627 PLOTTER

The IBM 1627 Plotter (Figure 30) provides an exceptionally versatile, reliable, and easy-to-

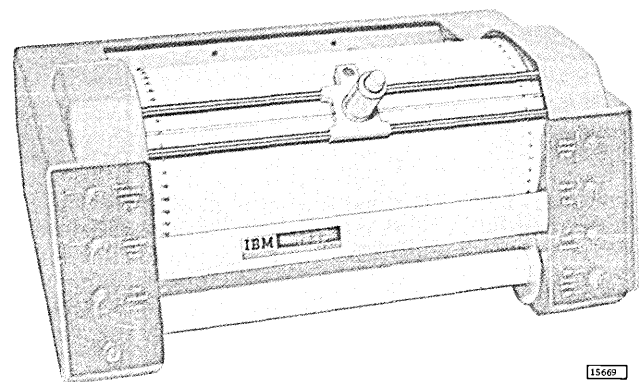


Figure 30. IBM 1627 Plotter

operate plotting system for the IBM 1130 Computing System. The plotter converts tabulated digital information into graphic form. Bar charts, flow charts, organization charts, engineering drawings, and maps are among the many graphic forms of data which can be plotted on the 1627 Plotter.

Two models of the 1627 are available and the major characteristics are as follows.

Model 1 - Plotting area: 11 inches by 120 feet, 1/100-inch incremental-step size, 18,000 steps/minute.

Model 2 - Plotting area: 29-1/2 inches by 120 feet, 1/100-inch incremental-step size, 12,000 steps/minute.

Figure 31 gives more information on both models.

Speed	X, Y Increments Pen Status Change	Model 1	Model 2
		18,000 Steps/Min 600 Operations/Min	12,000 Steps/Min 600 Operations/Min
Increment Size		1/100 Inch	1/100 Inch
Chart Paper	Width	12 Inches	31 Inches
	Plotting Width	11 Inches	29 1/2 Inches
	Length	120 Feet	120 Feet
	Sprocket Hole Dimensions	.130 Inch Dia on 3/8 Inch Centers	.188 Inch Dia on 1 Inch Centers

Figure 31. 1627 Operating Characteristics

OPERATION

Data from core storage is transferred serially to the 1627 under direct program control, where it is translated into 1627 actuating signals. These signals are then converted into drawing movements by the 1627 Plotter.

The actual recording is produced by incremental movement of the pen on the paper surface (y-axis) and/or the paper under the pen (x-axis). The pen is mounted in a carriage that travels horizontally across the paper, as viewed from the front of the Plotter. The vertical plotting motion is achieved by rotation of the pin feed drum, which also acts as a platen (Figure 32).

The drum and the pen carriage are bidirectional; that is, the paper moves up or down, and the pen moves right or left. Control is also provided to raise or lower the pen from or to the

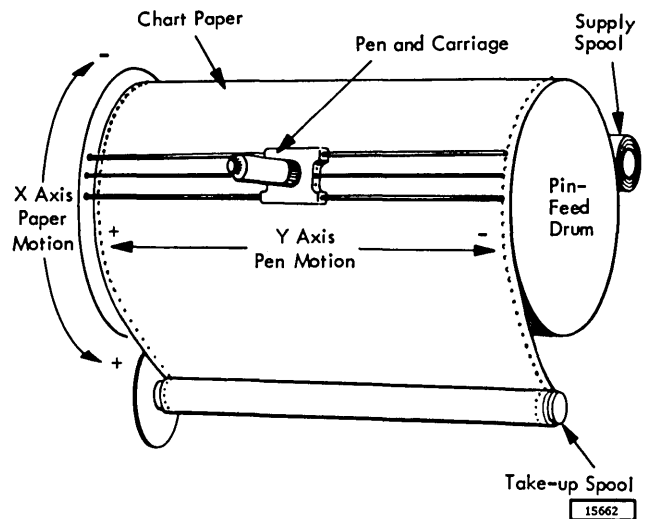


Figure 32. Plotter Paper and Pen Movements

paper surface. The pen remains in the "raised" or "lowered" position until directed to change to the opposite status.

The drum and pen-carriage movements and the pen status are controlled by digits transferred to the 1627. Each output word is decoded into a directional signal which causes a 1/100-inch incremental movement of the pen carriage (Figure 33) and/or paper, or a raise-pen or a lower-pen movement. The motion or action resulting from each word in the output record is shown in Figure 34.

The time required for execution of raise-pen and lower-pen commands is 100 ms. The time to plot a point is approximately 5 ms (3.3 ms for 300 steps/sec).

PROGRAMMING

The IBM 1627 Plotter operates under direct program control of the IBM 1130 Computing System.





Figure 33. Result of One Horizontal (y-axis) Movement

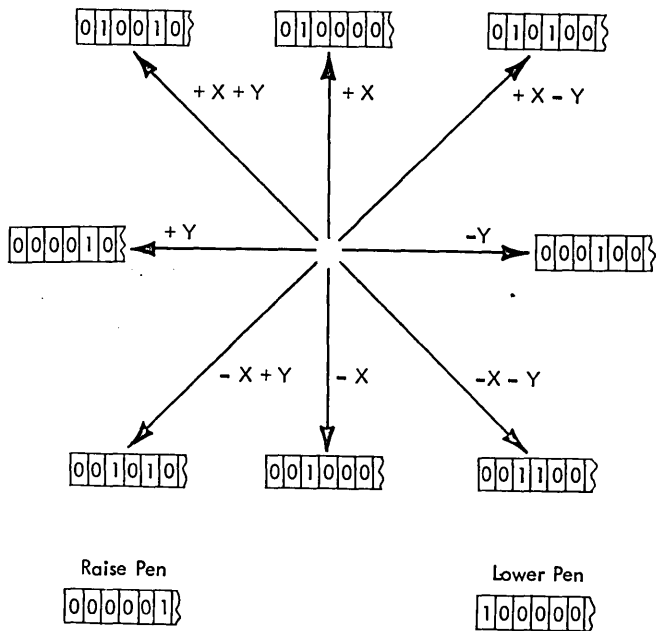


20102A

Figure 34. Plotter Control Codes

I/O Control Commands (IOCC)

The 1627 is addressed by the 5-bit Device code of the IOCC.


Write (001)



20103

This command causes bit positions 0 through 5 of the word in the core storage location specified by the Address to be sent to the 1627 to control the movement of the pen or drum.

Sense Device (111)



20104A

This command causes the 1627 Device Status Word (Figure 35) to be placed in the Accumulator. Modifier bit 15 on specifies reset for the plotter response.

Interrupt

There is only one interrupt associated with the 1627 attachment.

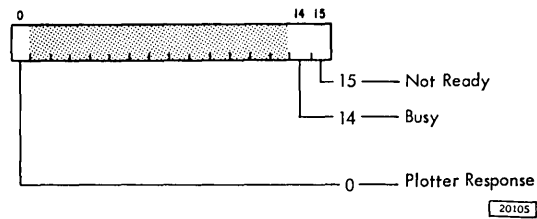


Figure 35. 1627 Device Status Word

Plotter Response. This interrupt occurs when the 1627 has completed the action specified by the last character transmitted by the Write command.

Indicators

Not Ready. When this indicator is off, it indicates that the 1627 has Power ON and can accept information.

Busy. This indicates that the 1627 is in a Busy status and cannot accept a character. After the first Write command the program should wait for succeeding plotter interrupts to initiate Write commands. If a Write command is given while Busy is on, loss of information will probably occur. No indication is given of this loss.

IBM 1132 PRINTER


The 1132 Printer (Figure 36) provides printed output for the 1130 Computing System at maximum rates of 82 lpm (lines per minute) for alphameric printing and 110 lpm for numeric printing. The print line is 120 print positions long; horizontal spacing is 10 characters per inch. Vertical spacing of six or eight lines per inch can be selected by the operator.

FUNCTIONAL DESCRIPTION

The 1132 contains a printwheel with 48 alphabetic, numeric, and special characters for each of the 120 printing positions. Special (FORTRAN) characters are as follows:

& - / . \$, * () ' + =

Each wheel rotates continuously and moves forward to print when the data in the output record specifies that the character to be printed is in the print position. Thus, all similar characters for the entire line are printed on the same cycle. Forty-eight cycles are required to print the complete line.

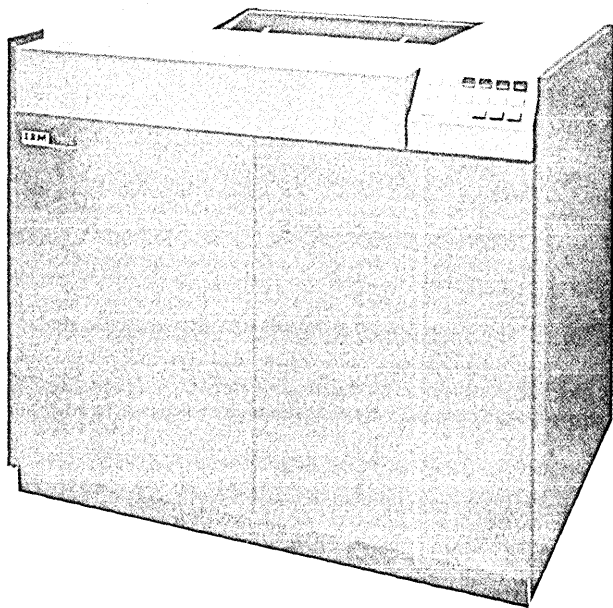

23085


Figure 36. IBM 1132 Printer

Forms control is provided through a tape-controlled carriage that uses the standard IBM carriage tape. Channels 1 through 6, 9, and 12 are available to the stored program.

The 1132 uses interrupt circuitry and responds on level 1. The core storage address related to the interrupt level is 0009; the device code of the printer is 00110. When an interrupt occurs, the DSW (Figure 37) for the printer can be sensed directly because the 1132 is the only device on level 1.

Operation

The data to be printed is assembled in core storage in the same order, including spaces, as the line that is to be printed. During each of the 48 cycles necessary to print all 48 characters, the character next in position to print is read from the character emitter and is compared with each character of the output record. For each equal comparison, a 1-bit is put in the printer scan field in the position corresponding to the printwheel to be fired. The printer scans the field in a cycle-steal mode and fires each printwheel whose position contains a 1-bit. The printer scan field is located in core storage locations 0032 through 0039. The 16 bits of each of the first seven words and bits 0 through 7 of the eighth word represent the 120 printwheels.

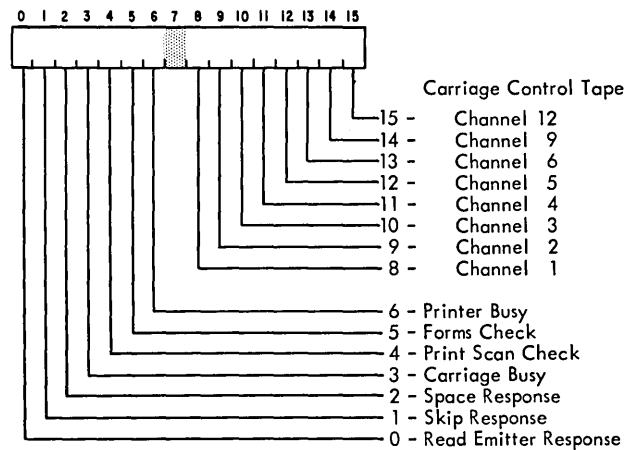

20241

Figure 37. 1132 Device Status Word


PROGRAMMING

The IBM 1132 Printer operates under direct program control of the CPU.

Printer Control Instructions

The 1132 Printer is addressed by the binary device code of 00110.


Read Emitter (010)



20239

This instruction causes the 8-bit code of the next character to be printed, emitted by the printer, to be read into the core storage location specified.

Control (100)



20240A

This command causes the execution of the function specified by the modifier bit. A 1-bit in the position indicated in parentheses after each instruction causes the operation described.

Start Printer (Bit 8). This causes the printer to start taking the printer scan field information. The printer continues to take print scan cycles at 11.2ms

intervals until it receives a Stop Printer command. Each position that contains a 1-bit causes the corresponding printwheel to print the character in position on that cycle. After the field of eight words has been scanned, a 1-bit is placed in bit position 0 of the 1132 Device Status Word. (See Figure 37.) This causes an interrupt when level 1 is the highest level waiting.

Stop Printer (Bit 9). This instruction causes the printer to be put in a ready (not-busy) state and inhibits subsequent printer interrupts. The Stop Printer instruction should not be given until all of the following conditions are met:


- 18 scan cycles have been completed after the command to print the last character.
- The carriage has stopped after a skip operation.
- The interrupt response from the last space command has occurred.

Start Carriage (Bit 13). This command initiates a skip operation, which is halted by a Stop Carriage instruction.

Stop Carriage (Bit 14). This command stops the carriage at the end of a Skip operation. A punch in carriage control tape channel 1, 2, 3, 4, 5, 6, 9, or 12 initiates an interrupt request, identified by Bit 1 of the DSW. When the desired tape channel bit in the DSW is on, a Stop Carriage command should be given.

Space (Bit 15). This command is given to space the carriage one line after a line is printed. After the space operation, an interrupt is initiated and a 1-bit is put in bit position 2 of the DSW to indicate spacing is completed. Another space can now be initiated.

Sense Device (111)



This instruction causes the DSW of the 1132 Printer to be placed in the ACC. The functions of the bit positions of the DSW are shown in Figure 37.

Programming Notes

Prior to initiating a Start Printer instruction, the program should set the printer scan field (0032-0039) to zeros to ensure that no erroneous bits are sensed on the first scan.

Before the first line of a record is printed, the status of the 1132 indicators should be checked. This is done by bringing the printer DSW into the ACC with a Sense Device instruction. The modifier bits of the Sense Device instruction should be set to zeros to prevent reset of the DSW responses and indicators. Bits 3, 5, and 6 (see Figure 37) of the DSW are tested. If all three positions are set to zero, the printer is ready to print the first line.

After the code of the next character has been emitted by the printer and read into core storage by a read emitter instruction, 11.2 ms (milliseconds) are available to scan the output record and set up the 1-bits in the printer scan field. At the end of 11.2 ms, the printer begins its scan and fires each printwheel represented by a 1-bit. If the program has been interrupted for a considerable period by level 0, the programmed scan may not have been completed. To ensure that the program is aware of this condition, the first steps of the scan program for each character should clear the printer scan field to zeros and, upon completion of the programmed scan, place a bit in position 15 of the eighth word (0039). When the printer scans the field it checks this position. If it is zero, the scan incomplete indicator (bit 4 of the DSW) is turned on. The program can test this indicator and branch to an error routine that provides for 47 idle scan cycles and a resumption of programmed scanning with the character not completed.

After the final scan cycle for a line of printing, 16 idle scan cycles must be taken before spacing or skipping can be started. If the operation is a single or double space, the next scan cycle can be started two scan cycles after the space operation is initiated. If the spacing operation is for more than three spaces, scan cycles for the next print line can be started after the last space command is given.

After each printer scan cycle, a 1-bit is placed in bit position 0 of the 1132 DSW, causing an interrupt when level 1 is the highest pending level. During an idle scan cycle the printer scan field should be set to zeros, except for bit 15 of the eighth word. This prevents the incomplete scan indicator from being turned on.

SYNCHRONOUS COMMUNICATIONS ADAPTER

The Synchronous Communications Adapter special feature enables the IBM 1130 Computing System to function as a point-to-point data transmission terminal, using either private or commercial common-carrier line transmission facilities. The Adapter sends data to or receives data from the line transmission facilities under control of the stored program in the 1130. It operates on an interrupt-request basis similar to that used by other input/output devices in the IBM 1130 Computing System.

The Synchronous Communications Adapter provides data interchange between remote locations and a central data-processing location. It provides communication with Synchronous Transmit-Receive (STR) devices such as the IBM 1009 Data Transmission Unit, the IBM 7701 and 7702 Magnetic Tape Transmission Terminals, the IBM 1013 Card Transmission Terminal, the IBM 7710 and 7711 Data Communication Units, as well as other IBM 1130 Computing Systems.

The adapter operates entirely under the control of the stored program in the 1130. While most applications require STR operation to match existing equipment, the mode of operation and the character coding are not limited by the functional electronics, therefore, compatibility with a variety of devices is possible.

Character Coding

All character coding is controlled by the stored program and is based on a character length of 8 bits. Recognition of control characters and checking for data transmission errors are also functions of the stored program. The four-of-eight line transmission code shown in Figure 1 is usually used, but in general, any character set which is recognized by both the transmitting terminal and the receiving terminal can be used. An appropriate analogy might be to consider two people conversing on the telephone: it matters little what language these two people use as long as each party understands what the other party has to say.

LINE ATTACHMENT

The Synchronous Communications Adapter is attached to either private or commercial line transmission facilities through a common-carrier data set. In the United States the interface for this data set is

defined by EIA* Standard RS-232-A and requires a Western Electric data set model 201A4, 201B2, 202C1, 202D1, or an IBM approved equivalent. Outside the United States the data set is defined by the CCITT** Standard and requires an IBM 3977 Modem or an IBM approved equivalent.

The adapter can operate in half-duplex mode using either two-wire or four-wire line transmission facilities. Data rates, selected by the machine operator, are 600, 1200, 2000, or 2400 bits per second (Baud).

Graphic	4 of 8 Code			Graphic	4 of 8 Code			
	N	X	O		R	8	4	2
blank	1	1	1	1	0	0	0	0
¢	0	1	1	0	1	0	1	0
.	1	0	0	0	1	0	1	1
<	0	1	1	0	1	1	0	0
(0	1	0	1	0	1	1	0
+	0	0	1	1	0	1	1	0
!	1	0	0	0	1	1	0	1
&	1	0	0	0	1	1	1	0
!	1	1	0	0	1	0	1	0
\$	0	1	0	0	1	0	1	1
*	1	1	0	0	1	1	0	0
)	0	1	0	1	1	0	0	0
.	0	0	1	1	1	0	0	1
¬	0	1	0	0	1	1	0	1
-	0	1	0	0	1	1	1	0
/	1	0	1	1	0	0	0	1
,	0	0	1	0	1	0	1	1
%	1	0	1	0	1	1	0	0
-	0	1	0	1	0	1	0	1
>	0	0	1	1	0	1	0	1
?	0	0	1	0	1	1	0	1
:	0	0	1	0	1	1	1	0
#	0	0	0	1	1	0	1	1
@	1	0	0	1	1	1	0	0
'	0	0	0	0	1	1	1	1
=	0	0	0	1	1	1	0	0
"	0	0	0	1	1	0	1	1
A	0	1	1	1	0	0	0	1
B	0	1	1	1	0	0	1	0
C	0	1	1	0	0	0	1	1
D	0	1	1	1	0	1	0	0
E	0	1	1	0	1	0	1	0
F	0	1	1	0	0	1	1	0
G	1	0	0	0	0	1	1	1
H	0	1	1	1	1	0	0	0
I	0	1	1	0	1	0	0	1
J	1	1	0	1	0	0	0	1
K	1	1	0	1	0	0	1	0
L	1	1	0	0	0	1	1	1
M	1	1	0	1	0	1	0	0
N	1	1	0	0	1	0	1	0
O	1	1	0	0	1	1	0	0
P	0	1	0	0	1	1	0	1
Q	1	1	0	1	1	0	0	0
R	1	1	0	0	1	0	0	1
none	1	0	1	0	1	0	1	0
S	1	0	1	1	0	0	1	0
T	1	0	1	0	0	0	1	1
U	1	0	1	1	0	1	0	0
V	1	0	1	0	1	0	1	0
W	1	0	1	0	1	0	1	0
X	0	0	1	0	1	0	1	1
Y	1	0	1	1	1	0	0	0
Z	1	0	1	0	1	0	1	0
0	1	0	0	1	1	0	1	0
1	1	1	1	0	0	0	1	1
2	1	1	1	0	0	1	0	1
3	1	0	0	1	0	0	1	1
4	1	1	1	0	0	1	0	0
5	1	0	0	1	0	1	0	1
6	1	0	0	1	0	1	0	1
7	0	0	0	1	0	1	1	1
8	1	1	1	0	1	0	0	0
9	1	0	0	1	1	0	1	0

11470

Figure 1. 4-of-8 Line Transmission Code

*Electronic Industries Association (EIA)

**Consultive Committee on International Telephone and Telegraph (CCITT)

Half-Duplex Operation

Half duplex is a mode of operation wherein either terminal can transmit or receive in conjunction with the remote terminal, but neither terminal can transmit and receive data simultaneously. In effect, the operation is quite similar to a normal telephone conversation, that is, one party talks while the other party listens. During the course of the conversation, each party may alternate between talking and listening as often as necessary.

Two-Wire Operation

Synchronous Transmit-Receive operations with a 2-wire half-duplex transmission system require a delay of approximately 200 milliseconds when the adapter switches from receiving to transmitting data. This turn-around delay allows the data set and the communication lines to reverse the direction of transmission and line echo to settle. The amount of delay is therefore related to the character of the line and data set. Line turn-around time is controlled by the data set and, when completed, the data set signals the adapter. The adapter does not transmit until the data set signals the completion of line turn-around.

Four-Wire Operation

When the adapter is connected to a 4-wire half-duplex transmission system, line turn-around time can be practically eliminated, and the adapter can remain synchronized by transmitting Idles on one pair of wires while receiving data on the second pair of wires.

FUNCTIONAL DESCRIPTION

The entire Synchronous Communications Adapter, except for the data set, is contained within the 1131 Central Processing Unit. The adapter functions as an input/output control unit between the 1130 system and the transmission line. All data transfer is character synchronous. This means that once an initial Idle character is recognized, each subsequent character is recognized as a group of incoming data bits timed by an internal electronic clock. Continuous regulation of the receiver's clock is provided.

Incoming data from the transmission line is serial-by-bit and serial-by-character. As the data comes in, it is stored, one bit at a time, in the adapter buffer register until the register contains a complete character. Then the adapter initiates an interrupt request to notify the CPU that a character

is ready to be read into core storage. When the interrupt request is serviced, the character is read in parallel into the high-order 8 positions of a 16-bit word in core storage.

Outgoing data, from core storage to the transmission line, is taken in parallel from the high order 8 positions of the address location in core storage. The adapter initiates an interrupt request to notify the CPU that the adapter is ready to accept a character from core storage. When the interrupt request is serviced, the character is transferred in parallel to the adapter buffer register. Data from the register is subsequently sent to the transmission line one bit at a time.

Data transfer to or from the transmission line begins with the low order position. Each 8-bit character is located in bit positions 0-7 of a 16-bit core storage location as follows:

<u>bit transfer sequence</u>	<u>bit position in core storage</u>
first	7
second	6
third	5
fourth	4
fifth	3
sixth	2
seventh	1
eighth	0

Synchronous Transmit-Receive (STR) Operation

IBM Programming Systems support for the adapter uses the STR mode of data transmission. Other modes of data transmission, which depend on character synchronism can be implemented by the user to satisfy his own requirements. In STR operation all characters contain a fixed number of bits. Two types of characters are used:

1. Control characters are used to control line functions; i. e., to acknowledge receipt of a message, to acknowledge synchronization, to signal start of a message or the end of a transmission. The four-of-eight code, used by STR devices, contains six characters used to control line functions.
2. Data characters contain the information to be transferred to or from the adapter. The four-of-eight code contains 64 valid data characters, however, some STR devices do not utilize all of the 64 data characters. The 1130 system can recognize any or all of the 64 data characters as directed by the stored program, but the programmer should determine the character set recognized by the remote STR to avoid sending invalid characters.

Control Operations

The four-of-eight code contains special characters which are reserved for control functions. These control characters and their bit structures are shown in Figure 2. Control sequences are initiated by the 1130 program and are transmitted to the remote terminal as data. The remote terminal then has the responsibility of recognizing the control sequence and responding appropriately.

Control Characters	4 of 8 Code							
	N	X	O	R	8	4	2	1
Idle	0	0	1	1	1	0	0	1
Start of Record 1 or Acknowledge 1 (SOR 1 or ACK 1)	0	1	0	1	0	0	1	1
Start of Record 2 or Acknowledge 2 (SOR 2 or ACK 2)	0	0	1	1	0	0	1	1
Transmit Leader (TL)	0	0	1	1	0	1	0	1
Control Leader (CL)	0	1	0	1	0	1	0	1
End of Transmission (EOT)*	0	1	0	1	1	0	1	0
Inquiry or Error (INQ or ERR)	0	1	0	1	1	0	0	1
Telephone*	0	1	0	1	1	1	0	0
Longitudinal Redundancy Check (LRC)**	-	-	-	-	-	-	-	-

* Also used as a data character

** This character has a 0 bit in each bit position that contained an even number of 1 bits for that bit position in the data record. If that bit position in the record had an odd number of 1 bits the LRC character ranges from all 0s to all 1s and thus, is not in the 4 of 8 code.

16162

Figure 2. Control Characters

All operations of the adapter are programmed and controlled by the 1130 system program. The program places the adapter in either the synchronize, transmit, or receive mode. In addition the program must store the Idle character in the idle register and, must generate the longitudinal redundancy check (LRC) character which is transmitted at the end of each record.

The Idle character is a special character which the adapter transmits automatically to the receiving terminal when no other data or control characters have been transferred to the adapter transmission. This condition occurs during the synchronization mode at the start of each transmission, and when the program responds too slowly to the adapters request for data. The Idle character is not included in the LRC character.

Control characters are used generally in two character sequences (Figure 3). Each sequence is made up of a leader character and a trailer character. Two of the six control characters can be used as leaders of a control sequence. These are the Transmit Leader (TL) character and the Control Leader (CL) character. The special characters used as trailers each have two possible meanings depending on whether the TL or the CL character precedes them. For example, the INQ/ERR character is interpreted as an INQ character when preceded by the TL leader and is interpreted as an ERR character when preceded by the CL leader. The End of Transmission sequence and the Telephone sequence consist of one control character followed by one of two data characters. These data characters are interpreted as being part of a control sequence only when they are preceded by the CL character. When not preceded by the CL character, they are interpreted as data.

Control Sequence	Control Character Sequence	
	Leader Character	Trailer Character
End of IDLE (EOI)*	CL	1 IDLE
Inquiry (Synchronized ?)	TL	INQ
Acknowledge (Synchronized)	CL	ACK 2
Telephone Sequence	CL	TEL
Start of Record 1 (SOR 1) 1st or odd numbered record	TL	SOR 1
Start of Record 2 (SOR 2) 2nd or even numbered record	TL	SOR 2
End of Transmittal Record (EOTR)	TL	LRC
Acknowledge Record 1	CL	ACK 1
Acknowledge Record 2	CL	ACK 2
Repeat Last Record (ERROR)	CL	ERR
End of Transmission (EOT)	CL	EOT
Acknowledge EOT	CL	EOT

* This sequence is always preceded by a 1-1/2 second transmission of IDLE characters.

16163

Figure 3. Control Sequences

The Inquiry control sequence is used by a terminal when it wishes to transmit a message. The terminal that is in control status may at any time send the Inquiry control sequence, which notifies the other terminal of the desire to transmit and asks for

permission to do so. If the other terminal is able to receive a message, it acknowledges the Inquiry control sequence with an Acknowledge sequence.

The Start of Record control sequence is transmitted immediately before each block of data. The Start of Record 1 (SOR 1) control sequence is transmitted before the first, third, fifth, etc., record of each message, while the Start of Record 2 (SOR 2) control sequence is transmitted before the second, fourth, sixth, etc., record of each message. This odd-even labeling of each record is used to ensure that no records of a message are lost or duplicated.

The End of Transmittal Record control sequence is sent immediately after each record of a message. The End of Transmittal Record control sequence contains the LRC character which is used to check the validity of the transmission.

One of the Acknowledge control sequences is sent by the receiving terminal after it correctly receives each block of data. This control sequence indicates to the transmitting terminal that it may proceed to send another record. The Acknowledge Record 1 control sequence should be sent after a record that began with the Start of Record 1 control sequence is received, while the Acknowledge Record 2 control sequence should be sent after a record that began with the Start of Record 2 control sequence is received. This assures the sender that the receiver has not lost a record. Either of the Acknowledge control sequences also is used as a "yes" to the Inquiry control sequence.

The Repeat Last Record (Error) control sequence is sent by a receiving terminal if it receives a block of data that is in error. This sequence notifies the transmitting terminal that it should repeat the transmission of the last record.

The End of Transmission control sequence is sent by the transmitting terminal after it has sent the last record of a message. This indicates that the message has been sent completely. A receiving terminal answers the End of Transmission control sequence by sending back an End of Transmission control sequence, thereby notifying the transmitting terminal that the receiving terminal has received the full message. After the transmission of these two End of Transmission control sequences, the two terminals return to synchronize mode of operation and exchange Idle characters.

The Telephone control sequence can be sent by either terminal and indicates that the terminal operator desires voice communication, via the handset, with the other terminal operator.

Synchronize Mode

The synchronize mode provides a means of synchronizing the transmitting and receiving terminals to ensure the proper recognition of data bits and characters as they are transmitted between terminals. The synchronize mode, sometimes referred to as handshaking, consists of the transmission of a series of characters for 1.5 seconds, followed by a control sequence and then turning around and listening for a similar series of characters from the other terminal for 3 seconds. The time intervals for transmit (1.5 seconds) and receive (3 seconds) are controlled by timers in the adapter. The timers are under control of the program. The character used in the synchronization sequence is called an Idle character.

At the end of the 1.5 second transmission time, the transmitting terminal sends an end-of-idle control sequence – a control leader (CL) followed by an Idle character – (Figure 3). This control sequence signals the receiving (remote) terminal to change from receive mode to transmit mode. When the turn-around is completed (200 ms for 2-wire-half-duplex) the remote terminal transmits the Idle character for 1.5 seconds. At the end of this time the remote terminal sends the end-of-idle sequence. If neither terminal has a message to transmit, the synchronization sequence continues.

Transmit Mode

When a terminal has a message to transmit, that terminal sends 1 or more Idle characters followed by the Inquiry sequence. This sequence informs the remote terminal that a message is about to be transmitted. The remote terminal, if it is in synchronization and is ready to receive, sends an Acknowledge control sequence. On receipt of the Acknowledge sequence, the transmitting terminal transmits its message.

The first two characters of a message are the Start-of-Record-1 sequence. This sequence is preceded by one or more idle characters. This sequence is followed by the message data characters for this record. At the end of the record, the End-of-Transmittal-Record (EOTR) sequence is sent. This sequence consists of a TL character and a longitudinal redundancy check (LRC) character. Two functions are performed by this sequence: it indicates the end of the record, and provides (via the LRC character) the receiving terminal with a method of checking for a complete message. The receiving

terminal acknowledges the EOTR by sending the Acknowledge 1 or 2 sequence (if LRC compares) or by the error sequence (if LRC does not compare).

Messages which contain more than one record, indicate the start of the second record by sending a Start-of-Record 2 sequence. The Start-of-Record 1 sequence is used each time an odd numbered record is transmitted, and the Start-of-Record 2 sequence is used each time an even numbered record is transmitted. The use of the two different start of record sequences enables detection of lost or duplicated data records from a terminal.

When the receiving terminal has acknowledged the correct receipt of the last record of a message, the transmitting terminal sends the end of transmission sequence. This sequence consists of a CL character and an End-of-Transmission (EOT) character. The receiving terminal acknowledges the EOT sequence by returning the same sequence. The terminals, if so programmed, return to the synchronize mode.

Receive Mode

In the receive mode, the adapter accepts data from other STR devices and transfers it to the 1130 core storage. Prior to the transfer of data, the transmitting and receiving terminals must be synchronized.

In the receive mode, the adapter compares the incoming data to the character in the idle register. After the first Idle character has been recognized, the first non-Idle character detected informs the adapter that data is on the line so that all subsequent characters in the record can be transferred into core storage. When the transmitting terminal signals the end of a record, the 1130 program checks the transmitted LRC character with the one compiled from the received record. If the two LRC characters are the same, the 1130 program generates the appropriate acknowledgement which is then sent from the adapter to the transmitting terminal. If the LRC characters are not the same, the 1130 program responds with an error sequence which is then sent from the adapter to the transmitting terminal. Normally, the 1130 program requests that the previous record be transmitted again. The number of transmission attempts is controlled by the programmer and may vary.

PROGRAMMING

All adapter operations are programmed using the 1130 XIO instruction (see Execute I/O description

in IBM 1130 Functional Characteristics manual). The effective address portion of the XIO instruction specifies the address of the two word IOCC which is required for the desired operation.

The adapter interrupts the 1130 system program on interrupt level 1. Bit position 1 of this interrupt level status word (ILSW) indicates that the interrupting device is the adapter. The program then senses the device status word (DSW).

The DSW is generated by the adapter to indicate the cause of the interrupt (Figure 4).

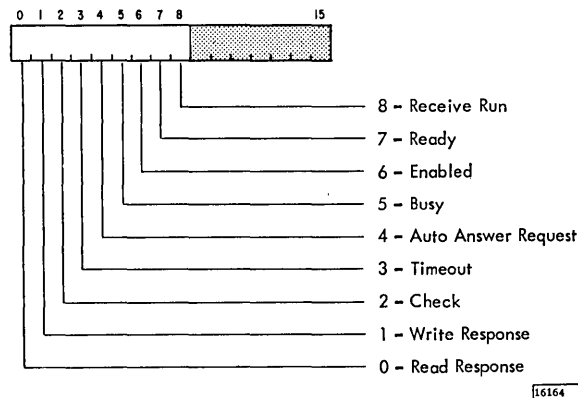


Figure 4. Device Status Word

The DSW bit positions indicate the following conditions:


- Bit 0 - The adapter is in receive mode and the buffer register in the adapter contains a data character which should be transferred into the 1130 core storage.
- Bit 1 - The adapter is in transmit mode and requires a data character from the 1130 core storage for transmission.
- Bit 2 - This bit indicates an error condition, data overrun, or character gap.
 - Data overrun indicates that the data character, received or transmitted, came too soon for correct retrieval by the adapter. This condition results in a loss of data and is usually a program error.
 - Character gap indicates that the data characters are being received or transmitted too slowly for correct adapter operation. This condition is usually a program error.
- Bit 3 - This bit indicates the end of the 1.5 second time for the transmission of Idle characters, or the end of the 3 second listening time for synchronization.
- Bit 4 - This bit indicates a remote terminal is signaling the adapter and requires an answer.

- Bit 5 - This bit indicates that the adapter is in either the receive or transmit mode.
- Bit 6 - This bit indicates that the adapter has been programmed for an auto answer request (see Bit 4).
- Bit 7 - This bit indicates that the data set is connected and ready to receive or transmit data.
- Bit 8 - This bit is used with 2-wire half-duplex systems only. It indicates that the adapter is in the "slave" mode. In "slave" mode the adapter transmits the normal acknowledge responses but does not transmit data records.

I/O CONTROL COMMANDS (IOCC)

The adapter is addressed by the 5-bit (bits 0 through 4) device (area) code in the IOCC. This code is 10_{10} (binary 01010).

Write (001)




A write command without a modifier bit instructs the 1130 to transfer the contents of the specified core storage address to the adapter buffer. The adapter then serializes the contents of the buffer register onto the transmission line.

If the modifier bit 13 is set, the 1130 transfers the data to the idle register in the adapter. The adapter buffer is not used and the data is not transmitted from the adapter at this time. The Idle character is transmitted during the synchronize mode or when the adapter is in transmit mode and has not received a data character for transmission.

Modifier bit 14 turns off audible alarm trigger in the adapter.


Modifier bit 15 turns on the adapter alarm trigger.

Read (010)




The read command instructs the 1130 to transfer the contents of the adapter buffer to the core storage location specified in the address portion of the command.

Sense Interrupt (011)



The sense interrupt command causes the 1130 to transfer the interrupt level status word (ILSW) to the accumulator and examine it for the cause of the interrupt. Bit position 1 of the ILSW indicates the adapter was the interrupting device. The device status word is then examined to determine the cause of the interrupt in the program.

Control (100)



The control command is always used with a modifier bit. This command causes the adapter to accomplish the functions specified by the modifier.

Modifier bit 8, when set to 1, enables the adapter for Auto Answer operation. Auto Answer allows the adapter to interrupt the 1130 program in response to a telephone ring from the remote terminal.


Modifier bit 9, when set to 1, disables the Auto Answer operation and does not allow a telephone ring from the remote terminal to interrupt the 1130 program.

Modifier bit 10, when set to 1, changes the state of the timer trigger from on to off or from off to on.

Modifier bit 11 sets the adapter to the synchronize mode.


Modifier bit 13 is the end operation command. This command resets the adapter regardless of the mode of operation. If the adapter is in the transmit mode, the reset is delayed until a character gap of 1 character is detected. It then resets the adapter. End operation also resets the timers used in the synchronization mode and disconnects the adapter from the communication line.

Start Write (101)



The start write command places the adapter in the transmit mode of operation.


Start Read (110)



The start read command places the adapter in the receive mode of operation.

A start read command with modifier bit 14 on, sets the send-receive run trigger and places the adapter in 'slave' mode operation. This mode of operation is used with 2-wire half-duplex systems. In the 'slave' mode the adapter should not be programmed to transmit data records to the master. The only transmissions that the adapter will make are the normal responses to the inquiry from the master and the normal acknowledgements. The start read command and a modifier bit 15 clears the send-receive run trigger and removes the adapter from 'slave' mode operations. This places the adapter in the 'master' mode which is used for the transmission of data.

Sense Device (111)



The sense device command instructs the 1130 to sense the Device Status Word (DSW). The DSW word is generated by the adapter to indicate the cause of the interrupt. The DSW word for the adapter is shown in Figure 4.

INDICATORS AND SWITCHES

The console panel for the 1131 CPU with the adapter installed is shown in Figure 5. The non-shaded portion of the figure shows the indicators which relate to the adapter.

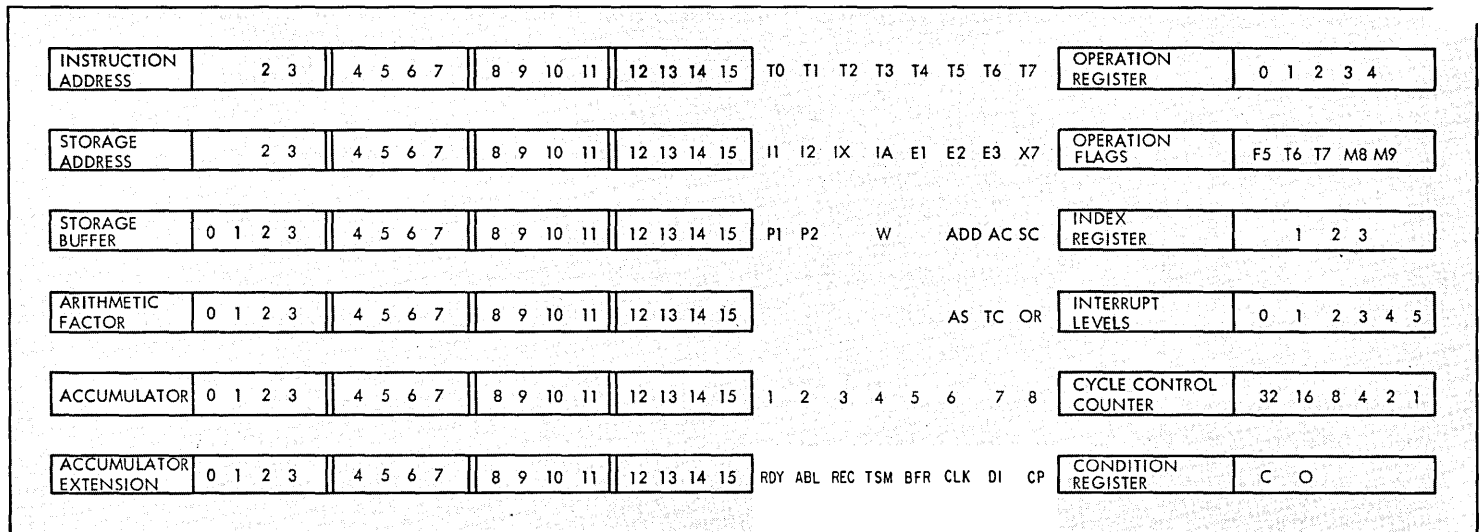


Figure 5. Console Panel

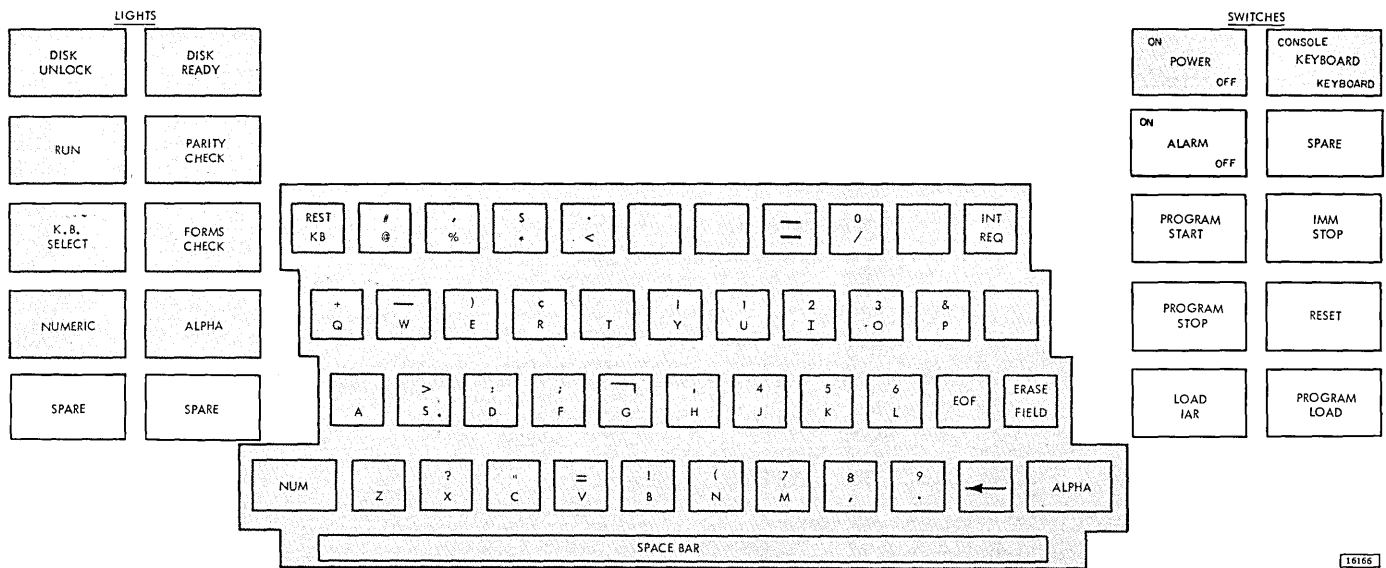


Figure 6. Console Keyboard

(RDY) Ready: This indicator lights when the data set is ready.

(ABL) Enabled: This indicator lights when the 1130 program has enabled the adapter to respond to a ring indicator signal from the data set.

(REC) Receive: This indicator lights when the adapter receive trigger is on.

(TSM) Transmit Mode: This indicator lights when the adapter is in the transmit mode.

(BFR) Buffer Loaded: This indicator lights when the buffer contains data.

(CLK) Clock Running: This indicator lights when the receive clock is running.

(DI) Data IN: This indicator lights when the receive data line from the data set is at a receive space level.

(CP) Character Phase: This indicator lights when the adapter is operating in character phase.

The addition of the adapter to the 1130 System also modifies the switches and lights on the console keyboard and the switch panel below the disk drive as shown in Figures 6 and 7. The shaded portions of the figures are unchanged.

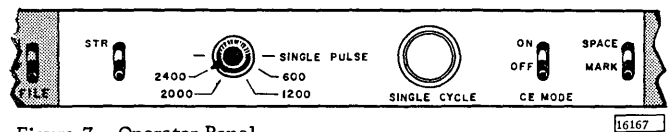


Figure 7. Operator Panel

STR Switch: This toggle switch in the STR position places the adapter in the STR mode of operation.

Speed Selection Switch: This rotary switch is set to establish the number of bits per second which may be transmitted or received. In actual practice the switch setting is determined by the data set.

Single Cycle Pushbutton: This pushbutton switch is used by the CE to aid in maintaining the adapter.

CE Mode Switch: This switch is used by the CE in maintaining the adapter. This switch must be turned OFF for normal adapter operations.

Space/Mark Switch: This switch is effective only when the CE mode switch is on.

Audible Alarm Switch: This switch is located on the console keyboard and provides a means of turning off the adapter alarm in the CPU, should the program not do so for any reason.

APPENDIX A. NUMBER SYSTEMS

NUMBER CONCEPT

The concept of assigning a symbol to represent a value or a quantity has been important to man since the earliest attempts to communicate. As life became more complex, the need for symbols to represent more than one or two and be more precise than "many" became evident. Early counting methods, based on the ten fingers on both hands, evolved into the decimal system, which is in common use today.

The decimal system is built around the base ten and uses the 0, 1, 2, 3, 4, 5, 6, 7, 8, and 9 symbols. Combining these symbols and the place system for their arrangement, any number can be expressed, no matter how large or how small. The value of each symbol depends on its place in a row of symbols. For example, the symbol 1, by itself, has a place value of 1. Combined with another symbol, as in 21, the 1 symbol still has a place value of 1. Reverse the symbols, however, (12) and the 1 symbol now has a place value of 10.

This concept can be readily applied to any other number system. For example, imagine a number system containing only the symbols 0, 1, 2, 3, and 4. Since there are five symbols used, the system is called quinary or, more commonly, a base 5 system. To count in this system, the first symbol used is the 0. This is followed by the 1, 2, 3, and 4. At this point, all five symbols have been used. The next step is to assign the decimal value of five to the 1 symbol by placing it one position to the left and combining it with the 0 symbol (10). This combination is then followed by the 11, 12, 13, and 14 combinations. The third symbol in the system (2) is then assigned the decimal value of ten and is combined with the 0 giving the combination 20. This is followed by 21, 22, 23, 24, 30, and so forth.

The following table shows the arrangement of symbols used to represent the same values in each system of notation.

Decimal	Quinary	Decimal	Quinary
0	0	10	20
1	1	11	21
2	2	12	22
3	3	13	23
4	4	14	24
5	10	15	30
6	11	16	31
7	12	17	32
8	13	18	33
9	14	19	34

The main difficulty in using an unfamiliar number system is recognizing the new values assigned to familiar symbols. For example, to add the decimal symbols 3 and 4 and get a decimal result of 7 is simple for anyone acquainted with the decimal system. To add the quinary symbols 3 and 4 and get a quinary result of 12 is more difficult because of limited use of the quinary system.

Arithmetic Tables

The construction of arithmetic tables makes operations faster and easier. Table 2 shows sample add tables for both decimal and quinary systems.

To use these tables, the symbols being added (3 and 4 in the decimal table) are located, one on the top and the other on the left side of the table. Lines are then projected until they meet. The value at the intersection is the result of the addition. Using the quinary table: $4 + 3 = 12$, $11 + 4 = 20$, $2 + 4 = 11$, and so forth. The results are expressed in quinary values.

The same principle may be applied to other arithmetic processes. Multiply tables for both systems are shown in Table 3. The use of these tables is the same as with the add tables; only the results differ. For example, 3×4 with the decimal table gives the result of 12, while 3×4 with the base 5 table gives the result 22; both results represent the same quantity.

Table 2. Add Tables

Decimal						Quinary							
0	1	2	3	4	5	0	1	2	3	4	10		
0	0	1	2	3	4	5	0	0	1	2	3	4	10
1	1	2	3	4	5	6	1	1	2	3	4	10	11
2	2	3	4	5	6	7	2	2	3	4	10	11	12
3	3	4	5	6	7	8	3	3	4	10	11	12	13
4	4	5	6	7	8	9	4	4	10	11	12	13	14
5	5	6	7	8	9	10	10	10	11	12	13	14	20
6	6	7	8	9	10	11	11	11	12	13	14	20	21

Table 3. Multiply Tables

Decimal						Quinary						
0	1	2	3	4		0	1	2	3	4		
0	0	0	0	0	0	0	0	0	0	0	0	
1	0	1	2	3	4	1	0	1	2	3	4	
2	0	2	4	6	8	2	0	2	4	11	13	
3	0	3	6	9	12	3	0	3	11	14	22	
4	0	4	8	12	16	4	0	4	13	22	31	

Binary Mode

Computers function in what is called a binary mode. This term simply means that the computer components can indicate only two possible states or conditions. Therefore, the binary mode system may also be called a base 2 system. For example, the ordinary light bulb operates in a binary mode; it is either on, producing light; or it is off, not producing light. The presence or absence of light indicates whether the bulb is on or off. Likewise, within the computer, transistors are either conducting or not conducting, magnetic materials are magnetized in one direction or in the opposite direction; and specific voltage potentials are present or absent (Figure 38). The binary modes of operation of the components are signals to the computer, as the presence or absence of light from an electric light is to a person.

Representing data within the computer is accomplished by assigning or associating a specific value to a binary indication or group of binary indications. For example, a device to represent values could be designed with four electric light bulbs and switches to turn each bulb on or off (Figure 39).

The bulbs are assigned arbitrary values of 1, 2, 4, and 8. When a light is on, it represents the value associated with it. When a light is off, the value is not considered. With such an arrangement, the single value represented by the four bulbs will be the numeric sum indicated by the lighted bulbs.

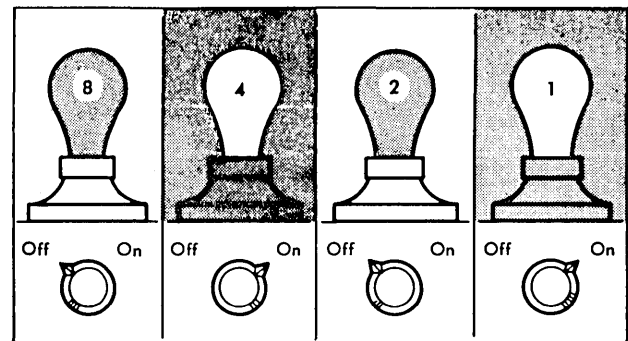


Figure 39. Decimal Data Representation

Values 0 through 15 can be represented. The value 0 is represented by all lights off; the value 15, by all lights on; 9, by having the 8 and 1 lights on and the 4 and 2 lights off; 5, with the 1 and 4 lights on and the 8 and 2 lights off; and so on.

The value assigned to each bulb or indicator in the example could have been something other than the values used. This change would involve assigning new values and determining a scheme of operation. In a computer, the values assigned to a specific number of binary indications become the code or language for representing data.

Because binary indications represent data within a computer, a binary method of notation is used to illustrate these indications. The binary system of notation uses only two symbols, zero (0) or one (1), to represent all quantities. In any single position of binary notation, the 0 represents the absence of a related or assigned value and the 1 represents the presence of a related or assigned value. Using the light bulbs in Figure 32, for example, the binary notation 0101 would represent a decimal 5.

The binary notations 0 and 1 are commonly called bits. The 0 bit is described as no bit and the 1 bit is described as a bit. Although 0 or 1 bits are necessary to illustrate the condition of a binary indication or a group of binary indications, the 1 bits are the bits generally referred to. For example, the binary notation 0101 of Figure 32 would be described as having a bit in the 1 and 4 bit positions. The assumption is that there are no bits (0 bits) in the 2 and 8 bit positions.

Binary Number System

In some computers, the values associated with the binary notation are related directly to the binary number system. This system is not used in all computers, but the method of representing

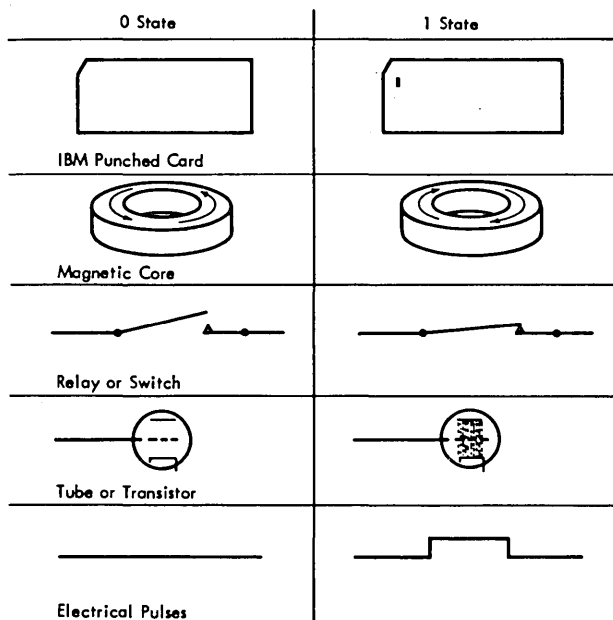


Figure 38. Binary Indicators

values using this numbering system is useful in learning the general concept of data representation.

The common decimal number system uses ten symbols or digits to represent all quantities, and the place value of the digits signifies units, tens, hundreds, thousands, and so on. The binary or base 2 number system uses only two symbols or digits: 0 and 1. The position value of the bit symbols (0 or 1) is based on the progression of powers of 2; the units position of a binary number has the value of 1; the next position, a value of 2; the next, 4; the next, 8; the next, 16; and so on (Figure 40).

8192	4096	2048	1024	512	256	128	64	32	16	8	4	2	1
------	------	------	------	-----	-----	-----	----	----	----	---	---	---	---

Figure 40. Place Value of Binary Numbers

In pure binary notation, the binary digits or bits indicate whether the corresponding power of 2 is absent or present in each position of the number. The 1 bit represents the presence of the value and the 0 bit represents the absence of the value. The place value of the digits does not signify units, tens, hundreds, or thousands, as in the decimal system; instead, the place value signifies units, twos, fours, eights, sixteens, and so on. Using this system, the quantity 12, for example, is expressed with the symbols 1100, meaning $(1 \times 2^3) + (1 \times 2^2) + (0 \times 2^1) + (0 \times 2^0)$ or $(1 \times 8) + (1 \times 4) + (0 \times 2) + (0 \times 1)$.

Figure 41 shows the binary representation of the decimal values 0 through 9. Note that the decimal digits 0 through 9 are expressed by four binary digits. The system of coding or expressing decimal digits in an equivalent binary value is

Decimal Value	Place Value			
	8	4	2	1
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1

Figure 41. Binary Representations

called binary coded decimal (BCD). For example, the decimal digits 2, 6, 5, 4, 9, and 8 would appear in binary coded decimal form as shown in Figure 42

Although binary numbers, in general, have more terms than their decimal counterparts (about 3.3 times as many), computation in the binary system is quite simple.

For addition, it is only necessary to remember three rules:

1. Zero plus zero equals zero.
2. Zero plus one equals one.
3. One plus one equals zero with a carry of one to the next position on the left.

To see how the rules work, consider the addition of $15 + 7$, with these numbers expressed in binary notation:

	Sixteens	Eights	Fours	Twos	Ones	
(Carries)	(1)	(1)	(1)	(1)		
	0	1	1	1	1	= 15
	0	0	1	1	1	= 7
	1	0	1	1	0	= 22

In the ones column, we have $1 + 1$ for a sum of 0 and a 1 carried to the twos column. In the twos column, we have $1 + 1$ for a sum of 0, but we must also add the carry from the ones column, making a final sum of 1 with a carry to the fours column. In the eights column, we have a $1 + 0$ giving a sum of 1, but adding in the carry from the fours column makes the final sum 0 with a carry to the sixteens column. In this column, we have $0 + 0$, giving a sum of 0 and to this we add the carry from the eights column, making a final sum of 1.

The resultant sum of the addition contains 1's in the sixteens, fours, and twos column, which is the binary representation of 22, the correct sum of 15 plus 7 ($16 + 4 + 2 = 22$).

The rules for subtraction of binary digits are equally simple:

1. Zero minus zero equals zero.
2. One minus one equals zero.

Decimal Digits	2	6	5	4	9	8
Binary Value	0010	0110	0101	0100	1001	1000
Place Value	8421	8421	8421	8421	8421	8421

Figure 42. Binary Coded Decimal

3. One minus zero equals one.
4. Zero minus one equals one, with one borrowed from the left.

Using the same numbers as we did in the addition, the subtraction is:

	SIXTEENS	EIGHTS	FOURS	TWOS	ONES
(Borrows)	(0)	(0)	(0)	(0)	(0)
	0	1	1	1	1 = 15
	- 0	0	1	1	1 = 7
	0	1	0	0	0 = 8

In the ones column we have 1 - 1 for a sum of 0 with no borrows. The same procedure occurs in the twos and fours columns. In the eights column, we have 1 - 0 for a sum of 1. In the sixteens column, we have 0 - 0 for a sum of 0. With the subtraction finished, we have 1's in the eights column only, signifying the answer to be 8.

For multiplication, only three rules are needed:

1. Zero times zero equals zero.
2. Zero times one equals zero; no carries are considered.
3. One times one equals one.

In the binary multiplication table, all that is necessary when multiplying one number (multiplicand) by another (multiplier) is to examine the multiplier digits one at a time and, each time a 1 is found, add the multiplicand into the result, and each time a 0 is found add nothing. The multiplicand must be shifted for each multiplier digit, but this is no different from the shifting done in the decimal system.

An example of binary multiplication is 26 x 19:

DECIMAL	BINARY
26 = 16 + 8 + 0 + 2 + 0	= 11010
x 19 = 16 + 0 + 0 + 2 + 1	= 10011
Using the rules, the product is arrived at by a series of adding the multiplicand and shifting whenever a 1 is in the multiplier.	11010 11010 00000 00000 11010 <u>111101110</u>

Interpreting the binary result of the multiplication by using the ones, twos, fours, ... etc. system, we find:

$$256 + 128 + 64 + 32 + 0 + 8 + 4 + 2 + 0$$

which equals 494, proving the problem.

Binary division is accomplished by applying similar concepts. From the examples of addition, subtraction, and multiplication, you can see that whatever operation the computer is working on is accomplished by repetitive addition.

The computer uses the binary system internally. However, it is able to convert one system to another by using a stored program. Thus, input/output data may be expressed in decimal (or any other) form when the programmer finds it convenient to do so.

Hexadecimal Number System

It has been noted that binary numbers require about three times as many positions as decimal numbers to express the equivalent number. This is not much of a problem to the computer; however, in talking and writing or in communicating with the computer, these binary numbers are bulky. A long string of 1's and 0's cannot be effectively transmitted from one individual to another. Some shorthand method is necessary.

The hexadecimal number system fills this need. Because of the simple relationship of hexadecimal to binary, numbers can be converted from one system to another by inspection. The base or radix of the hexadecimal system is 16. This means there are 16 symbols: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, and F. The letters A, B, C, D, E, and F represent the 10-base system values of 10, 11, 12, 13, 14, and 15, respectively.

Four binary positions are equivalent to one hexadecimal position. The following table shows the comparable values of the three number systems.

<u>Decimal</u>	<u>Binary</u>	<u>Hexadecimal</u>
0	0000	0
1	0001	1
2	0010	2
3	0011	3
4	0100	4
5	0101	5
6	0110	6
7	0111	7
8	1000	8
9	1001	9
10	1010	A
11	1011	B
12	1100	C
13	1101	D

<u>Decimal</u>	<u>Binary</u>	<u>Hexadecimal</u>
14	1110	E
15	1111	F

At this point, all 16 symbols have been used, and a carry to the next higher position of the number is necessary.

16	0001 0000	10
17	0001 0001	11
18	0001 0010	12
19	0001 0011	13
20	0001 0100	14
21	0001 0101	15

Remember that as far as the internal circuitry of the computer is concerned, it understands only binary. But an operator can look at a series of lights on the computer console showing binary 1's and 0's, for example, 0001 1110 0001 0011, and say that the lights represent the hexadecimal value 1E13, which is easier to state than the string of 1's and 0's.

NUMBER CONVERSIONS

Before converting numbers from one system to another, it is best to review what a number represents. In the decimal system, a number is represented or expressed by a sum of terms. Each individual term consists of a product of a power of ten and some integer from 0 to 9. For example, the number 123 means 100 plus 20 plus 3. This may also be expressed as:

$$(1 \times 10^2) + (2 \times 10^1) + (3 \times 10^0)$$

Ten is said to be the base or radix of this system. Radix is defined as an integer used in a system of notation whereby all numbers are expressed as powers of the integer. In the decimal system, the radix is 10; in the binary system, it is 2.


The base, or radix, of a number is expressed as a subscript. For example, 123_{10} is a decimal (base-10) number. Thus, 1101001_2 is a binary number, and 437_{16} is a hexadecimal number. The subscript is usually eliminated when the base is obvious.

If 2 is chosen as the base, numbers are said to be represented in the binary system. Consider the number 1 111 011. What do these zeros and ones represent? They represent the coefficients of the ascending powers of 2. Expressed in another way the number is:


$$(1 \times 2^6) + (1 \times 2^5) + (1 \times 2^4) + (1 \times 2^3) \\ + (0 \times 2^2) + (1 \times 2^1) + (1 \times 2^0)$$

The places do not have the meaning of units, tens, hundreds, thousands, etc., as in the decimal system; instead they signify units, twos, fours, eights, sixteens, etc. In applying the above information, the decimal number 123 breaks down in both systems as:

DECIMAL



BINARY



In the hexadecimal system, a number is represented in the same manner, except that the base is 16. The digits of the number represent the coefficients of the ascending powers of 16. Consider the hexadecimal number:

$$75_{16} = 7 (16^1) + 5 (16^0) \\ = 112 + 5 \\ = 117_{10}$$

Similarly:

$$\text{Hexadecimal } 75 \\ \begin{array}{l} \text{---} 5 \text{ (units)} \\ \text{---} 112 \text{ (sixteens)} \\ \hline 117_{10} \end{array}$$

By remembering what a number represents in the binary or hexadecimal system, you can convert the number to its decimal equivalent by the method shown. As the numbers get bigger, this method becomes quite impractical. The following section provides detailed methods for converting from one system to another.

Integers

Appendix F is a table for conversion of decimal to hexadecimal and hexadecimal to decimal. The use

of the table is explained in a later section. This and the following sections provide conversion methods if the table is not available or the number is beyond the range of the table.

Decimal to Hexadecimal

Rule: Divide the decimal number by 16 and develop the remainders in low-order to high-order sequence for the hexadecimal number.

Example. Convert 839_{10} to its hexadecimal equivalent.

$$\begin{array}{r} 0 \text{ r} = 3 \\ 16 \overline{) 3} \text{ r} = 4 \\ 16 \overline{) 52} \text{ r} = 7 \\ 16 \overline{) 839} \end{array}$$

$$839_{10} = 347_{16}$$

The original number to be converted is divided by 16. The remainder of this first division becomes the low-order digit of the conversion (7). The quotient (received from the first division) is then divided by 16. Again the remainder becomes a part of the answer (next higher order, 4). This method is continued until the quotient is smaller than the divisor. The final quotient is considered the high order of the conversion (3).

Hexadecimal to Decimal

Rule. Multiply high-order hexadecimal digit by 16 and add next low-order digit to result; multiply sum by 16 and add next low-order digit. Repeat process until low-order digit of number has been added.

Example. Convert 347_{16} to its decimal equivalent.

$$\begin{array}{r} 347 \\ \times 16 \\ \hline 48 \\ + 4 \\ \hline 52 \\ \times 16 \\ \hline 832 \\ + 7 \\ \hline 839_{10} \end{array}$$

The high-order digit is multiplied by 16 and the next lower-order digit is added to the result. The resultant answer is then multiplied by 16 and the next lower-order digit is added to the result. When the low-order digit has been added to the answer, the process ends.

Alternate Method, Expansion.

$$\begin{aligned} 347_{16} &= 3(16^2) + 4(16^1) + 7(16^0) \\ &= 768 + 64 + 7 \\ &= 839_{10} \end{aligned}$$

NOTE: In the following examples, where multiplication or division is used, detailed explanations are not given because the operations are similar to those previously described.

Hexadecimal to Binary

Rule. Express each hexadecimal number as a binary group of four bits.

Example. Convert $7E9_{16}$ to its binary equivalent.

$$\begin{array}{r} \text{Hexadecimal} = \quad 7 \quad \quad E \quad \quad 9 \\ \text{Binary} \quad \quad = \quad \overline{0111} \quad \overline{1110} \quad \overline{1001} \end{array}$$

Binary to Hexadecimal

Rule. Express each binary group of four bits as a hexadecimal digit.

Example. Convert 01111101001_2 to its hexadecimal equivalent.

$$\begin{array}{r} \text{Binary} \quad \quad = \quad \overline{0111} \quad \overline{1110} \quad \overline{1001} \\ \text{Hexadecimal} = \quad 7 \quad \quad E \quad \quad 9 \end{array}$$

Decimal to Binary

Rule. Divide the decimal number by 2 and develop the remainders in low-order to high-order sequence for the equivalent hexadecimal number.


Example. Convert 149_{10} to its binary equivalent.

$$\begin{array}{l}
0r = 1 \\
2)1r = 0 \\
2)2r = 0 \\
2)4r = 1 \\
2)9r = 0 \\
2)18r = 1 \\
2)37r = 0 \\
2)74r = 1 \\
2)149 \\
149_{10} = 10010101_2
\end{array}$$

Binary to Decimal

Rule. Multiply high-order binary digit by 2 and add next low-order digit to result; multiply sum by 2 and add next low-order digit. Repeat process until low-order digit of binary number has been added.

Example. Convert 10010101_2 to its decimal equivalent.

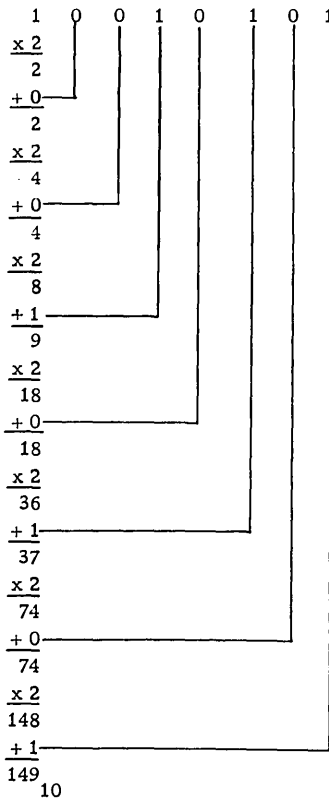

Alternate Method, Expansion.

$$\begin{aligned}
10010101_2 &= 1(2^7) + 0(2^6) + 0(2^5) + 1(2^4) + 0(2^3) + 1(2^2) + 0(2^1) + 1(2^0) \\
&= 128 + 16 + 4 + 1 \\
&= 149_{10}
\end{aligned}$$

Fractions

In a preceding section, Number Conversions, we reviewed what a number represents, i. e., in the decimal system, a number is the sum of its radix to the power of each position, multiplied by the value of that position. Fractions follow the same rules. The decimal fraction .123 can also be expressed as 1 tenth plus 2 hundredths plus 3 thousandths. Since a negative coefficient is the fractional power of the base, a tenth can be written 10^{-1} and a hundredth as 10^{-2} . Thus, it follows that

$$\begin{aligned}
.123_{10} &= 1(10^{-1}) + 2(10^{-2}) + 3(10^{-3}) \\
&= 1\left(\frac{1}{10}\right) + 2\left(\frac{1}{100}\right) + 3\left(\frac{1}{1000}\right) \\
&= \frac{100 + 20 + 3}{1000} = .123_{10}
\end{aligned}$$

By the same reasoning, the binary number .00100101 can be represented in the decimal system as

$$0(2^{-1}) + 0(2^{-2}) + 1(2^{-3}) + 0(2^{-4}) + 0(2^{-5}) + 1(2^{-6}) + 0(2^{-7}) + 1(2^{-8}).$$

With the coefficients converted to fractions, the binary number becomes

$$\frac{1}{8} + \frac{1}{64} + \frac{1}{256} = \frac{32 + 4 + 1}{256} = \frac{37}{256} = .145_{10}$$

In the hexadecimal system, the base of 16 with negative coefficients represents the same number in decimal notation. Thus, $.581_{16}$ may be stated as

$$5(16^{-1}) + 8(16^{-2}) + 1(16^{-3}) = \frac{5}{16} + \frac{8}{256} + \frac{1}{4096} = \frac{1409}{4096} = .344_{10}$$

Note that the hexadecimal fraction is always larger than the decimal equivalent; the opposite is true with integers.

Decimal to Hexadecimal

Rule. Multiply the fractional part of the decimal number by 16 and develop integers as successive terms of the hexadecimal fraction. The hexadecimal fraction should be carried out to the number of places contained in the decimal fraction.

Example. Convert $.344_{10}$ to its hexadecimal equivalent.

Fixed-point operands may be recorded in single precision words (16 bits) or double precision words (32 bits). In both, the first bit position (0) holds the sign of the number, with the remaining bit positions used to designate the magnitude of the number.

Positive fixed-point numbers are represented in true binary form with a zero sign bit. Negative fixed-point numbers are represented in two's complement notation with a one bit in the sign position. In all cases, the bits between the sign bit and the left-most significant bit of the integer are the same as the sign bit (i. e. all zeros for positive numbers, all ones for negative numbers).

Negative fixed-point numbers are formed in two's complement notation by inverting each bit of the positive binary number and adding one. For example, the true binary form of the decimal value (plus 26) is made negative (minus 26) in the following manner:

	S	INTEGER	
+ 26	0	00000000	00011010
Invert	1	11111111	11100101
Add 1			1
-26	1	11111111	11100110 (Two's complement form)

This is equivalent to the subtraction,

$$\begin{array}{r}
 1\ 00000000\ 00000000 \\
 -\ 00000000\ 00011010 \\
 \hline
 11111111\ 11100110
 \end{array}$$

The following addition examples illustrate two's complement arithmetic and the operation of the carry and overflow indicators. To simplify the illustrations, only eight bit positions are used. All negative numbers are in two's complement form.

$ \begin{array}{r} (+) 41 = 00101001 \\ + (+) 74 = 01001010 \\ \hline (+) 115 = 01110011 \end{array} $	No overflow and no carry out: sum is correct
---------------------------------------------------------------------------------------------------------------	-------------------------------------------------

$ \begin{array}{r} (+) 84 = 01010100 \\ + (+) 74 = 01001010 \\ \hline (+) 158 \neq 10011110 \end{array} $	Overflow into sign position, with no carry out: sum is not correct.
------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------

$ \begin{array}{r} (-) 41 = 11010111 \\ + (-) 74 = 10110110 \\ \hline (-) 115 = 10001101 \end{array} $	Overflow into sign position resulted in carry out: sum is correct.
---------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------


$ \begin{array}{r} (-) 84 = 10101011 \\ + (-) 74 = 10111110 \\ \hline (-) 158 \neq 01100001 \end{array} $	Carry out, with no overflow into sign position: sum is not correct.
------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------

Since subtraction is performed by changing the sign of the subtrahend and adding, the above examples also illustrate that function.

I/O Function Codes and Modifiers

I/O Device (Code) Instruction	Function Code	Modifier Bits		
		Bit No.	Bit	Function
Console Printer (00001) Write	001			
Sense Device	111	15	1	Reset Int. Level 4 ind.
Console Keyboard (00001) Read	010			
Control (Interrupt)	100			
Sense Device	111	15	1	Reset Int. Level 4 ind.
1442 Card Read-Punch (00010) Read	010			
Write	001			
Control	100	8	1	Stacker Select
		13	1	Initiate Read
		14	1	Feed Cycle
		15	1	Initiate Punch
Sense Device	111	14	1	Reset Int. Level 4 ind.
		15	1	Reset Int. Level 0 ind.
1134 Paper Tape Reader (00011) Tape Punch (00011) Read	010			
Write	001			
Control	100			
Sense Device	111	15	1	Reset Int. Level 4 ind.
Disk Storage (00100) Initiate Write	101	13-15		Sector address
Initiate Read	110	13-15		Sector address
		8	0	Read operation
		8	1	Read-check operation
Control	100	13	0	Move access forward
		13	1	Move access backward
Sense Device	111	15	1	Reset Int. Level 2 ind.
1627 Plotter (00101) Write	001			
Sense Device	111	15	1	Reset Int. Level 3 ind.
1132 Printer (00110) Read Emitter	010			
Control	100	8	1	Start Printer
		9	1	Stop Printer
		13	1	Start Carriage
		14	1	Stop Carriage
		15	1	Space Carriage
Sense Device	111	15	1	Reset Int. Level 1 ind.
Console Entry Switches (00111) Read	010			

IOCC Format

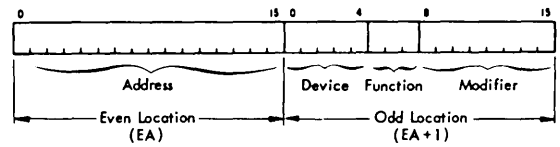

Value Ranges - Single Precision Word

Positive Binary Values Bit Positions 0123 4567 8901 2345	Powers of 2	Absolute Values		Negative Binary Values Bit Positions 0123 4567 8901 2345
		Decimal Notation Base-10	Hexa- decimal Notation Base-16	
0000 0000 0000 0000	0	0	0	No negative zero
0000 0000 0000 0001	1	1	1	1111 1111 1111 1111
0000 0000 0000 0010	2	2	2	1111 1111 1111 1110
0000 0000 0000 0100	4	4	4	1111 1111 1111 1100
0000 0000 0000 1000	8	8	8	1111 1111 1111 1000
0000 0000 0000 0000	16	16	10	1111 1111 1111 0000
0000 0000 0010 0000	32	32	20	1111 1111 1110 0000
0000 0000 0100 0000	64	64	40	1111 1111 1100 0000
0000 0000 1000 0000	128	128	80	1111 1111 1000 0000
0000 0001 0000 0000	256	256	100	1111 1111 0000 0000
0000 0010 0000 0000	512	512	200	1111 1110 0000 0000
0000 0100 0000 0000	1,024	1,024	400	1111 1100 0000 0000
0000 1000 0000 0000	2,048	2,048	800	1111 1000 0000 0000
0001 0000 0000 0000	4,096	4,096	1,000	1111 0000 0000 0000
0010 0000 0000 0000	8,192	8,192	2,000	1110 0000 0000 0000
0100 0000 0000 0000	16,384	16,384	4,000	1100 0000 0000 0000
0111 1111 1111 1111	32,767	7,FFF	1000 0000 0000 0001	1000 0000 0000 0001
No positive equivalent	32,768	8,000	1000 0000 0000 0000	1000 0000 0000 0000

Value Ranges - Double Precision Word

Positive Binary Values Bit Positions 0123 4567 8901 2345 6789 0123 4567 8901	Powers of 2	Absolute Values		Negative Binary Values Bit Positions 0123 4567 8901 2345 6789 0123 4567 8901
		Decimal Notation Base - 10	Hexadecimal Notation Base - 16	
0000 0000 0000 0000 0000 0000 0000 0000	0	0	0	No negative zero
0000 0000 0000 0000 0000 0000 0000 0001	1	1	1	1111 1111 1111 1111 1111 1111 1111 1111
0000 0000 0000 0000 0000 0000 0000 0010	2	2	2	1111 1111 1111 1111 1111 1111 1111 1110
0000 0000 0000 0000 0000 0000 0000 0100	4	4	4	1111 1111 1111 1111 1111 1111 1111 1100
0000 0000 0000 0000 0000 0000 0000 1000	8	8	8	1111 1111 1111 1111 1111 1111 1111 1000
0000 0000 0000 0000 0000 0000 0001 0000	16	16	10	1111 1111 1111 1111 1111 1111 1111 0000
0000 0000 0000 0000 0000 0000 0010 0000	32	32	20	1111 1111 1111 1111 1111 1111 1110 0000
0000 0000 0000 0000 0000 0000 0100 0000	64	64	40	1111 1111 1111 1111 1111 1111 1100 0000
0000 0000 0000 0000 0000 0000 1000 0000	128	128	80	1111 1111 1111 1111 1111 1111 1000 0000
0000 0000 0000 0000 0000 0001 0000 0000	256	256	100	1111 1111 1111 1111 1111 1111 0000 0000
0000 0000 0000 0000 0000 0010 0000 0000	512	512	200	1111 1111 1111 1111 1111 1110 0000 0000
0000 0000 0000 0000 0000 0100 0000 0000	1,024	1,024	400	1111 1111 1111 1111 1111 1100 0000 0000
0000 0000 0000 0000 0000 1000 0000 0000	2,048	2,048	800	1111 1111 1111 1111 1111 1000 0000 0000
0000 0000 0000 0000 0001 0000 0000 0000	4,096	4,096	1,000	1111 1111 1111 1111 1111 0000 0000 0000
0000 0000 0000 0000 0010 0000 0000 0000	8,192	8,192	2,000	1111 1111 1111 1111 1110 0000 0000 0000
0000 0000 0000 0000 0100 0000 0000 0000	16,384	16,384	4,000	1111 1111 1111 1111 1100 0000 0000 0000
0000 0000 0000 0000 1000 0000 0000 0000	32,768	32,768	8,000	1111 1111 1111 1111 1000 0000 0000 0000
0000 0000 0000 0001 0000 0000 0000 0000	65,536	65,536	10,000	1111 1111 1111 1111 0000 0000 0000 0000
0000 0000 0000 0010 0000 0000 0000 0000	131,072	131,072	20,000	1111 1111 1111 1110 0000 0000 0000 0000
0000 0000 0000 0100 0000 0000 0000 0000	262,144	262,144	40,000	1111 1111 1111 1100 0000 0000 0000 0000
0000 0000 0000 1000 0000 0000 0000 0000	524,288	524,288	80,000	1111 1111 1111 1000 0000 0000 0000 0000
0000 0000 0001 0000 0000 0000 0000 0000	1,048,576	1,048,576	100,000	1111 1111 1111 0000 0000 0000 0000 0000
0000 0000 0010 0000 0000 0000 0000 0000	2,097,152	2,097,152	200,000	1111 1111 1111 1110 0000 0000 0000 0000
0000 0000 0100 0000 0000 0000 0000 0000	4,194,304	4,194,304	400,000	1111 1111 1110 0000 0000 0000 0000 0000
0000 0001 0000 0000 0000 0000 0000 0000	8,388,608	8,388,608	800,000	1111 1111 1000 0000 0000 0000 0000 0000
0000 0010 0000 0000 0000 0000 0000 0000	16,777,216	16,777,216	1,000,000	1111 1111 0000 0000 0000 0000 0000 0000
0000 0010 0000 0000 0000 0000 0000 0000	33,554,432	33,554,432	2,000,000	1111 1111 0000 0000 0000 0000 0000 0000
0000 0100 0000 0000 0000 0000 0000 0000	67,108,864	67,108,864	4,000,000	1111 1100 0000 0000 0000 0000 0000 0000
0000 1000 0000 0000 0000 0000 0000 0000	134,217,728	134,217,728	8,000,000	1111 1000 0000 0000 0000 0000 0000 0000
0001 0000 0000 0000 0000 0000 0000 0000	268,435,456	268,435,456	10,000,000	1111 0000 0000 0000 0000 0000 0000 0000
0010 0000 0000 0000 0000 0000 0000 0000	536,870,912	536,870,912	20,000,000	1110 0000 0000 0000 0000 0000 0000 0000
0100 0000 0000 0000 0000 0000 0000 0000	1,073,741,824	1,073,741,824	40,000,000	1100 0000 0000 0000 0000 0000 0000 0000
0111 1111 1111 1111 1111 1111 1111 1111	2,147,483,647	7F,FFF,FFF	1000 0000 0000 0000 0000 0000 0000 0001	1000 0000 0000 0000 0000 0000 0000 0001
No positive equivalent	2,147,483,648	80,000,000	1000 0000 0000 0000 0000 0000 0000 0000	1000 0000 0000 0000 0000 0000 0000 0000


I/O Device Codes and Interrupt Levels

Device Code	I/O Device	Interrupt	
		Level	Core Storage Address
00001	Console Keyboard	4	0012
	Console Printer	4	0012
00010	1442 Card Read-Punch	0	0008
		4	0012
00011	1134 Paper Tape Rdr	4	0012
	1055 Paper Tape Punch	4	0012
00100	Disk Storage	2	0010
00101	1627 Plotter	3	0011
00110	1132 Printer	1	0009
00111	Console Entry Switches		
	Program Stop Switch	5	0013


Reserved Core Storage Locations

Tag Bits	Core Storage Address	Description
00	--	Displacement
01	0001	Index Register 1
10	0002	Index Register 2
11	0003	Index Register 3
--	0008 - 0013	Interrupt Addresses
--	0032 - 0039	Printer Image Output

Single Precision Data Word Format



Double Precision Data Word Format

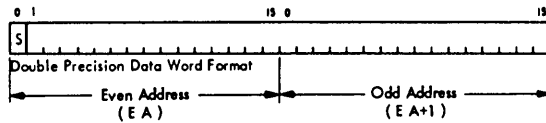

Effective Address Computation


	F = 0 (Direct Addressing)	F = 1, IA = 0 (Direct Addressing)	F = 1, IA = 1 (Indirect Addressing)
T = 00	EA = Disp + IAR	EA = Add	EA = C/Add
T = 01	EA = Disp + XR1	EA = Add + XR1	EA = C/Add + XR1
T = 10	EA = Disp + XR2	EA = Add + XR2	EA = C/Add + XR2
T = 11	EA = Disp + XR3	EA = Add + XR3	EA = C/Add + XR3

Disp = Contents of Displacement field of instruction.
 Add = Contents of Address field of instruction.
 C = Contents of Location specified by Add or Add + XR.

Short Instruction Format



Long Instruction Format



Instruction Codes and Execution Times

Instruction	Mnemonic	Binary OP Code	Execution Times (in microseconds)								
			Single Word (F = 0)				Double Word (F = 1)				
			T = 00		T = 01, 10, or 11		T = 00		T = 01, 10, or 11		
			Avg.	Max.	Avg.	Max.	Avg. ^①	Max. ^①	Avg. ^①	Max. ^①	
Load and Store											
Load ACC	LD	11000	7.6	-	11.2	-	10.8	-	14.8	-	
Load Double	LDD	11001	11.2	-	14.9	-	14.4	-	18.0	-	
Store ACC	STO	11010	7.6	-	11.2	-	10.8	-	14.8	-	
Store Double	STD	11011	11.2	-	14.9	-	14.4	-	18.0	-	
Load Index	LDX	01100	4.5	-	7.2	-	7.2	-	11.8	-	
Store Index	STX	01101	7.6	-	11.2	-	11.8	-	15.4	-	
Load Status*	LDS	00100	3.6	-	3.6	-	-	-	-	-	
Store Status	STS	00101	7.6	-	11.2	-	10.8	-	14.8	-	
Arithmetic											
Add	A	10000	8.0	13.0	11.7	16.6	11.2	16.2	15.3	20.3	
Add Double	AD	10001	12.2	22.0	15.8	25.6	15.3	25.2	19.3	29.5	
Subtract	S	10010	8.0	13.0	11.7	16.6	11.2	16.2	15.3	20.3	
Subtract Double	SD	10011	12.2	22.0	15.8	25.6	15.3	25.2	19.3	29.5	
Multiply	M	10100	25.7	40.0	29.3	43.6	29.3	43.6	32.9	47.2	
Divide	D	10101	76.0	150.8	79.6	154.4	79.6	154.4	83.2	150.0	
And	AND	11100	7.6	-	11.2	-	10.8	-	14.8	-	
Or	OR	11101	7.6	-	11.2	-	10.8	-	14.8	-	
Exclusive Or	EOR	11110	7.6	-	11.2	-	10.8	-	14.8	-	
Shift Left* Modifier Bits 8 & 9:											
Shift Left ACC	00	SLA	⑦	00010	}	③	-	④	-	-	-
Shift Left ACC and EXT	10	SLT	⑦	00010							
Shift Left and Count ACC	01	⑧ SLCA	⑦	00010							
Shift Left and Count ACC and EXT	11	⑧ SLC	⑦	00010							
Shift Right* Modifier Bits 8 & 9:											
Shift Right ACC	00 or 01	SRA	⑦	00011	}	⑤	-	⑥	-	-	-
Shift Right ACC and EXT	10	SRT	⑦	00011							
Rotate Right	11	RTE	⑦	00011							
Branch											
Branch and Store IAR	BSI	01000	7.6	-	11.2	-	10.8	-	14.8	-	
Branch or Skip on Condition	BSC	01001	3.6	-	3.6	-	7.2	-	11.2	-	
Modify Index and Skip	MDX	01110	4.5	9.9	11.2	16.2	18.5	23.4	18.5	23.4	
Wait*	WAIT	00110	⑩	-	3.6	-	-	-	-	-	
Input/Output	XIO	⑩	11.2	-	14.8	-	14.8	-	18.4	-	

* Valid in short format only

NOTES:

- 1 Indirect addressing, where applicable, adds 3.6 μsec to execution time
- 2 If branch is taken
- 3 3.6 + .45(N-4)
- 4 7.2 + .45(N-4)
- 5 N > 16: 3.6 + .45(N-19)
N < 16: 3.6 + .45(N-4)
- 6 N > 16: 7.2 + .45(N-19)
N < 16: 7.2 + .45(N-4)
- 7 Indirect addressing not allowed
- 8 If T=00, functions as SLA or SLT
- 9 All unassigned OP codes are defined as Wait operations
- 10 If XIO Read or Write, add 3.6 μsec

Tag Bit Codes

Instruction	Tag Bits	Register/Operation
Load Index	00	IAR
Store Index	01	XR1
	10	XR2
	11	XR3
Shift Left	00	Disp.
Shift Right	01	XR1
	10	XR2
	11	XR3
Modify Index and Skip		
F = 0	00	Disp. added to IAR
	01	Disp. added to XR1
	10	Disp. added to XR2
	11	Disp. added to XR3
F = 1; IA = 0	00	Disp. added to C
	01	Add. added to XR1
	10	Add. added to XR2
	11	Add. added to XR3
F = 1; IA = 1	00	Disp. added to C
	01	C added to XR1
	10	C added to XR2
	11	C added to XR3

Disp. = Contents of Displacement field of instruction
 Add. = Contents of Address field of instruction
 C = Contents of location specified by Add.

BSC Condition Codes

Bit Position	Condition
10	ACC zero
11	ACC negative
12	ACC positive, not zero
13	ACC even
14	Carry Indicator OFF
15	Overflow Indicator OFF

Short Instruction
 Skip if any one condition is true
 No-Op if all bits are zero

Long Instruction
 Branch if none of the conditions is true
 Unconditional branch if all bits are zero

AND, OR, EOR Operations

Memory → ACC →	Results		
	AND	OR	EOR
0 → 0	0	0	0
0 → 1	0	1	1
1 → 0	0	1	1
1 → 1	1	1	0

APPENDIX C. DEVICE STATUS WORD

Device Device Code Interrupt Level Bit Position	Console Printer	Keyboard	1442	1134 1055	1627	Disk Storage	1132	Console
	1	1	2	3	5	4	6	7
	4	4	0,4	4	3	2	1	5
0	Service Response		Read Response		Response	Data Error	Read Emitter Response	Program Stop Key
1		Response	Punch Response	Reader Response		Operation Complete	Skip Response	Interrupt Run Mode
2		Request	Error Check			Busy, Not Ready	Space Response	
3		0 - Keyboard Entry 1 - Console Entry	Last Card	Punch Response		Busy	Carriage Busy	
4	Printer Busy		Operation Complete	Reader Busy		Carriage Home	Print Scan Check	
5	Printer Busy, Not Ready			Reader Busy, Not Ready			Forms Check	
6		Keyboard Busy		Punch Busy			Printer Busy	
7				Punch Busy, Not Ready				
8							Carriage Control Tape Channel No. 1	
9							2	
10							3	
11							4	
12							5	
13							6	
14			1442 Busy		1627 Busy	Sector Counts	9	
15			1442 Busy, Not Ready		1627 Not Ready		12	

20295A

APPENDIX D. POWERS OF TWO TABLE

2^n	n	2^{-n}
1	0	1.0
2	1	0.5
4	2	0.25
8	3	0.125
16	4	0.062 5
32	5	0.031 25
64	6	0.015 625
128	7	0.007 812 5
256	8	0.003 906 25
512	9	0.001 953 125
1 024	10	0.000 976 562 5
2 048	11	0.000 488 281 25
4 096	12	0.000 244 140 625
8 192	13	0.000 122 070 312 5
16 384	14	0.000 061 035 156 25
32 768	15	0.000 030 517 578 125
65 536	16	0.000 015 258 789 062 5
131 072	17	0.000 007 629 394 531 25
262 144	18	0.000 003 814 697 265 625
524 288	19	0.000 001 907 348 632 812 5
1 048 576	20	0.000 000 953 674 316 406 25
2 097 152	21	0.000 000 476 837 158 203 125
4 194 304	22	0.000 000 238 418 579 101 562 5
8 388 608	23	0.000 000 119 209 289 550 781 25
16 777 216	24	0.000 000 059 604 644 775 390 625
33 554 432	25	0.000 000 029 802 322 387 695 312 5
67 108 864	26	0.000 000 014 901 161 193 847 656 25
134 217 728	27	0.000 000 007 450 580 596 923 828 125
268 435 456	28	0.000 000 003 725 290 298 461 914 062 5
536 870 912	29	0.000 000 001 862 645 149 230 957 031 25
1 073 741 824	30	0.000 000 000 931 322 574 615 478 515 625
2 147 483 648	31	0.000 000 000 465 661 287 307 739 257 812 5
4 294 967 296	32	0.000 000 000 232 830 643 653 869 628 906 25
8 589 934 592	33	0.000 000 000 116 415 321 826 934 814 453 125
17 179 869 184	34	0.000 000 000 058 207 660 913 467 407 226 562 5
34 359 738 368	35	0.000 000 000 029 103 830 456 733 703 613 281 25
68 719 476 736	36	0.000 000 000 014 551 915 228 366 851 806 640 625
137 438 953 472	37	0.000 000 000 007 275 957 614 183 425 903 320 312 5
274 877 906 944	38	0.000 000 000 003 637 978 807 091 712 951 660 156 25
549 755 813 888	39	0.000 000 000 001 818 989 403 545 856 475 830 078 125

11157

APPENDIX E. CHARACTER CODES

Ref No.	EBCDIC			IBM Card Code					Graphics and Control Names	
	Binary		Hex	Rows						
	0123	4567		12	11	0	9	8		7-1
0	0000	0000	00	12	0	9	8	1	8030	NUL
1	0001	0001	01	12	9	1			9010	
2	0010	0010	02	12	9	2			8810	
3	0011	0011	03	12	9	3			8410	
4	0100	0010	04	12	9	4			8210	PF Punch Off
5	0101	0010	05	12	9	5			8110	HT Horiz.Tab
6	0110	0010	06	12	9	6			8090	LC Lower Case
7	0111	0010	07	12	9	7			8050	DEL Delete
8	1000	0010	08	12	9	8			8030	
9	1001	0010	09	12	9	8	1		9030	
10	1010	0010	0A	12	9	8	2		8830	
11	1011	0010	0B	12	9	8	3		8430	
12	1100	0010	0C	12	9	8	4		8230	
13	1101	0010	0D	12	9	8	5		8130	
14	1110	0010	0E	12	9	8	6		80B0	
15	1111	0010	0F	12	9	8	7		8070	
16	0001	0000	10	12	11	9	8	1	D030	
17	0001	0001	11	11	9	1			5010	
18	0010	0001	12	11	9	2			4810	
19	0011	0001	13	11	9	3			4410	
20	0100	0001	14	11	9	4			4210	RES Restore
21	0101	0001	15	11	9	5			4110	NL New Line
22	0110	0001	16	11	9	6			4090	BS Backspace
23	0111	0001	17	11	9	7			4050	IDL Idle
24	1000	0001	18	11	9	8			4030	
25	1001	0001	19	11	9	8	1		5030	
26	1010	0001	1A	11	9	8	2		4830	
27	1011	0001	1B	11	9	8	3		4430	
28	1100	0001	1C	11	9	8	4		4230	
29	1101	0001	1D	11	9	8	5		4130	
30	1110	0001	1E	11	9	8	6		4080	
31	1111	0001	1F	11	9	8	7		4070	
32	0010	0000	20	11	0	9	8	1	7030	
33	0001	0000	21	0	9	1			3010	
34	0010	0000	22	0	9	2			2810	
35	0011	0000	23	0	9	3			2410	
36	0100	0000	24	0	9	4			2210	BYP Bypass
37	0101	0000	25	0	9	5			2110	LF Line Feed
38	0110	0000	26	0	9	6			2090	EOB End of Block
39	0111	0000	27	0	9	7			2050	PRE Prefix
40	1000	0000	28	0	9	8			2030	
41	1001	0000	29	0	9	8	1		3030	
42	1010	0000	2A	0	9	8	2		2830	
43	1011	0000	2B	0	9	8	3		2430	
44	1100	0000	2C	0	9	8	4		2230	
45	1101	0000	2D	0	9	8	5		2130	
46	1110	0000	2E	0	9	8	6		2080	
47	1111	0000	2F	0	9	8	7		2070	
48	0011	0000	30	12	11	0	9	8	F030	
49	0001	0000	31	9	1				1010	
50	0010	0000	32	9	2				0810	
51	0011	0000	33	9	3				0410	
52	0100	0000	34	9	4				0210	PN Punch On
53	0101	0000	35	9	5				0110	RS Reader Stop
54	0110	0000	36	9	6				0090	UC Upper Case
55	0111	0000	37	9	7				0050	EOT End of Trans.
56	1000	0000	38	9	8				0030	
57	1001	0000	39	9	8	1			1030	
58	1010	0000	3A	9	8	2			0830	
59	1011	0000	3B	9	8	3			0430	
60	1100	0000	3C	9	8	4			0230	
61	1101	0000	3D	9	8	5			0130	
62	1110	0000	3E	9	8	6			00B0	
63	1111	0000	3F	9	8	7			0070	
64	0100	0000	40	12	no punches				0000	(space)
65	0001	0000	41	12	0	9	1		8010	
66	0010	0000	42	12	0	9	2		A810	
67	0011	0000	43	12	0	9	3		A410	
68	0100	0000	44	12	0	9	4		A210	
69	0101	0000	45	12	0	9	5		A110	
70	0110	0000	46	12	0	9	6		A090	
71	0111	0000	47	12	0	9	7		A050	
72	1000	0000	48	12	0	9	8		A030	
73	1001	0000	49	12	8	1			9020	
74	1010	0000	4A	12	8	2			8820	⋄ (period)
75	1011	0000	4B	12	8	3			8420	<
76	1100	0000	4C	12	8	4			8220	(
77	1101	0000	4D	12	8	5			8120	+
78	1110	0000	4E	12	8	6			80A0	(logical OR)
79	1111	0000	4F	12	8	7			8060	
80	0101	0000	50	12	11	9	1		8000	&
81	0001	0000	51	12	11	9	2		D010	
82	0010	0000	52	12	11	9	3		C810	
83	0011	0000	53	12	11	9	4		C410	
84	0100	0000	54	12	11	9	5		C210	
85	0101	0000	55	12	11	9	6		C110	
86	0110	0000	56	12	11	9	7		C090	
87	0111	0000	57	12	11	9	8		C050	
88	1000	0000	58	12	11	9	8	1	C030	
89	1001	0000	59	11	8	1			5020	!
90	1010	0000	5A	11	8	2			4820	\$
91	1011	0000	5B	11	8	3			4420	!
92	1100	0000	5C	11	8	4			4220	*
93	1101	0000	5D	11	8	5			4120)
94	1110	0000	5E	11	8	6			40A0	;
95	1111	0000	5F	11	8	7			4060	¬ (logical NOT)
96	0110	0000	60	11	0	9	1		4000	- (dash)
97	0001	0000	61	11	0	9	2		3000	/
98	0010	0000	62	11	0	9	3		6810	
99	0011	0000	63	11	0	9	4		6410	
100	0100	0000	64	11	0	9	5		6210	
101	0101	0000	65	11	0	9	6		6110	
102	0110	0000	66	11	0	9	7		6090	
103	0111	0000	67	11	0	9	8		6050	
104	1000	0000	68	11	0	9	8	1	6030	
105	1001	0000	69	12	11	0	8	1	3020	
106	1010	0000	6A	12	11	0	8	2	C000	
107	1011	0000	6B	12	11	0	8	3	2420	, (comma)
108	1100	0000	6C	12	11	0	8	4	2220	%
109	1101	0000	6D	12	11	0	8	5	2120	_ (underscore)
110	1110	0000	6E	12	11	0	8	6	20A0	>
111	1111	0000	6F	12	11	0	8	7	2060	?
112	0111	0000	70	12	11	0	9	1	E000	
113	0001	0000	71	12	11	0	9	2	F010	
114	0010	0000	72	12	11	0	9	3	E810	
115	0011	0000	73	12	11	0	9	4	E410	
116	0100	0000	74	12	11	0	9	5	E210	
117	0101	0000	75	12	11	0	9	6	E110	
118	0110	0000	76	12	11	0	9	7	E090	
119	0111	0000	77	12	11	0	9	8	E050	
120	1000	0000	78	12	11	0	9	8	E030	
121	1001	0000	79	12	11	0	9	8	1020	:
122	1010	0000	7A	12	11	0	9	8	2020	#
123	1011	0000	7B	12	11	0	9	8	3020	@
124	1100	0000	7C	12	11	0	9	8	4020	' (apostrophe)
125	1101	0000	7D	12	11	0	9	8	5020	
126	1110	0000	7E	12	11	0	9	8	60A0	=
127	1111	0000	7F	12	11	0	9	8	7060	"

20296

Ref No.	EBCDIC		Hex	IBM Card Code					Hex	Graphics and Control Names
	Binary			Rows						
	0123	4567		12	11	0	9	8		
128	1000	0000	80	12	0	8	1	B020	a b c d e f g h i	
129	↓	0001	81	12	0	8	1	B000		
130	↓	0010	82	12	0	8	2	A800		
131	↓	0011	83	12	0	8	3	A400		
132	↓	0100	84	12	0	8	4	A200		
133	↓	0101	85	12	0	8	5	A100		
134	↓	0110	86	12	0	8	6	A080		
135	↓	0111	87	12	0	8	7	A040		
136	↓	1000	88	12	0	8	8	A020		
137	↓	1001	89	12	0	9	8	A010		
138	↓	1010	8A	12	0	8	2	A820		
139	↓	1011	8B	12	0	8	3	A420		
140	↓	1100	8C	12	0	8	4	A220		
141	↓	1101	8D	12	0	8	5	A120		
142	↓	1110	8E	12	0	8	6	A0A0		
143	↓	1111	8F	12	0	8	7	A060		
144	1001	0000	90	12	11	8	1	D020	j k l m n o p q r	
145	↓	0001	91	12	11	8	1	D000		
146	↓	0010	92	12	11	8	2	C800		
147	↓	0011	93	12	11	8	3	C400		
148	↓	0100	94	12	11	8	4	C200		
149	↓	0101	95	12	11	8	5	C100		
150	↓	0110	96	12	11	8	6	C080		
151	↓	0111	97	12	11	8	7	C040		
152	↓	1000	98	12	11	8	8	C020		
153	↓	1001	99	12	11	9	8	C010		
154	↓	1010	9A	12	11	8	2	C820		
155	↓	1011	9B	12	11	8	3	C420		
156	↓	1100	9C	12	11	8	4	C220		
157	↓	1101	9D	12	11	8	5	C120		
158	↓	1110	9E	12	11	8	6	C0A0		
159	↓	1111	9F	12	11	8	7	C060		
160	1010	0000	A0	11	0	8	1	7020	s t u v w x y z	
161	↓	0001	A1	11	0	8	1	7000		
162	↓	0010	A2	11	0	8	2	6800		
163	↓	0011	A3	11	0	8	3	6400		
164	↓	0100	A4	11	0	8	4	6200		
165	↓	0101	A5	11	0	8	5	6100		
166	↓	0110	A6	11	0	8	6	6080		
167	↓	0111	A7	11	0	8	7	6040		
168	↓	1000	A8	11	0	8	8	6020		
169	↓	1001	A9	11	0	9	8	6010		
170	↓	1010	AA	11	0	8	2	6820		
171	↓	1011	AB	11	0	8	3	6420		
172	↓	1100	AC	11	0	8	4	6220		
173	↓	1101	AD	11	0	8	5	6120		
174	↓	1110	AE	11	0	8	6	60A0		
175	↓	1111	AF	11	0	8	7	6060		

Ref No.	EBCDIC		Hex	IBM Card Code					Hex	Graphics and Control Names	
	Binary			Rows							
	0123	4567		12	11	0	9	8			7-1
192	1100	0000	C0	12	0			A000	(+ zero)		
193	↓	0001	C1	12			1	9000			
194	↓	0010	C2	12			2	8800			
195	↓	0011	C3	12			3	8400			
196	↓	0100	C4	12			4	8200			
197	↓	0101	C5	12			5	8100			
198	↓	0110	C6	12			6	8080			
199	↓	0111	C7	12			7	8040			
200	↓	1000	C8	12			8	8020			
201	↓	1001	C9	12			9	8010			
202	↓	1010	CA	12	0	9	8	2		A830	
203	↓	1011	CB	12	0	9	8	3		A430	
204	↓	1100	CC	12	0	9	8	4		A230	
205	↓	1101	CD	12	0	9	8	5		A130	
206	↓	1110	CE	12	0	9	8	6	A080		
207	↓	1111	CF	12	0	9	8	7	A070		
208	1101	0000	D0	11	0			6000	(- zero)		
209	↓	0001	D1	11			1	5000			
210	↓	0010	D2	11			2	4800			
211	↓	0011	D3	11			3	4400			
212	↓	0100	D4	11			4	4200			
213	↓	0101	D5	11			5	4100			
214	↓	0110	D6	11			6	4080			
215	↓	0111	D7	11			7	4040			
216	↓	1000	D8	11			8	4020			
217	↓	1001	D9	11			9	4010			
218	↓	1010	DA	12	11	9	8	2		C830	
219	↓	1011	DB	12	11	9	8	3		C430	
220	↓	1100	DC	12	11	9	8	4		C230	
221	↓	1101	DD	12	11	9	8	5		C130	
222	↓	1110	DE	12	11	9	8	6	C080		
223	↓	1111	DF	12	11	9	8	7	C070		
224	1110	0000	E0		0	8	2	2820	S T U V W X Y Z		
225	↓	0001	E1	11	0	9	1	7010			
226	↓	0010	E2		0	2		2800			
227	↓	0011	E3		0	3		2400			
228	↓	0100	E4		0	4		2200			
229	↓	0101	E5		0	5		2100			
230	↓	0110	E6		0	6		2080			
231	↓	0111	E7		0	7		2040			
232	↓	1000	E8		0	8		2020			
233	↓	1001	E9		0	9		2010			
234	↓	1010	EA	11	0	9	8	2		6830	
235	↓	1011	EB	11	0	9	8	3		6430	
236	↓	1100	EC	11	0	9	8	4		6230	
237	↓	1101	ED	11	0	9	8	5		6130	
238	↓	1110	EE	11	0	9	8	6	6080		
239	↓	1111	EF	11	0	9	8	7	6070		
240	1111	0000	F0		0			2000	0 1 2 3 4 5 6 7 8 9		
241	↓	0001	F1				1	1000			
242	↓	0010	F2				2	0800			
243	↓	0011	F3				3	0400			
244	↓	0100	F4				4	0200			
245	↓	0101	F5				5	0100			
246	↓	0110	F6				6	0080			
247	↓	0111	F7				7	0040			
248	↓	1000	F8				8	0020			
249	↓	1001	F9				9	0010			
250	↓	1010	FA	12	11	0	9	8		2	E830
251	↓	1011	FB	12	11	0	9	8		3	E430
252	↓	1100	FC	12	11	0	9	8		4	E230
253	↓	1101	FD	12	11	0	9	8		5	E130
254	↓	1110	FE	12	11	0	9	8	6	E080	
255	↓	1111	FF	12	11	0	9	8	7	E070	

Decimal/Hexadecimal Conversion Chart

The tables printed below are used to convert decimal numbers to hexadecimal and hexadecimal numbers to decimal. In the descriptions that follow, the explanation of each step is followed by an example in parentheses.

Decimal to Hexadecimal Conversion. Locate the decimal number (0489) in the body of the table. The two high-order digits (1E) of the hexadecimal number are in the left column on the same line, and the low-order digit (9) is at the top of the column. Thus, the hexadecimal number 1E9 is equal to the decimal number 0489.

Hexadecimal to Decimal Conversion. Locate the first two digits (1E) of the hexadecimal number (1E9) in the left column. Follow the line of figures across the page to the column headed by the low-order digit (9). The decimal number (0489) located at the junction of the horizontal line and the vertical column is the equivalent of the hexadecimal number.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	0000	0001	0002	0003	0004	0005	0006	0007	0008	0009	0010	0011	0012	0013	0014	0015
01	0016	0017	0018	0019	0020	0021	0022	0023	0024	0025	0026	0027	0028	0029	0030	0031
02	0032	0033	0034	0035	0036	0037	0038	0039	0040	0041	0042	0043	0044	0045	0046	0047
03	0048	0049	0050	0051	0052	0053	0054	0055	0056	0057	0058	0059	0060	0061	0062	0063
04	0064	0065	0066	0067	0068	0069	0070	0071	0072	0073	0074	0075	0076	0077	0078	0079
05	0080	0081	0082	0083	0084	0085	0086	0087	0088	0089	0090	0091	0092	0093	0094	0095
06	0096	0097	0098	0099	0100	0101	0102	0103	0104	0105	0106	0107	0108	0109	0110	0111
07	0112	0113	0114	0115	0116	0117	0118	0119	0120	0121	0122	0123	0124	0125	0126	0127
08	0128	0129	0130	0131	0132	0133	0134	0135	0136	0137	0138	0139	0140	0141	0142	0143
09	0144	0145	0146	0147	0148	0149	0150	0151	0152	0153	0154	0155	0156	0157	0158	0159
0A	0160	0161	0162	0163	0164	0165	0166	0167	0168	0169	0170	0171	0172	0173	0174	0175
0B	0176	0177	0178	0179	0180	0181	0182	0183	0184	0185	0186	0187	0188	0189	0190	0191
0C	0192	0193	0194	0195	0196	0197	0198	0199	0200	0201	0202	0203	0204	0205	0206	0207
0D	0208	0209	0210	0211	0212	0213	0214	0215	0216	0217	0218	0219	0220	0221	0222	0223
0E	0224	0225	0226	0227	0228	0229	0230	0231	0232	0233	0234	0235	0236	0237	0238	0239
0F	0240	0241	0242	0243	0244	0245	0246	0247	0248	0249	0250	0251	0252	0253	0254	0255
10	0256	0257	0258	0259	0260	0261	0262	0263	0264	0265	0266	0267	0268	0269	0270	0271
11	0272	0273	0274	0275	0276	0277	0278	0279	0280	0281	0282	0283	0284	0285	0286	0287
12	0288	0289	0290	0291	0292	0293	0294	0295	0296	0297	0298	0299	0300	0301	0302	0303
13	0304	0305	0306	0307	0308	0309	0310	0311	0312	0313	0314	0315	0316	0317	0318	0319
14	0320	0321	0322	0323	0324	0325	0326	0327	0328	0329	0330	0331	0332	0333	0334	0335
15	0336	0337	0338	0339	0340	0341	0342	0343	0344	0345	0346	0347	0348	0349	0350	0351
16	0352	0353	0354	0355	0356	0357	0358	0359	0360	0361	0362	0363	0364	0365	0366	0367
17	0368	0369	0370	0371	0372	0373	0374	0375	0376	0377	0378	0379	0380	0381	0382	0383
18	0384	0385	0386	0387	0388	0389	0390	0391	0392	0393	0394	0395	0396	0397	0398	0399
19	0400	0401	0402	0403	0404	0405	0406	0407	0408	0409	0410	0411	0412	0413	0414	0415
1A	0416	0417	0418	0419	0420	0421	0422	0423	0424	0425	0426	0427	0428	0429	0430	0431
1B	0432	0433	0434	0435	0436	0437	0438	0439	0440	0441	0442	0443	0444	0445	0446	0447
1C	0448	0449	0450	0451	0452	0453	0454	0455	0456	0457	0458	0459	0460	0461	0462	0463
1D	0464	0465	0466	0467	0468	0469	0470	0471	0472	0473	0474	0475	0476	0477	0478	0479
1E	0480	0481	0482	0483	0484	0485	0486	0487	0488	0489	0490	0491	0492	0493	0494	0495
1F	0496	0497	0498	0499	0500	0501	0502	0503	0504	0505	0506	0507	0508	0509	0510	0511
20	0512	0513	0514	0515	0516	0517	0518	0519	0520	0521	0522	0523	0524	0525	0526	0527
21	0528	0529	0530	0531	0532	0533	0534	0535	0536	0537	0538	0539	0540	0541	0542	0543
22	0544	0545	0546	0547	0548	0549	0550	0551	0552	0553	0554	0555	0556	0557	0558	0559
23	0560	0561	0562	0563	0564	0565	0566	0567	0568	0569	0570	0571	0572	0573	0574	0575
24	0576	0577	0578	0579	0580	0581	0582	0583	0584	0585	0586	0587	0588	0589	0590	0591
25	0592	0593	0594	0595	0596	0597	0598	0599	0600	0601	0602	0603	0604	0605	0606	0607
26	0608	0609	0610	0611	0612	0613	0614	0615	0616	0617	0618	0619	0620	0621	0622	0623
27	0624	0625	0626	0627	0628	0629	0630	0631	0632	0633	0634	0635	0636	0637	0638	0639
28	0640	0641	0642	0643	0644	0645	0646	0647	0648	0649	0650	0651	0652	0653	0654	0655
29	0656	0657	0658	0659	0660	0661	0662	0663	0664	0665	0666	0667	0668	0669	0670	0671
2A	0672	0673	0674	0675	0676	0677	0678	0679	0680	0681	0682	0683	0684	0685	0686	0687
2B	0688	0689	0690	0691	0692	0693	0694	0695	0696	0697	0698	0699	0700	0701	0702	0703
2C	0704	0705	0706	0707	0708	0709	0710	0711	0712	0713	0714	0715	0716	0717	0718	0719
2D	0720	0721	0722	0723	0724	0725	0726	0727	0728	0729	0730	0731	0732	0733	0734	0735
2E	0736	0737	0738	0739	0740	0741	0742	0743	0744	0745	0746	0747	0748	0749	0750	0751
2F	0752	0753	0754	0755	0756	0757	0758	0759	0760	0761	0762	0763	0764	0765	0766	0767
30	0768	0769	0770	0771	0772	0773	0774	0775	0776	0777	0778	0779	0780	0781	0782	0783
31	0784	0785	0786	0787	0788	0789	0790	0791	0792	0793	0794	0795	0796	0797	0798	0799
32	0800	0801	0802	0803	0804	0805	0806	0807	0808	0809	0810	0811	0812	0813	0814	0815
33	0816	0817	0818	0819	0820	0821	0822	0823	0824	0825	0826	0827	0828	0829	0830	0831
34	0832	0833	0834	0835	0836	0837	0838	0839	0840	0841	0842	0843	0844	0845	0846	0847
35	0848	0849	0850	0851	0852	0853	0854	0855	0856	0857	0858	0859	0860	0861	0862	0863
36	0864	0865	0866	0867	0868	0869	0870	0871	0872	0873	0874	0875	0876	0877	0878	0879
37	0880	0881	0882	0883	0884	0885	0886	0887	0888	0889	0890	0891	0892	0893	0894	0895
38	0896	0897	0898	0899	0900	0901	0902	0903	0904	0905	0906	0907	0908	0909	0910	0911
39	0912	0913	0914	0915	0916	0917	0918	0919	0920	0921	0922	0923	0924	0925	0926	0927
3A	0928	0929	0930	0931	0932	0933	0934	0935	0936	0937	0938	0939	0940	0941	0942	0943
3B	0944	0945	0946	0947	0948	0949	0950	0951	0952	0953	0954	0955	0956	0957	0958	0959
3C	0960	0961	0962	0963	0964	0965	0966	0967	0968	0969	0970	0971	0972	0973	0974	0975
3D	0976	0977	0978	0979	0980	0981	0982	0983	0984	0985	0986	0987	0988	0989	0990	0991
3E	0992	0993	0994	0995	0996	0997	0998	0999	1000	1001	1002	1003	1004	1005	1006	1007
3F	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039
41	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055
42	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071
43	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087
44	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103
45	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119
46	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135
47	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151
48	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167
49	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183
4A	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199
4B	1200															

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063
81	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079
82	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095
83	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111
84	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127
85	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143
86	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159
87	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175
88	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191
89	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207
8A	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223
8B	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239
8C	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255
8D	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271
8E	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287
8F	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303
90	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319
91	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335
92	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351
93	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367
94	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383
95	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399
96	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415
97	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431
98	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447
99	2448	2449	2450	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460	2461	2462	2463
9A	2464	2465	2466	2467	2468	2469	2470	2471	2472	2473	2474	2475	2476	2477	2478	2479
9B	2480	2481	2482	2483	2484	2485	2486	2487	2488	2489	2490	2491	2492	2493	2494	2495
9C	2496	2497	2498	2499	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509	2510	2511
9D	2512	2513	2514	2515	2516	2517	2518	2519	2520	2521	2522	2523	2524	2525	2526	2527
9E	2528	2529	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539	2540	2541	2542	2543
9F	2544	2545	2546	2547	2548	2549	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559
A0	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569	2570	2571	2572	2573	2574	2575
A1	2576	2577	2578	2579	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589	2590	2591
A2	2592	2593	2594	2595	2596	2597	2598	2599	2600	2601	2602	2603	2604	2605	2606	2607
A3	2608	2609	2610	2611	2612	2613	2614	2615	2616	2617	2618	2619	2620	2621	2622	2623
A4	2624	2625	2626	2627	2628	2629	2630	2631	2632	2633	2634	2635	2636	2637	2638	2639
A5	2640	2641	2642	2643	2644	2645	2646	2647	2648	2649	2650	2651	2652	2653	2654	2655
A6	2656	2657	2658	2659	2660	2661	2662	2663	2664	2665	2666	2667	2668	2669	2670	2671
A7	2672	2673	2674	2675	2676	2677	2678	2679	2680	2681	2682	2683	2684	2685	2686	2687
A8	2688	2689	2690	2691	2692	2693	2694	2695	2696	2697	2698	2699	2700	2701	2702	2703
A9	2704	2705	2706	2707	2708	2709	2710	2711	2712	2713	2714	2715	2716	2717	2718	2719
AA	2720	2721	2722	2723	2724	2725	2726	2727	2728	2729	2730	2731	2732	2733	2734	2735
AB	2736	2737	2738	2739	2740	2741	2742	2743	2744	2745	2746	2747	2748	2749	2750	2751
AC	2752	2753	2754	2755	2756	2757	2758	2759	2760	2761	2762	2763	2764	2765	2766	2767
AD	2768	2769	2770	2771	2772	2773	2774	2775	2776	2777	2778	2779	2780	2781	2782	2783
AE	2784	2785	2786	2787	2788	2789	2790	2791	2792	2793	2794	2795	2796	2797	2798	2799
AF	2800	2801	2802	2803	2804	2805	2806	2807	2808	2809	2810	2811	2812	2813	2814	2815
B0	2816	2817	2818	2819	2820	2821	2822	2823	2824	2825	2826	2827	2828	2829	2830	2831
B1	2832	2833	2834	2835	2836	2837	2838	2839	2840	2841	2842	2843	2844	2845	2846	2847
B2	2848	2849	2850	2851	2852	2853	2854	2855	2856	2857	2858	2859	2860	2861	2862	2863
B3	2864	2865	2866	2867	2868	2869	2870	2871	2872	2873	2874	2875	2876	2877	2878	2879
B4	2880	2881	2882	2883	2884	2885	2886	2887	2888	2889	2890	2891	2892	2893	2894	2895
B5	2896	2897	2898	2899	2900	2901	2902	2903	2904	2905	2906	2907	2908	2909	2910	2911
B6	2912	2913	2914	2915	2916	2917	2918	2919	2920	2921	2922	2923	2924	2925	2926	2927
B7	2928	2929	2930	2931	2932	2933	2934	2935	2936	2937	2938	2939	2940	2941	2942	2943
B8	2944	2945	2946	2947	2948	2949	2950	2951	2952	2953	2954	2955	2956	2957	2958	2959
B9	2960	2961	2962	2963	2964	2965	2966	2967	2968	2969	2970	2971	2972	2973	2974	2975
BA	2976	2977	2978	2979	2980	2981	2982	2983	2984	2985	2986	2987	2988	2989	2990	2991
BB	2992	2993	2994	2995	2996	2997	2998	2999	3000	3001	3002	3003	3004	3005	3006	3007
BC	3008	3009	3010	3011	3012	3013	3014	3015	3016	3017	3018	3019	3020	3021	3022	3023
BD	3024	3025	3026	3027	3028	3029	3030	3031	3032	3033	3034	3035	3036	3037	3038	3039
BE	3040	3041	3042	3043	3044	3045	3046	3047	3048	3049	3050	3051	3052	3053	3054	3055
BF	3056	3057	3058	3059	3060	3061	3062	3063	3064	3065	3066	3067	3068	3069	3070	3071

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	3072	3073	3074	3075	3076	3077	3078	3079	3080	3081	3082	3083	3084	3085	3086	3087
C1	3088	3089	3090	3091	3092	3093	3094	3095	3096	3097	3098	3099	3100	3101	3102	3103
C2	3104	3105	3106	3107	3108	3109	3110	3111	3112	3113	3114	3115	3116	3117	3118	3119
C3	3120	3121	3122	3123	3124	3125	3126	3127	3128	3129	3130	3131	3132	3133	3134	3135
C4	3136	3137	3138	3139	3140	3141	3142	3143	3144	3145	3146	3147	3148	3149	3150	3151

Decimal to Hexadecimal Conversion. Locate the decimal fraction (.1973) in the table. If the exact figure is not shown, locate the next higher and lower fractions (.19726563, .19750977). The first two digits of the hexadecimal fraction are at the top of the column (.32). To locate the third digit, determine by observation or subtraction the smaller difference between the known fraction and each of the found fractions. The smaller difference identifies the correct line (.008). The hexadecimal equivalent is .328. If the hexadecimal fraction is required to more places, multiply the decimal fraction by 16 and develop integers as successive terms of the hexadecimal fraction. Using the previous sample decimal fraction:

```

.1973
x16
3.1568
x16
2.5085
x16
8.1360
x16
2.1760
.197310 = .328216

```

Hexadecimal to Decimal Conversion. Locate the first two digits (.1E) of the hexadecimal fraction (.1E9) in the horizontal row of column headings. Locate the third digit (.009) in the leftmost column of the table. Follow the .009 line horizontally to the right to the .1E column. The decimal equivalent is .11938477. The decimal fractions in the table were carried to eight places and rounded. If 12 places are required, or if the hexadecimal fraction exceeds the capacity of the table, express the hexadecimal fraction as powers of 16 (expansion). For example:

$$\begin{aligned}
 .1E94_{16} &= 1(16^{-1}) + 14(16^{-2}) + 9(16^{-3}) + 4(16^{-4}) \\
 &= 1(.0625) + 14(.00390625) + 9(.000244140625) + 4(.0000152587890625) \\
 &= .1194458007812500_{10}
 \end{aligned}$$

	.00	.01	.02	.03	.04	.05	.06	.07	.08	.09	.0A	.0B	.0C	.0D	.0E	.0F
.000	.0000000	.00390625	.00781250	.01171875	.01562500	.01953125	.02343750	.02734375	.03125000	.03515625	.03906250	.04296875	.04687500	.05078125	.05468750	.05859375
.001	.0024414	.0048828	.0073242	.0097656	.0122070	.0146484	.0170898	.0195312	.0219726	.0244140	.0268554	.0292968	.0317382	.0341796	.0366210	.0390625
.002	.0048828	.0097656	.0146484	.0195312	.0244140	.0292968	.0341796	.0390625	.0439453	.0488281	.0537109	.0585937	.0634766	.0683594	.0732422	.0781250
.003	.0073242	.0146484	.0219726	.0292968	.0366210	.0439453	.0512695	.0585937	.0659179	.0732422	.0805664	.0878906	.0952148	.1025391	.1098633	.1171875
.004	.0097656	.0195312	.0292968	.0390625	.0488281	.0585937	.0683594	.0781250	.0878906	.0976562	.1074219	.1171875	.1269531	.1367187	.1464843	.1562500
.005	.0122070	.0244140	.0366210	.0488281	.0609350	.0732422	.0855493	.0978564	.1101635	.1224706	.1347777	.1470848	.1593919	.1716990	.1840061	.1963132
.006	.0146484	.0292968	.0439453	.0585937	.0732422	.0878906	.1025391	.1171875	.1318359	.1464843	.1611327	.1757811	.1904295	.2050779	.2197263	.2343747
.007	.0170898	.0341796	.0512695	.0683594	.0854492	.1025391	.1196290	.1367187	.1538086	.1708984	.1879883	.2050781	.2221680	.2392579	.2563478	.2734377
.008	.0195312	.0390625	.0585937	.0781250	.0976562	.1171875	.1367187	.1562500	.1757811	.1953125	.2148438	.2343750	.2539062	.2734375	.2929687	.3125000
.009	.0219726	.0439453	.0659179	.0878906	.1101635	.1324364	.1547093	.1769822	.1992551	.2215280	.2438009	.2660738	.2883467	.3106196	.3328925	.3551654
.00A	.0244140	.0488281	.0732422	.0976562	.1224706	.1472850	.1720994	.1969138	.2217282	.2465426	.2713570	.2961714	.3209858	.3457999	.3706143	.3954287
.00B	.0268554	.0537109	.0805664	.1074219	.1342728	.1611237	.1879746	.2148255	.2416764	.2685273	.2953782	.3222291	.3490800	.3759309	.4027818	.4296327
.00C	.0292968	.0585937	.0878906	.1171875	.1464843	.1757811	.2050779	.2343747	.2636716	.2929685	.3222654	.3515623	.3808592	.4101561	.4394530	.4687499
.00D	.0317382	.0634766	.0952148	.1269531	.1584914	.1900297	.2215680	.2531063	.2846446	.3161829	.3477212	.3792595	.4107978	.4423361	.4738744	.5054127
.00E	.0341796	.0683594	.1025391	.1367187	.1708984	.2050781	.2392579	.2734377	.3076175	.3417973	.3759771	.4101569	.4443367	.4785165	.5126963	.5468761
.00F	.0366210	.0732422	.1098633	.1464843	.1831253	.2197663	.2564073	.2930483	.3296893	.3663303	.4029713	.4396123	.4762533	.5128943	.5495353	.5861763
	.10	.11	.12	.13	.14	.15	.16	.17	.18	.19	.1A	.1B	.1C	.1D	.1E	.1F
.000	.0625000	.06640625	.07031250	.07421875	.07812500	.08203125	.08593750	.08984375	.09375000	.09765625	.10156250	.10546875	.10937500	.11328125	.11718750	.12109375
.001	.06274414	.06665039	.07055664	.07446289	.07836914	.08227539	.08618164	.09008789	.09399414	.09790039	.10180664	.10571289	.10961914	.11352539	.11743164	.12133789
.002	.06298828	.06689453	.07080078	.07470703	.07861328	.08251953	.08642578	.09033203	.09423828	.09814453	.10205078	.10595703	.10986328	.11376953	.11767578	.12158203
.003	.06323242	.06713867	.07104492	.07495117	.07885742	.08276367	.08666992	.09057617	.09448242	.09838867	.10229492	.10620117	.11010742	.11401367	.11791992	.12182617
.004	.06347656	.06738281	.07128906	.07519531	.07910156	.08300781	.08691406	.09082031	.09472656	.09863281	.10253906	.10644531	.11035156	.11425781	.11816406	.12207031
.005	.06372070	.06762695	.07153320	.07543945	.07934570	.08325195	.08715820	.09106445	.09497070	.09887695	.10278320	.10668945	.11059570	.11450195	.11840820	.12231445
.006	.06396484	.06787109	.07177734	.07568359	.07958984	.08349609	.08740234	.09130859	.09521484	.09912109	.10302734	.10693359	.11083984	.11474609	.11865234	.12255859
.007	.06420898	.06811523	.07202148	.07592773	.07983398	.08374023	.08764648	.09155273	.09545898	.09936523	.10327148	.10717773	.11108398	.11499023	.11889648	.12280273
.008	.06445313	.06835938	.07226563	.07617188	.08007813	.08398438	.08789063	.09179688	.09570313	.09960938	.10351563	.10742188	.11132813	.11523438	.11914063	.12304688
.009	.06469727	.06860352	.07250977	.07641602	.08032227	.08422852	.08813477	.09204102	.09594727	.09985352	.10375977	.10766602	.11157227	.11547852	.11938477	.12329102
.00A	.06494141	.06884766	.07275391	.07666016	.08056641	.08447266	.08837891	.09228516	.09619141	.10009766	.10400391	.10791016	.11181641	.11572266	.11962891	.12353516
.00B	.06518555	.06909180	.07299805	.07690430	.08081055	.08471680	.08862305	.09252930	.09643555	.10034180	.10424805	.10815430	.11206055	.11596680	.11987305	.12377930
.00C	.06542969	.06933594	.07324219	.07714844	.08105469	.08496094	.08886719	.09277344	.09667969	.10058594	.10449219	.10839844	.11230469	.11621094	.12011719	.12402344
.00D	.06567383	.06958008	.07348633	.07739258	.08129883	.08520508	.08911133	.09301758	.09692383	.10083008	.10473633	.10864258	.11254883	.11645508	.12036133	.12426758
.00E	.06591797	.06982422	.07373047	.07763672	.08154297	.08544922	.08935547	.09326172	.09716797	.10107422	.10498047	.10888672	.11279297	.11669922	.12060547	.12451172
.00F	.06616211	.07006836	.07397461	.07788086	.08178711	.08569336	.08959961	.09350586	.09741211	.10131836	.10522461	.10913086	.11303711	.11694336	.12084961	.12475586
	.20	.21	.22	.23	.24	.25	.26	.27	.28	.29	.2A	.2B	.2C	.2D	.2E	.2F
.000	.1250000	.12890625	.13281250	.13671875	.14062500	.14453125	.14843750	.15234375	.15625000	.16015625	.16406250	.16796875	.17187500	.17578125	.17968750	.18359375
.001	.12524414	.12915039	.13305664	.13696289	.14086914	.14477539	.14868164	.15258789	.15649414	.16040039	.16430664	.16821289	.17211914	.17602539	.17993164	.18383789
.002	.12548828	.12939453	.13330078	.13720703	.14111328	.14501953	.14892578	.15283203	.15673828	.16064453	.16455078	.16845703	.17236328	.17626953	.18017578	.18408203
.003	.12573242	.12963867	.13354492	.13745117	.14135742	.14526367	.14916992	.15307617	.15698242	.16088867	.16479492	.16870117	.17260742	.17651367	.18041992	.18432617
.004	.12597656	.12988281	.13378906	.13769531	.14160156	.14550781	.14941406	.15332031	.15722656	.16113281	.16503906	.16894531	.17285156	.17675781	.18066406	.18457031
.005	.12622070	.13012695	.13403320	.13793945	.14184570	.14575195	.14965820	.15356445	.15747070	.16137695	.16528320	.16918945	.17309570	.17700195	.18090820	.18481445
.006	.12646484	.13037109	.13427734	.13818359	.14208984	.14599609	.14990234	.15380859	.15771484	.16162109	.16552734	.16943359	.17333984	.17724609	.18115234	.18505859
.007	.12670898	.13061523	.13452148	.13842773	.14233398	.14624023	.15014648	.15405273	.15795898	.16186523	.16577148	.16967773	.17358398	.17749023	.18139648	.18530273
.008	.12695313	.13085938	.13476563	.13867188	.14257813	.14648438	.15039063	.15429688	.15820313	.16210938	.16601563	.16992188	.17382813	.17773438	.18164063	.18554688
.009	.12719727	.13110352	.13500977	.13891602	.14282227	.14672852	.15063477	.15454102	.15844727	.16235352	.16625977	.17016602	.17407227	.17797852	.18188477	.18579102
.00A	.12744141	.13134766	.13525391	.13916016	.14306641	.14697266	.15087891	.15478516	.15869141	.16259766	.16650391	.17041016	.17431641	.17822266	.18212891	.18603516
.00B	.12768555	.13159180	.13549805	.13940430	.14331055	.14721680	.15112305	.15502930	.15893555	.16284180	.16674805	.17065430	.17456055	.17846680	.18237305	.18627930
.00C	.12792969	.13183594	.13574219	.13964844	.14355469	.14746094	.15136719	.15527344	.15917969	.16308594	.16699219	.17089844	.17480469	.17871094	.18261719	.18652344
.00D	.12817383	.13208008	.13598633	.13989258	.14379883	.14770508	.15161133	.15551758	.15942383	.16333008	.16723633	.17114258	.17504883	.17895508	.18286133	.18676758
.00E	.12841797	.13232422	.13623047	.14013672	.14404297	.14794922	.15185547	.15576172	.15966797	.16357422	.16748047	.17138672	.17529297	.17919922	.18310547	.18701172
.00F	.12866211	.13256836	.13647461	.14038086	.14428711	.14819336	.15209961	.15600586	.15991211	.16381836	.16772461	.17163086	.17553711	.17944336	.18334961	.18725586

	.30	.31	.32	.33	.34	.35	.36	.37	.38	.39	.3A	.3B	.3C	.3D	.3E	.3F
.000	1.8750000	1.9140625	1.9531250	1.9921875	2.0312500	2.0703125	2.1093750	2.1484375	2.1875000	2.2265625	2.2656250	2.3046875	2.3437500	2.3828125	2.4218750	2.4609375
.001	1.8774414	1.9165039	1.9555664	1.9946289	2.0336914	2.0727539	2.1118164	2.1508789	2.1899414	2.2290039	2.2680664	2.3071289	2.3461914	2.3852539	2.4243164	2.4633789
.002	1.8798828	1.9189453	1.9580078	1.9970703	2.0361328	2.0751953	2.1142578	2.1533203	2.1923828	2.2314453	2.2705078	2.3095703	2.3486328	2.3876953	2.4267578	2.4658203
.003	1.8823242	1.9213867	1.9604492	1.9995117	2.0385742	2.0776367	2.1166992	2.1557617	2.1948242	2.2338867	2.2729492	2.3120117	2.3510742	2.3901367	2.4291992	2.4682617
.004	1.8847656	1.9238281	1.9628906	2.0019531	2.0410156	2.0800781	2.1191406	2.1582031	2.1972656	2.2363281	2.2753906	2.3144531	2.3535156	2.3925781	2.4316406	2.4707031
.005	1.8872070	1.9262695	1.9653320	2.0043945	2.0434570	2.0825195	2.1215820	2.1606445	2.1997070	2.2387695	2.2778320	2.3168945	2.3559570	2.3950195	2.4340820	2.4731445
.006	1.8896484	1.9287109	1.9677734	2.0068359	2.0458984	2.0849609	2.1240234	2.1630859	2.2021484	2.2412109	2.2802734	2.3193359	2.3583984	2.3974609	2.4365234	2.4755859
.007	1.8920898	1.9311523	1.9702148	2.0092773	2.0483398	2.0874023	2.1264648	2.1655273	2.2045898	2.2436523	2.2827148	2.3217773	2.3608398	2.3999023	2.4389648	2.4780273
.008	1.8945313	1.9335938	1.9726563	2.0117188	2.0507813	2.0898438	2.1289063	2.1679688	2.2070313	2.2460938	2.2851563	2.3242188	2.3632813	2.4023438	2.4414063	2.4804688
.009	1.8969727	1.9360352	1.9750977	2.0141602	2.0532227	2.0922852	2.1313477	2.1704102	2.2094727	2.2485352	2.2875977	2.3266602	2.3657227	2.4047852	2.4438477	2.4829102
.00A	1.8994141	1.9384766	1.9775391	2.0166016	2.0556641	2.0947266	2.1337891	2.1728516	2.2119141	2.2509766	2.2900391	2.3291016	2.3681641	2.4072266	2.4462891	2.4853516
.00B	1.9018555	1.9409180	1.9799805	2.0190430	2.0581055	2.0971680	2.1362305	2.1752930	2.2143555	2.2534180	2.2924805	2.3315430	2.3706055	2.4096680	2.4487305	2.4877930
.00C	1.9042969	1.9433594	1.9824219	2.0214844	2.0605469	2.0996094	2.1386719	2.1777344	2.2167969	2.2558594	2.2949219	2.3339844	2.3730469	2.4121094	2.4511719	2.4902344
.00D	1.9067383	1.9458008	1.9848633	2.0239258	2.0629883	2.1020508	2.1411133	2.1801758	2.2192383	2.2583008	2.2973633	2.3364258	2.3754883	2.4145508	2.4536133	2.4926758
.00E	1.9091797	1.9482422	1.9873047	2.0263672	2.0654297	2.1044922	2.1435547	2.1826172	2.2216797	2.2607422	2.2998047	2.3388672	2.3779297	2.4169922	2.4560547	2.4951172
.00F	1.9116211	1.9506836	1.9897461	2.0288086	2.0678711	2.1069336	2.1459961	2.1850586	2.2241211	2.2631836	2.3022461	2.3413086	2.3803711	2.4194336	2.4584961	2.4975586
	.40	.41	.42	.43	.44	.45	.46	.47	.48	.49	.4A	.4B	.4C	.4D	.4E	.4F
.000	2.5000000	2.5390625	2.5781250	2.6171875	2.6562500	2.6953125	2.7343750	2.7734375	2.8125000	2.8515625	2.8906250	2.9296875	2.9687500	3.0078125	3.0468750	3.0859375
.001	2.5024414	2.5415039	2.5805664	2.6196289	2.6586914	2.6977539	2.7368164	2.7758789	2.8149414	2.8540039	2.8930664	2.9321289	2.9711914	3.0102539	3.0493164	3.0883789
.002	2.5048828	2.5439453	2.5830078	2.6220703	2.6611328	2.7001953	2.7392578	2.7783203	2.8173828	2.8564453	2.8955078	2.9345703	2.9736328	3.0126953	3.0517578	3.0908203
.003	2.5073242	2.5463867	2.5854492	2.6245117	2.6635742	2.7026367	2.7416992	2.7807617	2.8198242	2.8588867	2.8979492	2.9370117	2.9760742	3.0151367	3.0541992	3.0932617
.004	2.5097656	2.5488281	2.5878906	2.6269531	2.6660156	2.7050781	2.7441406	2.7832031	2.8222656	2.8613281	2.9003906	2.9394531	2.9785156	3.0175781	3.0566406	3.0957031
.005	2.5122070	2.5512695	2.5903320	2.6293945	2.6684570	2.7075195	2.7465820	2.7856445	2.8247070	2.8637695	2.9028320	2.9418945	2.9809570	3.0200195	3.0590820	3.0981445
.006	2.5146484	2.5537109	2.5927734	2.6318359	2.6708984	2.7099609	2.7490234	2.7880859	2.8271484	2.8662109	2.9052734	2.9443359	2.9833984	3.0224609	3.0615234	3.1005859
.007	2.5170898	2.5561523	2.5952148	2.6342773	2.6733398	2.7124023	2.7514648	2.7905273	2.8295898	2.8686523	2.9077148	2.9467773	2.9858398	3.0249023	3.0639648	3.1030273
.008	2.5195313	2.5585938	2.5976563	2.6367188	2.6757813	2.7148438	2.7539063	2.7929688	2.8320313	2.8710938	2.9101563	2.9492188	2.9882813	3.0273438	3.0664063	3.1054688
.009	2.5219727	2.5610352	2.6000977	2.6391602	2.6782227	2.7172852	2.7563477	2.7954102	2.8344727	2.8735352	2.9125977	2.9516602	2.9907227	3.0297852	3.0688477	3.1079102
.00A	2.5244141	2.5634766	2.6025391	2.6416016	2.6806641	2.7197266	2.7587891	2.7978516	2.8369141	2.8759766	2.9150391	2.9541016	2.9931641	3.0322266	3.0712891	3.1103516
.00B	2.5268555	2.5659180	2.6049805	2.6440430	2.6831055	2.7221680	2.7612305	2.8002930	2.8393555	2.8784180	2.9174805	2.9565430	2.9956055	3.0346680	3.0737305	3.1127930
.00C	2.5292969	2.5683594	2.6074219	2.6464844	2.6855469	2.7246094	2.7636719	2.8027344	2.8417969	2.8808594	2.9199219	2.9589844	2.9980469	3.0371094	3.0761719	3.1152344
.00D	2.5317383	2.5708008	2.6098633	2.6489258	2.6879883	2.7270508	2.7661133	2.8051758	2.8442383	2.8833008	2.9223633	2.9614258	3.0004883	3.0395508	3.0786133	3.1176758
.00E	2.5341797	2.5732422	2.6123047	2.6513672	2.6904297	2.7294922	2.7685547	2.8076172	2.8466797	2.8857422	2.9248047	2.9638672	3.0029297	3.0419922	3.0810547	3.1201172
.00F	2.5366211	2.5756836	2.6147461	2.6538086	2.6928711	2.7319336	2.7709961	2.8100586	2.8491211	2.8881836	2.9272461	2.9663086	3.0053711	3.0444336	3.0834961	3.1225586
	.50	.51	.52	.53	.54	.55	.56	.57	.58	.59	.5A	.5B	.5C	.5D	.5E	.5F
.000	3.1250000	3.1640625	3.2031250	3.2421875	3.2812500	3.3203125	3.3593750	3.3984375	3.4375000	3.4765625	3.5156250	3.5546875	3.5937500	3.6328125	3.6718750	3.7109375
.001	3.1274414	3.1665039	3.2055664	3.2446289	3.2836914	3.3227539	3.3618164	3.4008789	3.4399414	3.4790039	3.5180664	3.5571289	3.5961914	3.6352539	3.6743164	3.7133789
.002	3.1298828	3.1689453	3.2080078	3.2470703	3.2861328	3.3251953	3.3642578	3.4033203	3.4423828	3.4814453	3.5205078	3.5595703	3.5986328	3.6376953	3.6767578	3.7158203
.003	3.1323242	3.1713867	3.2104492	3.2495117	3.2885742	3.3276367	3.3666992	3.4057617	3.4448242	3.4838867	3.5229492	3.5620117	3.6010742	3.6401367	3.6791992	3.7182617
.004	3.1347656	3.1738281	3.2128906	3.2519531	3.2910156	3.3300781	3.3691406	3.4082031	3.4472656	3.4863281	3.5253906	3.5644531	3.6035156	3.6425781	3.6816406	3.7207031
.005	3.1372070	3.1762695	3.2153320	3.2543945	3.2934570	3.3325195	3.3715820	3.4106445	3.4497070	3.4887695	3.5278320	3.5668945	3.6059570	3.6450195	3.6840820	3.7231445
.006	3.1396484	3.1787109	3.2177734	3.2568359	3.2958984	3.3349609	3.3740234	3.4130859	3.4521484	3.4912109	3.5302734	3.5693359	3.6083984	3.6474609	3.6865234	3.7255859
.007	3.1420898	3.1811523	3.2202148	3.2592773	3.2983398	3.3374023	3.3764648	3.4155273	3.4545898	3.4936523	3.5327148	3.5717773	3.6108398	3.6499023	3.6889648	3.7280273
.008	3.1445313	3.1835938	3.2226563	3.2617188	3.3007813	3.3398438	3.3789063	3.4179688	3.4570313	3.4960938	3.5351563	3.5742188	3.6132813	3.6523438	3.6914063	3.7304688
.009	3.1469727	3.1860352	3.2250977	3.2641602	3.3032227	3.3422852	3.3813477	3.4204102	3.4594727	3.4985352	3.5375977	3.5766602	3.6157227	3.6547852	3.6938477	3.7329102
.00A	3.1494141	3.1884766	3.2275391	3.2666016	3.3056641	3.3447266	3.3837891	3.4228516	3.4619141	3.5009766	3.5400391	3.5791016	3.6181641	3.6572266	3.6962891	3.7353516
.00B	3.1518555	3.1909180	3.2299805	3.2690430	3.3081055	3.3471680	3.3862305	3.4252930	3.4643555	3.5034180	3.5424805	3.5815430	3.6206055	3.6596680	3.6987305	3.7377930
.00C	3.1542969	3.1933594	3.2324219	3.2714844	3.3105469	3.3496094	3.3886719	3.4277344	3.4667969	3.5058594	3.5449219	3.5839844	3.6230469	3.6621094	3.7011719	3.7402344
.00D	3.1567383	3.1958008	3.2348633	3.2739258	3.3129883	3.3520508	3.3911133	3.4301758	3.4692383	3.5083008	3.5473633	3.5864258	3.6254883	3.6645508	3.7036133	3.7426758
.00E	3.1591797	3.1982422	3.2373047	3.2763672	3.3154297	3.3544922	3.3935547	3.4326172	3.4716797	3.5107422	3.5498047	3.5888672	3.6279297	3.6669922	3.7060547	3.7451172
.00F	3.1616211	3.2006836	3.2397461	3.2788086	3.3178711	3.3569336	3.3959961	3.4350586	3.4741211	3.5131836	3.5522461	3.5913086	3.6303711	3.6694336	3.7084961	3.7475586
	.60	.61	.62	.63	.64	.65	.66	.67	.68	.69	.6A	.6B	.6C	.6D	.6E	.6F
.000	3.7500000	3.7890625	3.8281250	3.8671875	3.9062500	3.9453125	3.9843750	4.0234375	4.0625000	4.1015625	4.1406250	4.1796875	4.2187500	4.2578125	4.2968750	4.3359375
.001	3.7524414	3.7915039	3.8305664	3.8696289	3.9086914	3.9477539	3.9868164	4.0258789	4.064941							

	.70	.71	.72	.73	.74	.75	.76	.77	.78	.79	.7A	.7B	.7C	.7D	.7E	.7F
.000	43750000	44140625	44531250	44921875	45312500	45703125	46093750	46484375	46875000	47265625	47656250	48046875	48437500	48828125	49218750	49609375
.001	43774414	44165039	44555664	44946289	45336914	45727539	46118164	46508789	46899414	47290039	47680664	48071289	48461914	48852539	49243164	49633789
.002	43798828	44189453	44580078	44970703	45361328	45751953	46142578	46533203	46923828	47314453	47705078	48095703	48486328	48876953	49267578	49658203
.003	43823242	44213867	44604492	44995117	45385742	45776367	46166992	46557617	46948242	47338867	47729492	48120117	48510742	48901367	49291992	49682617
.004	43847656	44238281	44628906	45019531	45410156	45800781	46191406	46582031	46972656	47363281	47753906	48144531	48535156	48925781	49316406	49707031
.005	43872070	44262695	44653320	45043945	45434570	45825195	46215820	46606445	46997070	47387695	47778320	48168945	48559570	48950195	49340820	49731445
.006	43896484	44287109	44677734	45068359	45458984	45849609	46240234	46630859	47021484	47412109	47802734	48193359	48583984	48974609	49365234	49755859
.007	43920898	44311523	44702148	45092773	45483398	45874023	46264648	46655273	47045898	47436523	47827148	48217773	48608398	48999023	49389648	49780273
.008	43945313	44335938	44726563	45117188	45507813	45898438	46289063	46679688	47070313	47460938	47851563	48242188	48632813	49023438	49414063	49804688
.009	43969727	44360352	44750977	45141602	45532227	45922852	46313477	46704102	47094727	47485352	47875977	48266602	48657227	49047852	49438477	49829102
.00A	43994141	44384766	44775391	45166016	45556641	45947266	46337891	46728516	47119141	47509766	47900391	48291016	48681641	49072266	49462891	49853516
.00B	44018555	44409180	44799805	45190430	45581055	45971680	46362305	46752930	47143555	47534180	47924805	48315430	48706055	49096680	49487305	49877930
.00C	44042969	44433594	44824219	45214844	45605469	45996094	46386719	46777344	47167969	47558594	47949219	48339844	48730469	49121094	49511719	49902344
.00D	44067383	44458008	44848633	45239258	45629883	46020508	46411133	46801758	47192383	47583008	47973633	48364258	48754883	49145508	49536133	49926758
.00E	44091797	44482422	44873047	45263672	45654297	46044922	46435547	46826172	47216797	47607422	47998047	48388672	48779297	49169922	49560547	49951172
.00F	44116211	44506836	44897461	45288086	45678711	46069336	46459961	46850586	47241211	47631836	48022461	48413086	48803711	49194336	49584961	49975586
	.80	.81	.82	.83	.84	.85	.86	.87	.88	.89	.8A	.8B	.8C	.8D	.8E	.8F
.000	50000000	50390625	50781250	51171875	51562500	51953125	52343750	52734375	53125000	53515625	53906250	54296875	54687500	55078125	55468750	55859375
.001	50024414	50415039	50805664	51196289	51586914	51977539	52368164	52758789	53149414	53540039	53930664	54321289	54711914	55102539	55493164	55883789
.002	50048828	50439453	50830078	51220703	51611328	52001953	52392578	52783203	53173828	53564453	53955078	54345703	54736328	55126953	55517578	55908203
.003	50073242	50463867	50854492	51245117	51635742	52026367	52416992	52807617	53198242	53588867	53979492	54370117	54760742	55151367	55541992	55932617
.004	50097656	50488281	50878906	51269531	51660156	52050781	52441406	52832031	53222656	53613281	54003906	54394531	54785156	55175781	55566406	55957031
.005	50122070	50512695	50903320	51293945	51684570	52075195	52465820	52856445	53247070	53637695	54028320	54418945	54809570	55200195	55590820	55981445
.006	50146484	50537109	50927734	51318359	51708984	52099609	52490234	52880859	53271484	53662109	54052734	54443359	54833984	55224609	55615234	56005859
.007	50170898	50561523	50952148	51342773	51733398	52124023	52514648	52905273	53295898	53686523	54077148	54467773	54858398	55249023	55639648	56030273
.008	50195313	50585938	50976563	51367188	51757813	52148438	52539063	52929688	53320313	53710938	54101563	54492188	54882813	55273438	55664063	56054688
.009	50219727	50610352	51000977	51391602	51782227	52172852	52563477	52954102	53344727	53735352	54125977	54516602	54907227	55297852	55688477	56079102
.00A	50244141	50634766	51025391	51416016	51806641	52197266	52587891	52978516	53369141	53759766	54150391	54541016	54931641	55322266	55712891	56103516
.00B	50268555	50659180	51049805	51440430	51831055	52221680	52612305	53002930	53393555	53784180	54174805	54565430	54956055	55346680	55737305	56127930
.00C	50292969	50683594	51074219	51464844	51855469	52246094	52636719	53027344	53417969	53808594	54199219	54589844	54980469	55371094	55761719	56152344
.00D	50317383	50708008	51098633	51489258	51879883	52270508	52661133	53051758	53442383	53833008	54223633	54614258	55004883	55395508	55786133	56176758
.00E	50341797	50732422	51123047	51513672	51904297	52294922	52685547	53076172	53466797	53857422	54248047	54638672	55029297	55419922	55810547	56201172
.00F	50366211	50756836	51147461	51538086	51928711	52319336	52709961	53100586	53491211	53881836	54272461	54663086	55053711	55444336	55834961	56225586
	.90	.91	.92	.93	.94	.95	.96	.97	.98	.99	.9A	.9B	.9C	.9D	.9E	.9F
.000	56250000	56640625	57031250	57421875	57812500	58203125	58593750	58984375	59375000	59765625	60156250	60546875	60937500	61328125	61718750	62109375
.001	56274414	56665039	57055664	57446289	57836914	58227539	58618164	59008789	59399414	59790039	60180664	60571289	60961914	61352539	61743164	62133789
.002	56298828	56689453	57080078	57470703	57861328	58251953	58642578	59033203	59423828	59814453	60205078	60595703	60986328	61376953	61767578	62158203
.003	56323242	56713867	57104492	57495117	57885742	58276367	58666992	59057617	59448242	59838867	60229492	60620117	61010742	61401367	61791992	62182617
.004	56347656	56738281	57128906	57519531	57910156	58300781	58691406	59082031	59472656	59863281	60253906	60644531	61035156	61425781	61816406	62207031
.005	56372070	56762695	57153320	57543945	57934570	58325195	58715820	59106445	59497070	59887695	60278320	60668945	61059570	61450195	61840820	62231445
.006	56396484	56787109	57177734	57568359	57958984	58349609	58740234	59130859	59521484	59912109	60302734	60693359	61083984	61474609	61865234	62255859
.007	56420898	56811523	57202148	57592773	57983398	58374023	58764648	59155273	59545898	59936523	60327148	60717773	61108398	61499023	61889648	62280273
.008	56445313	56835938	57226563	57617188	58007813	58398438	58789063	59179688	59570313	59960938	60351563	60742188	61132813	61523438	61914063	62304688
.009	56469727	56860352	57250977	57641602	58032227	58422852	58813477	59204102	59594727	59985352	60375977	60766602	61157227	61547852	61938477	62329102
.00A	56494141	56884766	57275391	57666016	58056641	58447266	58837891	59228516	59619141	60009766	60400391	60791016	61181641	61572266	61962891	62353516
.00B	56518555	56909180	57299805	57690430	58081055	58471680	58862305	59252930	59643555	60034180	60424805	60815430	61206055	61596680	61987305	62377930
.00C	56542969	56933594	57324219	57714844	58105469	58496094	58886719	59277344	59667969	60058594	60449219	60839844	61230469	61621094	62011719	62402344
.00D	56567383	56958008	57348633	57739258	58129883	58520508	58911133	59301758	59692383	60083008	60473633	60864258	61254883	61645508	62036133	62426758
.00E	56591797	56982422	57373047	57763672	58154297	58544922	58935547	59326172	59716797	60107422	60498047	60888672	61279297	61669922	62060547	62451172
.00F	56616211	57006836	57397461	57788086	58178711	58569336	58959961	59350586	59741211	60131836	60522461	60913086	61303711	61694336	62084961	62475586
	.A0	.A1	.A2	.A3	.A4	.A5	.A6	.A7	.A8	.A9	.AA	.AB	.AC	.AD	.AE	.AF
.000	62500000	62890625	63281250	63671875	64062500	64453125	64843750	65234375	65625000	66015625	66406250	66796875	67187500	67578125	67968750	68359375
.001	62524414	62915039	63305664	63696289	64086914	64477539	64868164	65258789	65649414	66040039	66430664	66821289	67211914	67602539	67993164	68383789
.002	62548828	62939453	63330078	63720703	64111328	64501953	64892578	65283203	65673828	66064453	66455078	66845703	67236328	67626953	68017578	68408203
.003	62573242	62963867	63354492	63745117	64135742	64526367	64916992	65307617	65698242	66088867	66479492	66870117	67260742	67651367	68041992	68432617
.004	62597656	62988281	63378906	63769531	64160156	64550781	64941406	65332031	65722656	66113281	66503906	66894531	67285156	67675781	68066406	68457031
.005	62622070	63012695	63403320	63793945	64184570	64575195	64965820	65356445	65747070	66137695	6					

	.B0	.B1	.B2	.B3	.B4	.B5	.B6	.B7	.B8	.B9	.BA	.BB	.BC	.BD	.BE	.BF
.000	.68750000	.69140625	.69531250	.69921875	.70312500	.70703125	.71093750	.71484375	.71875000	.72265625	.72656250	.73046875	.73437500	.73828125	.74218750	.74609375
.001	.68774414	.69165039	.69555664	.69946289	.70336914	.70727539	.71118164	.71508789	.71899414	.72290039	.72680664	.73071289	.73461914	.73852539	.74243164	.74633789
.002	.68798828	.69189453	.69580078	.69970703	.70361328	.70751953	.71142578	.71533203	.71923828	.72314453	.72705078	.73095703	.73486328	.73876953	.74267578	.74658203
.003	.68823242	.69213867	.69604492	.69995117	.70385742	.70776367	.71166992	.71557617	.71948242	.72338867	.72729492	.73120117	.73510742	.73901367	.74291992	.74682617
.004	.68847656	.69238281	.69628906	.70019531	.70410156	.70800781	.71191406	.71582031	.71972656	.72363281	.72753906	.73144531	.73535156	.73925781	.74316406	.74707031
.005	.68872070	.69262695	.69653320	.70043945	.70434570	.70825195	.71215820	.71606445	.71997070	.72387695	.72778320	.73168945	.73559570	.73950195	.74340820	.74731445
.006	.68896484	.69287109	.69677734	.70068359	.70458984	.70849609	.71240234	.71630859	.72021484	.72412109	.72802734	.73193359	.73583984	.73974609	.74365234	.74755859
.007	.68920898	.69311523	.69702148	.70092773	.70483398	.70874023	.71264648	.71655273	.72045903	.72436528	.72827153	.73217778	.73608403	.73999028	.74389653	.74780278
.008	.68945313	.69335938	.69726563	.70117188	.70507813	.70898438	.71289063	.71679688	.72070313	.72460938	.72851563	.73242188	.73632813	.74023438	.74414063	.74804688
.009	.68969727	.69360352	.69750977	.70141602	.70532227	.70922852	.71313477	.71704102	.72094727	.72485352	.72875977	.73266602	.73657227	.74047852	.74438477	.74829102
.00A	.68994141	.69384766	.69775391	.70166016	.70556641	.70947266	.71337891	.71728516	.72119141	.72509766	.72900391	.73291016	.73681641	.74072266	.74462891	.74853516
.00B	.69018555	.69409180	.69799805	.70190430	.70581055	.70971680	.71362305	.71752930	.72143555	.72534180	.72924805	.73315430	.73706055	.74096680	.74487305	.74877930
.00C	.69042969	.69433594	.69824219	.70214844	.70605469	.70996094	.71386719	.71777344	.72167969	.72558594	.72949219	.73339844	.73730469	.74121094	.74511719	.74902344
.00D	.69067383	.69458008	.69848633	.70239258	.70629883	.71020508	.71411133	.71801758	.72192383	.72583008	.72973633	.73364258	.73754883	.74145508	.74536133	.74926758
.00E	.69091797	.69482422	.69873047	.70263672	.70654297	.71044922	.71435547	.71826172	.72216797	.72607422	.72998047	.73388672	.73779297	.74169922	.74560547	.74951172
.00F	.69116211	.69506836	.69897461	.70288086	.70678711	.71069336	.71459961	.71850586	.72241211	.72631836	.73022461	.73413086	.73803711	.74194336	.74584961	.74975586
	.C0	.C1	.C2	.C3	.C4	.C5	.C6	.C7	.C8	.C9	.CA	.CB	.CC	.CD	.CE	.CF
.000	.75000000	.75390625	.75781250	.76171875	.76562500	.76953125	.77343750	.77734375	.78125000	.78515625	.78906250	.79296875	.79687500	.80078125	.80468750	.80859375
.001	.75024414	.75415039	.75805664	.76196289	.76586914	.76977539	.77368164	.77758789	.78149414	.78540039	.78930664	.79321289	.79711914	.80102539	.80493164	.80883789
.002	.75048828	.75439453	.75830078	.76220703	.76611328	.77001953	.77392578	.77783203	.78173828	.78564453	.78955078	.79345703	.79736328	.80126953	.80517578	.80908203
.003	.75073242	.75463867	.75854492	.76245117	.76635742	.77026367	.77416992	.77807617	.78198242	.78588867	.78979492	.79370117	.79760742	.80151367	.80541992	.80932617
.004	.75097656	.75488281	.75878906	.76269531	.76660156	.77050781	.77441406	.77832031	.78222656	.78613281	.79003906	.79394531	.79785156	.80175781	.80566406	.80957031
.005	.75122070	.75512695	.75903320	.76293945	.76684570	.77075195	.77465820	.77856445	.78247070	.78637695	.79028320	.79418945	.79809570	.80200195	.80590820	.80981445
.006	.75146484	.75537109	.75927734	.76318359	.76708984	.77099609	.77490234	.77880859	.78271484	.78662109	.79052734	.79443359	.79833984	.80224609	.80615234	.81005859
.007	.75170898	.75561523	.75952148	.76342773	.76733398	.77124023	.77514648	.77905273	.78295898	.78686523	.79077148	.79467773	.79858398	.80249023	.80639648	.81030273
.008	.75195313	.75585938	.75976563	.76367188	.76757813	.77148438	.77539063	.77929688	.78320313	.78710938	.79101563	.79492188	.79882813	.80273438	.80664063	.81054688
.009	.75219727	.75610352	.76000977	.76391602	.76782227	.77172852	.77563477	.77954102	.78344727	.78735352	.79125977	.79516602	.79907227	.80297852	.80688477	.81079102
.00A	.75244141	.75634766	.76025391	.76416016	.76806641	.77197266	.77587891	.77978516	.78369141	.78759766	.79150391	.79541016	.79931641	.80322266	.80712891	.81103516
.00B	.75268555	.75659180	.76049805	.76440430	.76831055	.77221680	.77612305	.78002930	.78393555	.78784180	.79174805	.79565430	.79956055	.80346680	.80737305	.81127930
.00C	.75292969	.75683594	.76074219	.76464844	.76855469	.77246094	.77636719	.78027344	.78417969	.78808594	.79199219	.79589844	.79980469	.80371094	.80761719	.81152344
.00D	.75317383	.75708008	.76098633	.76489258	.76879883	.77270508	.77661133	.78051758	.78442383	.78833008	.79223633	.79614258	.80004883	.80395508	.80786133	.81176758
.00E	.75341797	.75732422	.76123047	.76513672	.76904297	.77294922	.77685547	.78076172	.78466797	.78857422	.79248047	.79638672	.80029297	.80419922	.80810547	.81201172
.00F	.75366211	.75756836	.76147461	.76538086	.76928711	.77319336	.77709961	.78100586	.78491211	.78881836	.79272461	.79663086	.80053711	.80444336	.80834961	.81225586
	.D0	.D1	.D2	.D3	.D4	.D5	.D6	.D7	.D8	.D9	.DA	.DB	.DC	.DD	.DE	.DF
.000	.81250000	.81640625	.82031250	.82421875	.82812500	.83203125	.83593750	.83984375	.84375000	.84765625	.85156250	.85546875	.85937500	.86328125	.86718750	.87109375
.001	.81274414	.81665039	.82055664	.82446289	.82836914	.83227539	.83618164	.84008789	.84399414	.84790039	.85180664	.85571289	.85961914	.86352539	.86743164	.87133789
.002	.81298828	.81689453	.82080078	.82470703	.82861328	.83251953	.83642578	.84033203	.84423828	.84814453	.85205078	.85595703	.85986328	.86376953	.86767578	.87158203
.003	.81323242	.81713867	.82104492	.82495117	.82885742	.83276367	.83666992	.84057617	.84448242	.84838867	.85229492	.85620117	.86010742	.86401367	.86791992	.87182617
.004	.81347656	.81738281	.82128906	.82519531	.82910156	.83300781	.83691406	.84082031	.84472656	.84863281	.85253906	.85644531	.86035156	.86425781	.86816406	.87207031
.005	.81372070	.81762695	.82153320	.82543945	.82934570	.83325195	.83715820	.84106445	.84497070	.84887695	.85278320	.85668945	.86059570	.86450195	.86840820	.87231445
.006	.81396484	.81787109	.82177734	.82568359	.82958984	.83349609	.83740234	.84130859	.84521484	.84912109	.85302734	.85693359	.86083984	.86474609	.86865234	.87255859
.007	.81420898	.81811523	.82202148	.82592773	.82983398	.83374023	.83764648	.84155273	.84545898	.84936523	.85327148	.85717773	.86108398	.86499023	.86889648	.87280273
.008	.81445313	.81835938	.82226563	.82617188	.83007813	.83398438	.83789063	.84179688	.84570313	.84960938	.85351563	.85742188	.86132813	.86523438	.86914063	.87304688
.009	.81469727	.81860352	.82250977	.82641602	.83032227	.83422852	.83813477	.84204102	.84594727	.84985352	.85375977	.85766602	.86157227	.86547852	.86938477	.87329102
.00A	.81494141	.81884766	.82275391	.82666016	.83056641	.83447266	.83837891	.84228516	.84619141	.85009766	.85400391	.85791016	.86181641	.86572266	.86962891	.87353516
.00B	.81518555	.81909180	.82299805	.82690430	.83081055	.83471680	.83862305	.84252930	.84643555	.85034180	.85424805	.85815430	.86206055	.86596680	.86987305	.87377930
.00C	.81542969	.81933594	.82324219	.82714844	.83105469	.83496094	.83886719	.84277344	.84667969	.85058594	.85449219	.85839844	.86230469	.86621094	.87011719	.87402344
.00D	.81567383	.81958008	.82348633	.82739258	.83129883	.83520508	.83911133	.84301758	.84692383	.85083008	.85473633	.85864258	.86254883	.86645508	.87036133	.87426758
.00E	.81591797	.81982422	.82373047	.82763672	.83154297	.83544922	.83935547	.84326172	.84716797	.85107422	.85498047	.85888672	.86279297	.86669922	.87060547	.87451172
.00F	.81616211	.82006836	.82397461	.82788086	.83178711	.83569336	.83959961	.84350586	.84741211	.85131836	.85522461	.85913086	.86303711	.86694336	.87084961	.87475586
	.E0	.E1	.E2	.E3	.E4	.E5	.E6	.E7	.E8	.E9	.EA	.EB	.EC	.ED	.EE	.EF
.000	.87500000	.87890625	.88281250	.88671875	.89062500	.89453125	.89843750	.90234375	.90625000	.91015625	.91406250	.91796875	.92187500	.92578125	.92968750	.93359375
.001	.87524414	.87915039	.88305664	.88696289	.89086914	.89477539	.89868164	.90258789	.90649414	.91040039	.91430664	.91821289	.92211914	.92602539	.92993164	.93383789
.002	.87548828	.87939453	.88330078	.88720703	.89111328	.89501953	.89892578	.90283203	.90673828	.91064453	.91455078	.91845703	.92236328	.92626953	.93017578	.93408203
.003	.87573242	.87963867	.88354492	.88745117	.89135742	.89526367	.89916992	.90307617	.90698242	.91088867	.91479492	.91870117	.92260742	.92651367	.93041992	.93432617
.004	.87597656	.87988281	.88378906	.88769531	.89160156	.89550781	.89941406	.90332031	.90722656	.91113281	.91503906	.91894531	.92285156	.92675781	.93066406	.93457031
.005	.87622070	.88012695	.88403320	.8879												

	.F0	.F1	.F2	.F3	.F4	.F5	.F6	.F7	.F8	.F9	.FA	.FB	.FC	.FD	.FE	.FF
.000	.93750000	.94140625	.94531250	.94921875	.95312500	.95703125	.96093750	.96484375	.96875000	.97265625	.97656250	.98046875	.98437500	.98828125	.99218750	.99609375
.001	.93774414	.94165039	.94555664	.94946289	.95336914	.95727539	.96118164	.96508789	.96899414	.97290039	.97680664	.98071289	.98461914	.98852539	.99243164	.99633789
.002	.93798828	.94189453	.94580078	.94970703	.95361328	.95751953	.96142578	.96533203	.96923828	.97314453	.97705078	.98095703	.98486328	.98876953	.99267578	.99658203
.003	.93823242	.94213867	.94604492	.94995117	.95385742	.95776367	.96166992	.96557617	.96948242	.97338867	.97729492	.98120117	.98510742	.98901367	.99291992	.99682617
.004	.93847656	.94238281	.94628906	.95019531	.95410156	.95800781	.96191406	.96582031	.96972656	.97363281	.97753906	.98144531	.98535156	.98925781	.99316406	.99707031
.005	.93872070	.94262695	.94653320	.95043945	.95434570	.95825195	.96215820	.96606445	.96997070	.97387695	.97778320	.98168945	.98559570	.98950195	.99340820	.99731445
.006	.93896484	.94287109	.94677734	.95068359	.95458984	.95849609	.96240234	.96630859	.97021484	.97412109	.97802734	.98193359	.98583984	.98974609	.99365234	.99755859
.007	.93920898	.94311523	.94702148	.95092773	.95483398	.95874023	.96264648	.96655273	.97045898	.97436523	.97827148	.98217773	.98608398	.98999023	.99389648	.99780273
.008	.93945313	.94335938	.94726563	.95117188	.95507813	.95898438	.96289063	.96679688	.97070313	.97460938	.97851563	.98242188	.98632813	.99023438	.99414063	.99804688
.009	.93969727	.94360352	.94750977	.95141602	.95532227	.95922852	.96313477	.96704102	.97094727	.97485352	.97875977	.98266602	.98657227	.99047852	.99438477	.99829102
.00A	.93994141	.94384766	.94775391	.95166016	.95556641	.95947266	.96337891	.96728516	.97119141	.97509766	.97900391	.98291016	.98681641	.99072266	.99462891	.99853516
.00B	.94018555	.94409180	.94799805	.95190430	.95581055	.95971680	.96362305	.96752930	.97143555	.97534180	.97924805	.98315430	.98706055	.99096680	.99487305	.99877930
.00C	.94042969	.94433594	.94824219	.95214844	.95605469	.95996094	.96386719	.96777344	.97167969	.97558594	.97949219	.98339844	.98730469	.99121094	.99511719	.99902344
.00D	.94067383	.94458008	.94848633	.95239258	.95629883	.96020508	.96411133	.96801758	.97192383	.97583008	.97973633	.98364258	.98754883	.99145508	.99536133	.99926758
.00E	.94091797	.94482422	.94873047	.95263672	.95654297	.96044922	.96435547	.96826172	.97216797	.97607422	.97998047	.98388672	.98779297	.99169922	.99560547	.99951172
.00F	.94116211	.94506836	.94897461	.95288086	.95678711	.96069336	.96459961	.96850586	.97241211	.97631836	.98022461	.98413086	.98803711	.99194336	.99584961	.99975586

- Access mechanism, disk storage, 19
- Access time, disk storage, 20
- ACC (accumulator), 5
- Accumulator, console display panel, 27
- Accumulator extension (EXT), 5
- Accumulator extension, console display panel, 27
- Add (A) instruction, 9
- Add double (AD) instruction, 9
- Add to memory, with MDX instruction, 13
- Addition, 5
- Address bits in instruction, 4
- Address field, IOCC, 14
- Addressing core storage, 2
- Alphabetic, console function light, 28
- Alphabetic mode, console keyboard, 25
- AND instruction, 9, 52
- Arithmetic factor, console display panel, 27
- AFR (Arithmetic Factor register), 5
- Arithmetic functions, 5
- Arithmetic instructions, 9
- Arithmetic tables in number systems, 42

- Backspace key, console keyboard, 25
- Binary mode, computer operation in, 43
- Binary number system, 43
- Binary numbers, negative, 2
- Binary numbers, positive, 2
- Binary to decimal conversion, fractions, 48
- Binary to decimal conversion, integers, 47
- Binary to hexadecimal conversion, fractions, 48
- Binary to hexadecimal conversion, integers, 46
- Branch and Store IAR (BSI) instruction, 12
 - CPU-generated in interrupt operation, 15
- Branch instructions, 11
- Branch or Skip on Condition (BSC) instruction, 11
 - Condition codes, 11, 52
 - in interrupt operation, 16
- Busy indicator
 - Console printer, 24
 - Disk storage, 22
 - Keyboard, 25
 - 1134, 36
 - 1055, 36
 - 1132 Carriage, 40
 - 1132 Printer, 40
 - 1442, 34
 - 1627, 39

- Capacity, core storage, 2
- Capacity, Disk storage, 19
- Card feeding procedure, 1442, 30
- Card punching procedure, 1442, 32
- Card punching speed, 1442, 30
- Card reading procedure, 1442, 32
- Card reading speed, 1442, 30
- Carriage control tape, 40

- Carriage Home indicator, disk storage, 22
- Carry indicator, 5
- CPU time, disk storage, 20
- Changing disk storage cartridge, 20
- Channel interrupt and indicator, 1132, 40
- Character codes
 - Summary, 55
 - 1134, 35
 - 1055, 35
- Clock timer (T), console display panel, 27
- Condition register, console display panel, 27
- Console, 22
 - Display panel, 26
 - Entry switches, 28
 - Function switches and lights, 28
 - Keyboard, 24
 - Printer, 23
- Console display panel, 26
 - Accumulator, 27
 - Accumulator extension, 27
 - Arithmetic factor, 27
 - Clock timer (T), 27
 - Condition register, 27
 - Control functions, 27
 - CE lights, 27
 - Cycle control counter, 27
 - Instruction address, 26
 - Interrupt levels, 27
 - Machine cycle (I, E), 27
 - Mode switch, 28
 - Operation register, 27
 - Operation TAGS, 27
 - Parity indicator, 27
 - Storage address, 26
 - Storage buffer, 27
 - Wait indicator (W), 27
- Console Entry switches (CES), 28
- Console function lights, 28
- Console function switches, 29
- Console keyboard, 24
 - Alphabetic mode, 25
 - Backspace key, 25
 - Console/Keyboard switch, 25
 - Control instruction, 26
 - Data format, 24
 - DSW, 26
 - EOF key, 25
 - Erase Field key, 25
 - Function keys, 25
 - IOCC, 26
 - Interrupt request, 26
 - Interrupt Request Key, 25
 - Interrupts, 26
 - Keyboard Response interrupt, 26
 - Keyboard Select light, 25
 - Mode key, 25

- Numeric mode, 25
- Operating procedure, 25
- Programming, 26
- Read instruction, 26
- Restore key, 25
- Sense Device instruction, 26
- Console/Keyboard indicator, 25, 26, 29
- Console printer, 23
 - Busy indicator, 24
 - Data coding, 23
 - Data format, 23
 - DSW, 24
 - IOCC, 24
 - Interrupt, 24
 - Not Ready indicator, 24
 - Programming, 24
 - Sense Device instruction, 24
 - Write instruction, 24
- Control function, console display panel, 27
- Control instruction
 - Console keyboard, 25
 - Console printer, 24
 - Disk storage, 16
 - 1134, 36
 - 1132, 39
 - 1442, 33
- Conversion, number systems, 46
 - binary to decimal, 47, 48
 - binary to hexadecimal, 46, 48
 - decimal to binary, 46, 48
 - decimal to hexadecimal, 46, 47, 57
 - hexadecimal to binary, 46, 48
 - hexadecimal to decimal, 46, 48, 57
- Core storage
 - Addressing, 2
 - Capacity, 2
 - Memory cycle (time), 2
 - Reserved locations, 2, 51
- CE lights, console display panel, 27
- Cycle Control counter, console display panel, 27
- Cylinder, disk storage, 19
- Data checking, disk storage, 20
- Data coding
 - Console printer, 23
 - 1442, 30
- Data format
 - Console keyboard, 23
 - Console printer, 23
 - Double precision word, 2, 51
 - Negative binary numbers, 2
 - Positive binary numbers, 2
 - Single precision word, 2, 51
- Decimal number system, 3, 42
- Decimal to binary conversion, fractions, 48
- Decimal to binary conversion, integers, 46
- Decimal to hexadecimal conversion, fractions, 47
- Decimal to hexadecimal conversion, integers, 46, 57
- Device field, IOCC, 14
- Device status word (DSW), 16, 52
- Console keyboard, 25
- Console printer, 24
- Disk storage, 16
 - 1134, 37
 - 1055, 37
 - 1132, 40
 - 1442, 34
 - 1627, 39
- Direct addressing, 6
- Disk assembly, 19
- Disk Busy indicator, disk storage, 22
- Disk Not Ready indicator, disk storage, 22
- File Ready, console function light, 28
- Disk storage, 16
 - Access mechanism, 19
 - Access time, 20
 - Capacity, 19
 - Carriage Home indicator, 22
 - CPU time, 20
 - Changing cartridge, 20
 - Control instruction, 21
 - Cylinder, 19
 - Data Check indicator, 22
 - Data checking, 20
 - DSW, 22
 - Disk assembly, 19
 - Disk Busy indicator, 22
 - Disk Not Ready indicator, 22
 - Error correction routines, 22
 - Functional description, 19
 - Initiate read, 21
 - Initiate write, 21
 - IOCC, 21
 - Interrupt, 22
 - Modulo 4 check, 20
 - Operation Complete indicator, 22
 - Operation Complete interrupt, 22
 - Organization of data, 20
 - Programming, 21
 - Programming considerations, 22
 - Read/Write time, 20
 - Read instruction, 21
 - Read-Check instruction, 21
 - Sector, 19
 - Sector count, 22
 - Sense Device instruction, 22
 - Timing, 20
 - Track, 19
- Displacement bits, instruction, 3
- Display core storage (DISP), mode switch, 28
- Divide (D) instruction, 9
- Division, 5
- Double precision word, data format, 2, 51
- Double precision word, value ranges, 4, 51
- Effective address (EA) generation, 6, 52
- EOF key, console keyboard, 25
- Erase Field key, console keyboard, 25
- Error Check indicator
 - Disk storage, 22
 - 1442, 34

- Error correction routines, disk storage, 22
- Exclusive OR instruction, 10, 52
- Execute I/O (XIO) instruction, 14
- EXT (accumulator extension), 5
- External Clock indicator, console display panel, 27

- F-bit indicator, console display panel, 27
- F-bit in instruction, 3, 52
- Feed cycle, Console instruction, 1442, 33
- Fixed-point, two's complement notation, 48
- Fractions, conversion, 47
- Format-bit, see F-bit
- Forms Check, console function light, 28
- Forms Check indicator, 1132, 40
- Function code, IOCC, 14, 51
- Function keys, console keyboard, 25
- Function lights, console, 28
- Function switches, console, 28
- Functional characteristics, 1130 System, 2
- Functional description
 - Console keyboard, 24
 - Console printer, 23
 - Disk storage, 16
 - 1134, 35
 - 1055, 35
 - 1132, 39
 - 1442, 30
 - 1627, 37

- Hexadecimal number system, 3, 44
- Hexadecimal to binary conversion, fractions, 48
- Hexadecimal to binary conversion, integers, 46
- Hexadecimal to decimal conversion, fractions, 48
- Hexadecimal to decimal conversion, integers, 46, 57

- Improper fractions, conversion, 48
- Index registers, 4
- Index registers in EA generation, 6
- Indicators
 - ACC, 5
 - Console display panel, 26
 - Console printer, 23
 - Disk storage, 22
 - 1134, 37
 - 1055, 37
 - 1132, 41
 - 1442, 34
 - 1627, 39
- IA (indirect addressing), 6
- IA bit in instruction, 4
- Initiate Read, disk storage, 21
- Initiate Write, disk storage, 21
- Input/Output Control Command (IOCC), 14
 - Console keyboard, 26
 - Console printer, 24
 - Disk storage, 21
 - Format of, 14, 51
 - 1134, 36
 - 1055, 36
 - 1132, 40
 - 1442, 33
 - 1627, 38

- I/O device codes, 14, 51
- I/O instructions
 - interrupt, 15
 - IOCC, 14
 - Execute I/O (XIO), 14
- Input/Output operations, 13
- Instruction
 - Address, console display panel, 26
 - Address bits, 4
 - Codes and execution times, 8, 52
 - Displacement, 3
 - F-bit, 3, 52
 - Formats, 3
 - IA bit, 4
 - Long format
 - OP code, 3
 - Short format, 3, 52
 - TAG bits, 3, 52
- Instruction Address Register (IAR), 5
 - Console display panel, 26
 - in EA generation, 6
- Integers, conversion, 45
- Interrupt, 15
 - BSI, CPU-generated, 15
 - BSC, 16
 - Console keyboard, 26
 - Console printer, 24
 - DSW, 16, 53
 - Disk storage, 22
 - Identification of, 16
 - Indicator, console display panel, 26
 - Level codes, 15, 51
 - Level Status Word (ILSW), 15
 - Nesting, 16
 - Philosophy, 15
 - Program operation, 15
 - Recognition procedure, 17
 - 1134, 37
 - 1055, 37
 - 1132, 40
 - 1442, 33
 - 1627, 39
- Interrupt Level Status Word (ILSW), 15
- Interrupt request, console keyboard, 26
- Interrupt Request key, console keyboard, 25
- Interrupt run (INT RUN), console Mode switch, 28

- Keyboard, also see console keyboard
- Keyboard interrupt procedure, CES, 28
- Keyboard Response interrupt, console keyboard, 26
- Keyboard Select, console function light, 28
- Keyboard Select light, console keyboard, 25

- Last Card indicator, 1442, 34
- Last card procedure, 1442, 33
- Level-0 interrupts, 1442, 34
- Level-4 interrupt, 1442, 34
- Load ACC (LD) instruction, 7
- Load and Store instructions, 7
- Load core storage (LOAD), console mode switch, 28
- Load Double (LDD) instruction, 7
- Load Index (LDX) instruction, 7

- Load IAR, console function switch, 29
- Load Status (LDS) instruction, 7
- Logical AND (AND) instruction, 9, 52
- Logical Exclusive OR (EOR) instruction, 10, 52
- Logical OR (OR) instruction, 10, 52
- Long instruction, EA generation, 6
- Long instruction format, 4, 52

- Machine cycle (I, E), console display panel, 27
- Machine registers, 5
- Manual entry procedure, CES, 28
- Manual start procedure, console keyboard, 25
- Memory cycle (time), core storage, 2
- Mode key, console keyboard, 25
- Mode switch, console display panel, 27
- Modify Index and Skip (MDX) instruction, 13
- Modifier-bit indicators, console display panel, 27
- Modifier codes, 51
- Modifier, IOCC, 14
- Modulo-4 check, disk storage, 19
- Multiplication, 5
- Multiply (M) instruction, 9

- Nesting of interrupts, 16
- No-Op with BSC instruction, 12
- No-Op with MDX instruction, 13
- Not Ready indicator
 - Console printer, 24
 - Disk storage, 22
 - 1134, Reader, 37
 - 1055, Punch, 37
 - 1627, 39
- Not Ready or Busy indicator, 1442, 34
- Number concept, number systems, 42
- Number systems, 42
 - Arithmetic tables in, 42
 - Binary, 43
 - Conversion of, 45
 - Decimal, 3, 42
 - Fixed-point and 2's complement notation, 48
 - Hexadecimal, 3, 45
 - Number concept, 42
 - Quinary, 42
- Numeric mode, console keyboard, 25
- Numeric, console function light, 29

- Operating characteristics, 1627, 37
- Operating procedures, console keyboard, 25
- Operating procedures, 1442, 30
- Operation (OP) code, in instruction, 3
- Operation Complete indicator, disk storage, 22
- Operation Complete interrupt, disk storage, 22
- Operation Complete interrupt, 1442, 34
- OP (operation) register, 5
- Operation register, console display panel, 27
- Operation TAGS, console display panel, 27
- Operation
 - 1134, 36
 - 1055, 36
 - 1130 System, 7
 - 1132, 42
 - 1627, 38

- Organization, disk storage, 18
- Overflow indicator, 5

- Paper tape punch, see 1055
- Paper tape reader, see 1134
- Parity Check, console function light, 28
- Parity indicator (P), console display panel, 27
- Parity Run/Stop, console function switch, 29
- Plotter, see 1627 Plotter
- Plotter Response interrupt, 1627, 39
- Powers of two table, 54
- Print Scan Check indicator, 1132, 40
- Printer, see console printer, 1132 printer
- Program Load, console function switch, 29
- Program load, 1134, 35
- Program load procedure, 1442, 32
- Program operation, interrupt, 15
- Program Run (RUN), console mode switch, 28
- Program Stop, console function switch, 29
- Program Stop interrupt, console, 29
- Programming
 - Console keyboard, 26
 - Console printer, 24
 - Disk storage, 21, 22
 - 1134, 36
 - 1055, 36
 - 1132, 40, 41
 - 1442, 33
 - 1627, 38
- Punch Busy indicator, 1055, 37
- Punch Not Ready indicator, 1055, 37
- Punch Response interrupt, 1055, 37
- Punch Response Interrupt, 1442, 34

- Quinary number system, 42

- Read-Check instruction, disk storage, 21
- Read Emitter instruction, 1132, 40
- Read instruction
 - Console keyboard, 26
 - Disk storage, 21
 - 1134, 36
 - 1442, 33
- Read instruction procedure, CES, 28
- Read Response interrupt, 1442, 34
- Read/Write time, disk storage, 20
- Reader Busy indicator, 1134, 37
- Reader Not Ready indicator, 1134, 37
- Reader Response interrupt, 1134, 37
- File Ready, console function light, 28
- Reference summary, 51
- Registers, 4
- Request interrupt, keyboard, 26
- Reserved locations, core storage, 2, 51
- Reset, console function switch, 29
- Response interrupt
 - Console Printer Service, 24
 - Keyboard, 26
 - 1134 Reader, 37
 - 1055 Punch, 37
 - 1132 Read Emitter, 40
 - 1132 Skip, 40

- 1132 Space, 40
- 1442 Read, 34
- 1442 Punch, 34
- 1627 Plotter, 39
- Restore key, console keyboard, 25
- Run, console function light, 28
- Rotate Right ACC and EXT (RTE) instruction, 11

- Sector count, disk storage, 22
- Sector, disk storage, 19
- Sense Device instruction
 - Console keyboard, 26
 - Console printer, 24
 - Disk storage, 22
 - 1134, 37
 - 1055, 37
 - 1132, 41
 - 1442, 33
 - 1627, 39
- Sense Interrupt, XIO instruction, 15
- Shift instructions, 10
- SLC instruction in interrupt identification, 16
- Shift Left ACC (SLA) instruction, 10
- Shift Left ACC and EXT (SLT) instruction, 10
- Shift Left and Count ACC (SLCA) instruction, 11
- Shift Left and Count ACC and EXT (SLC) instruction, 11
- Shift Right ACC (SRA) instruction, 11
- Shift Right ACC and EXT (SRT) instruction, 11
- Short instruction, EA generation, 6
- Short instruction format, 3, 51
- Single instruction (SI), console mode switch, 28
- Single precision word, data format, 2, 51
- Single step (SS), console mode switch, 27
- Single memory cycle, console mode switch, 27
- Space Carriage, Control instruction, 1132, 41
- Special characters, 1132, 39
- Speed
 - Card punching, 1442, 30
 - Card reading, 1442, 30
 - Paper tape punching, 1055, 35
 - Paper tape reading, 1134, 35
- Stacker Select, Control instruction, 1442, 33
- Start Carriage, Control instruction, 1132, 41
- Start Printer, Control instruction, 1132, 40
- Start Punch, Control instruction, 1442, 33
- Start Read, Control instruction, 1442, 33
- Program Start, console function switch, 29
- Stop Carriage, Control instruction, 1132, 41
- Stop Printer, Control instruction, 1132, 40
- Program Stop, console function switch, 29
- Storage address, console display panel, 26
- SAR (storage address register), 5
- Storage buffer, console display panel, 27
- SBR (storage buffer register), 5
- Store ACC (STO) instruction, 7
- Store Double (STD) instruction, 7
- Store Index (STX) instruction, 7
- Store Status (STS) instruction, 7
- Subtract Double (SD) instruction, 9
- Subtract (S) instruction, 9
- Subtraction, 5

- TAG (operation tag register), 5
- TAG-Bit indicators, console display panel, 27
- TAG bits, in instruction, 3, 52
- TAG bits in MDX instruction, 13
- TAG bits in Shift instructions, 10
- TAR (temporary accumulator), 5
- Timing, disk storage, 20
- Track, disk storage, 19
- Two's complement, fixed-point notation, 48

- Unconditional branch, with
 - BSI instruction, 12
 - BSC instruction, 12
 - LDX instruction, 7
 - MDX instruction, 13
- Undefined OP codes in instructions, 13
- Value ranges, double precision word, 4, 51
- Value ranges, single precision word, 3, 51

- Wait instructions, 13
- Wait indicator (W), console display panel, 27
- Write instruction
 - Console printer, 24
 - 1055, 36
 - 1442, 33
 - 1627, 39

- 1134 Paper Tape Reader, 35
 - Character code, 35
 - Control instruction, 36
 - DSW, 37
 - Indicators, 37
 - IOCC, 36
 - Interrupt, 37
 - Operation, 36
 - Program load, 35
 - Read instruction, 36
 - Reader Busy indicator, 37
 - Reader Not Ready indicator, 37
 - Reader Response interrupt, 37
 - Sense Device instruction, 37
 - Speed, paper tape reading, 35

- 1055 Paper Tape Punch, 35
 - Character code, 35
 - DSW, 37
 - Indicators, 37
 - IOCC, 36
 - Interrupt, 37
 - Operation, 36
 - Punch Busy indicator, 37
 - Punch Not Ready indicator, 37
 - Punch Response interrupt, 37
 - Sense Device instruction, 37
 - Speed, paper tape punching, 36
 - Write instruction, 36

- 1132 Printer, 39
 - Control instruction, 40
 - DSW, 40

- Functional description, 39
- Operation, 40
- Programming, 40
- Programming considerations, 41
- Read Emitter instruction, 40
- Sense Device instruction, 41
- Special characters, 39

1442 Card Read-Punch, 30

- Busy indicator, 34
- Card feeding procedure, 30
- Card punching procedure, 32
- Card reading procedure, 32
- Control instruction, 33
- Data coding, 30
- DSW, 34
- Error Check indicator, 34
- Feed Cycle, Control instruction, 33
- Indicators, 34
- IOCC, 33
- Interrupts, 33
- Last Card indicator, 34
- Last card procedure, 33
- Level-0 interrupts, 34
- Level-4 interrupt, 34
- Not Ready or Busy indicator, 34
- Operating procedures, 30

- Operation Complete interrupt, 34
- Program load procedure, 32
- Programming, 33
- Punch Response interrupt, 34
- Read instruction, 33
- Read Response interrupt, 34
- Sense Device instruction, 33
- Speed, card punching, 30
- Speed, card reading, 30
- Stacker Select, Control instruction, 33
- Start Punch, Control instruction, 33
- Start Read, Control instruction, 33
- Write instruction, 33

1627 Plotter, 37

- Busy indicator, 38
- Control codes, 38
- DSW, 39
- Indicators, 39
- IOCC, 38
- Interrupt, 39
- Not Ready indicator, 39
- Operating characteristics, 37
- Operation, 38
- Plotter Response interrupt, 39
- Programming, 38
- Sense Device instruction, 39
- Write instruction, 39