

[HOW TO CONFIGURE DG-HR1400 FOR INTERNET ACCESS](#)

STEP 1: ACCESSING THE WEB CONFIGURATION PAGE INSIDE THE ROUTER

Open the configuration page of the router by typing <http://192.168.2.1> in a web browser. We recommend this one time configuration to be done using [Internet Explorer](#).

Enter the username as [admin](#) and password as [1234](#) and click on Login.




STEP 2: CONFIGURE THE ROUTER IN STATIC IP MODE

Click on [Setup > Internet Setup](#).

Under [WAN Interface > Select WAN Access Type](#) as [Static IP](#).

Enter IP Address, Subnet Mask, Default Gateway and [DNS Server 1](#) and [DNS Server 2](#) provided by the ISP.

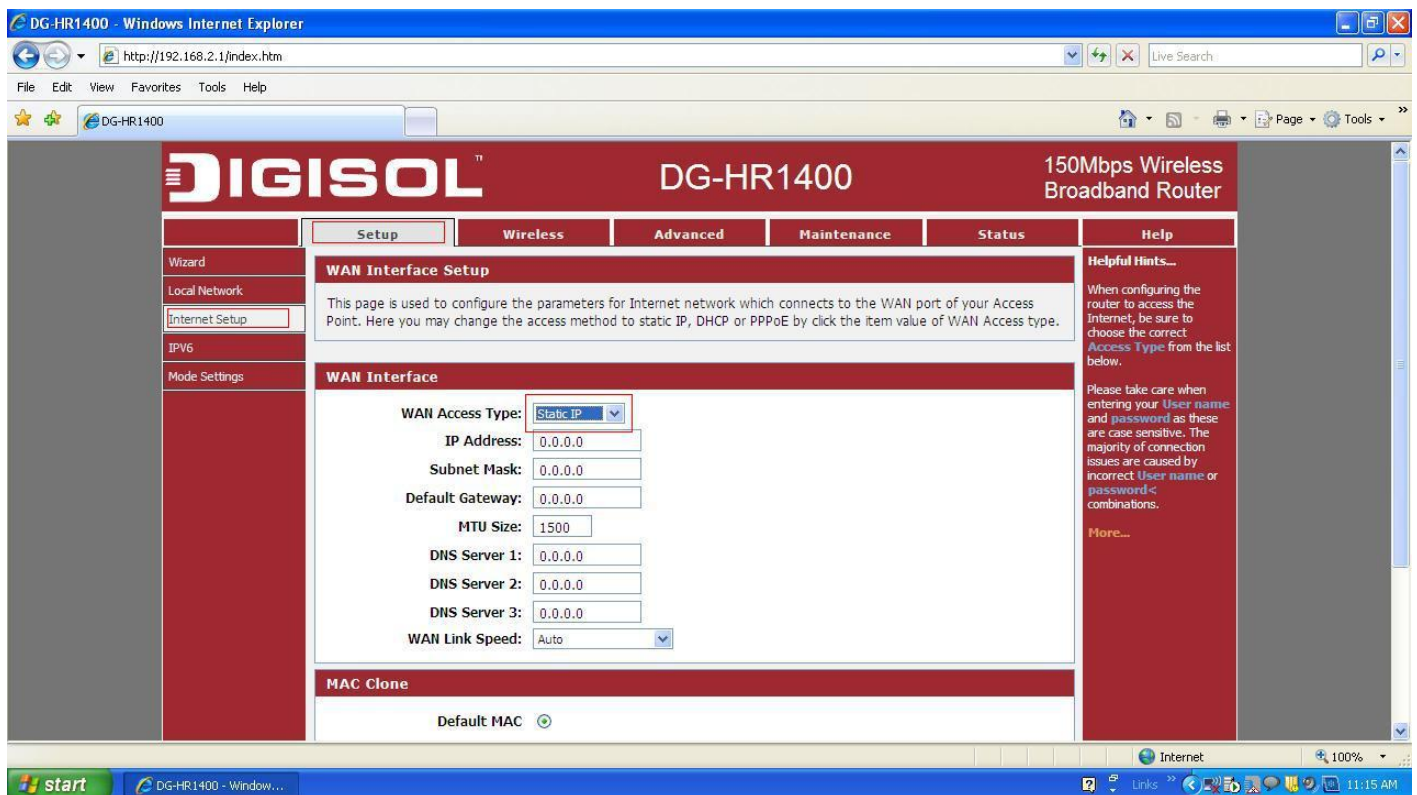


The screenshot shows the web interface of a DIGISOL DG-HR1400 router. The browser window is titled "DG-HR1400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The page has a red header with the DIGISOL logo and the text "DG-HR1400 150Mbps Wireless Broadband Router". Below the header is a navigation menu with tabs for "Setup", "Wireless", "Advanced", "Maintenance", "Status", and "Help". The "Setup" tab is selected, and the "Internet Setup" sub-tab is active. The main content area is titled "WAN Interface Setup" and contains the following fields:

- WAN Access Type: Static IP (dropdown menu)
- IP Address: 0.0.0.0 (text input)
- Subnet Mask: 0.0.0.0 (text input)
- Default Gateway: 0.0.0.0 (text input)
- MTU Size: 1500 (text input)
- DNS Server 1: 0.0.0.0 (text input)
- DNS Server 2: 0.0.0.0 (text input)
- DNS Server 3: 0.0.0.0 (text input)
- WAN Link Speed: Auto (dropdown menu)

Below these fields is a "MAC Clone" section with a "Default MAC" button. On the right side of the page, there is a "Helpful Hints..." section with text: "When configuring the router to access the Internet, be sure to choose the correct Access Type from the list below. Please take care when entering your User name and password as these are case sensitive. The majority of connection issues are caused by incorrect User name or password combinations. More..."

Under [MAC Clone](#) > Select [MAC From PC](#).

Click on [Apply Changes](#).

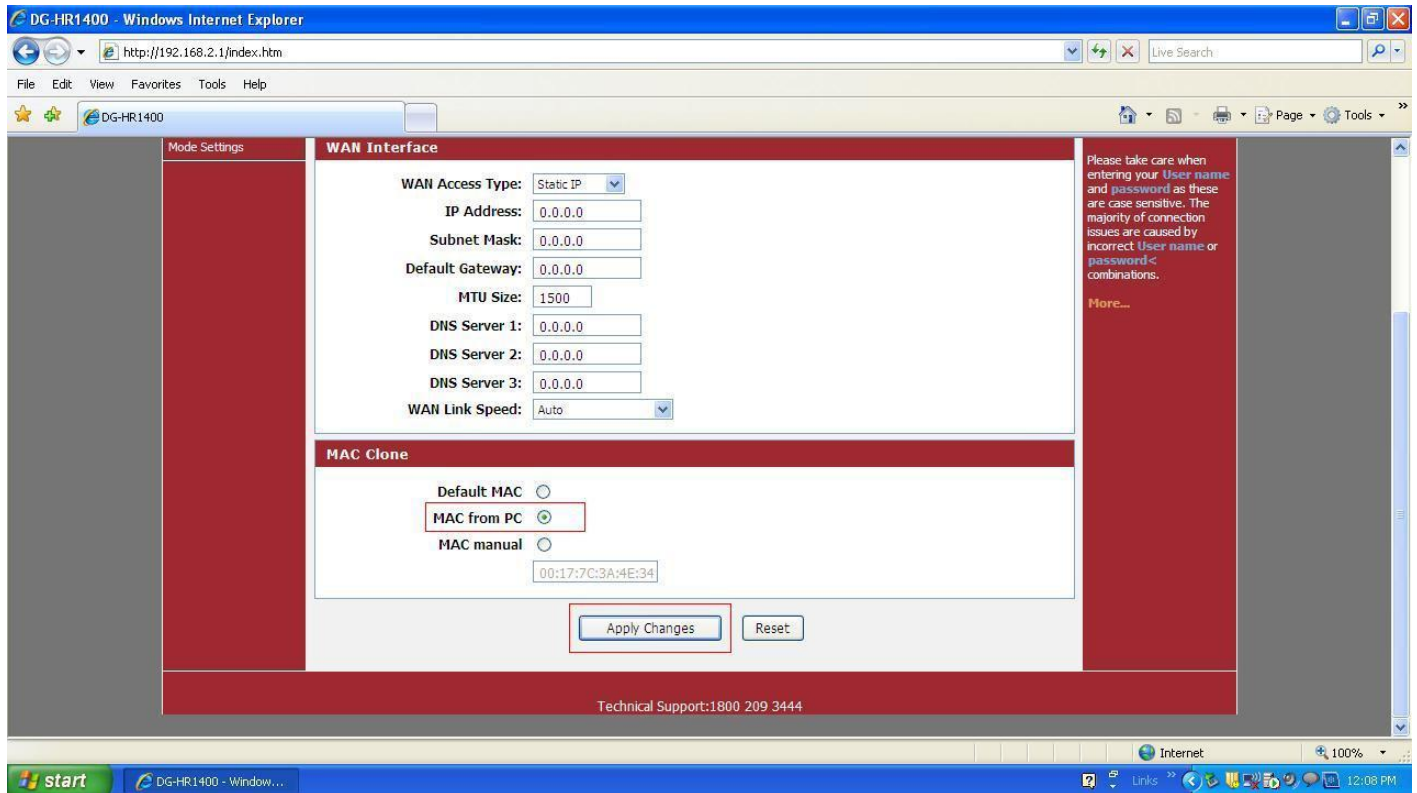

The screenshot shows the web interface of a DG-HR1400 device, accessed via Internet Explorer. The browser address bar shows <http://192.168.2.1/index.htm>. The interface is divided into two main sections: **WAN Interface** and **MAC Clone**.

WAN Interface settings:

- WAN Access Type: Static IP (dropdown)
- IP Address: 0.0.0.0
- Subnet Mask: 0.0.0.0
- Default Gateway: 0.0.0.0
- MTU Size: 1500
- DNS Server 1: 0.0.0.0
- DNS Server 2: 0.0.0.0
- DNS Server 3: 0.0.0.0
- WAN Link Speed: Auto (dropdown)

MAC Clone settings:

- Default MAC:
- MAC from PC: (highlighted with a red box)
- MAC manual:
- MAC Address: 00:17:7C:3A:4E:34

Buttons: **Apply Changes** (highlighted with a red box) and **Reset**.

Technical Support: 1800 209 3444

A warning message on the right side of the interface reads: "Please take care when entering your User name and password as these are case sensitive. The majority of connection issues are caused by incorrect User name or password combinations. More..."

STEP 3: CHECKING INTERNET STATUS

Click [Status > Device Info](#).

If you are successfully connected to the internet, you will get numbers like 114.35.54.56 etc under [WAN Configuration](#) inside the [IP Address](#) and [Gateway](#) section with [Protocol](#) displayed as [Static IP](#).



The screenshot shows the web interface of a DG-HR1400 router. The browser window title is "DG-HR1400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The interface displays the following configuration sections:

IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enable
MAC Address	00:17:7C:3A:4E:33

WLAN Configuration

Wireless	Enabled
Mode	AP
SSID	DIGISOL
Encryption	None
Channel	6
Broadcast SSID	Enabled
WPS	Enabled
Repeater Status	Disconnected

WAN Configuration

Interface	Protocol	IP Address	Gateway	DNS	Status
WAN	DHCP	0.0.0.0	0.0.0.0	0.0.0.0	Link Down(DHCP Client)

Technical Support:1800 209 3444

Now verify the internet access through DG-HR1400 router.