



User Guide

AC1900 Whole Home Mesh Wi-Fi System

Contents

About This Guide	1	Advanced Features	22
Appearance	2	WPS.....	27
Set Up Your Deco	3	Parental Controls	28
Add More Decos.....	7	QoS.....	29
Dashboard	8	Monthly Report	30
Check Deco Status	9	Managers	31
Remove/Reboot Deco	11	Control Your Deco with Alexa.....	32
Manage Connected Devices	12	Troubleshooting	33
Create a New Network	15	Authentication	34
Delete a Network	17		
Wi-Fi Settings.....	18		
Guest Network	19		
Blacklist	20		
Upgrade Your Deco	21		



About This Guide

This guide provides a brief introduction to Deco Whole Home Mesh Wi-Fi System and the Deco app, as well as regulatory information.

Features available in Deco may vary by model and software version. Deco availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Deco experience.

Conventions

In this guide, the following conventions are used:

Convention	Description
Deco	Stands for Deco Whole Home Mesh Wi-Fi System/Unit.
<u>Underline</u>	Hyperlinks are in teal and underlined. You can click to redirect to a website or a specific section.
Teal	Key information appears in teal, including management page text such as menus, items, buttons and so on.
 Note:	Ignoring this type of note might result in a malfunction or damage to the device.
 Tips:	Indicates important information that helps you make better use of your device.

More Info

- Specific product information can be found on the product page at <https://www.tp-link.com>.
- A Technical Community is provided for you to discuss our products at <https://community.tp-link.com>.
- Our Technical Support contact information can be found at the [Help](#) center of the Deco app and the [Contact Technical Support](#) page at <https://www.tp-link.com/support>.

Speed/Coverage/Device Quantity Disclaimer

Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Range, coverage, and maximum quantity of connected devices are based on test results under normal usage conditions. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

MU-MIMO Disclaimer


Use of MU-MIMO requires clients to also support MU-MIMO.


Seamless Roaming Disclaimer

Clients need to support 802.11k/v/r and may require additional set up. Performance may vary depending on the client device.

Appearance

Each Deco has an LED that changes color according to its status, three RJ-45 Ethernet ports, a power slot, and a Reset button. See the explanation below:

 Tip: The product label can be found at the bottom of the product.

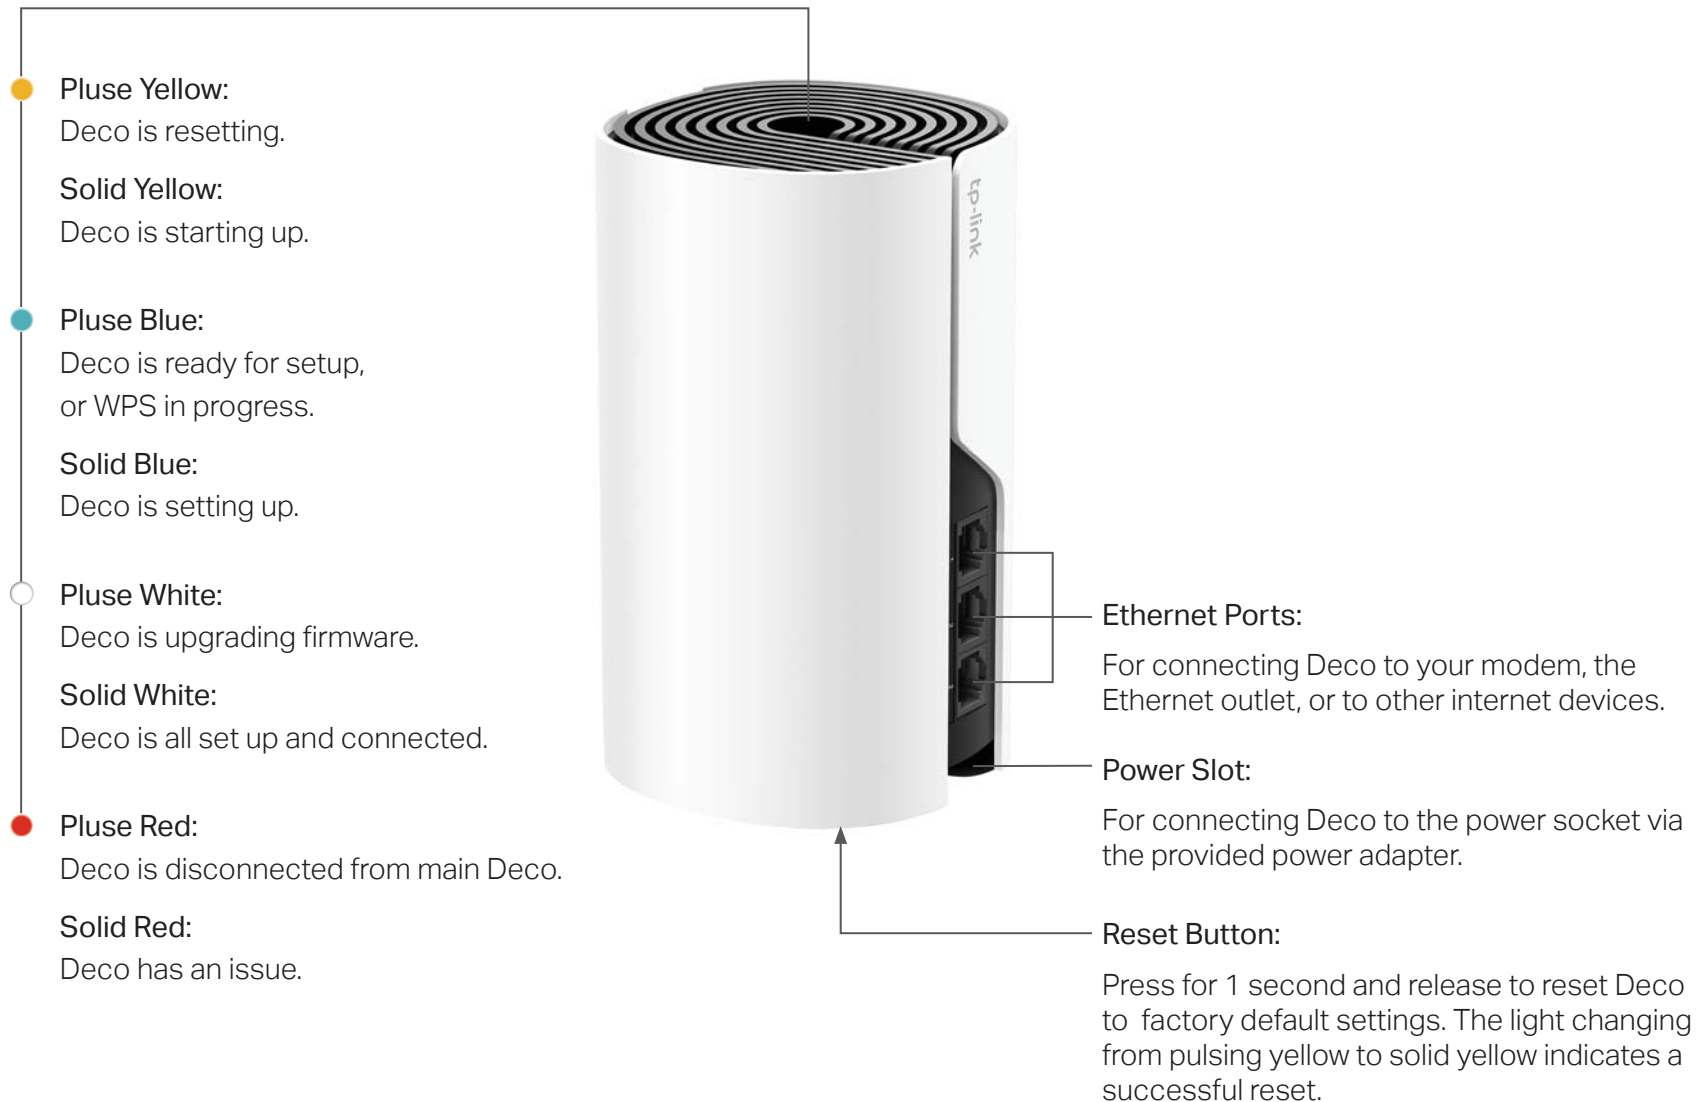

Set Up Your Deco

The intuitive Deco app guides you through an easy setup process that gets each unit up and all your devices connected and online. Follow the steps below to set up your Deco Whole Home Mesh Wi-Fi System.

1. Download and install the Deco app

Scan the QR code below or go to Google Play or the App Store to download the Deco app. Install the app on your Android or iOS smartphone or tablet.




or



2. Log in with TP-Link ID

Open the app. Use your TP-Link ID to log in. If you don't have a TP-Link ID, sign up first.

Note: If you forgot your login password, tap [Forgot Password?](#). The Deco app will guide you through the rest.

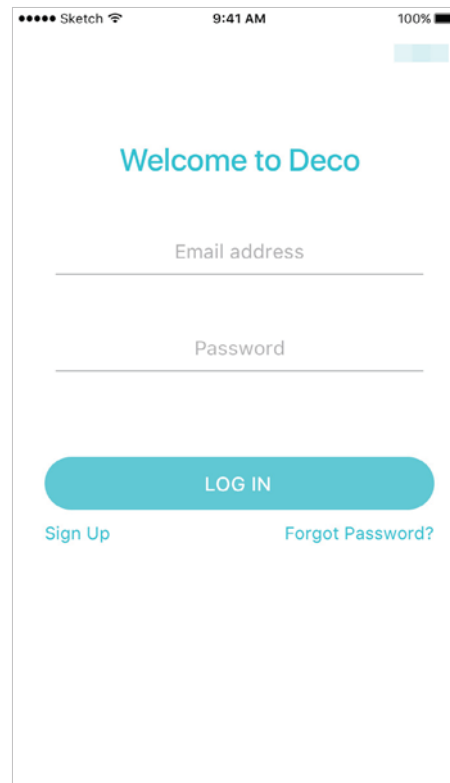

The login screen displays the title 'Welcome to Deco' at the top. Below it are two input fields: 'Email address' and 'Password'. A large teal 'LOG IN' button is centered below the fields. At the bottom, there are two links: 'Sign Up' on the left and 'Forgot Password?' on the right. The status bar at the top shows 'Sketch' as the carrier, signal strength, time '9:41 AM', and 100% battery.

3. Identify your Deco


Choose your Deco model.



4. Plug in and power on Deco


Power off your modem. Connect your Deco to the modem and power them both on.

If you don't have a modem, connect the Ethernet outlet directly to your Deco.

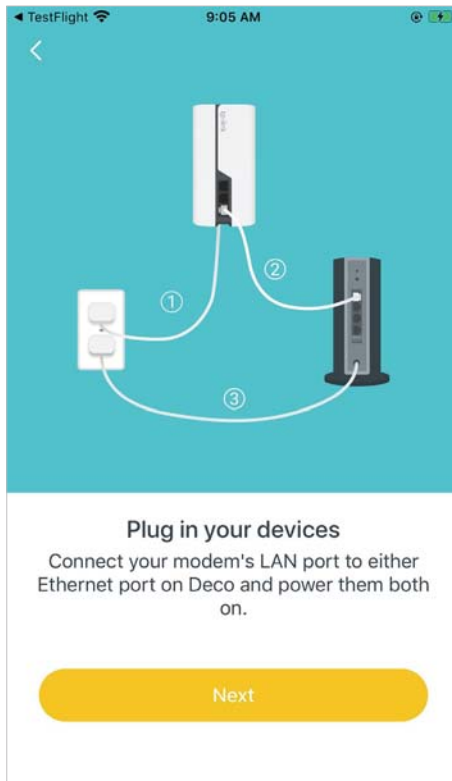


5. Connect to the Deco's Wi-Fi

Wait until the Wi-Fi Signal LED pulses blue, then connect to the Deco's Wi-Fi using the default SSID printed on the product label.

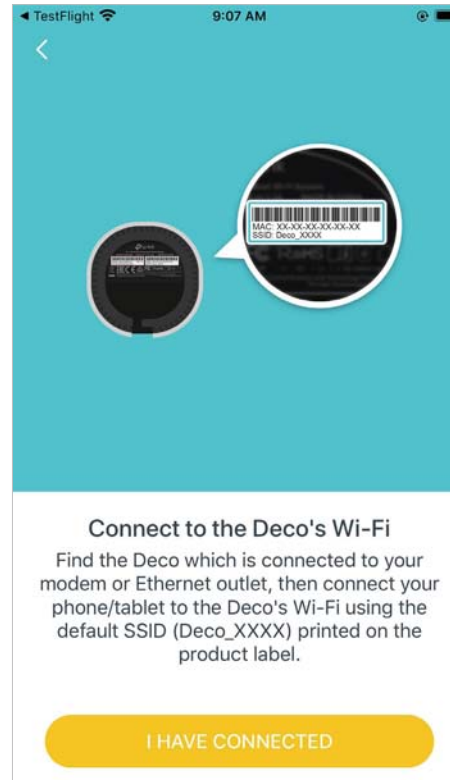

6. Select a location

Select a location for this Deco. If its location is not listed, you can create a new one by choosing [Custom](#). This will be the name of your Deco.

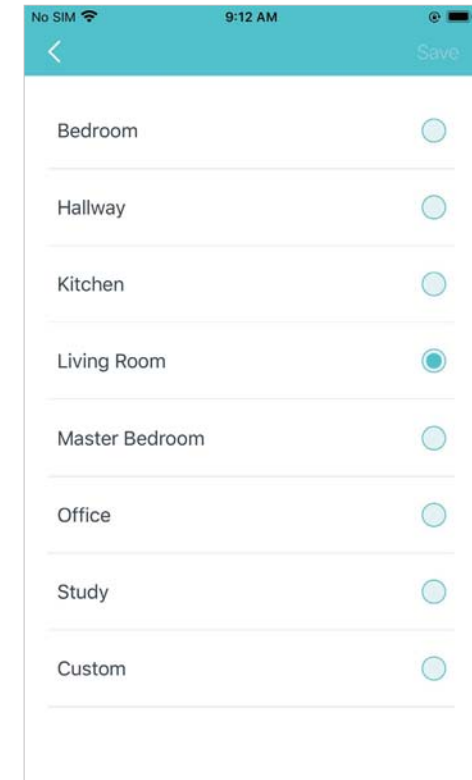

7. Set up internet connection

Select the internet connection type and enter the information. If you are not sure, contact your internet service provider.



No SIM 2:00 PM

Set Connection Type

Dynamic IP

PPPoE

Static IP


L2TP

PPTP

DS-Lite

8. Create your Wi-Fi network

Set a network name and a password. These will be the name and password you use to connect your devices to Wi-Fi.

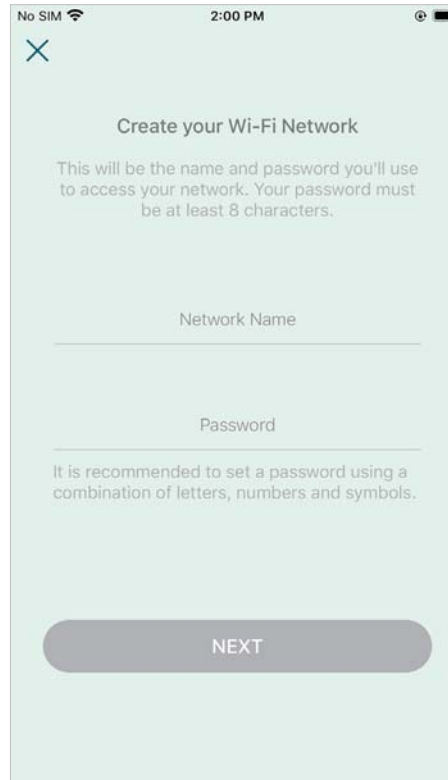

No SIM 2:00 PM

Create your Wi-Fi Network

This will be the name and password you'll use to access your network. Your password must be at least 8 characters.

Network Name


Password

It is recommended to set a password using a combination of letters, numbers and symbols.

NEXT

9. Connect to your Wi-Fi network

Connect your phone/tablet to the Deco's Wi-Fi.

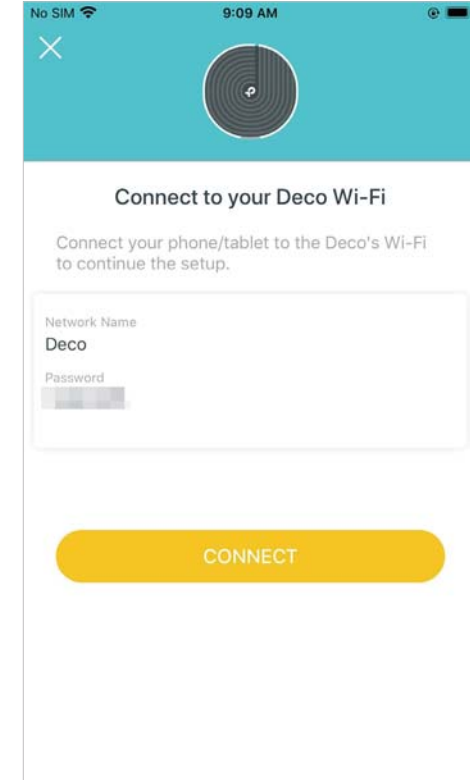

No SIM 9:09 AM

Connect to your Deco Wi-Fi

Connect your phone/tablet to the Deco's Wi-Fi to continue the setup.


Network Name
Deco

Password

CONNECT

10. Setup complete


Your Deco network is now up. Connect all devices to the Deco network. You can also [Add More Decos](#) to expand the Wi-Fi coverage.

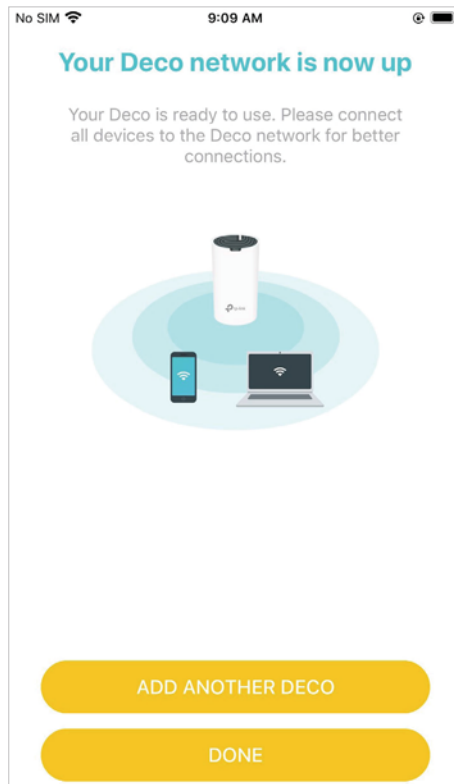


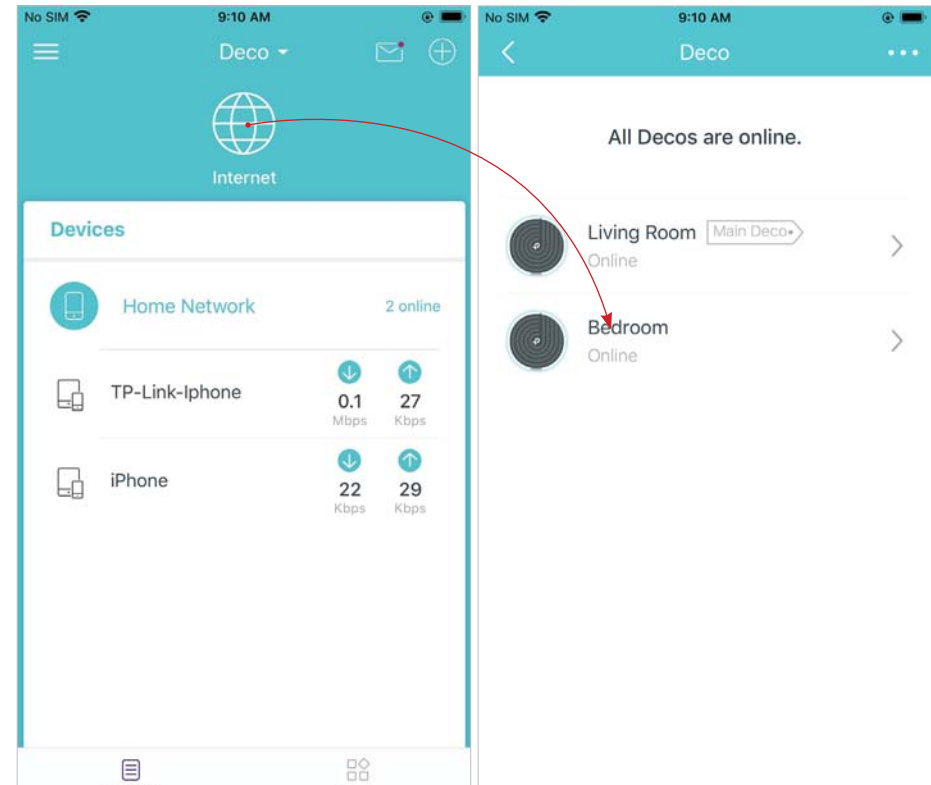
Add More Decos

After creating a Deco network, you can add more Deco units to the network to expand the Wi-Fi coverage and manage them easily on your Deco app.

In Overview, tap **+**. Select the Deco model you want to add, and follow app instructions to complete the setup.

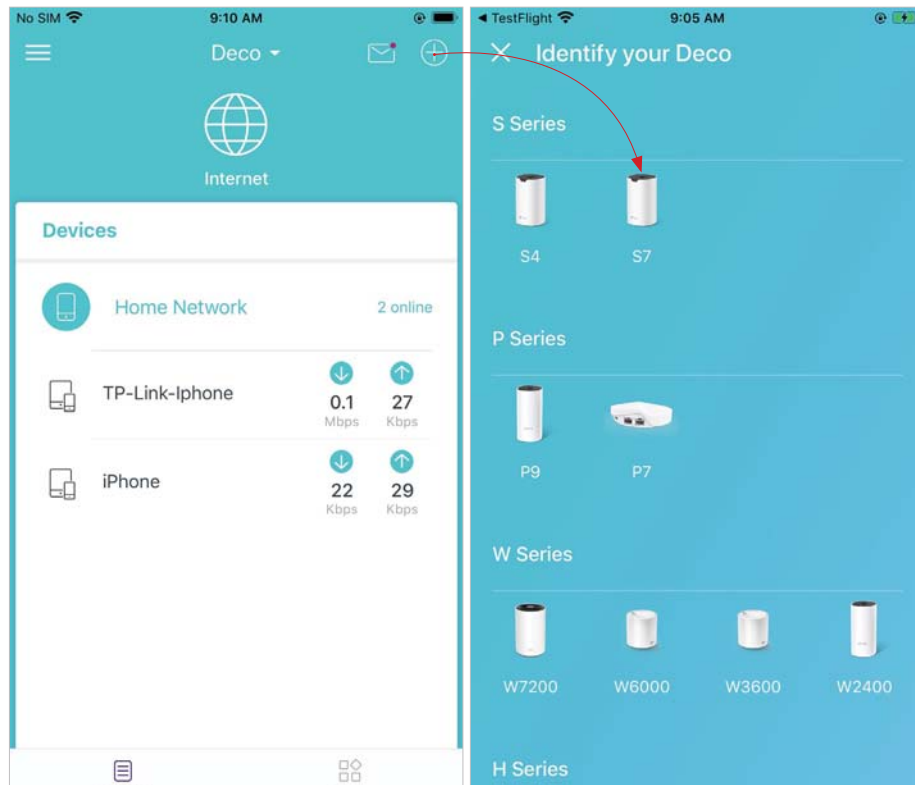


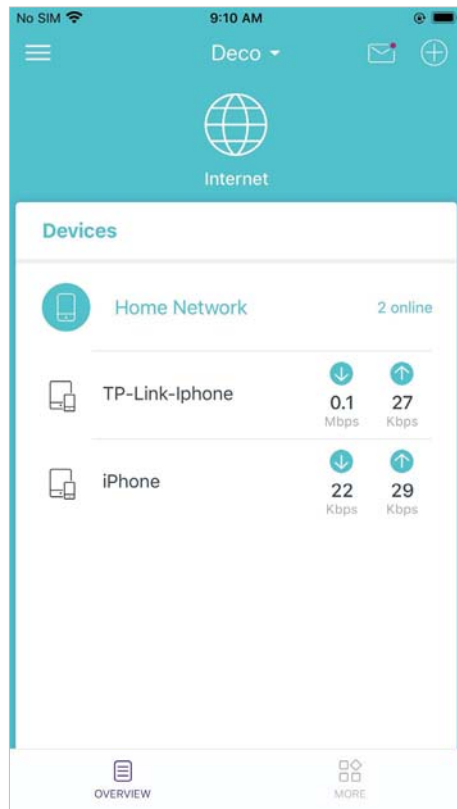
After the setup, you can find the added Deco units by tapping  in Overview.




Dashboard

After you successfully set up your Deco network, you will see the dashboard of the Deco app. Here you can get an overview of the network status, check the connected clients, and set up various advanced features.

Tap  to get an overview of the network status.




Tap  for more features.

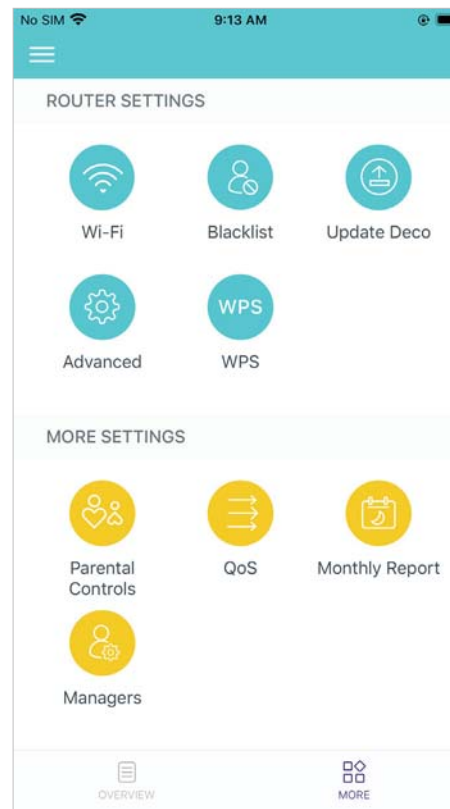


Check Deco Status

In Overview, you can check the working status (online/offline) of all the Decos, check the details (speed/Deco's IP address & MAC address/connected clients) of each Deco unit, change the Deco's location/name, and more.


1. Tap  to check all Decos' status.

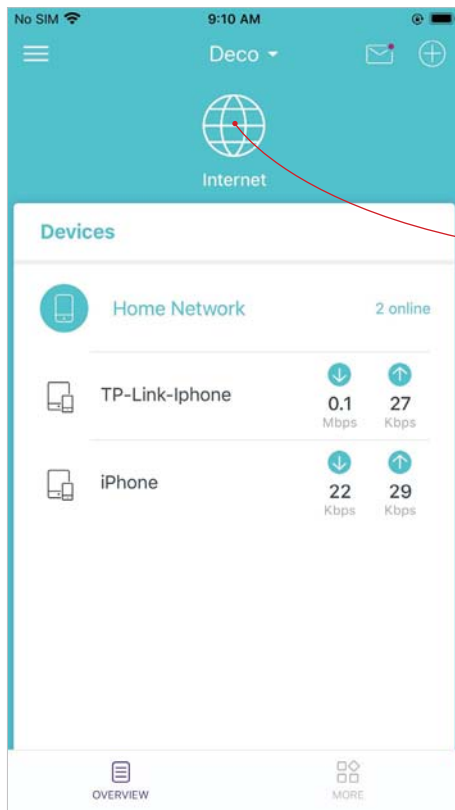


2. Tap a Deco unit to check the details.

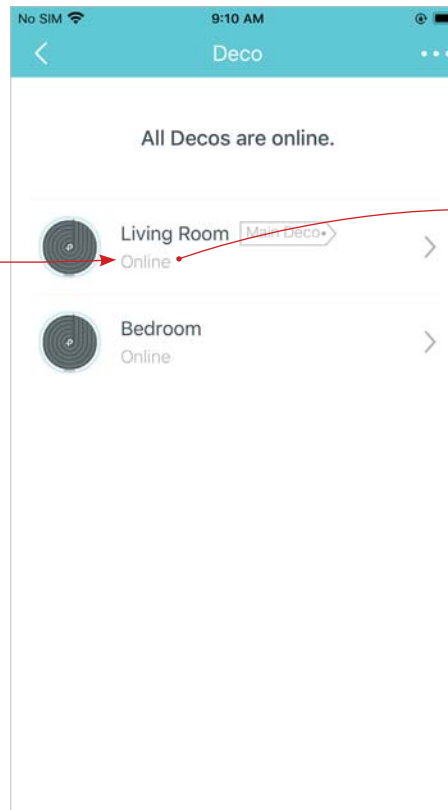

3. Check download/upload speed and connected clients of the Deco.

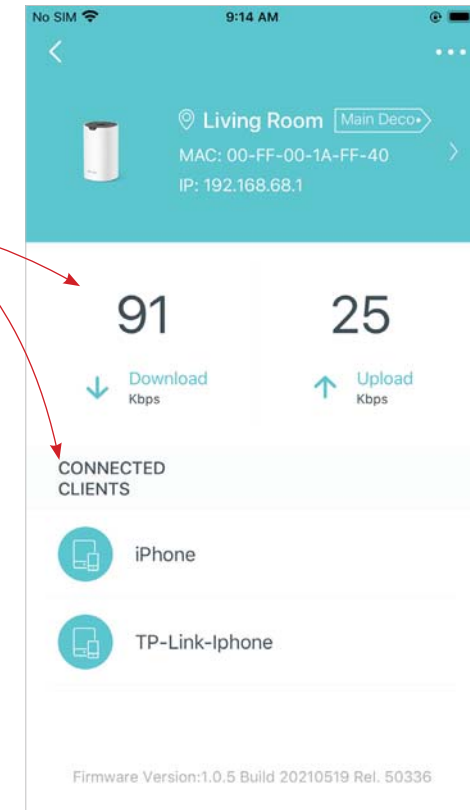

Change or customize the location/name of the Deco.

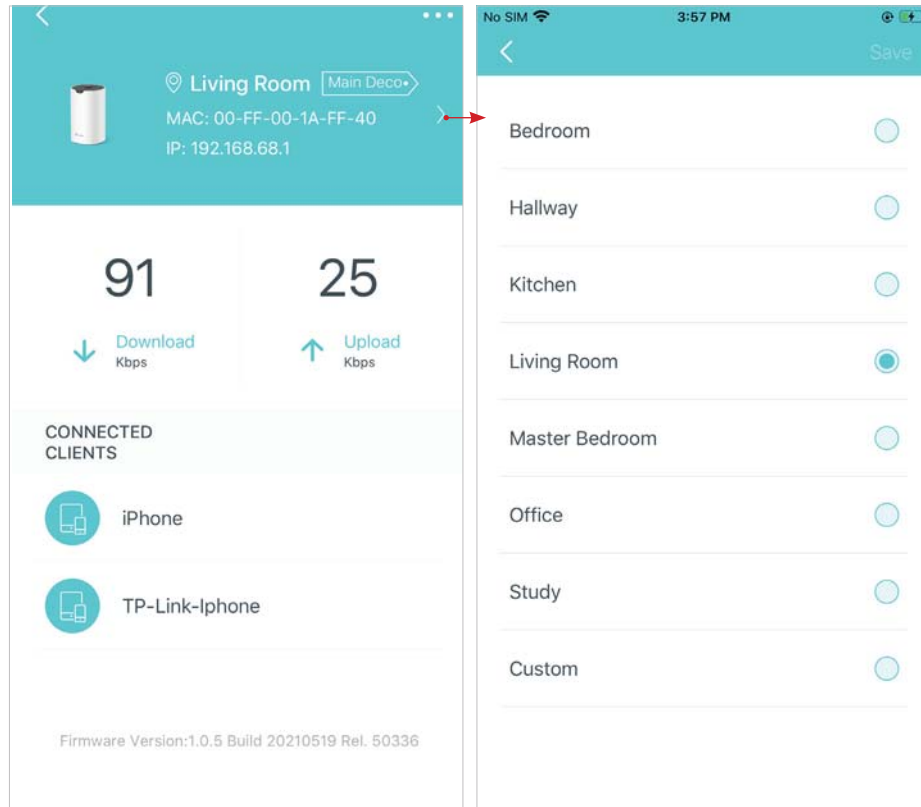

Remove/Reboot Deco

You can remove or reboot your Deco easily in the Deco app. Follow the steps below.





■ Note: Removing a Deco will reset it to factory default settings and you will need to set up your Deco again. You can also press the Reset button on the Deco for 1 second to quickly reset your Deco to factory default settings.

1. In Overview, tap .

2. Select a Deco unit.

3. Tap  to remove or reboot the Deco.


■ Note: If the LED light of Deco does not turn pulsing blue after tapping [Remove](#), press the Reset button on the Deco for 1 second to reset it.

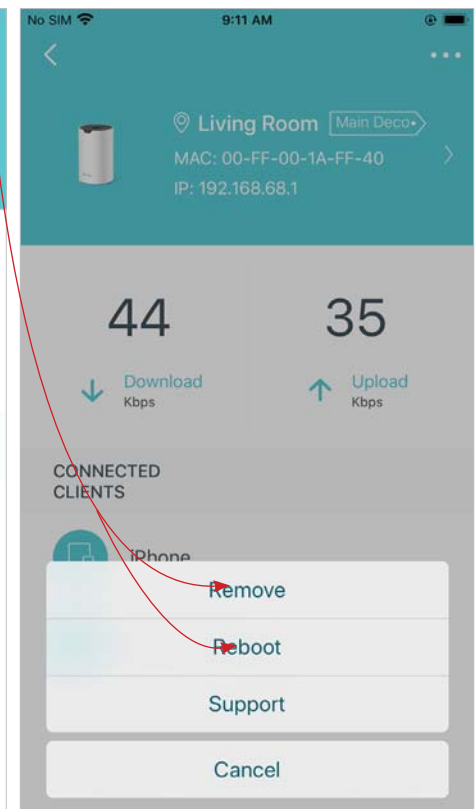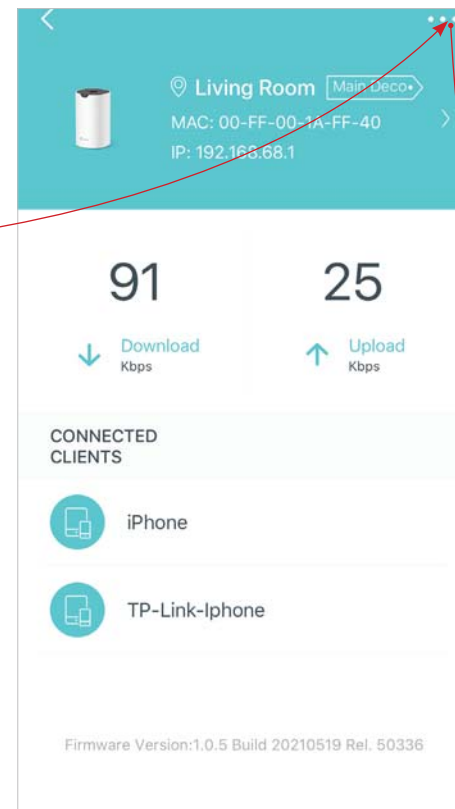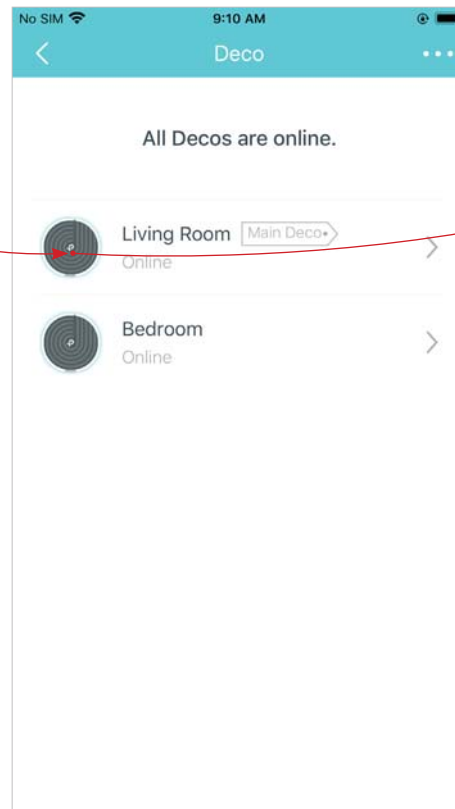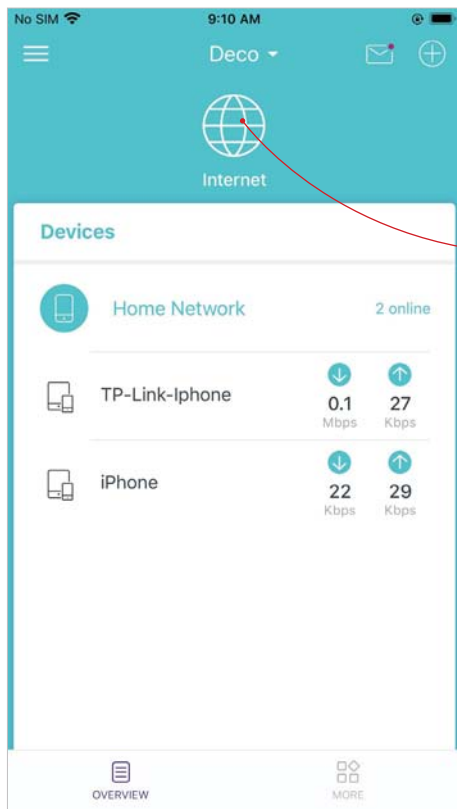


Manage Connected Devices

In Overview, you can check the working status of all the connected devices, view the device details, and change the device settings.

Tap a connected device to check the details (eg. real-time upload/download speeds).

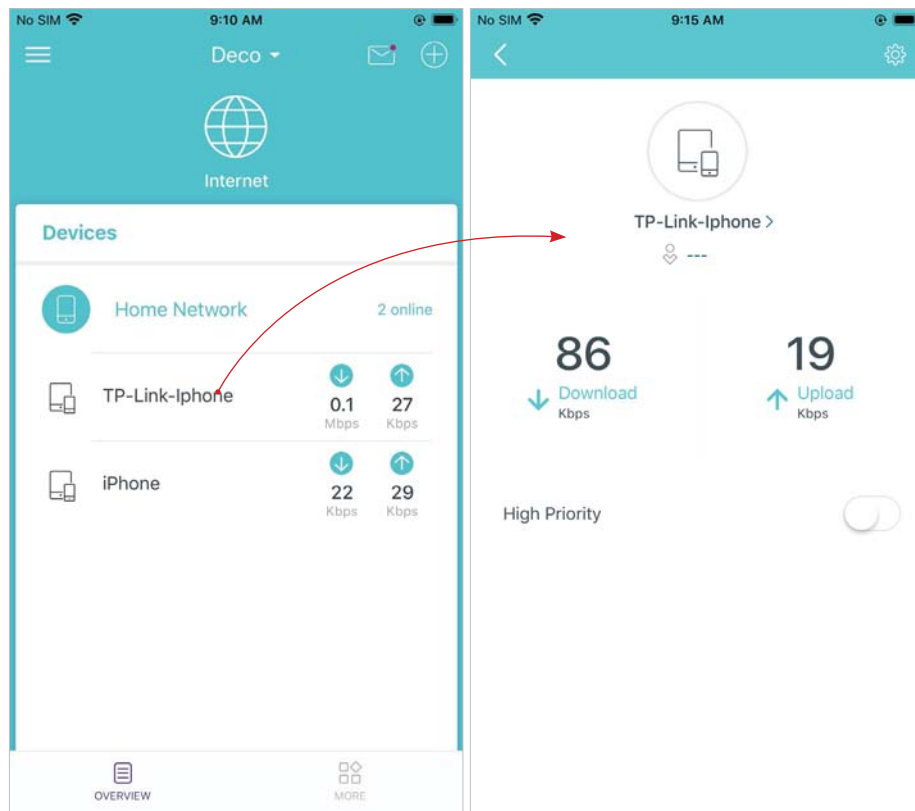

Change the device name as needed.

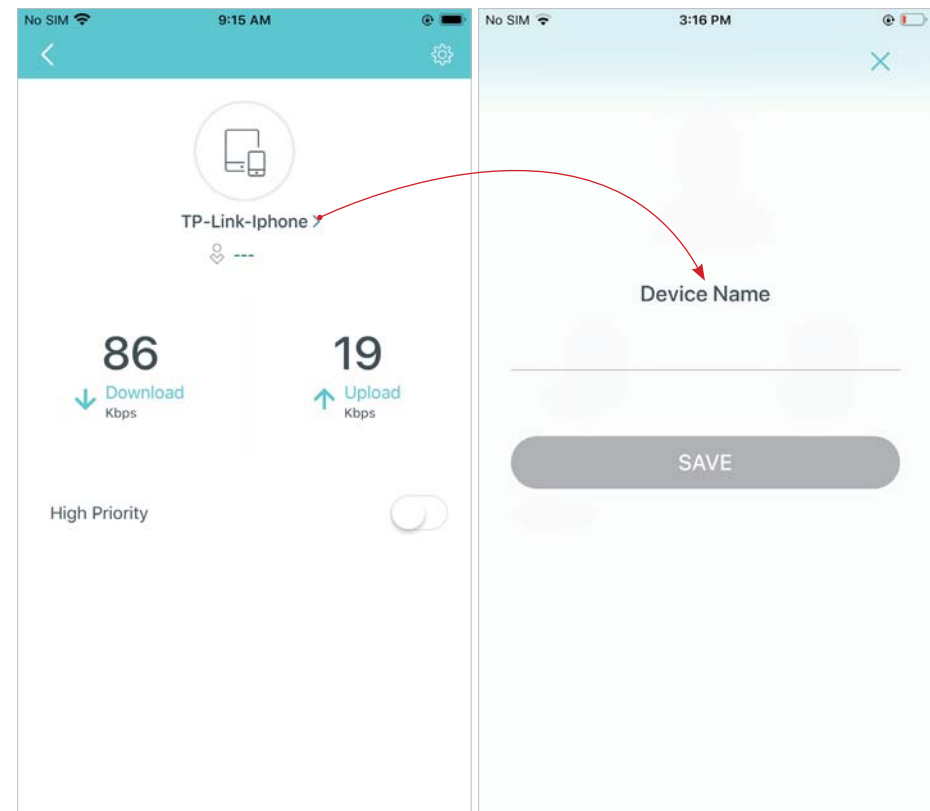

The image displays two screenshots of the TP-Link Tether mobile application interface.

Left Screenshot (Main Dashboard):

- Status Bar:** Shows "No SIM", signal strength, and time "9:16 AM".
- Header:** Teal bar with a back arrow, a gear icon for settings, and a close button (X).
- Device Selection:** A circular icon showing a laptop and a phone with a star, labeled "TP-Link-Iphone >". Below it is a small icon of a person and a dashed line.
- Speed Metrics:**
 - Download:** Large number "71" with a downward arrow and the text "Download Kbps".
 - Upload:** Large number "81" with an upward arrow and the text "Upload Kbps".
- Settings:**
 - High Priority:** A toggle switch that is currently turned on.
 - Duration:** A label with the text "All The Time >" next to it.

Right Screenshot (Duration Selection):

- Status Bar:** Shows "No SIM", signal strength, and time "9:16 AM".
- Header:** Light blue bar with a close button (X).
- Title:** "Duration" in bold black text.
- Options:** Four rounded rectangular buttons stacked vertically:
 - "All The Time" (highlighted with a light blue background)
 - "1 Hour"
 - "2 Hours"
 - "4 Hours"

The image displays two screenshots of the TP-Link Tether mobile application interface.


Left Screenshot (Main Dashboard):

- Status Bar:** Shows "No SIM", signal strength, 9:16 AM, and battery level.
- Header:** Teal bar with a back arrow and a settings gear icon.
- Device Icon:** A circular icon showing a smartphone and a star.
- Device Name:** "TP-Link-Iphone >" with a dropdown arrow.
- Speeds:**
 - Download: 71 Kbps (indicated by a green downward arrow).
 - Upload: 81 Kbps (indicated by a green upward arrow).
- High Priority:** A toggle switch that is currently turned on (blue).
- Duration:** Set to "All The Time >" with a dropdown arrow.

Right Screenshot (Device Settings):

- Status Bar:** Shows "No SIM", signal strength, 9:15 AM, and battery level.
- Header:** Teal bar with a back arrow.
- Device Icon:** A circular icon showing a smartphone.
- Device Name:** "TP-Link-Iphone >" with a dropdown arrow.
- Settings List:**
 - Device Type:** "Other >" with a dropdown arrow.
 - IP Address:** "192.168.68.100".
 - MAC Address:** "FC-FC-48-95-CD-F3".
 - Connection Type:** "Main Network(5GHz)".
 - Linked Deco:** "Living Room" with a Wi-Fi icon.
 - Belongs to:** A dropdown menu with a right arrow.


Tap **Belongs to** to add a unique profile for the device and manage its online activities. For example, when and for how long this device can access the internet, block inappropriate content, and pause the internet if necessary.

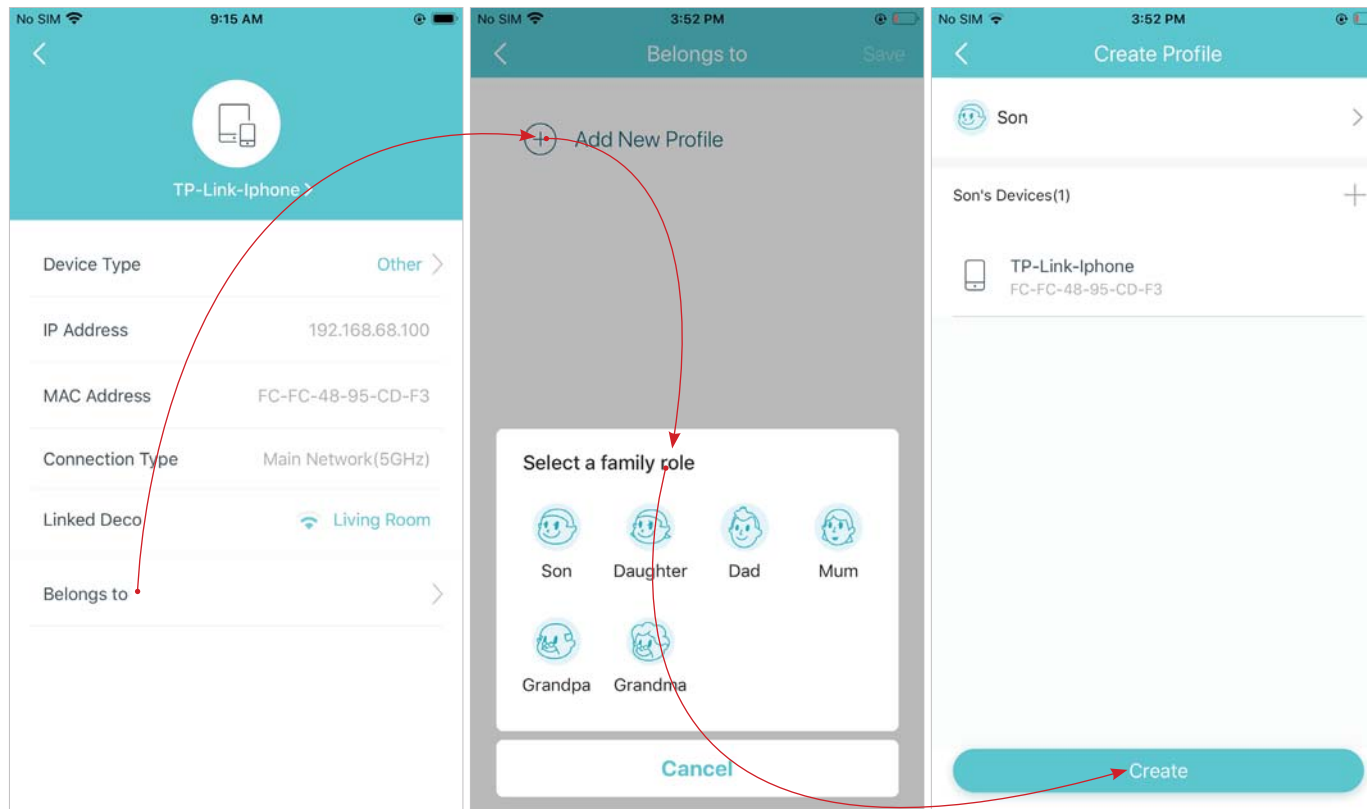


Create a New Network

In the Deco app, you can create different Deco networks with your TP-Link ID and manage them conveniently from the Deco app with one account. You can also help family or friends manage their networks with your Deco app. Two methods are provided as below to create a new network.


Method 1. Create a new network from the Overview page

1. Tap  > [Create New Network](#). Then follow the app instructions to complete the setup.

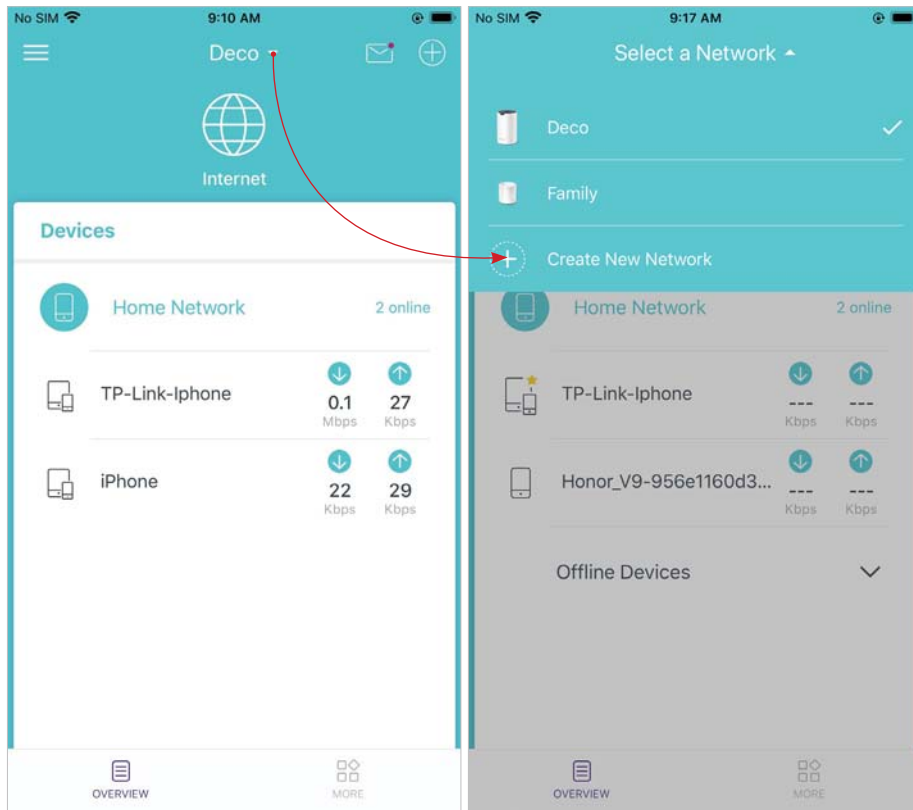


Method 2. Create a new network from the Menu page


1. Tap  to open the Menu.

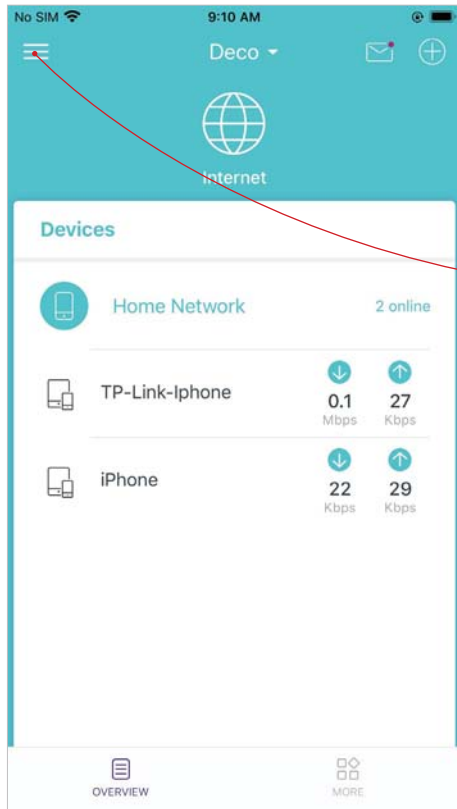

2. Tap  > [CREATE NEW NETWORK](#).

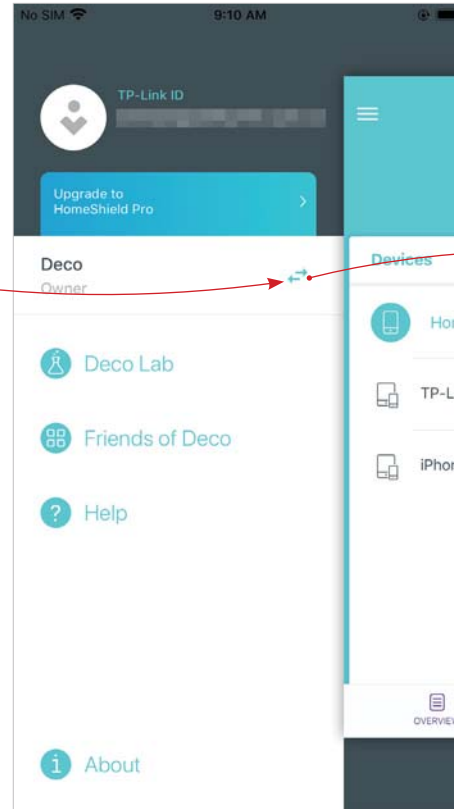

3. Follow app instruction to complete the setup.


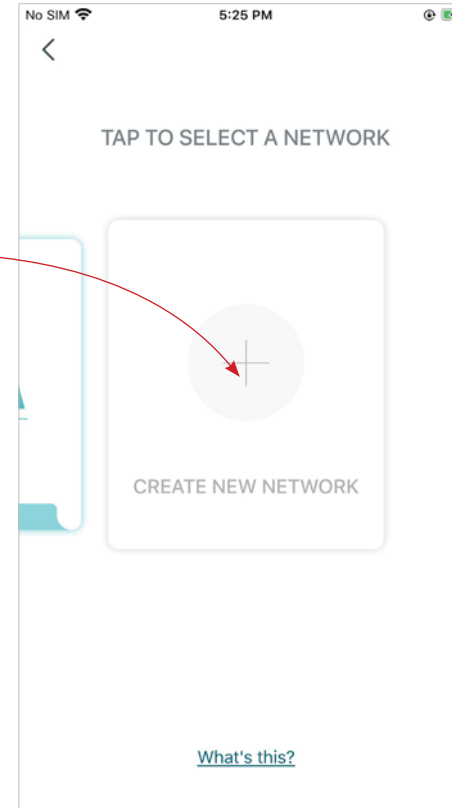


Delete a Network

You can delete a Deco network if you don't need it anymore. Deleting a Deco network will reset all Decos in this network to factory default settings.

1. In Overview, tap .

2. Tap  > Delete.

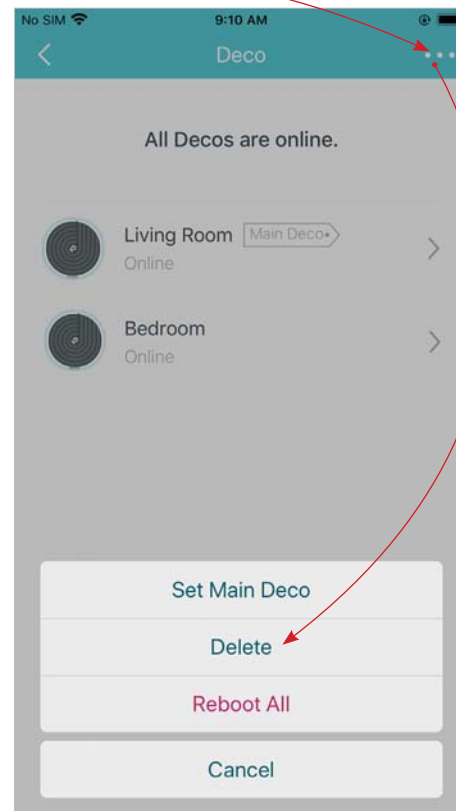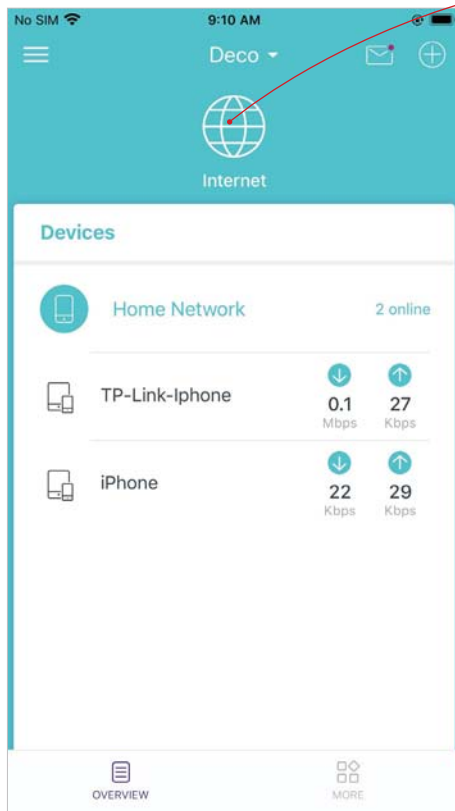





Wi-Fi Settings

You can change the network name and password of your main network at any time and share the network easily with family and friends.

Tap  > [Wi-Fi](#).

Manage main network (eg. change your main network's Wi-Fi name and password).

Share your network with others.

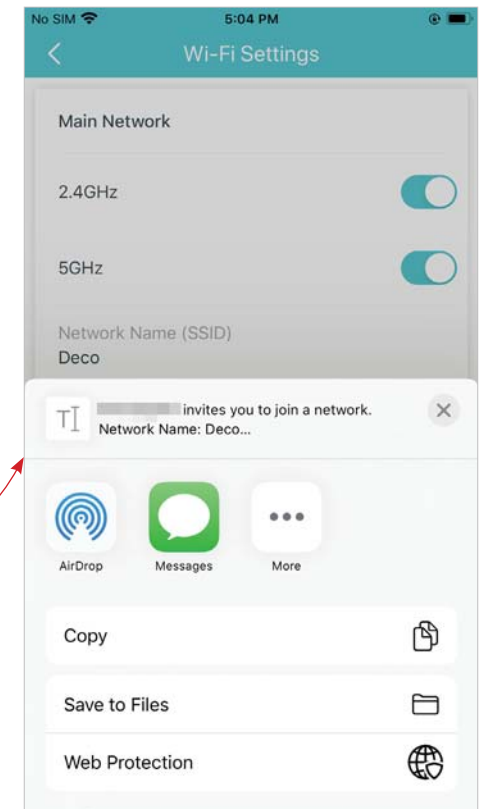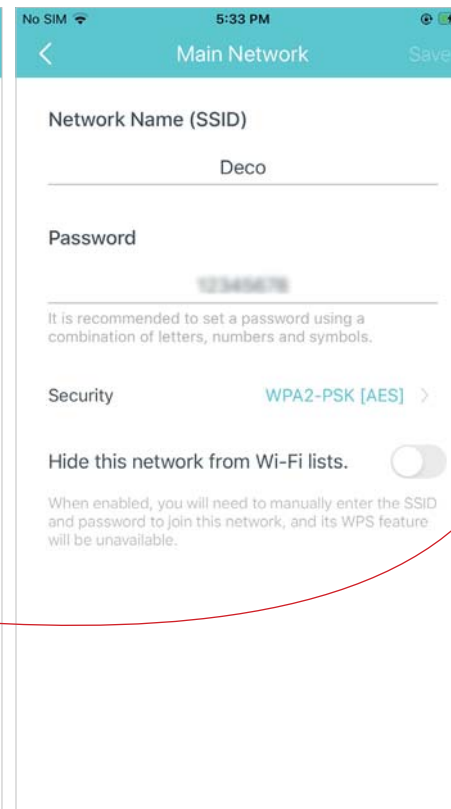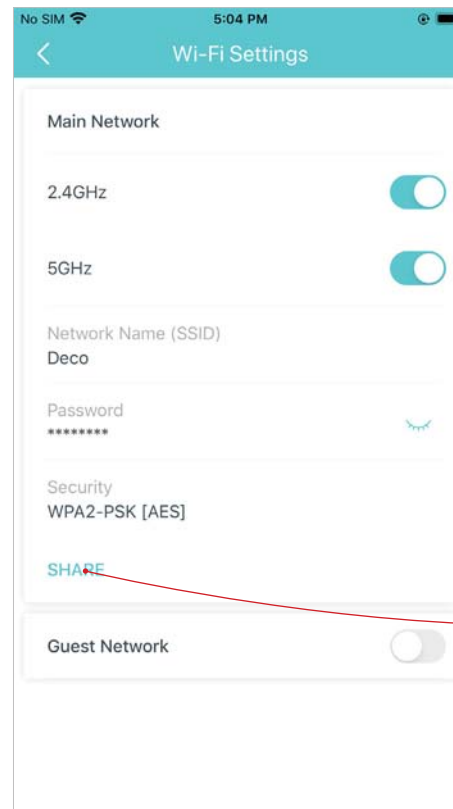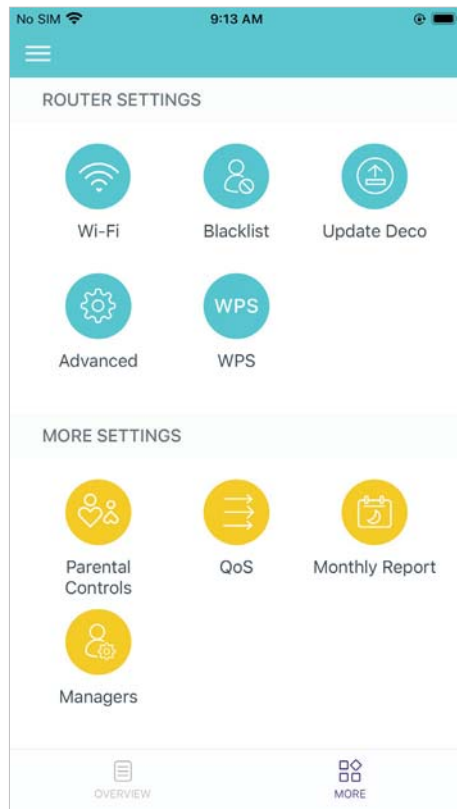


Guest Network

You can create and share a separate network for guests to guarantee the security and privacy of your main network.

Tap  > **Wi-Fi** and enable **Guest Network**.

Set a Wi-Fi name and password for the guest network.


Share your guest network with others.



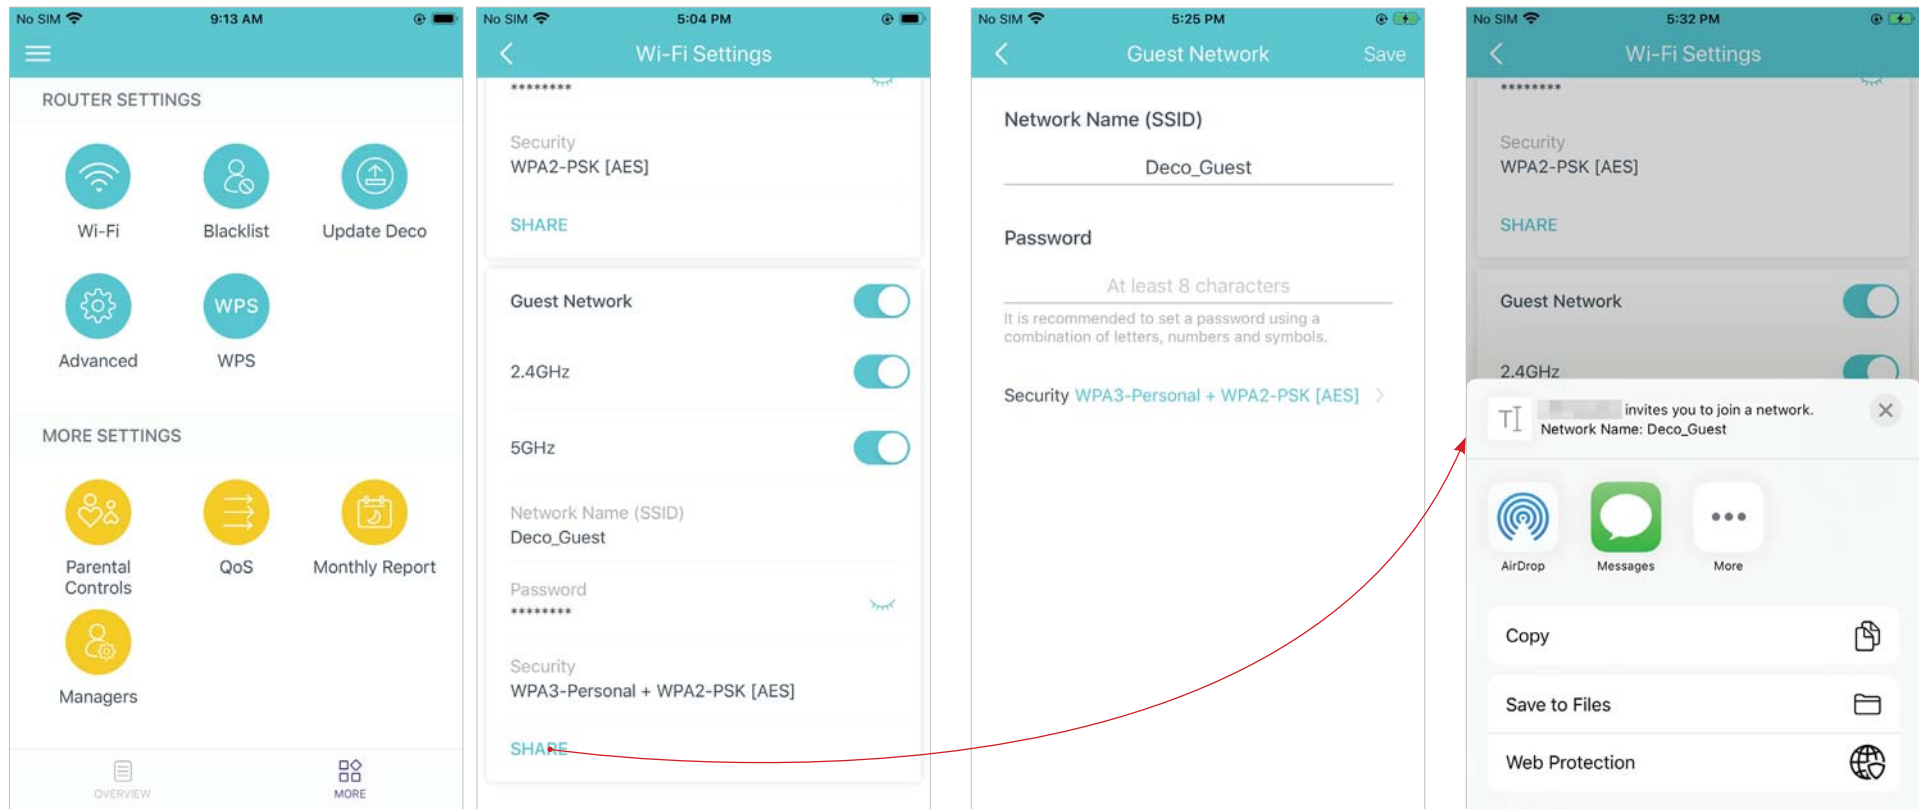


Blacklist

Add devices to the blacklist to prevent the devices from accessing your network, ensuring the safety of your personal information shared in the network.

1. Tap  > [Blacklist](#).


2. Tap  on the top right corner and add clients or other devices to the blacklist.

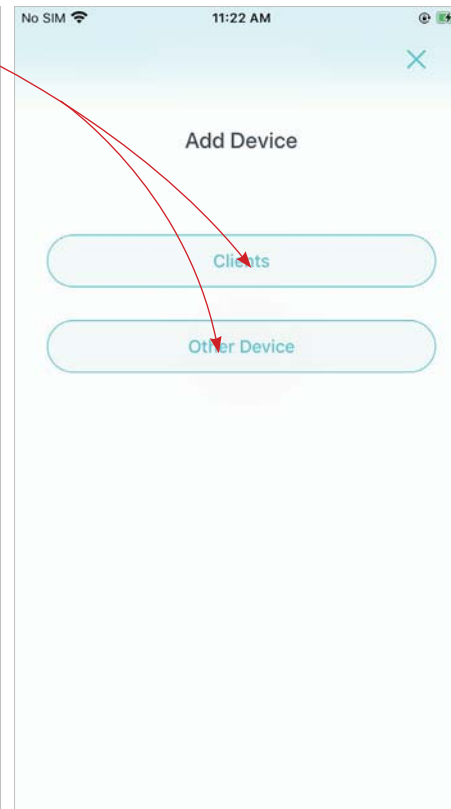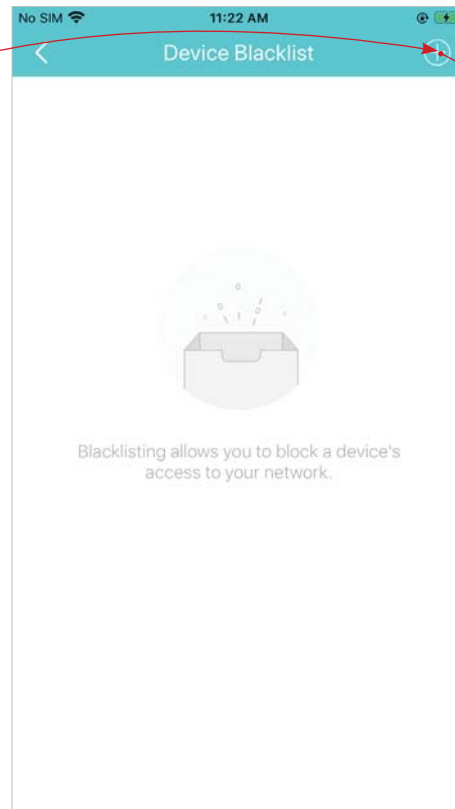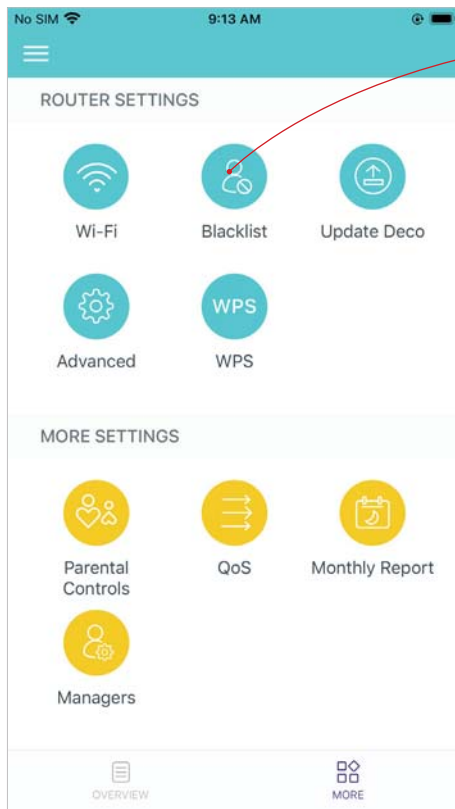


Upgrade Your Deco

TP-Link is dedicated to improving product features and providing a better customer experience. An up-to-date firmware provides better and stabler network performance. Always update your Deco to the latest firmware version when prompted in the Deco app.

1. Tap  > [Update Deco](#).

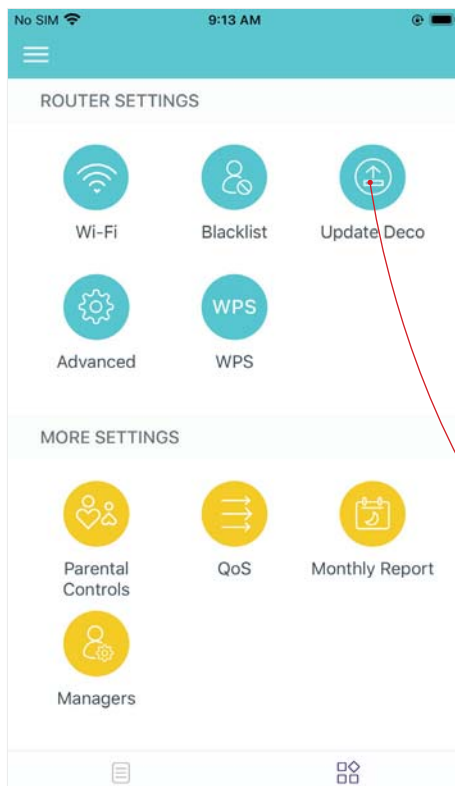

2. Download and install the firmware (if any) and follow app instructions to update your Deco to the latest version.

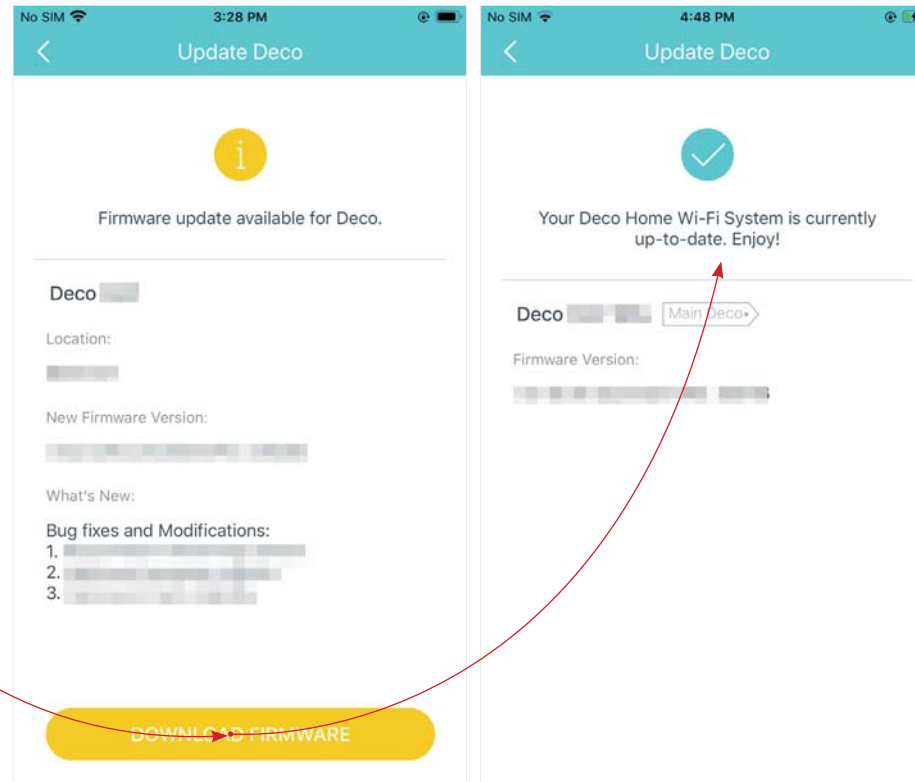

Advanced Features





Additional features are available under the Advanced menu. You can modify WAN settings (IPv4 & IPv6), add IPv6 firewall rules, modify LAN IP, set up DHCP server, enable VLAN/IPTV/MAC Clone mode, reserve the same IP address for a specific device, set up port forwarding rules to make your local computers accessible to other devices over the internet, enable TP-Link DDNS, SIP ALG, fast roaming and beamforming, control Deco's LED, change the working mode, and configure the notification settings.

Tap  > [Advanced](#).


View IPv4 details or change the internet connection type.

Enable IPv6 to set up an IPv6 internet connection.

Add IPv6 firewall rules to allow specific devices to access the specified services.

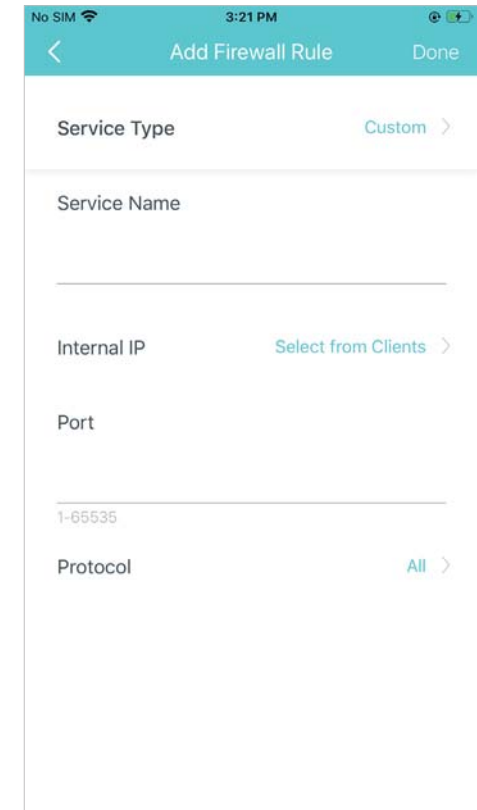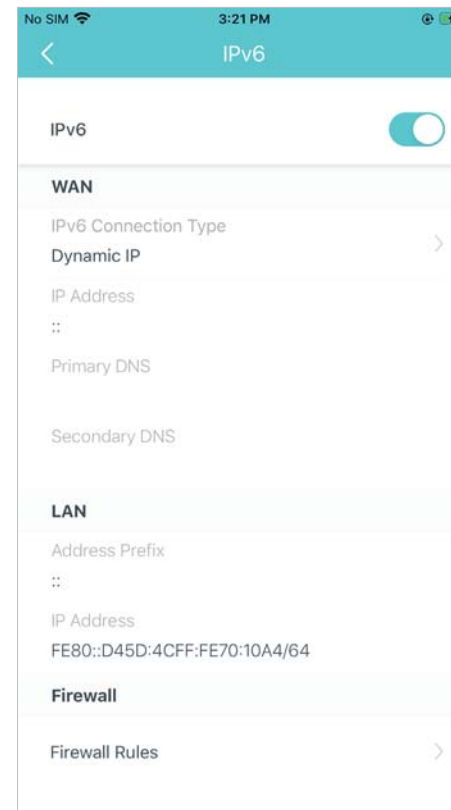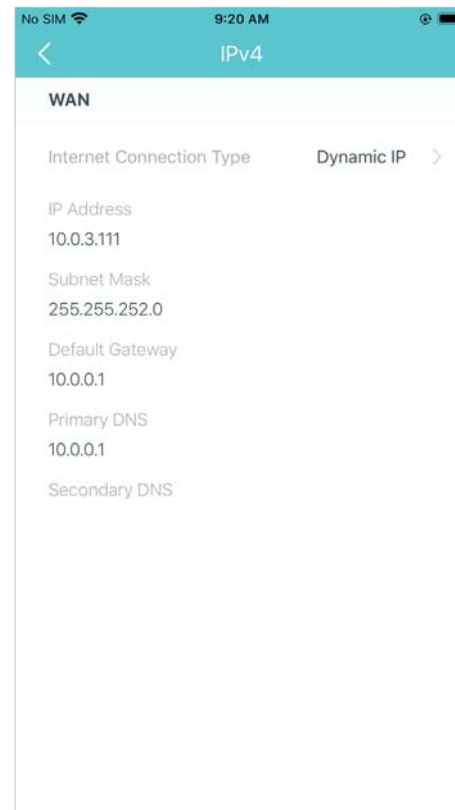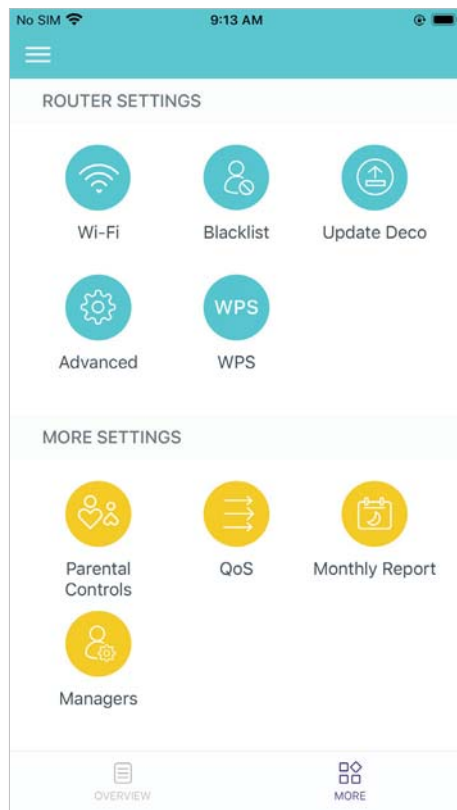

Modify LAN IP to avoid IP address conflict.

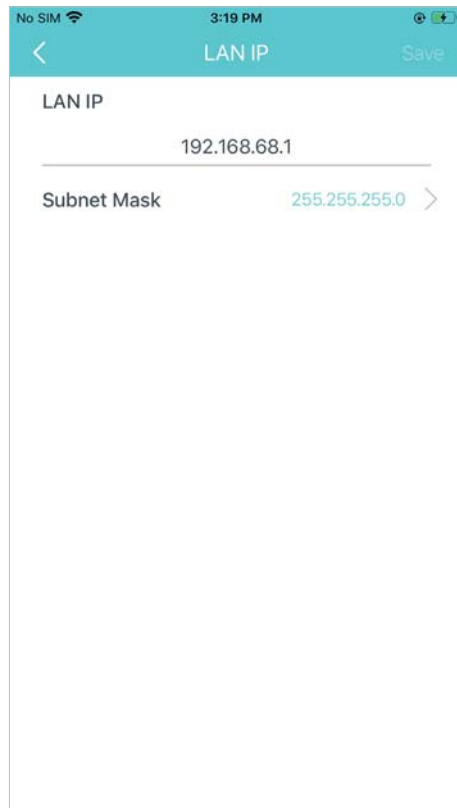


LAN IP

192.168.68.1

Subnet Mask 255.255.255.0

Save

Change DHCP server settings.

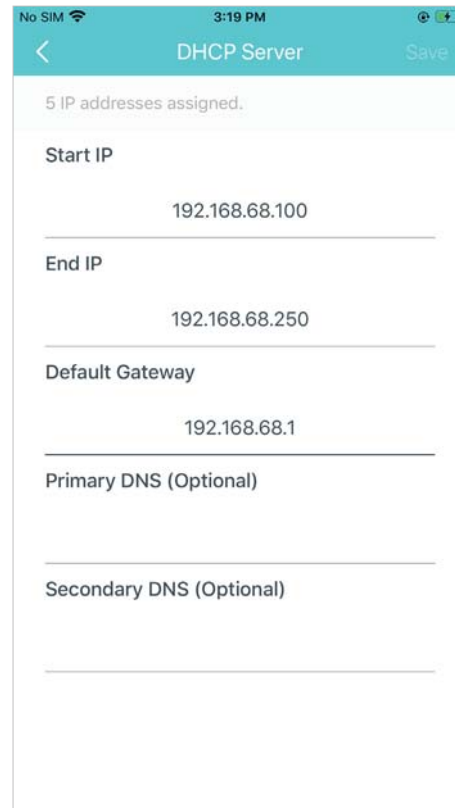

DHCP Server

5 IP addresses assigned.

Start IP

192.168.68.100

End IP

192.168.68.250

Default Gateway


192.168.68.1

Primary DNS (Optional)

Secondary DNS (Optional)

Save

Enable IPTV/VLAN mode to support IPTV services.

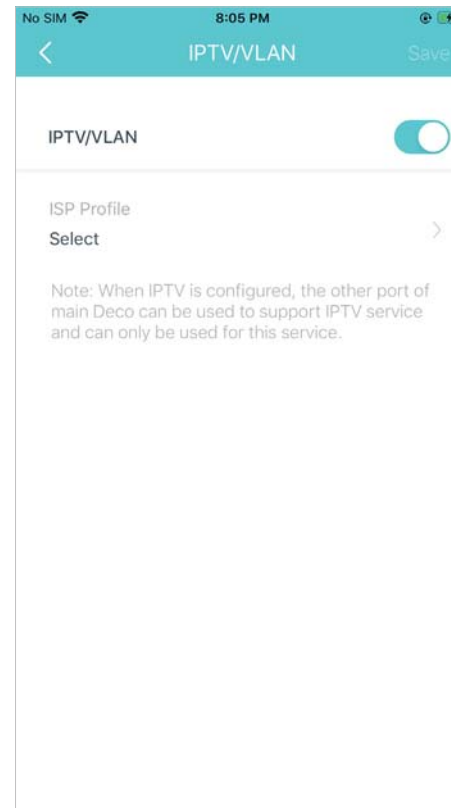

IPTV/VLAN


ISP Profile Select

Note: When IPTV is configured, the other port of main Deco can be used to support IPTV service and can only be used for this service.

Save

Enable MAC Clone if Deco fails to connect to the internet.

Tip: For more about MAC Clone, refer to <https://www.tp-link.com/support/faq/2925/>

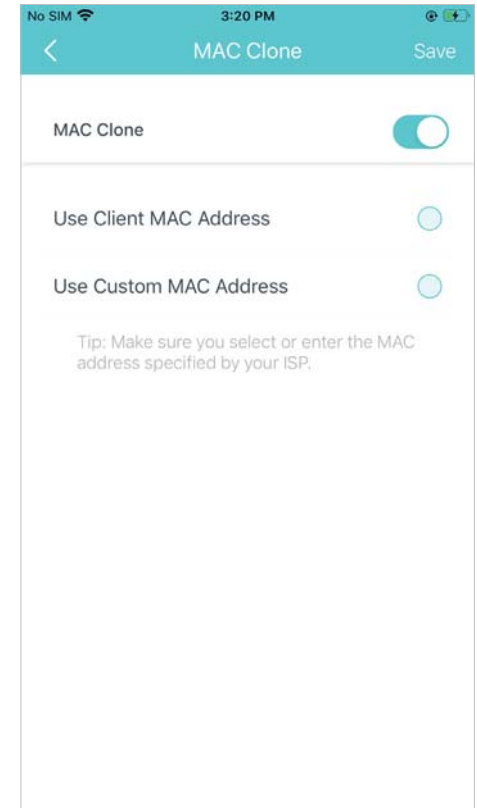

MAC Clone

Use Client MAC Address

Use Custom MAC Address


Tip: Make sure you select or enter the MAC address specified by your ISP.

Save


Reserve IP addresses for specific devices to recognize and manage the device more easily.



Set up port forwarding rules to enable devices in your network accessible over the internet with safety.

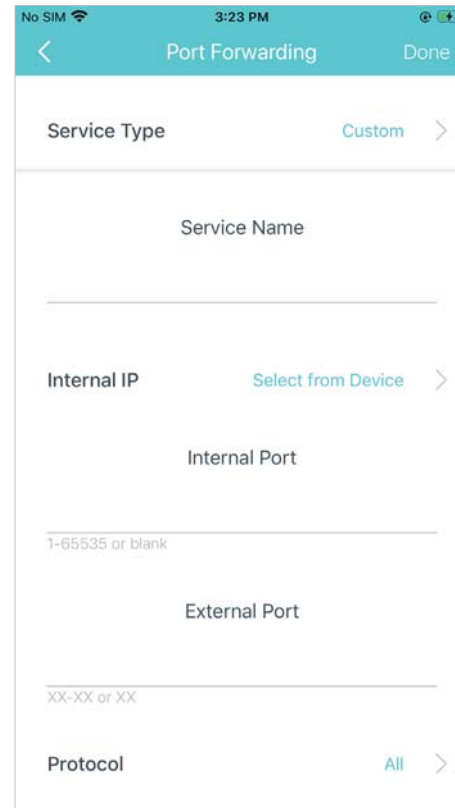


Register a TP-Link DDNS domain name to access your router and local servers using a domain name.

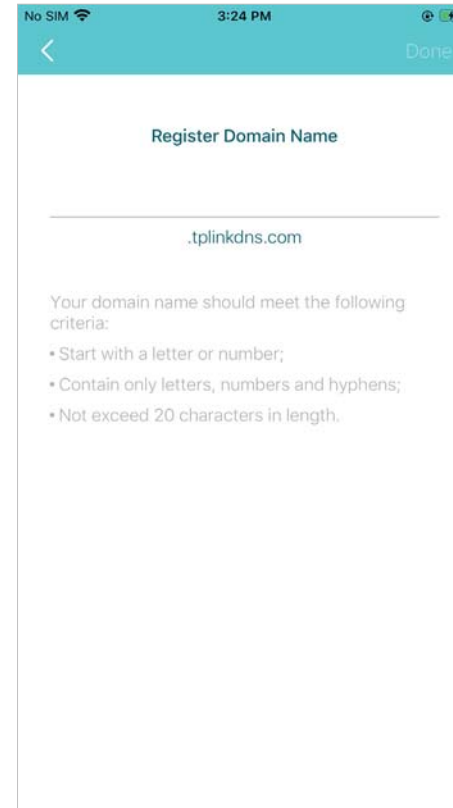


Enable SIP ALG to communicate with SIP (Session Initiation Protocol) servers via NAT).



Enable UPNP to enable devices on your local network to dynamically open ports for applications such as multiplayer gaming.

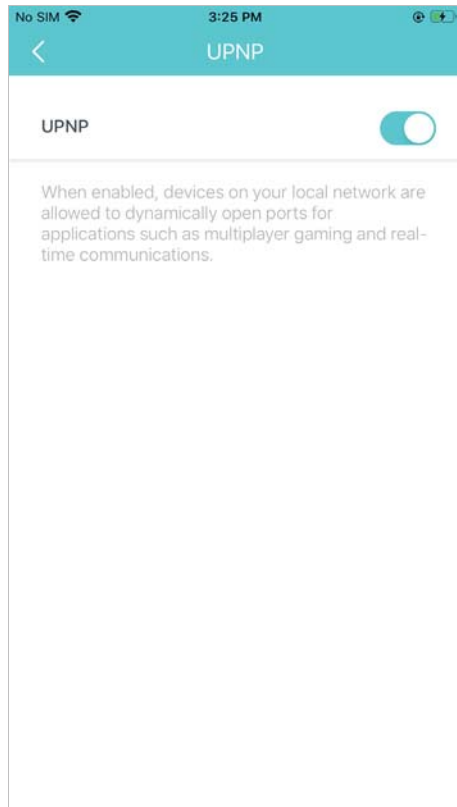


Enable Fast Roaming to allow your wireless devices to switch connection to different Decos.

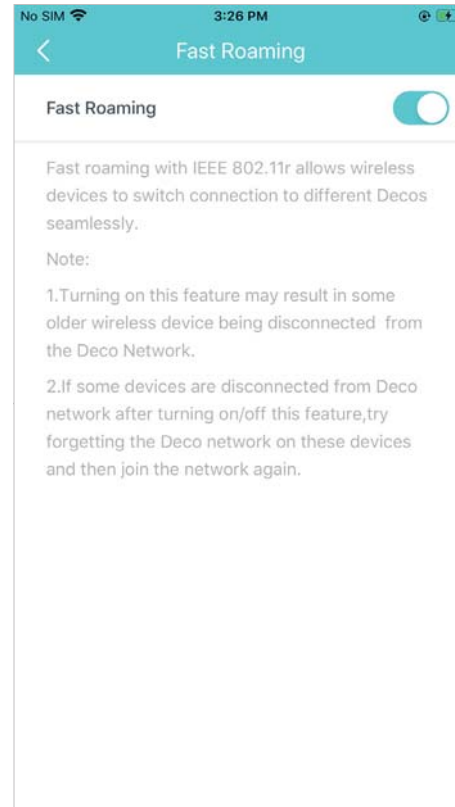

Enable Beamforming to concentrate Wi-Fi signal towards connected devices for stronger connections.




Toggle off LED to turn off the light on Deco. Configure the Night Mode to turn off the LED light at bedtime only.

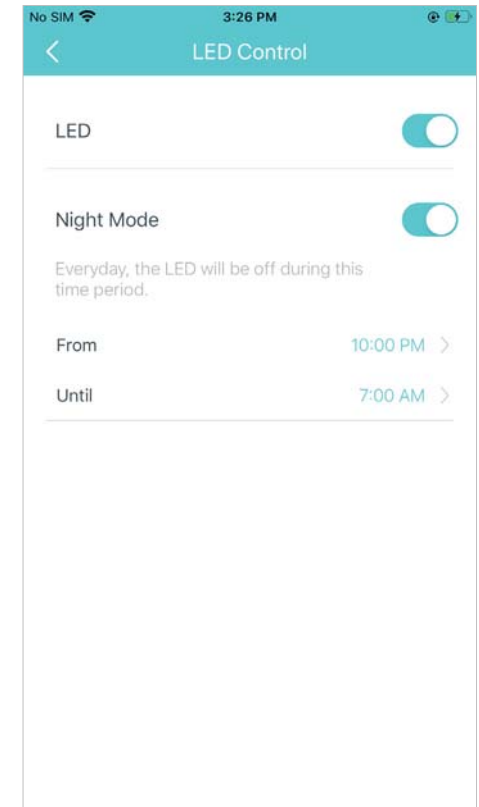


Change the operating mode.


Note: When the Deco works in Access Point mode, advanced features such as IPv4, Address Reservation, Port Forwarding, and DHCP server are not available.

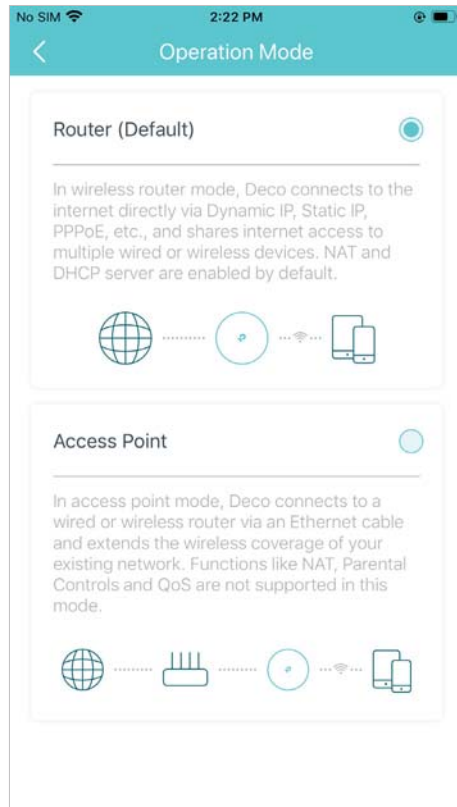

Set connection alerts to receive notifications once the clients connect to or disconnect from Deco.

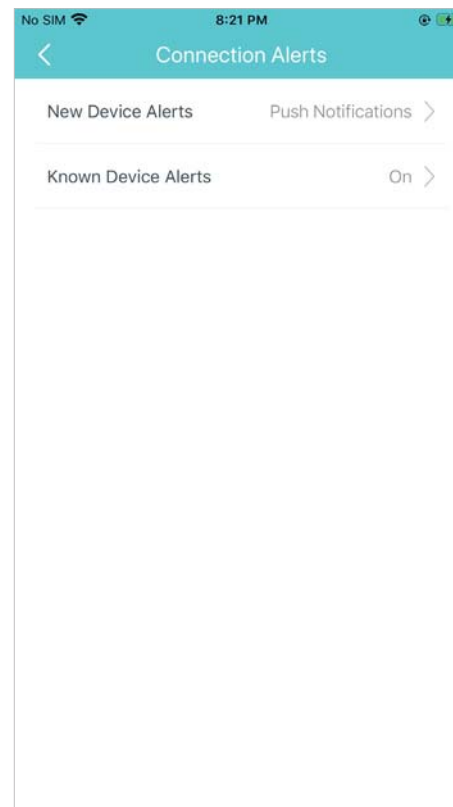


Set notifications to receive alerts in the notification bar.

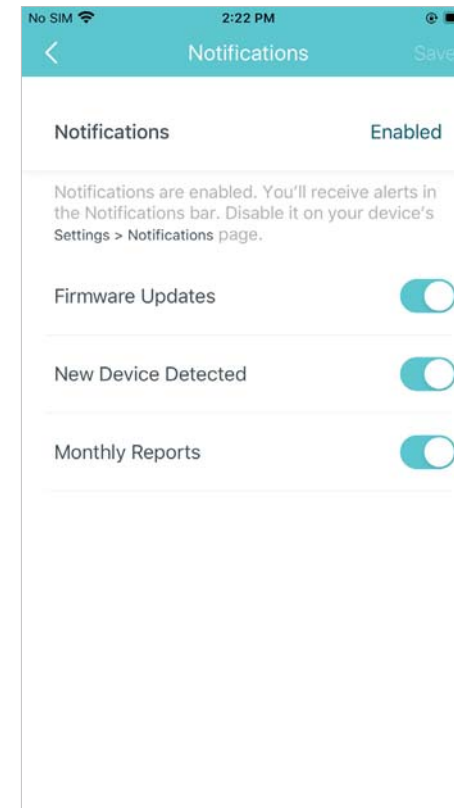


WPS

WPS (Wi-Fi Protected Setup) helps you to quickly and securely connect a client to a network with a tap without entering any password.


1. Tap  > WPS.

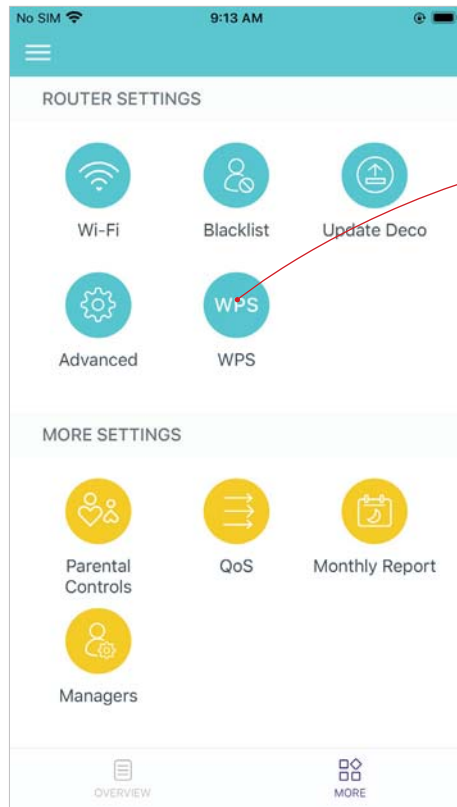

2. Tap the WPS icon in the Deco app and then on your client.

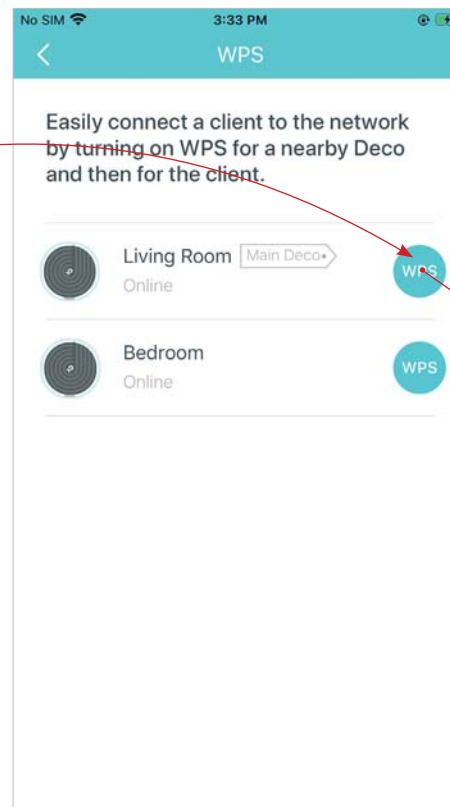


3. Your client has connected to the network successfully if shown as below.

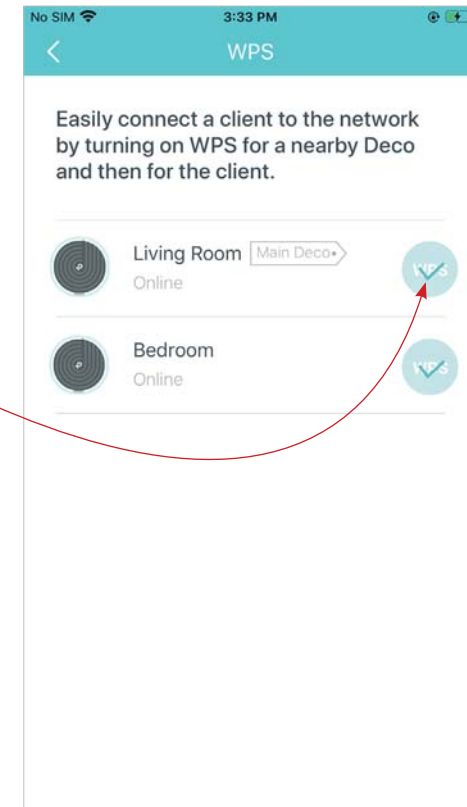


Parental Controls

Parental Controls allows you to filter content, limit time spent online and check internet history. Start by creating unique profiles for your family members.


1. Tap  > Parental Controls.

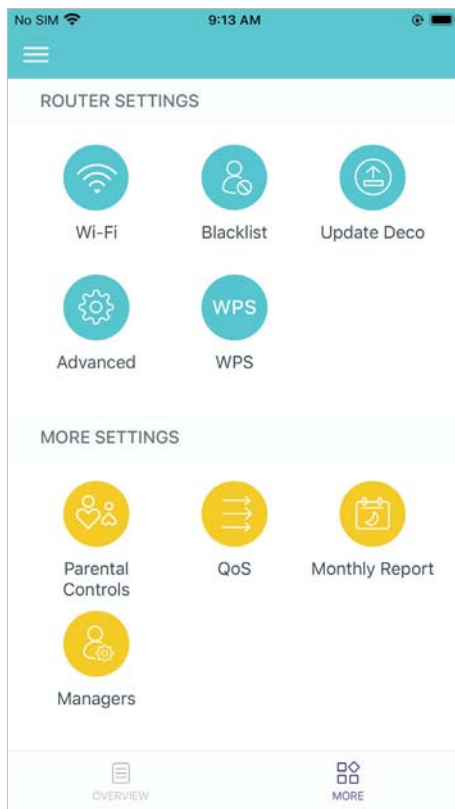


2. Create unique profiles for family members.

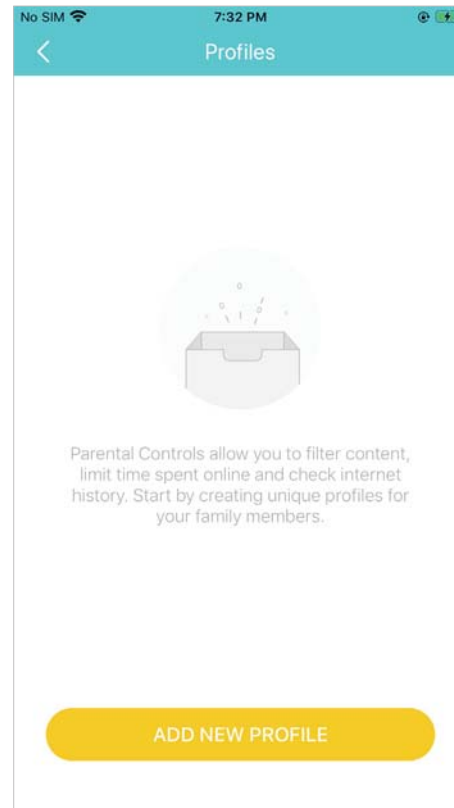

3. Set filter level to block inappropriate contents.

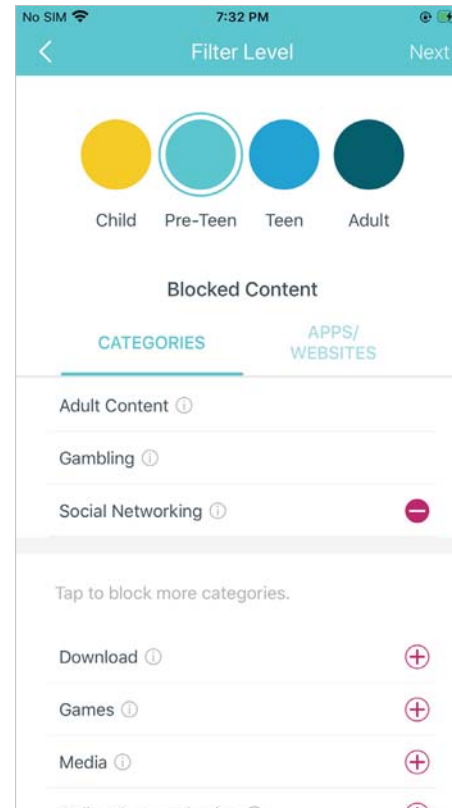


4. Set daily time limits for the total time spent online.

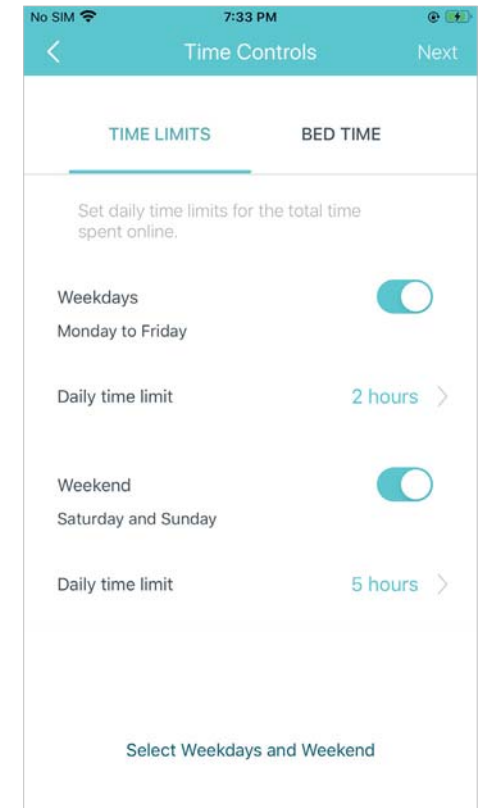


QoS

QoS (Quality of Service) helps you set priority for specific applications and devices, so that they can perform better with lower latency.


1. Tap  > QoS.

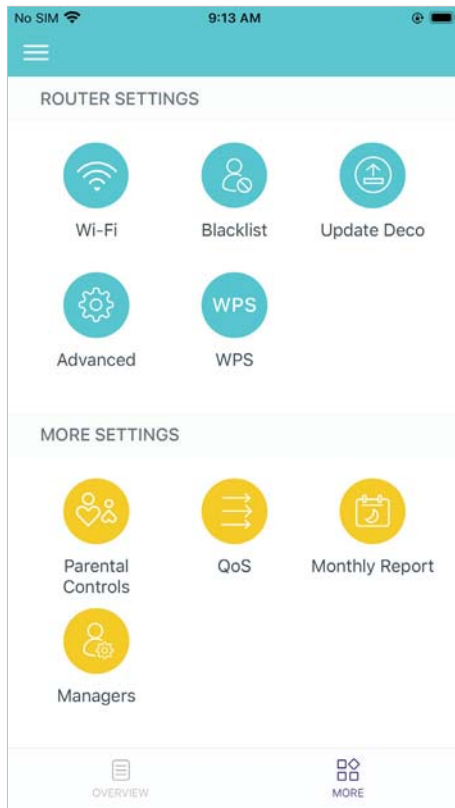

2. Set the total bandwidth before using QoS.

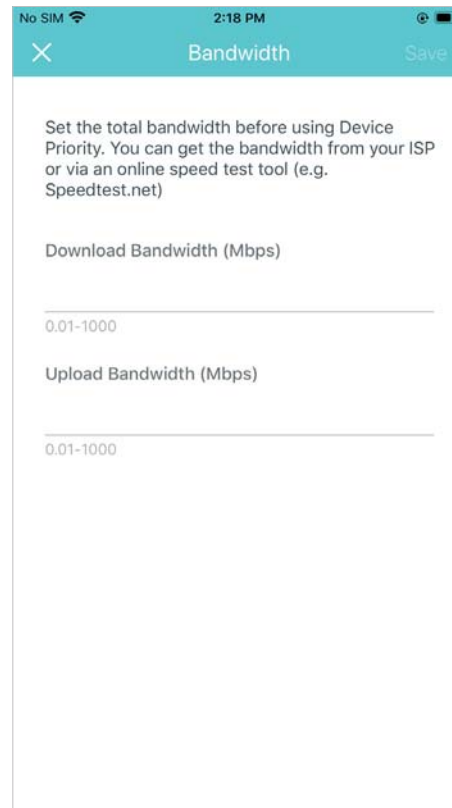


3. Add devices you want to prioritize to guarantee a better network performance.

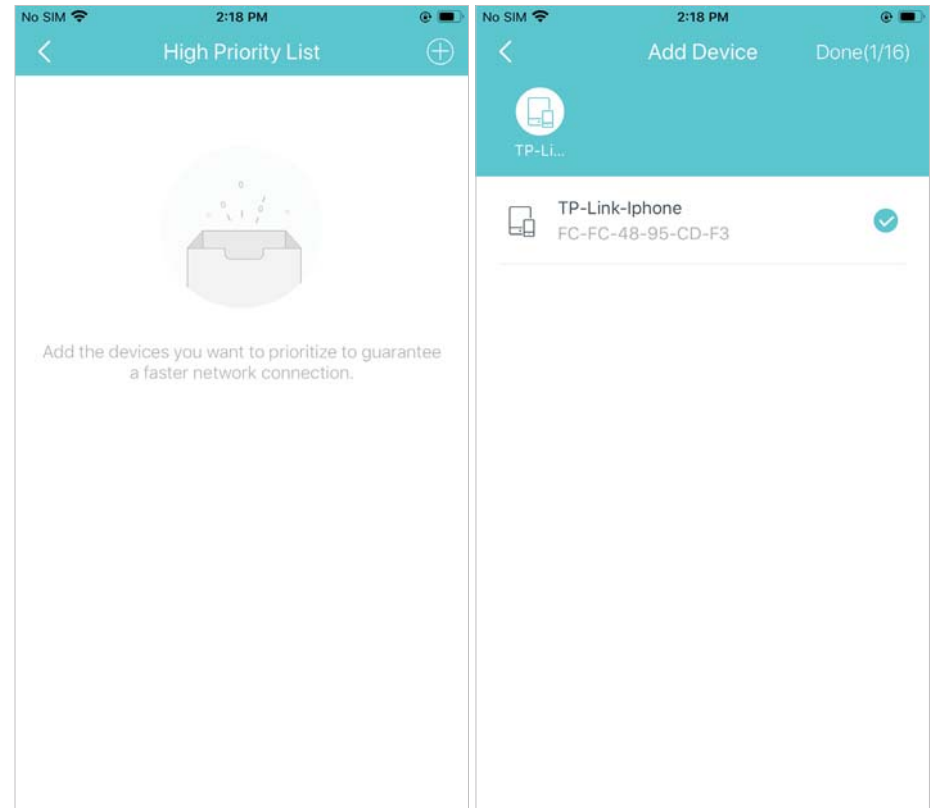

Monthly Report

Review the monthly usage statistics, such as security threats and total connected network devices each day.


Tap  > [Monthly Report](#).

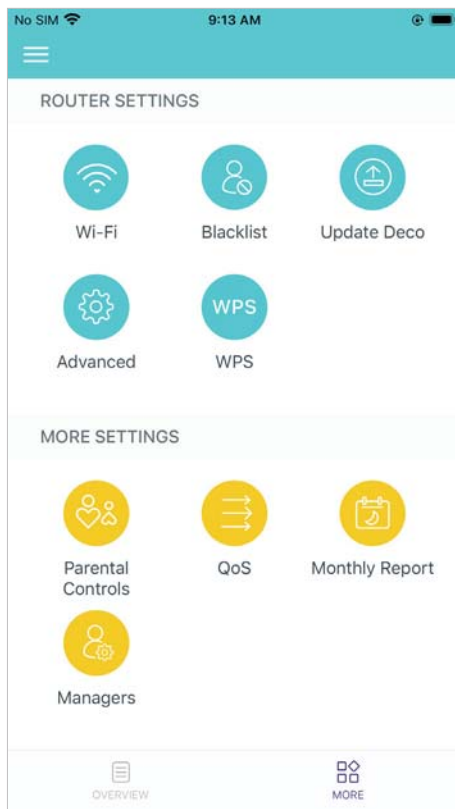


View monthly reports.



Enable or disable monthly report.

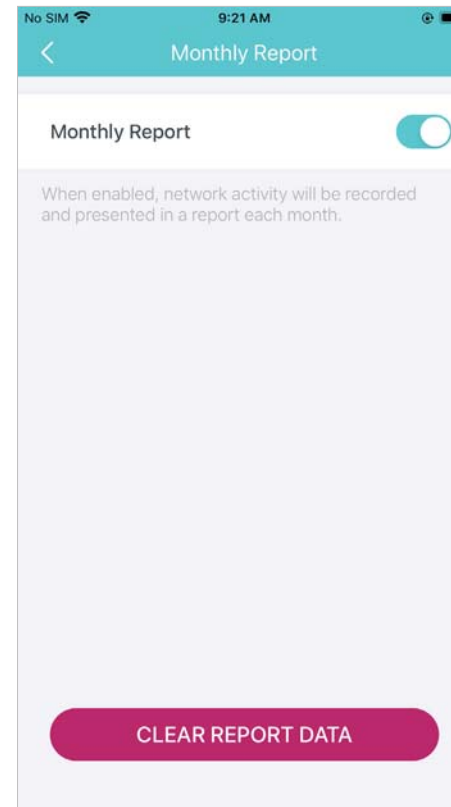


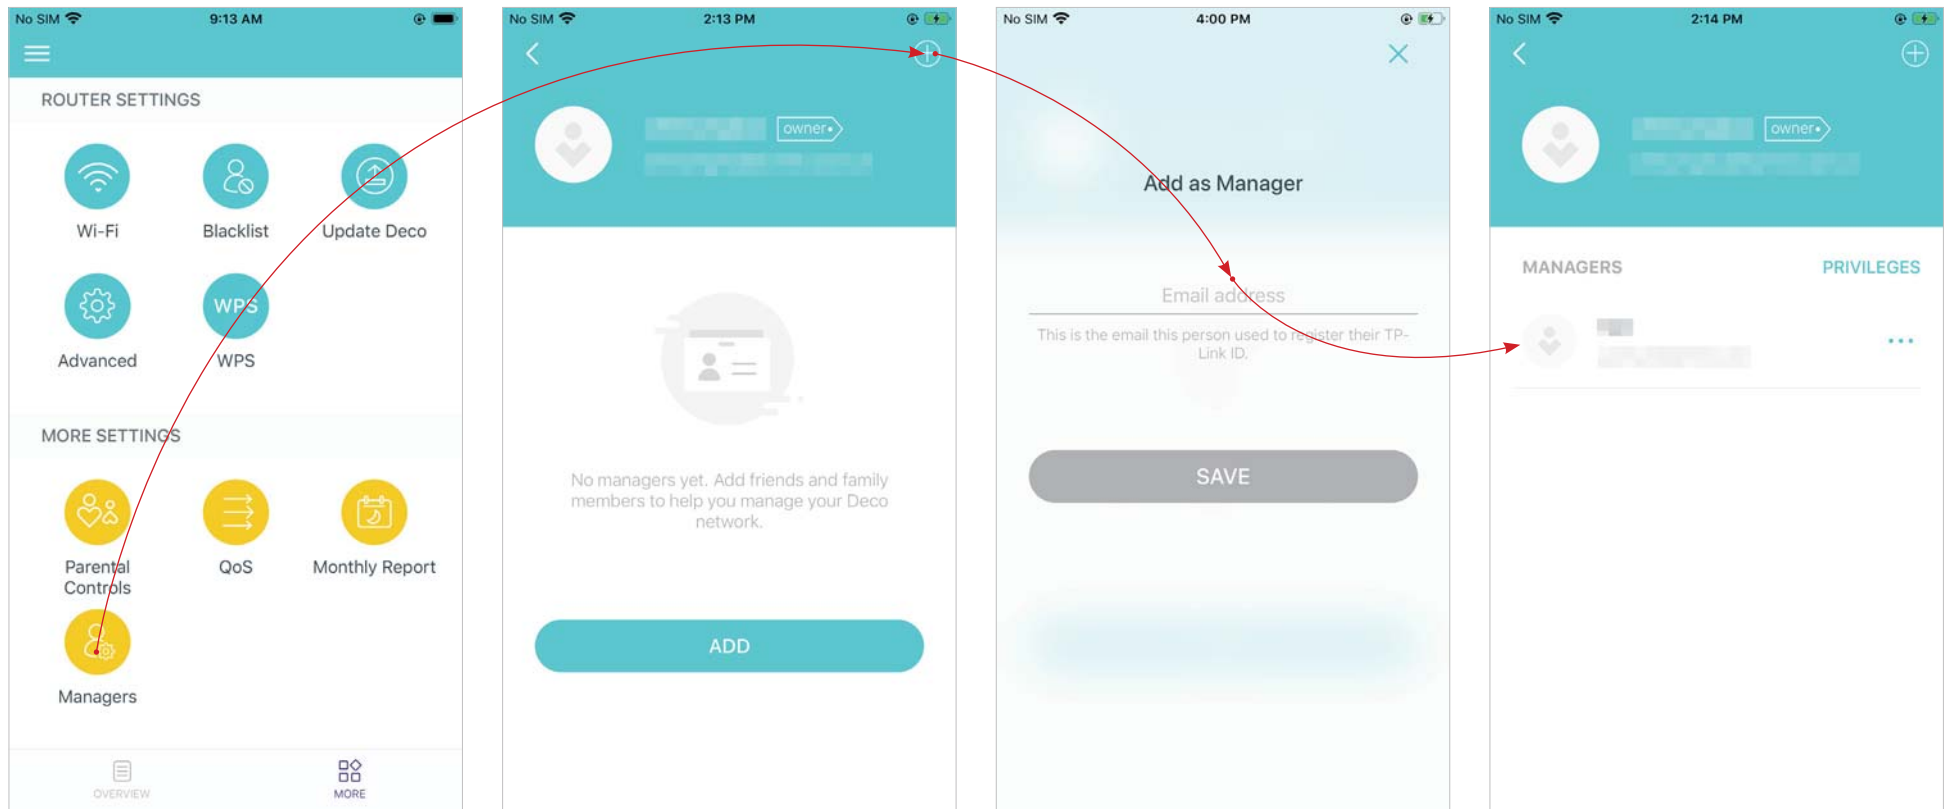
Clear monthly report data.

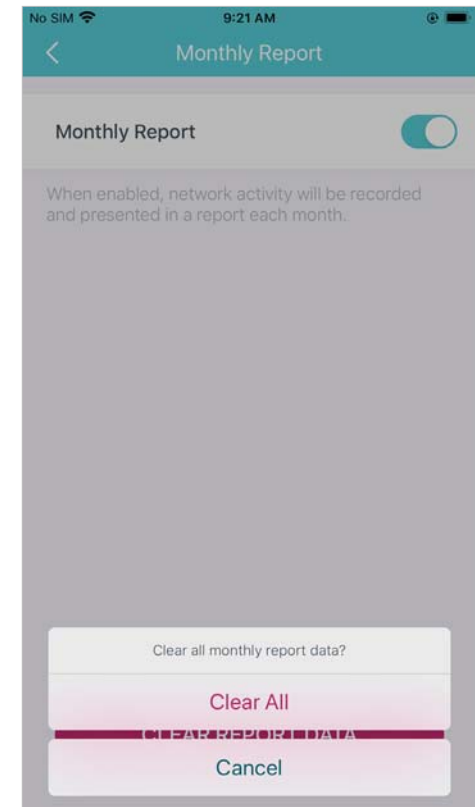

Managers

Add friends and family members to help manage your network. Each manager should have their own TP-Link ID.

Tap  > [Managers](#), and follow app instructions to add other TP-Link ID account as manager. Then the manager can start to manage the network.



Control Your Deco with Alexa


Alexa Integration allows you to control your Deco using Amazon's Alexa voice service. You can control and customize your home network by giving simple voice commands to Alexa, such as enabling the Guest Network, turning off your Deco LEDs, and more.

Follow the steps below to use Alexa voice commands to control your Deco network.

Tip: To know more about how to set up Alexa Integration in Alexa app, refer to <https://www.tp-link.com/support/faq/1571/>.

Note: This feature is currently available in English (US), English (UK), German and Japanese.

In the Deco app, tap  to open the menu, tap **Friends of Deco** > **Alexa** > **TP-Link Router Skill**, then follow the app instructions complete the setup.

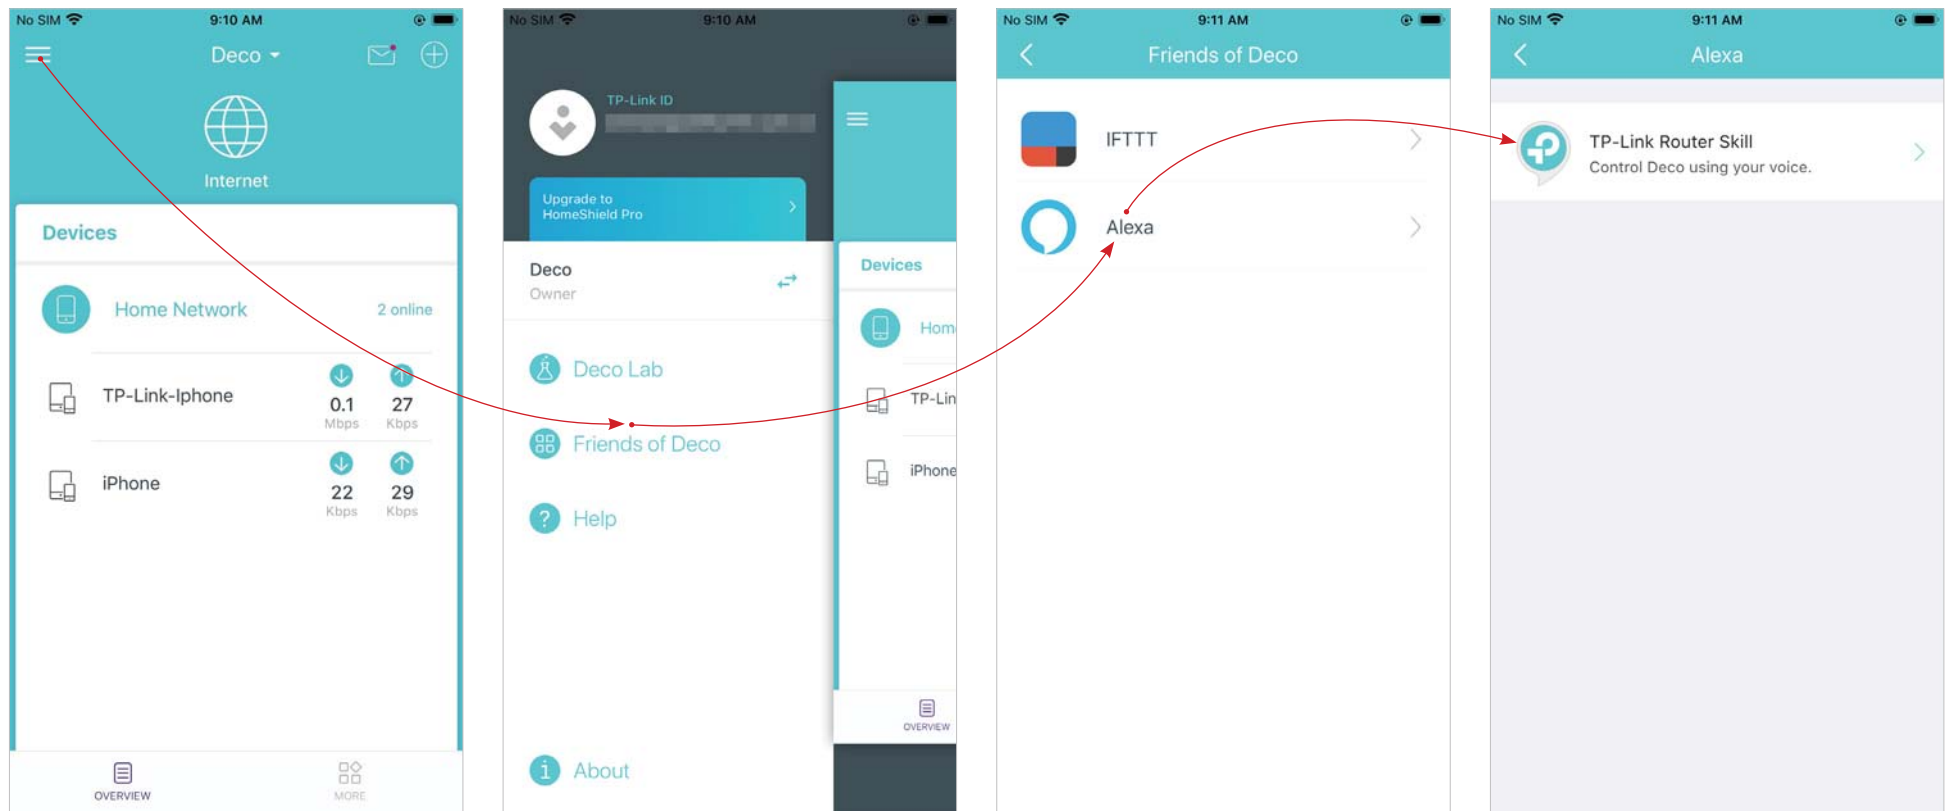

Troubleshooting

Solutions to common problems during setup or use are provided here for reference. Follow the steps in the provided link to solve your problem.
If problems still exist, contact us: <https://www.tp-link.com/support>

Q1. What should I do if I fail to configure the main Deco and get stuck on “We couldn't find Deco”?

Refer to the guide <https://www.tp-link.com/support/faq/2239/> or follow the video <https://youtu.be/2HYuEYS9XJM>

Q2. What should I do if I fail to configure the satellite Deco and get stuck on “We couldn't find another Deco”?

Refer to the guide <https://www.tp-link.com/support/faq/1447/> or follow the video <https://youtu.be/iVgDzoo16T4>

Q3. What should I do if I fail to configure the main Deco and get stuck on “Testing Internet Connection”?

Refer to the video <https://youtu.be/OSUrGdWH-i0>

Q4. What should I do if my wireless devices cannot connect to Deco?

Refer to the guide <https://www.tp-link.com/support/faq/2718/>

Q5. What should I do if Deco suddenly lost internet access?

Refer to the guide <https://www.tp-link.com/support/faq/1454/>

Q6. How can I find a suitable spot for my Deco?

Refer to the guide <https://www.tp-link.com/support/faq/1446/>

Q7. What can I do if the Deco app isn't working properly?

Refer to the guide <https://www.tp-link.com/support/faq/1456/>

Authentication

FCC Compliance Information Statement



Product Name: AC1900 Whole Home Mesh Wi-Fi System

Model Number: Deco S7

Component Name	Model
I.T.E POWER SUPPLY	T120150-2B1

Responsible party:

TP-Link USA Corporation, d/b/a TP-Link North America, Inc.

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 25 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

We, TP-Link USA Corporation, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2021-07-12

FCC Compliance Information Statement



Product Name: I.T.E POWER SUPPLY

Model Number: T120150-2B1

Responsible party:

TP-Link USA Corporation, d/b/a TP-Link North America, Inc.

Address: 145 South State College Blvd. Suite 400, Brea, CA 92821

Website: <http://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6803

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, TP-Link USA Corporation, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2021-07-12

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY(the maximum transmitted power)

2412MHz—2483.5MHz (20dBm)

5150MHz—5250MHz (23dBm)

EU Declaration of Conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011 /65/EU and (EU) 2015/863.

The original EU Declaration of Conformity may be found at <https://www.tp-link.com/en/support/ce/>

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

National restrictions

Attention: This device may only be used indoors in all EU member states and EFTA countries, and Northern Ireland.

	AT	BE	BG	CH	CY	CZ	DE	DK
	EE	EL	ES	FI	FR	HR	HU	IE
	IS	IT	LI	LT	LU	LV	MT	NL
	NO	PL	PT	RO	SE	SI	SK	UK(NI)

UKCA Mark



UK Declaration of Conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at <https://www.tp-link.com/support/ukca/>

National restrictions

Attention: This device may only be used indoors in Great Britain.



Canadian Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage;
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

Avertissement:

Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 25cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 25 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.

NCC Notice & BSMI Notice:

注意！

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

安全諮詢及注意事項

- 請按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先切斷電源。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 不要私自拆開機殼或自行維修，如產品有故障請與原廠或代理商聯繫。

限用物質含有情況標示聲明書

設備名稱：		型號（型式）：				
Equipment name:		Type designation (Type)				
AC1900 Whole Home Mesh Wi-Fi System		Deco S7				
單元 Unit	限用物質及其化學符號					
	Restricted substances and its chemical symbols					
	鉛	汞	鎘	六價鉻	多溴聯苯	多溴二苯醚
	Lead	Mercury	Cadmium	Hexavalent chromium	Polybrominated biphenyls	Polybrominated diphenyl ethers
	(Pb)	(Hg)	(Cd)	(Cr ⁺⁶)	(PBB)	(PBDE)
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○
電源供應器	—	○	○	○	○	○
其他及其配件	—	○	○	○	○	○

備考1. 超出0.1 wt %” 及 “超出0.01 wt %” 系指限用物質之百分比含量超出百分比含量基準值。

Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○” 系指該項限用物質之百分比含量未超出百分比含量基準值。

Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—” 系指該項限用物質為排除項目。

Note 3: The “—” indicates that the restricted substance corresponds to the exemption.



Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.








Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Operating Temperature: 0°C~40°C (32°F~104°F)
- Storage Temperature: -40°C~60°C (-40°F~140°F)
- Operating Humidity: 10%~90%RH, Non-condensing

- Storage Humidity: 10%~90%RH, Non-condensing

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Explanation of the symbols on the product label

Symbol	Explanation
	DC voltage
	Caution
	Operator's manual
	Indoor use only
	<p>RECYCLING</p> <p>This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.</p> <p>User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.</p>