

Copyright & Trademark Information

Fujitsu Computer Systems Corporation has made every effort to ensure the accuracy and completeness of this document. However, as ongoing development efforts are continually improving the capabilities of our products, we cannot guarantee the accuracy of the contents of this document. We disclaim liability for errors, omissions, or future changes.

Fujitsu, the Fujitsu logo, and LifeBook are registered trademarks of Fujitsu Limited.

MS, MS-DOS, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

PCMCIA is a trademark of the Personal Computer Memory Card International Association.

Intel and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Adobe, Acrobat, and Acrobat Reader are either a registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

All other trademarks mentioned herein are the property of their respective owners.

© Copyright 2004 Fujitsu Computer Systems Corporation. All rights reserved. No part of this publication may be copied, reproduced, or translated, without prior written consent of Fujitsu Computer Systems Corporation. No part of this publication may be stored or transmitted in any electronic form without the written consent of Fujitsu Computer Systems Corporation.

B6FH-3071-01EN-00

Warning



Handling the cord on this product or cords associated with accessories sold with this product, will expose you to lead, a chemical known to the State of California to cause birth defects or other reproductive harm.

Wash hands after handling.



DECLARATION OF CONFORMITY

according to FCC Part 15

Responsible Party Name: Fujitsu Computer Systems Corporation


Address: 1250 E. Arques Avenue, MS 122
Sunnyvale, CA 94085

Telephone: (408) 746-6000




Declares that product: Model Configuration:
LifeBook T4010 Tablet PC
LifeBook T4010D Tablet PC

Complies with Part 15 of the FCC Rules.

This device complies with Part 15 of the FCC rules. Operations are subject to the following two conditions:
(1) This device must not be allowed to cause harmful interference, (2) This device must accept any interference received, including interference that may cause undesired operation.



LifeBook T Series Tablet PC



Fujitsu LifeBook® T Series Tablet PC

Table of Contents

1

PREFACE

Preface

About This Guide	3
Fujitsu Contact Information	3
Warranty	3

2

GETTING TO KNOW YOUR TABLET PC

Overview

Unpacking	7
Optional Accessories	8

Locating the Controls and Connectors

Top and Front Components	10
Left-Side Panel Components	11
Right-Side Panel Components	12
Rear Panel Components	13
Bottom Components	14

Status Indicator Panel

Power Indicator	15
AC Adapter Indicator	15
Battery Level Indicators	15
Battery Charging Indicator	16
Hard Drive Access Indicator	16
NumLk Indicator	16
CapsLock Indicator	16
ScrLk Indicator	16
Security Indicator	16

Display Panel

Opening the Display Panel	17
Using the System as a Tablet	17
Adjusting Display Panel Brightness	18

Keyboard

Using the Keyboard	19
Numeric Keypad	19
Windows Keys	19
Cursor Keys	20
Function Keys	20

LifeBook Security/Tablet PC Buttons

Changing Tablet PC Button Functions	22
Setting up LifeBook Security Panel	22
Passwords	22
Using Your LifeBook Security Panel	23
Precautions	23
Uninstalling the Security Panel Application	24

Touchpad Pointing Device

Clicking	25
Double-Clicking	25
Dragging	26
Scrolling	26
Touchpad Control Adjustment	26

Pen and Active Digitizer

Using the Pen	27
Calibrating the Pen	27
Replacing the Pen Tip	28
Using the Active Digitizer	28

Volume Control

Controlling the Volume	29
----------------------------------	----

3

USING YOUR TABLET PC

Power Sources

Connecting the Power Adapters 33

Starting Your Tablet PC

Power On 34

Boot Sequence 34

BIOS Setup Utility 34

Booting the System 35

Activating Additional Utilities 35

Registering Your LifeBook T Series Tablet PC . . . 35

Power Management

Suspend/Resume Button 36

Standby Mode 36

Hibernate Mode 37

Display Timeout 37

Hard Disk Timeout 37

Windows Power Management 37

Restarting the System 37

Power Off 38

4

USER-INSTALLABLE FEATURES

Lithium ion Battery

Recharging the Battery 41

Replacing the Battery 42

Memory Upgrade Module

Installing Memory Upgrade Modules 43

To Remove a Memory Upgrade Module 43

Checking the Memory Capacity 44

PC Cards

Installing PC Cards 45

Removing PC Cards 45

Smart Card Reader 45

Port Replicator

Rear Panel Components 46

Front Panel Components 47

Attaching the Port Replicator 47

Detaching the Port Replicator 47

Device Ports

Modem (RJ-11) Jack 48

Internal LAN (RJ-45) jack 48

Docking Port 48

Universal Serial Bus Ports 48

Infrared Port 48

Microphone Jack 49

Headphone Jack 49

External Monitor Port 49

5

TROUBLESHOOTING

Troubleshooting

Identifying the Problem 53

Specific Problems 53

Troubleshooting Table 54

Power On Self Test Messages 61

Modem Result Codes 62

Restoring Your Software

Drive Image Special Edition (DISE) 63

6

CARING FOR YOUR TABLET PC

Care and Maintenance

Keyboard 68

Batteries 68

Optional Floppy Disk Drive and Floppy Disks . . . 68

Optional CD Drive and CDs 68

PC Cards 69

7 SPECIFICATIONS

Specifications

Configuration Label	73
Physical Specifications	73
Processing Specifications	73
Memory/Storage Specifications	73
Display Specifications	73
Interface Specifications	73
Power Specifications	74
Environmental Specifications	74
Agency Approval Specifications	74
Additional Specifications	74
Regulatory Information	75

8 GLOSSARY

Glossary	81
--------------------	----

APPENDIX: INTEGRATED WIRELESS LAN USER'S GUIDE

Before Using the Wireless LAN

Wireless LAN Modes Using this Device	90
Wireless Network Considerations	91
Deactivating the WLAN Device	92
Activating the WLAN Device	92

Configuration of the WLAN Device

Flow of Operations	93
Configuration Using Wireless Zero Configuration Tool	93
Configuration Using Intel PROSet Software	94
Configuration Using Atheros Client Utility Software	95
Connection to the network	97

Troubleshooting the WLAN

Troubleshooting	101
---------------------------	-----

Wireless LAN Glossary

Glossary	102
--------------------	-----

IP address information


Additional Information	103
----------------------------------	-----

WLAN Specifications



Specification	104
-------------------------	-----

Using the Bluetooth Device


What is Bluetooth	109
Where to Find Information About Bluetooth	109





LifeBook T Series Tablet PC



1 Preface



LifeBook T Series Tablet PC



Preface

ABOUT THIS GUIDE

The LifeBook® T Series Tablet PC from Fujitsu Computer Systems Corporation is a powerful convertible computer. It can be used either as a standard notebook using keyboard input, or in tablet configuration using pen input. It is powered by an Intel® microprocessor, has a built-in color display with an active digitizer, and brings the computing power of desktop personal computers (PCs) to a portable and versatile environment.

This manual explains how to operate your LifeBook T Series Tablet PC's hardware and built-in system software. Your LifeBook T Series Tablet PC comes with Windows® XP Tablet Edition pre-installed.

Your LifeBook T Series Tablet PC is a completely self-contained unit with an active-matrix (TFT) color LCD display. The display has a wide viewing angle and can be used indoors or outdoors. The tablet has a powerful interface that enables it to support a variety of optional features.

Conventions Used in the Guide

Keyboard keys appear in brackets.

Example: [Fn], [F1], [Esc], [Enter] and [Ctrl].

Pages with additional information about a specific topic are cross-referenced within the text.

Example: (See page xx.)

On screen buttons or menu items appear in bold.

Example: Click **OK** to restart your Tablet PC.

DOS commands you enter appear in Courier type.

Example: Shutdown the computer?



The information icon highlights information that will enhance your understanding of the subject material.



The caution icon highlights information that is important to the safe operation of your computer, or to the integrity of your files. Please read all caution information carefully.



The warning icon highlights information that can be hazardous to either you, your system, or your files. Please read all warning information carefully.

FUJITSU CONTACT INFORMATION

Service and Support

You can contact Fujitsu Computer Systems Service and Support the following ways:

- Toll free: 1-800-8Fujitsu (1-800-838-5487)
- Fax: 1-408-764-2724
- E-mail: 8fujitsu@us.fujitsu.com
- Web site: <http://us.fujitsu.com/computers>

Before you place the call, you should have the following information ready so that the customer support representative can provide you with the fastest possible solution:

- Product name
- Product configuration number
- Product serial number
- Purchase date
- Conditions under which the problem occurred
- Any error messages that have occurred
- Type of device connected, if any

Fujitsu Online

You can go directly to the online Fujitsu Product catalog for your Tablet PC. Go to Start -> All Programs -> Service & Support Software, and click on Pen Accessories Web site.


You can also reach Fujitsu Service and Support online by going to Start -> All Programs -> Service & Support Software, and clicking on Fujitsu Service & Support Web site.





You must have an active internet connection to use the online URL links.

WARRANTY

Your LifeBook T Series Tablet PC is backed by an International Limited Warranty and includes toll-free technical support. Check the service kit that came with your Tablet PC for warranty terms and conditions.




LifeBook T Series Tablet PC - Preface







2

Getting to Know Your Tablet PC



LifeBook T Series Tablet PC



TBD - NEW GRAPHIC

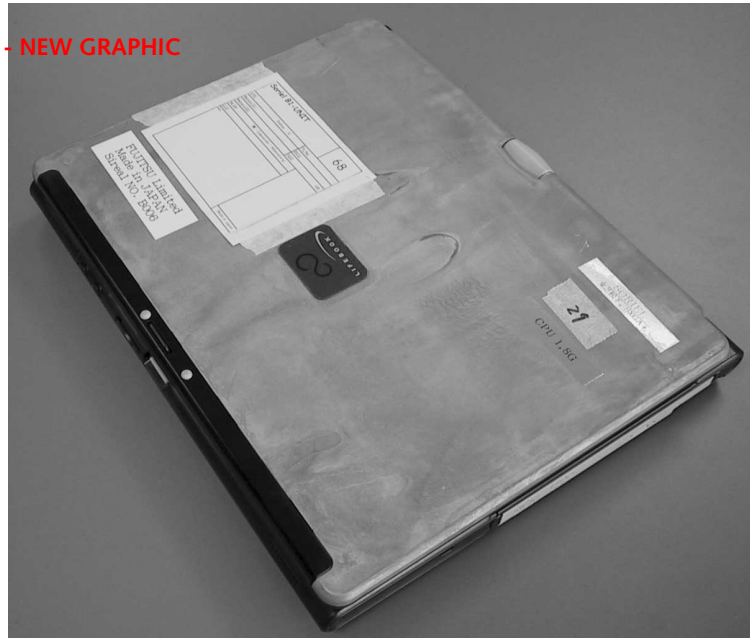


Figure 2-1. Fujitsu LifeBook T Series Tablet PC

Overview

This section describes the components of your Fujitsu LifeBook T Series Tablet PC. We strongly recommend that you read it before using your Tablet PC, even if you are already familiar with mobile computers.

UNPACKING

When you receive your LifeBook T Series Tablet PC, unpack it carefully, and compare the parts you have received with the items listed below.

For a pre-configured model you should have:

- LifeBook T Series Tablet PC (Figure 2-1)
- AC adapter with AC power cord (Figure 2-2)
- Phone/Modem (RJ-11) telephone cable
- Pen
- Driver and Application Restore (DAR) CD
- Getting Started Guide
- User's Guide (this document)
- International Limited Warranty Booklet
- Certificate of Authenticity
- Lithium ion battery (pre-installed)

You may also have one or more of the following optional devices in the box:

- Port Replicator (Figure 2-3)
- External USB Floppy Disk Drive

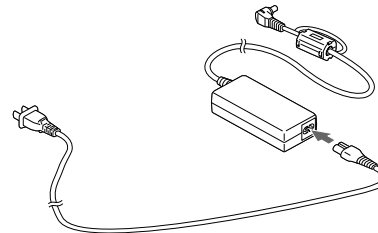


Figure 2-2. AC Adapter



Figure 2-3. Optional Port Replicator

LifeBook T Series Tablet PC - Section 2

OPTIONAL ACCESSORIES - TBD ALL

The following optional accessories can be used with the LifeBook T Series Tablet PC. Refer to the instructions provided with these accessories for details on their use. For the latest list of accessories available for your LifeBook T Series Tablet PC, be sure to frequently check the Fujitsu Web site at: us.fujitsu.com/computers.












Peripheral/Accessory	Fujitsu Part Number
Docking Options	
LifeBook T Series Tablet PC port replicator	FPCPR39AP
Carrying Cases	
Duo Travel Bag	FPCCC16
Director leather carrying case	FPCCC22
Diplomat carrying case	FPCCC02
Propak backpack	FPCCC07
Storage Options	
External USB floppy disk drive	FPCFDD12
External DVD/CD-RW combo drive	FPCDVR26
External CD-ROM drive	FPCCD33AP
Memory	
256 MB SDRAM, DDR266	FPCEM51AP
512 MB SDRAM, DDR 266	FPCEM55AP
1.0 GB SDRAM, DDR 266	FPCEM87AP
128 MB Compact Flash card	FPCEMC02
256 MB Compact Flash card	FPCEMC03
128 MB Secure Digital memory card	FPCEMC01
Power Options	
AC Adapter with US cord	FPCAC23
Main battery	FPCBP73AP
Auto/airline adapter	FPCAA02
Battery charger	FPCBC06
Input Accessories	
Replacement pen set (2-pack)	FPCPN11AP
USB optical mouse	FPCMO08AP
Additional Accessories	
Smart Card holder	FPSCCH01
4-in-1 PC Card Adapter	FPCC01
Compact Flash card adapter	FPCCFA01
Notebook Guardian Lock	FPCLCK02
USB 2.0 and FireWire CardBus DV Kit	FPCC02

Table 2-1. Optional Accessories for LifeBook T Series Tablet PC

Locating the Controls and Connectors

Connectors and peripheral interfaces on the LifeBook T Series Tablet PC and the optional port replicator allow you to connect a variety of devices. Specific locations are illustrated in Figures 2-4 through 2-8. The table below

provides a short description of each icon on the LifeBook T Series Tablet PC. Each of the icons is either molded into or printed on the Tablet PC chassis.

Connection	Tablet PC Icon	Purpose
DC in connector		Connect an external power source such as the AC adapter or auto/airline adapter.
SD/Memory Stick Slot		The Secure Digital (SD) card/Memory Stick slot allows you to install a flash memory card for data storage. Flash memory cards allow you to transfer data to and from a variety of different digital devices.
Smart Card Slot	tbd	The dedicated Smart Card slot allows you to install a Smart Card on which you can store such data as medical information or electronic "cash".
USB Port		Connect Universal Serial Bus 2.0 or 1.1 compliant devices to the Tablet PC.
PCMCIA Card slot		Install Type I, Type II, or Type III PC Cards.
Microphone jack		Connect an external microphone. The internal microphone is disabled when you plug in an external microphone.
Headphone jack		Connect stereo headphones or powered external speakers. The internal speaker is disabled when you plug in external headphones or powered speakers.
IrDA/FIR port		An infrared transceiver built into the Tablet PC allows you to communicate with other devices that are compliant with IrDA Standard Rev. 1.1. Effective range for infrared communication is about 3 feet, and within 15 degrees off center. A clear line-of-sight path must exist between the IrDA port on the computer and the IrDA transceiver on the other device.
Modem		Connect a telephone line to the internal modem using a standard RJ-11 telephone plug.
Tablet Dock port		Connect the Tablet PC port replicator or other approved docking device. Refer to documentation accompanying the dock for more information.
Security lock slot		The security slot allows you to secure the Tablet PC using Kensington-compatible locking devices.
Suspend/Resume button		The Suspend/Resume button allows you to suspend Tablet PC activity without powering off, resume your Tablet PC from suspend mode, and power on the system when it has been shut down from Windows.

LifeBook T Series Tablet PC - Section 2





Connection	Tablet PC Icon	Purpose
Local Area Network (LAN)		The LAN (RJ-45) jack is used to connect the internal Fast Ethernet (10/100 Base-T/TX) to a Local Area Network (LAN) in your office or home, or broadband devices such as a cable modem, DSL, or satellite Internet.
Battery Release Latch		The battery release latch allows you to remove the battery from your system for storage or replacement.
Wireless LAN On-Off Switch		The wireless LAN switch allows you to turn power to the optional wireless LAN device on and off.
Display Rotation		This icon indicates the direction in which the display should be rotated when converting to tablet mode.

Table 2-2. System icons

Getting to Know Your Tablet PC

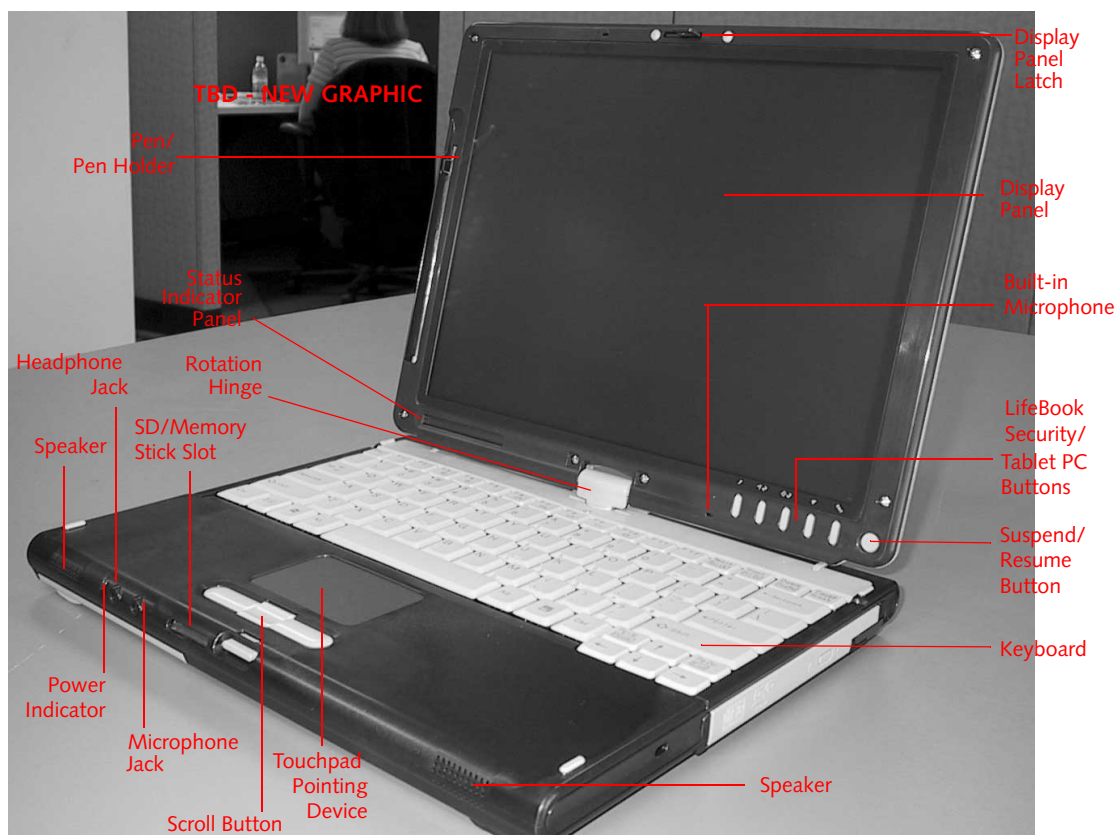


Figure 2-4. LifeBook T Series Tablet PC with display open

TOP AND FRONT COMPONENTS

The following is a brief description of the top and front features of the LifeBook T Series Tablet PC. (Figure 2-4)

Pen/Pen Holder

The pen is used as the interface with the active digitizer display.

Built-in Microphone

The built-in microphone allows you to input mono audio.

Display Panel Latch

The display panel latch locks and releases the display panel.

Power Indicator

The power indicator **TBD**

Status Indicator Panel

The Status Indicator Panel displays symbols that correspond to specific components of your LifeBook T Series Tablet PC. See “Status Indicator Panel” on page 15.

LifeBook Security/Tablet PC Buttons

The LifeBook T Series Tablet PC Security/Tablet PC Buttons provide hardware security and application launch capabilities. See “LifeBook Security/ Tablet PC Buttons” on page 21.

Touchpad Pointing Device

The Touchpad pointing device consists of two mouse-like buttons and one scroll button. See “Touchpad Pointing Device” on page 25.

Keyboard

A full-function keyboard with dedicated Windows keys. See “Keyboard” on page 19.

SD Card/Memory Stick

The Secure Digital (SD) card/Memory Stick slot allows you to install a flash memory card for data storage. Flash memory cards allow you to transfer data to and from a variety of different digital devices.

Display Panel

The display panel is a color LCD panel with back lighting for the display of text and graphics and active digitizer functionality.

LifeBook T Series Tablet PC - Section 2

Dual Speakers

The dual speakers allow you to listen to stereo sound from your system.

Suspend/Resume Button

The Suspend/Resume button allows you to suspend Tablet PC activity without powering off, resume your Tablet PC from standby mode, and power on your system when it has been shut down from the Windows operating system. See “Power On” on page 34.

Rotation Hinge

The rotation hinge allows you to transform your Tablet PC from a notebook configuration into a tablet configuration. For more information, see See “Using the System as a Tablet” on page 17.

Headphone Jack

The headphone jack allows you to connect headphones or powered external speakers. See “Headphone Jack” on page 53.

Microphone Jack

The microphone jack allows you to connect an external mono microphone. See “Microphone Jack” on page 53.