



This convenient guide will lead you through the start-up process and will also offer some valuable tips.

## What's in the Box


Check to see that all of the following items are in the box:

- Fujitsu notebook
- Lithium ion battery, pre-installed
- AC adapter with power cord
- Drivers and Applications Restore (DAR) disc
- International Limited Warranty and Registration booklet


## Controls, Connectors, and Access Points

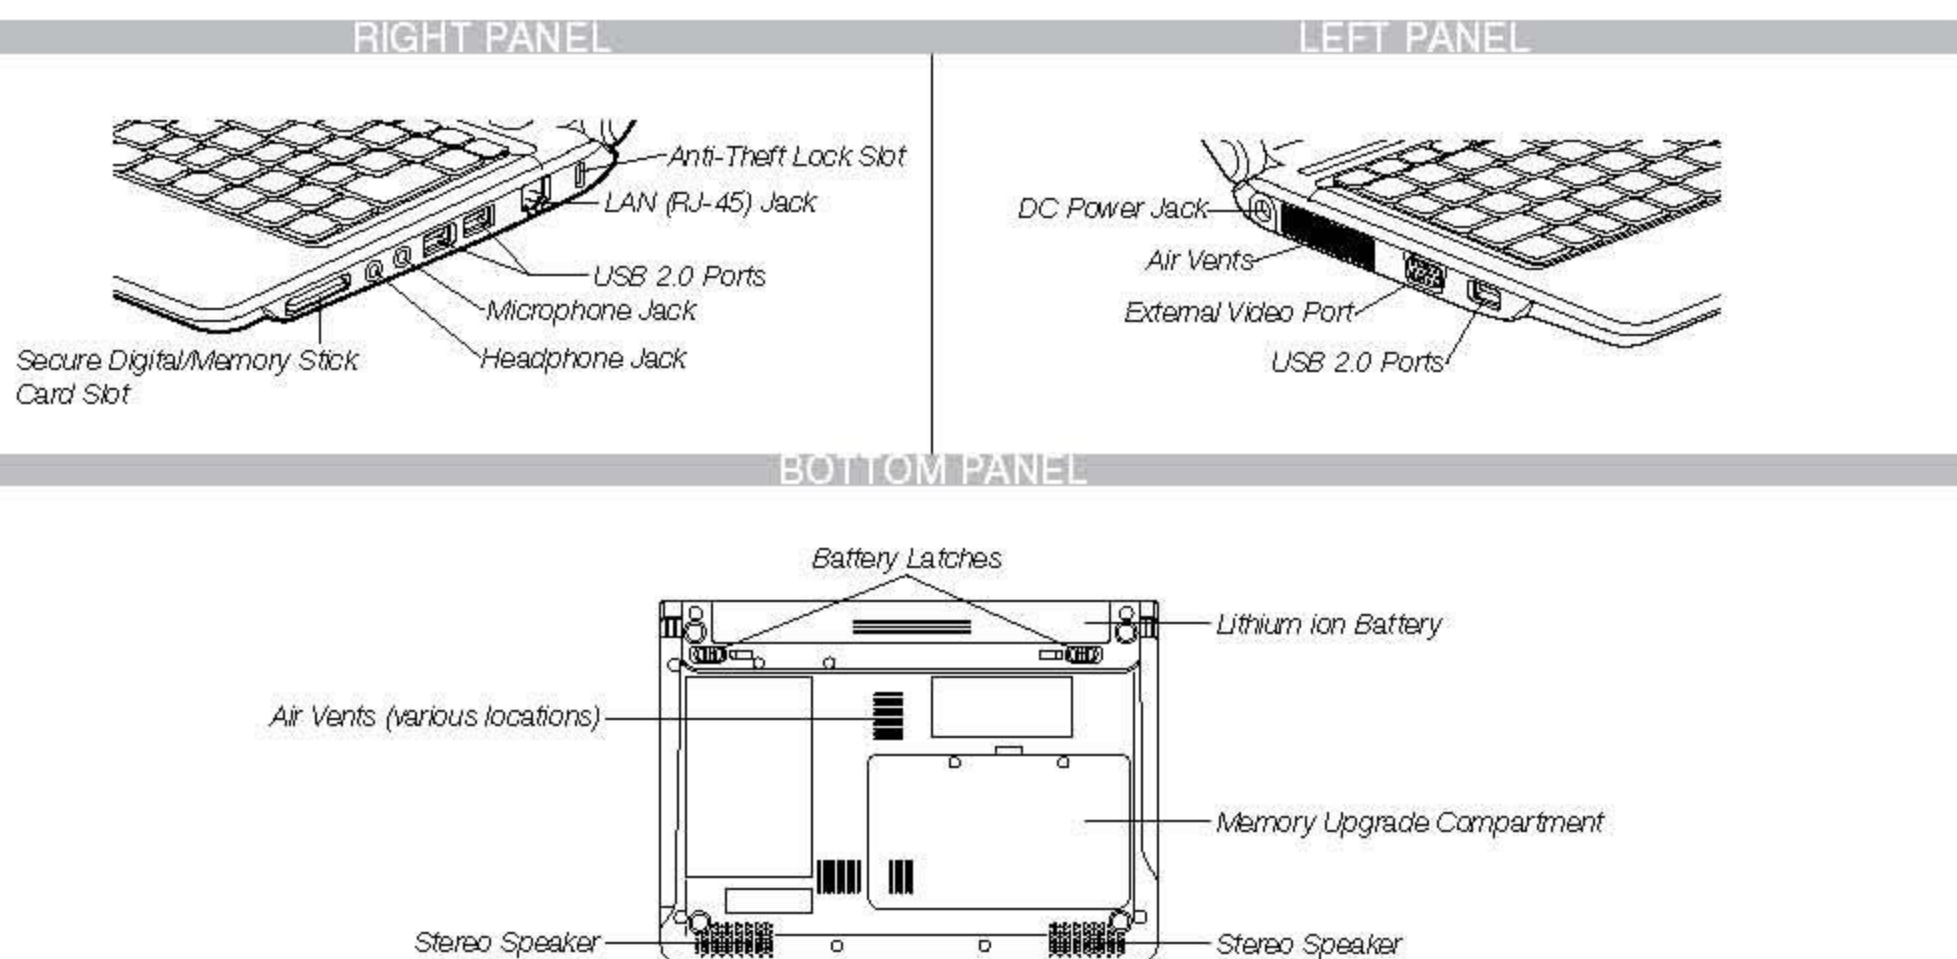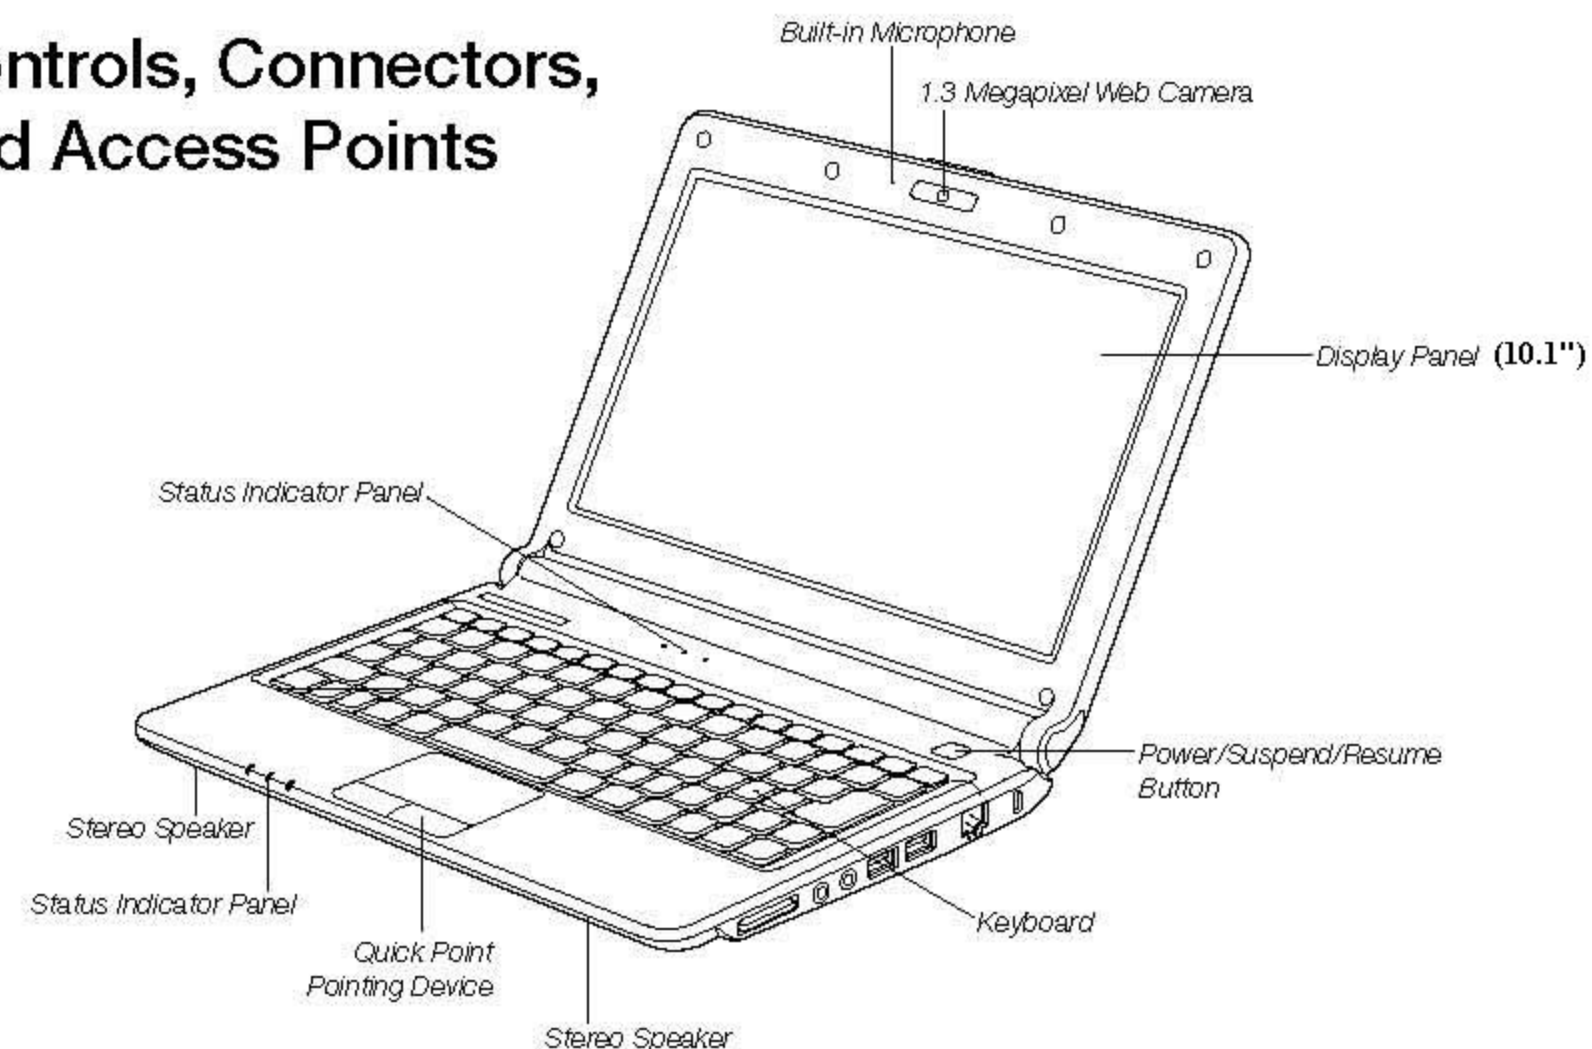

## Initial Start Up

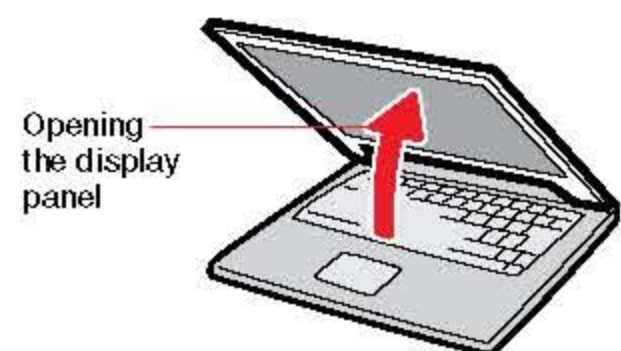

Opening the display panel

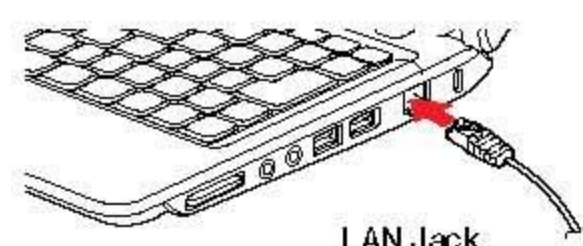

LAN Jack



Power/Suspend/Resume Button

### 1. Open the Display Panel

- Ensure that your notebook is on a hard level surface and that the air vents are not blocked.
- Lift the display, being careful not to touch the screen.
- Adjust the display until it is at a comfortable viewing angle.

### 2. Connect AC Power

- Plug the AC adapter into your notebook.
- Plug the power cord into the AC adapter.
- Connect the power cord to an electrical outlet.

### 3. Connect to Internet or Network

- Connect the Ethernet cable to the LAN jack on your notebook and to a wall jack or to an Ethernet router.

#### Important:

- During the setup procedure, do not disconnect the power supply, press any buttons, or use any peripheral devices such as a remote control.
- You should not attach any external devices and do not put a DVD/CD in your drive until you have gone through the initial power on sequence.

### 4. Booting the System

- i** The Lithium ion battery is not charged upon purchase. Initially you will need to connect either the AC adapter or the Auto/Airline adapter to use your notebook.
- i** Be careful when you select the language. The only way to change the language is to do a recovery process.

- Press the Suspend/Resume/Power button (above the keyboard) to turn on the notebook. When you do this for the first time, it will display a Fujitsu logo on the screen. If you do nothing the system will load the operating system, and then the Windows Welcome will begin.

### 5. Installing Click Me!

- When you click the Click Me! icon, your system will automatically build the icon tray in the bottom right of the screen. These icons provide links to utilities that you will frequently access.



- If the FDU icon is missing from Windows taskbar notification area, please download and install FDU package from the support website. This application will keep your notebook up to date with the latest released drivers.

### 6. Registering Your Fujitsu notebook

- Register your notebook with Fujitsu Service and Support via our website at [us.fujitsu.com/computers](http://us.fujitsu.com/computers).
- You will need to be set up with an Internet Service Provider (ISP) to register online.

### 7. Access your User's Guide

- To take advantage of all the features of your new Fujitsu notebook, it is highly recommended that you read your electronic User's Guide. It contains important detailed information about your new computer. You can access your User's Guide by selecting its icon from the screen desktop. You will need to be connected to the Internet.



### 8. Restoring your System

- If the need arises, you can safely recover back to the factory image by following a straight-forward procedure which comes with your recovery disc.

## Common Indicators

### Status Display Panel

The Status Indicators represent specific components of your Fujitsu notebook. The LEDs below each symbol tell you how each of those components are operating.

**Wireless Device Indicator**  
Glow blue when your wireless device is turned on.

**Power Indicator**  
Glow blue when your system is turned on.

**Battery Charger / DC In**  
Orange, solid: AC adapter and battery are available and system is charging.

Green, solid: AC adapter and battery are available and system is fully charged, or AC adapter is plugged in but battery is not installed.

Orange, blinking: AC adapter and battery are available and waiting to charge battery (battery is out of thermal range).

Off: AC adapter is not plugged in.

**i** If the battery pack is installed while the power is turned off, the battery level indicator will display the charge level for five seconds after it blinks orange.

**i** If the AC adapter is not connected or the battery pack is not fully charged when the computer is switched to standby mode, the indicator will blink. The LED blinks at the rate of one second on/six seconds off.

**!** Batteries subjected to shocks, vibration or extreme temperatures can be permanently damaged.

A shorted battery is damaged and must be replaced.

**!** **Hard Drive Access**  
Glow green when your internal hard drive is being accessed. Note that flickering is normal.

**!** **Caps Lock**  
Glow when your keyboard is set to type in all capital letters.

**!** **NumLock**  
Glow when the integral keyboard is in ten-key numeric keypad mode.



## Quick Tips

It takes approximately 4 hours to charge a fully discharged single battery with unit off or in suspend mode.

### Optimizing Battery Life

- Set power management setting to Maximize Battery Life.
- Adjust display brightness levels to lowest comfortable setting.
- Remove PC Cards and Express-Cards when not needed.
- Utilize Suspend mode when not using your notebook.
- Read the Power Management section in your electronic User's Guide for additional features.

### Adjusting Display Brightness

- Fn + F6 to decrease brightness
- Fn + F7 to increase brightness

### Adjusting Volume

- Fn + F8 to decrease volume
- Fn + F9 to increase volume

- Stereo microphone/line in jack depending on configuration.
- Stereo headphone/Optical Digital Audio out jack or stereo headphone/Line Out/Optical Digital Audio out jack.

## Drivers

Look for the latest drivers on the Drivers and Applications Restore disc, or download them at [us.fujitsu.com/computers](http://us.fujitsu.com/computers).



## SAVE THESE INSTRUCTIONS

All repairs must be accomplished by an Authorized Repair Technician.



### Warning



HANDLING THE CORD ON THIS PRODUCT WILL EXPOSE YOU TO LEAD, A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. WASH HANDS AFTER HANDLING.

**DECLARATION OF CONFORMITY** according to FCC Part 15 Responsible Party Name: Fujitsu Computer Systems Corporation Address: 1250 E. Arques Avenue, M/S 122 Sunnyvale, CA 94085 Telephone: (408) 746-6000 Declares that product: Base Model Configuration: Fujitsu M2010 notebook Complies with Part 15 of the FCC Rules. This device complies with Part 15 of the FCC rules. Operations are subject to the following two conditions: (1) This device may not cause harmful interference, (2) This device must accept any interference received, including interference that may cause undesired operation.

### IMPORTANT SAFETY INSTRUCTIONS

This unit requires an AC adapter to operate. Use only UL Listed I.T.E. Class II Adapters with an output rating of 19 VDC, with a current of 4.22 A (80 W).

AC adapter output polarity:

When using your notebook equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:

- Do not use this product near water for example, near a bathtub, washbowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- Avoid using the modem during an electrical storm. There may be a remote risk of electric shock from lightning.
- Do not use the modem to report a gas leak in the vicinity of the leak.
- Use only the power cord and batteries indicated in this manual. Do not dispose of batteries in a fire. They may explode. Check with local codes for possible special disposal instructions.
- To reduce the risk of fire, use only No. 26 AWG or larger UL Listed or CSA Certified Telecommunication Line Cord.
- For TV tuner use: To protect from overvoltages and transients on the Cable Distribution System, be sure that the outer shield of the coaxial cable is connected to earth (grounded) at the building premise as close to the point of cable entrance as practicable, as required per NEC Article 820.93, ANSI/NFPA 70: 2005. If you have questions about your CATV installation, contact your service provider.

### For Authorized Repair Technicians Only



### Warning

DANGER OF EXPLOSION IF LITHIUM (CLOCK) BATTERY IS INCORRECTLY REPLACED. REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE RECOMMENDED BY THE MANUFACTURER. DISPOSE OF USED BATTERIES ACCORDING TO THE MANUFACTURER'S INSTRUCTION.



### Caution

FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH THE SAME TYPE AND RATING FUSE.

## System Disposal



LAMP(S) INSIDE THIS PRODUCT CONTAIN MERCURY AND MUST BE RECYCLED OR DISPOSED OF ACCORDING TO LOCAL, STATE, OR FEDERAL LAWS.

## Recycling your battery

Over time, the batteries that run your mobile computer will begin to hold a charge for a shorter amount of time; this is a natural occurrence for all batteries. When this occurs, you may want to replace the battery with a fresh one\*. If you replace it, it is important that you dispose of the old battery properly because batteries contain materials that could cause environmental damage if disposed of improperly.



Fujitsu is very concerned with environmental protection, and has enlisted the services of the Rechargeable Battery Recycling Corporation (RBRC)\*\*, a non-profit public service organization dedicated to protecting our environment by recycling old batteries at no cost to you.

RBRC has drop-off points at tens of thousands of locations throughout the United States and Canada. To find the location nearest you, go to [www.RBRC.org](http://www.RBRC.org) or call 1-800-822-8837.

If there are no convenient RBRC locations near you, you can also go to the EIA Consumer Education Initiative website (<http://EIAE.org/>) and search for a convenient disposal location. Remember—protecting the environment is a cooperative effort, and you should make every effort to protect it for current and future generations.

\* To order a new battery for your Fujitsu mobile computer, go to the Fujitsu shopping site at [www.shopfujitsu.com](http://www.shopfujitsu.com) in the US or [www.fujitsu.ca/products/notebooks](http://www.fujitsu.ca/products/notebooks) in Canada.

\*\* RBRC is an independent third party to which Fujitsu provides funding for battery recycling; RBRC is in no way affiliated with Fujitsu.

**FUJITSU** THE POSSIBILITIES ARE INFINITE

## Popular Accessories

Lithium Ion Battery  
Auto/Airline Adapter  
Additional AC Adapter  
USB 2.0 Docking Station  
USB Optical Mouse  
Wireless Keyboard and Mouse

### Carrying Cases

- Diplomat
- Workstation Plus

### Have questions or need help?

- Visit our website at [us.fujitsu.com/computers](http://us.fujitsu.com/computers)
- Call us anytime at 1.800.8FUJITSU
- Email us at [8fujitsu@us.fujitsu.com](mailto:8fujitsu@us.fujitsu.com)

### Want more information on Fujitsu products?

- Visit our website at [www.shopfujitsu.com](http://www.shopfujitsu.com)
- Call us anytime at 1.800.FUJITSU

### Fujitsu Extended Service Plans available.

### Visit [us.fujitsu.com/computers](http://us.fujitsu.com/computers)

to purchase any of these accessories or to get more information.

### Record your notebook serial number here:

Serial # \_\_\_\_\_  
(see bottom of computer)

Fujitsu Computer Systems Corporation  
1250 E. Arques Avenue M/S 122  
Sunnyvale, CA 94085

Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. Microsoft, Windows, and Genuine Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or in other countries. All other trademarks mentioned herein are the property of their respective owners. Product description data represents Fujitsu design objectives and is provided for comparative purposes; actual results may vary based on a variety of factors. Specifications are subject to change without notice.

©2009 Fujitsu Computer Systems Corporation. All rights reserved.



# Getting Started

Get Started with your  
Fujitsu M2010 Notebook

This guide will lead you through the start-up process for your new Fujitsu notebook and will also provide some valuable tips. To learn about all the exciting features that your new notebook has to offer, please see the User's Guide that can be accessed after completing the start-up procedure.

**FUJITSU**

THE POSSIBILITIES ARE INFINITE