

# **KEYPOINT**

**USB Presentation & Multimedia Controller  
User's Manual**

## **Copyright Notice**

Copyright 2003 by Macally Peripherals

This manual is furnished under license and may be used or copied only in accordance with the terms of such license.

Except as permitted by such license, no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or any means, electronic, mechanical, recording, or otherwise, including translation to another language or format, without the prior written permission of Macally Peripherals.

The content of this manual is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Macally Peripherals. Macally Peripherals assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

Macally is a trademark of the Mace Group, Inc. All other product names, trademarks and registered trademarks in this document are the property of their respective holder.

## **FCC Information**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

The equipment has been tested and found to comply with the limits for Class B Digital Device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

The changes or modifications not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

## **Warranty**

Macally Peripherals warrants that this product will be free from defects in materials and workmanship for period of time specified on the product packaging. This limited warranty shall commence from the date of purchase. Macally Peripherals warranty is not transferable and is limited to the original purchaser. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, Macally Peripherals will repair or replace the product. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, normal wear and tear or any condition other than what can be considered normal use.

## **Warranty Disclaimers**

Macally Peripherals makes no other warranties, expressed or implied, and specifically disclaims any warranty for merchantability or fitness for a particular purpose. The exclusion of implied warranties is not permitted in some states and the exclusions specified herein may not apply to you. This warranty provides you with specific legal rights. There may be other rights that you have which vary from state to state.

## **Limitation of Liability**

The liability of Macally Peripherals arising from this warranty and sale shall be limited to a refund of the purchase price. In no event shall Macally Peripherals be liable for costs of procurement of substitute products or services, or for any lost profits, or for any consequential, incidental, direct or indirect damages, however caused and on any theory of liability, arising from this warranty and sale. These limitations shall apply not with standing any failure of essential purpose of any limited remedy.

# Contents

<b>Introducing the Macally USB KeyPoint</b>	<b>4</b>
About This Guide	4
System Requirements	4
Registration	4
About Macally Products and Services	4
Package Contents	4
<b>Hardware Basics</b>	<b>5</b>
<b>Software Installation</b>	<b>6</b>
For Mac OS 9.2	6
For Mac OS X v10.1.5 or Mac OS X v10.2	7
For Windows 98SE/ME	8
For Windows XP/2000	8
<b>Software Basics</b>	<b>6</b>
Managing Macally KeyPoint in General View for Mac	12
Example 1	13
Example 2	14
Managing Macally KeyPoint in General View for PC	15
Example 1	16
Example 2	17
<b>World Wide Office</b>	<b>18</b>

# INTRODUCTION

## Introducing the Macally USB KeyPoint

Thank you for purchasing Macally's USB KeyPoint. The Macally KeyPoint is one of the most versatile multimedia and presentation RF remote control available. It allows you to control your presentation up to 33 feet away. Whether you watch iDVD or listen to your iTunes, KeyPoint would be your indispensable companion for home or office.

## System Requirements

- Mac OS 9.2, Mac OS 10.1.5, Mac OS 10.2
- Windows 98SE/ME/2000/XP
- Any desktop or notebook computer with an available USB port
- Windows 98SE/ME/2000/XP CD may required for PC users

## Package Contents

The Macally KeyPoint package includes the following:

- Multimedia Remote Control and Receiver
- 3" USB extension cable
- 2 AAA Batteries
- Driver CD -Driver, manual, and registration form

## Registration

We are confident that the Macally KeyPoint will greatly increase your productivity and simplify the usage of your computer. Please register this product at

**[www.macally.com/register.html](http://www.macally.com/register.html)**. It will help you obtaining latest drivers, updates, technical support and new Macally product release information.

## About Macally Product and Services

More information about Macally products and services is available through the following sources:

The Macally Home Page on the World Wide Web URL

**<http://www.macally.com>** or **<http://www.macally-europe.com>**


Macally Technical Support:

In U.S.A, please call 1-626-214-2770 or


In other areas, E-mail us at **[techsupport@macally.com](mailto:techsupport@macally.com)**




or **[techsupport@macally-europe.com](mailto:techsupport@macally-europe.com)**

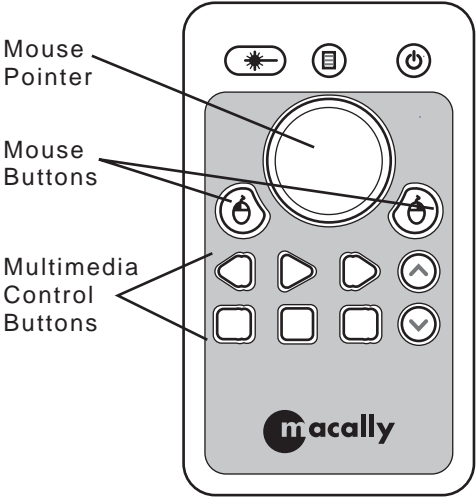Multimedia  
Remote Control

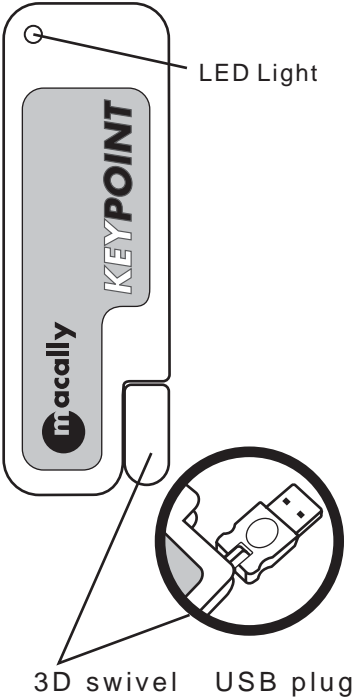

Receiver



-  Laser Pointer
-  KeyPoint Manager Menu
-  System Power Button

## SOFTWARE INSTALLATION

### For Mac OS 9.2

To install the Macally USB KeyPoint

1. Insert the Macally KeyPoint Driver CD.
2. Open "MacOS 9.2" Folder.
3. Click at Install Keypoint file and the following window will pop up, click "Install" and follow the on screen procedure to install the driver.(Fig 1)



Fig 1

4. Follow the step-by-step on screen procedure to finish software installation
5. Restart the computer after the installation.

**For Mac OS X v10.1.5 or Mac OS X v10.2**

1. Insert the Macally KeyPoint Driver CD to your computer
2. Open "MacOS X" Folder.
3. Copy "KeypointX\_xxxx.pkg.sit" to the Desktop and expand the file.
4. "KeypointX.pkg" icon will show up on the desktop.(Fig 2)

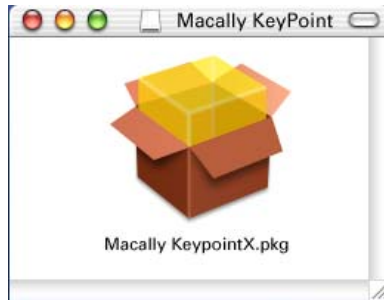


Fig 2

5. Double click the "KeypointX.pkg" icon to install.
6. Follow the step-by-step on screen procedure to finish software installation
7. Restart the computer.

\*Note: A KeyPoint Manager file will be created and saved in Applications folder.

## For Windows 98SE/ME

### “iMPORTANT”

**Please install the KeyPoint driver “FIRST” before plug into the computer**

1. Insert the Macally KeyPoint Driver CD. Double click on the KeyPointWin\_xxx. exe (Fig 3)




Fig 3

2. Macally KeyPoint Setup Wizard will be launched. (Fig 3.1)

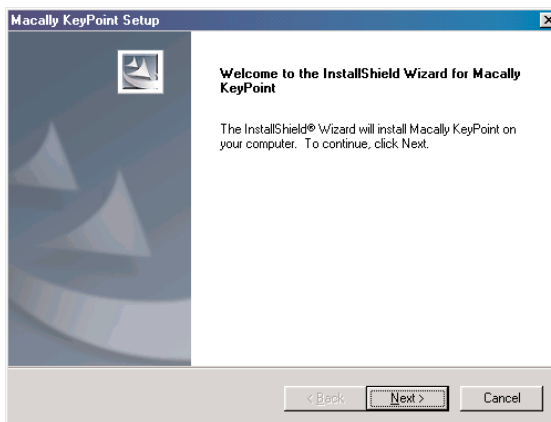


Fig 3.1

3. Follow the step-by-step on screen procedure to finish software installation.
4. Restart the computer.
5. Plug in the Macally KeyPoint Receiver to a available USB port

6. Windows will detect a New Device and may ask for the Windows 98SE/ME CD-ROM (Fig 3.2)

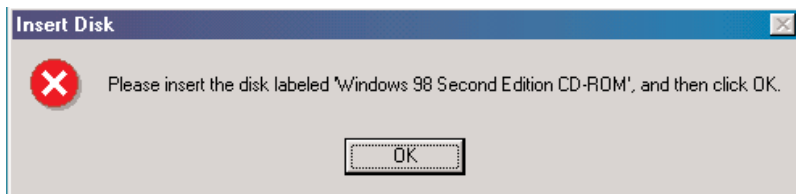


Fig 3.2

7. Follow the step-by-step on screen procedure to finish windows driver installation.
8. Macally KeyPoint is ready to use now.

### For Windows 2000/XP

#### **“iMPORTANT”**

**Please install the KeyPoint driver “FIRST” before you plug into the computer**

1. Insert the Macally KeyPoint Driver CD. Double click on the KeyPointWin\_xxx. exe (Fig 4)




Fig 4

2. Macally KeyPoint Setup Wizard is launched. (Fig 4.1)Click “Next” to continue the InstallShield and follow the step-by-step on screen procedure.

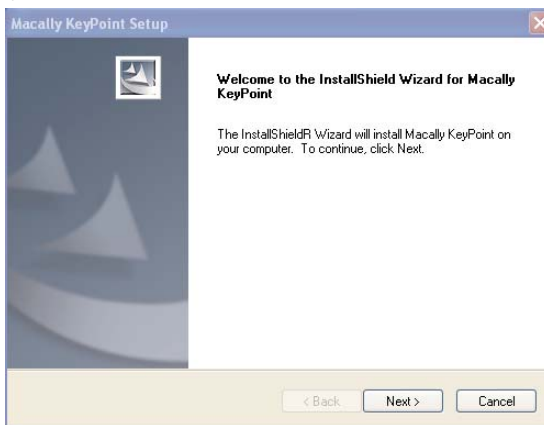


Fig 4.1

3. When the “Alert” windows pop up (Fig 4.2),and ask you to plug the KeyPoint, plug the KeyPoint Receiver to you computer and click “Yes” to continue

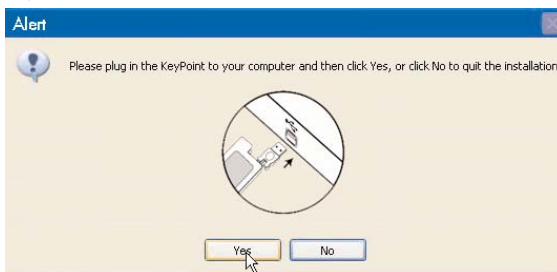


Fig 4.2

4. Follow the step-by-step on screen procedure to finish software installation.
5. Restart the computer and the KeyPoint is ready to use now.

## SOFTWARE BASICS

### Keypoint manager pre-settings.

For your convenience, we added pre-set settings for several commonly used applications. When you launch the applications listed below, KeyPoint will automatically function, you won't need to go through the programming procedure unless you want to customize the settings.

#### Pre-programmed settings for Mac OS9:

Acrobat Reader	AppleCD Audio Player
DVD Player	Internet Explorer
iTunes	QuickTime Player
Microsoft PowerPoint	

#### Pre-programmed settings for Mac OSX:


Acrobat Reader	DVD Player
iMovie	Internet Explorer
iPhoto	iTunes
Keynote	Microsoft PowerPoint
QuickTime Player	

#### Pre-programmed settings for Windows 98/ME/2000/XP:

Acrobat Reader	Microsoft PowerPoint
QuickTime Player	RealOne Player
Windows Media Player	Winamp

Note: additional settings are available on our website at: <http://www.macally.com/techsupport/drivers.html> page. Also, you may send us an email to [techsupport@macally.com](mailto:techsupport@macally.com) request setting for your favorite application.

## Customizing the Macally KeyPoint Manager for Macintosh

Launch Macally KeyPoint Manager from Application Folder (from Control Panels or Application's folder in Mac OS 9.2 ) or press the  button on the Remote Control to bring up the Macally KeyPoint Manager window. (Fig 5)

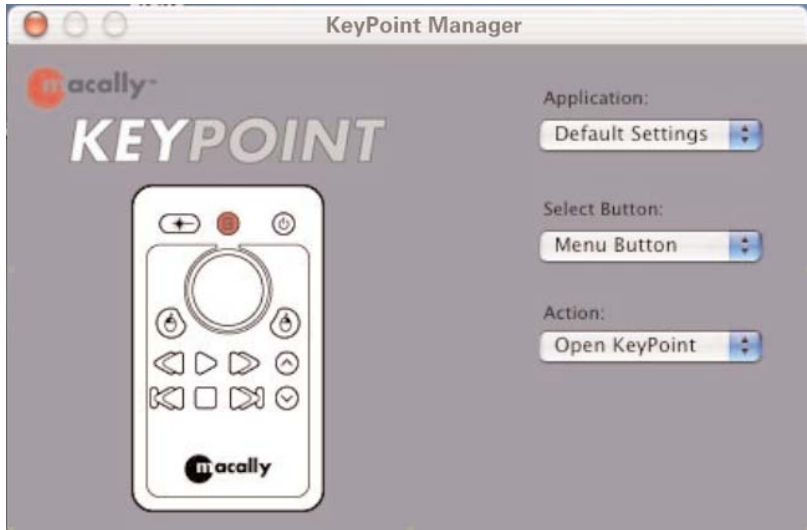


Fig 5

Once the Macally KeyPoint Manager is open, you are ready to program the keys. Before you start, you should have a general idea of what you want to program into the multimedia keys. We've provided a few examples for you to get started.

**Example 1, I would like to change on the Mouse Button Setting on the KeyPoint.**

1. Bring Up the Macally KeyPoint Manager by pressing on the Menu Button on the KeyPoint. In the KeyPoint Manager(Fig 5) “Application” should be set to “Default Settings”.
2. To program the “Mouse Left Button”, press “Mouse Left Button” on the KeyPoint or from the “Select Button” pop-up window select “Mouse Left Button”. The “Mouse Left Button” icon on Control Panel menu will be highlighted in red color. (Fig 6.1)
3. From the “Action” pop-up window select “Mouse Click”.



Fig 6.1

4. Make sure none of the “Modifier Keys” is highlighted. Now, “Mouse Left Button” is set. (Fig 6.2)



Fig 6.2

5. To program the “Mouse Pointer” speed, press the “Mouse Pointer” on the KeyPoint or select “Mouse Pointer” from the “Select Button” pop-up menu and change “Cursor Speed” to “Slow”. (Fig 6.3)

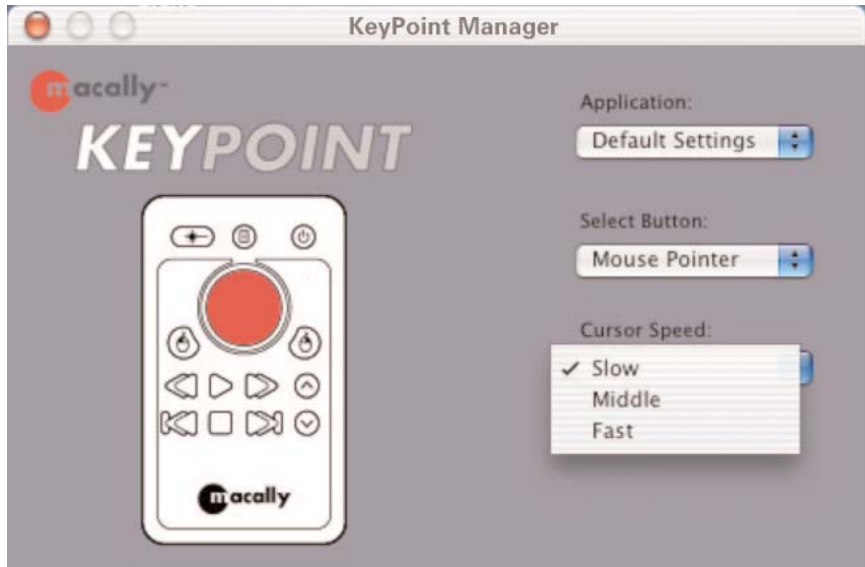


Fig 6.3

7. To program the “Mouse Right Button”, press “Mouse Right Button” on the KeyPoint or select “Mouse Right Button” from the “Select Button” pop-up menu.
8. Select “Right Click” from the “Action” pop-up window. (Fig 6.4)



Fig 6.4

9. Now, Mouse-Right- Button is set. (Fig 6.5)

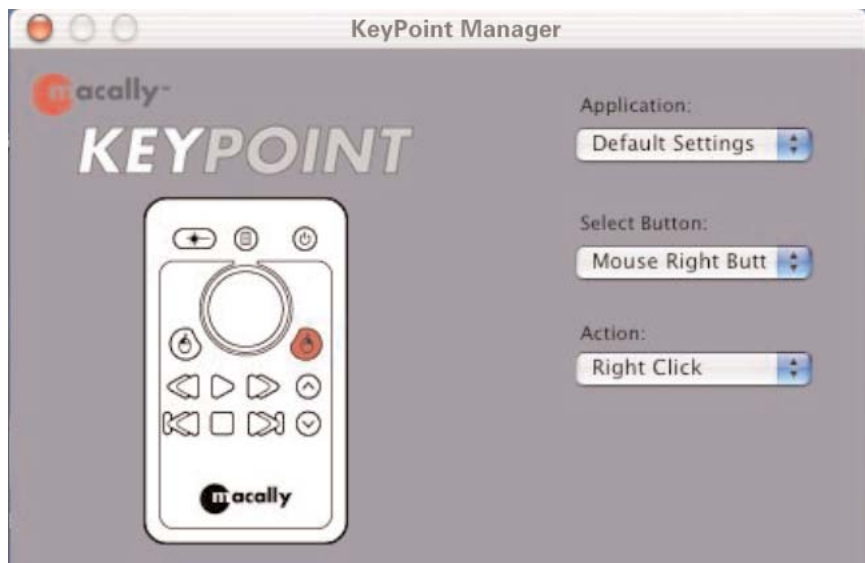


Fig 6.5

## Example 2,

How to program KeyPoint to support new Application?

1. From the “Application” pop-up menu. Select “Add Application...” (Fig 7.1)



Fig 7.1

2. You will be prompted to open an application. Locate and highlight the application you want (e.g., Acrobat Reader 5), and click “Open” (Fig 7.2). The application will be added to the Application list. In this example, we will be using Adobe Acrobat Reader as an example.



Fig 7.2

3. While the application is added in “Application” pop-up menu. Press “Play” Button on the KeyPoint or select “Play” Button from the “Select Button” pop-up menu. Select “Keystroke” from the “Action” pop-up menu (Fig 7.3)



Fig 7.3

4. Press the “Command” and “L” keys at the same time. The combination of the two keys will be shown on the Keystroke field (Fig 7.4) and now the “Play” button is set

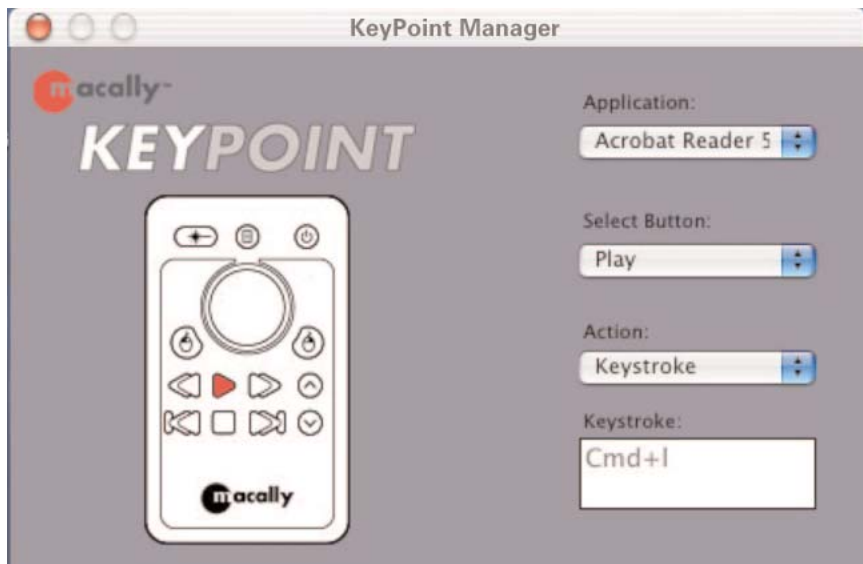



Fig 7.4

5. Repeat step 3 and step 4 to set other KeyPoint buttons within the application. Close the KeyPoint Control Panel windows when finish. To test the new settings, open a PDF document using Acrobat Reader.

# Customizing the Macally KeyPoint Manager for Windows

Press the  button on the KeyPoint to bring up the Macally KeyPoint Manager window. (Fig 8)

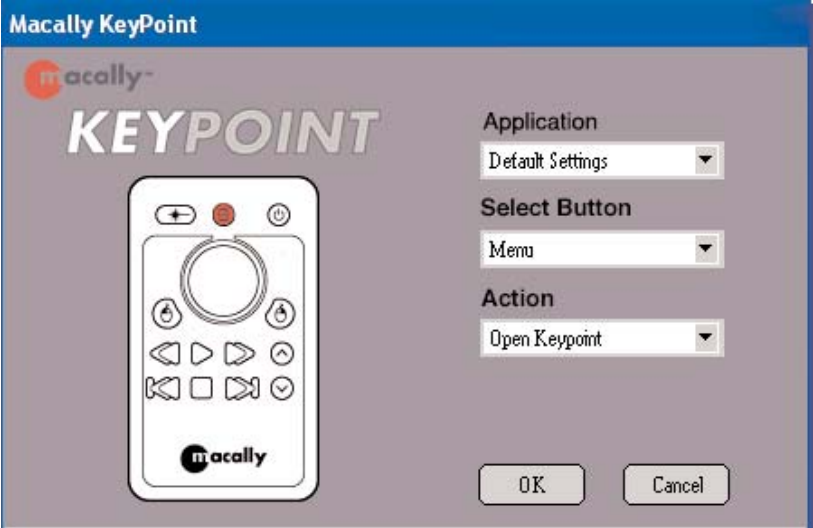


Fig 8

Before you start, you should have a general idea of what you want to program into the keys. We've provided a few examples for you to get started.

**Example 1, I would like to change the settings on the Mouse Button on the KeyPoint.**

1. Bring Up the Macally KeyPoint Manager by pressing on the Menu Button on the KeyPoint. In the KeyPoint Manager(Fig 8) “Application” should be set to “Default Settings”.
2. To program the “Mouse Left Button”, press “Mouse Left Button” on the KeyPoint or from the “Select Button” pop-up window select “Mouse Left Button”. The “Mouse Left Button” icon on Control Panel menu will be highlighted in red color. (Fig 9.1)
3. From the “Action” pop-up window select “Mouse Click”.

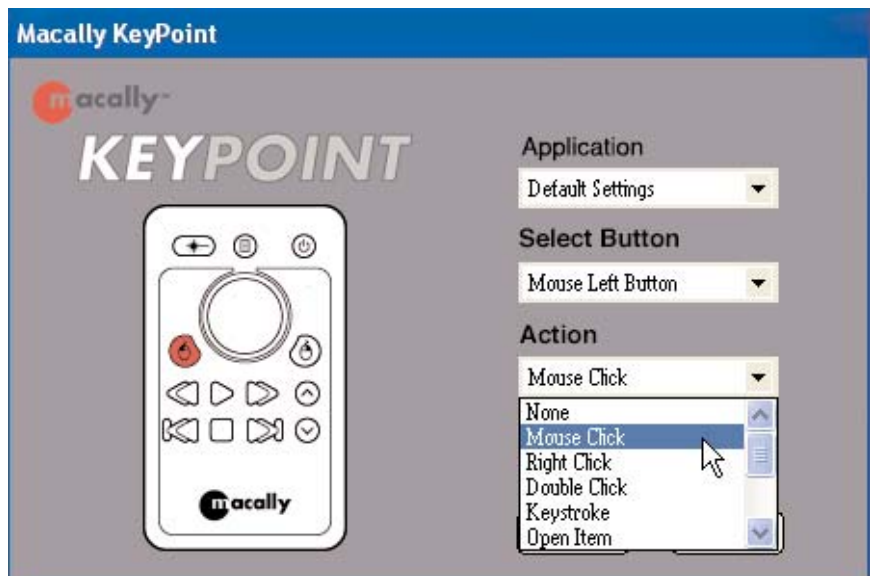


Fig 9.1

4. Now, "Mouse Left Button" is set. (Fig 9.2)

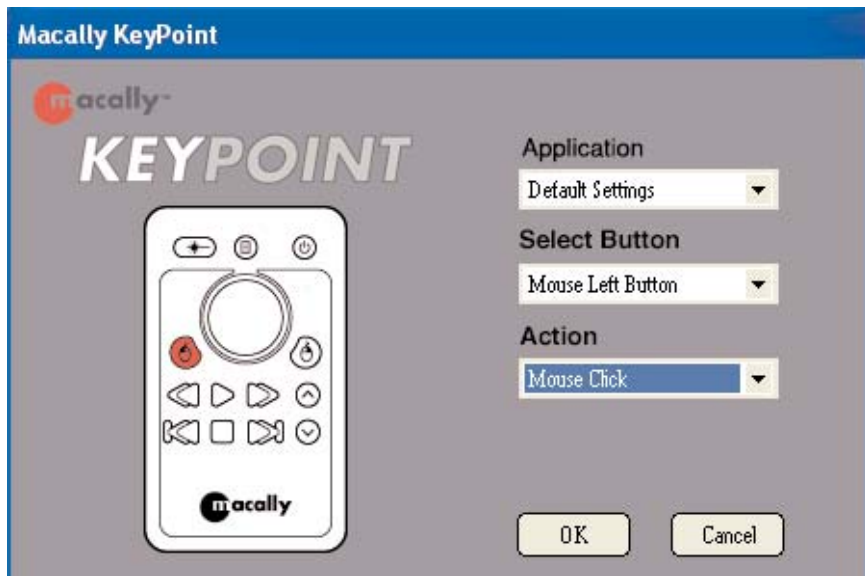


Fig 9.2

5. To program the “Mouse Pointer” Button speed, press “Mouse Pointer” Button on the KeyPoint or select “Mouse Pointer” from the “Select Button” pop-up menu and change “Cursor Speed” to “Slow”. (Fig 9.3)

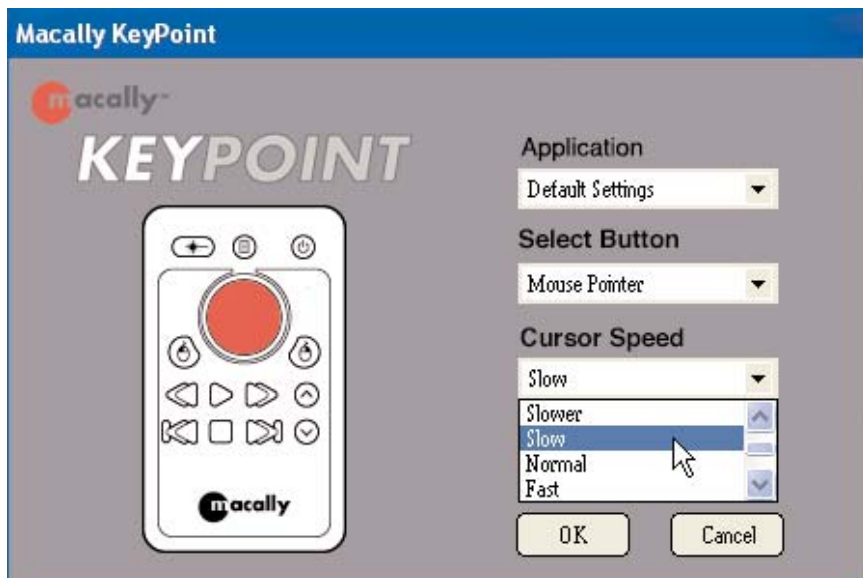


Fig 9.3

7. To program the “Mouse Right Button”, press “Mouse Right Button” on the KeyPoint or select “Mouse Right Button” from the “Select Button” pop-up menu.
8. From the “Action” pop-up window select “Right Click”. (Fig 9.4)

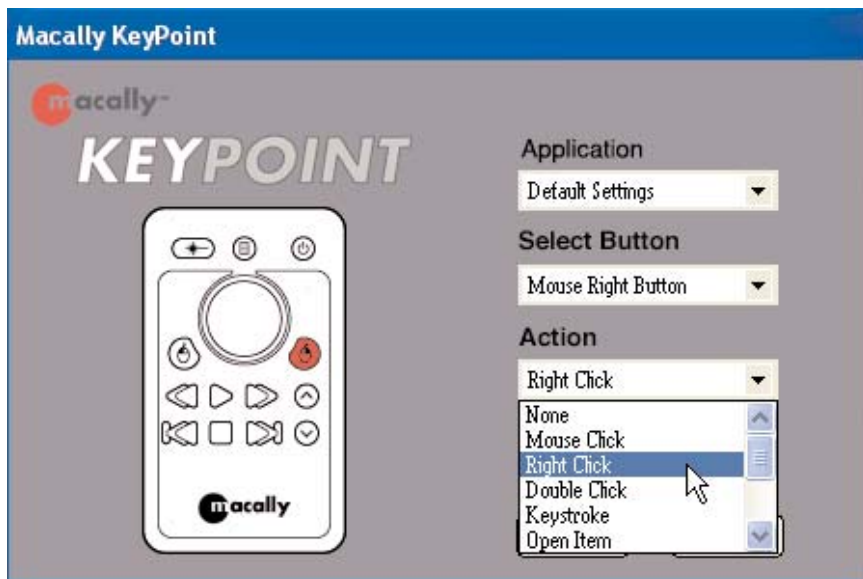


Fig 9.4

9. Now, Mouse-Right- Button is set. (Fig 9.5)

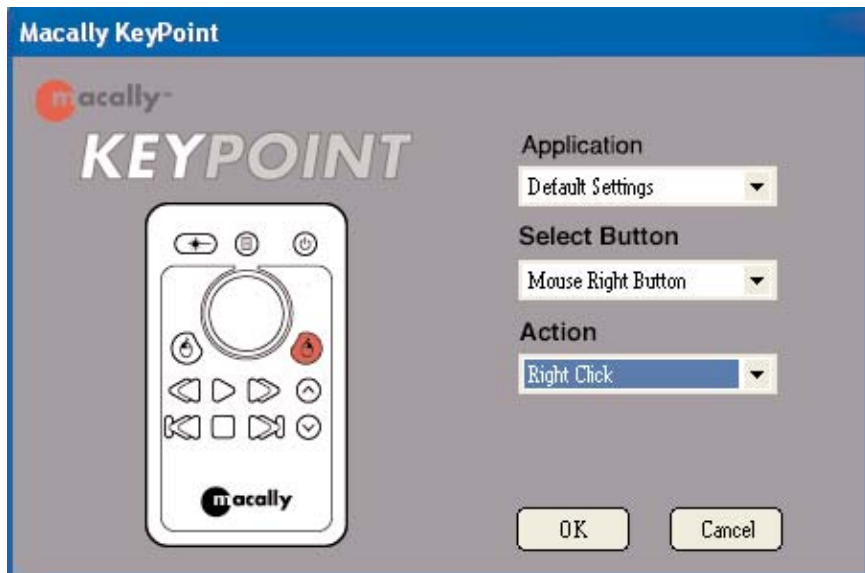


Fig 9.5

## Example 2,

How to program KeyPoint to support new Application?

1. From the “Application” pop-up menu. Select “Add Application...” (Fig 10.1)

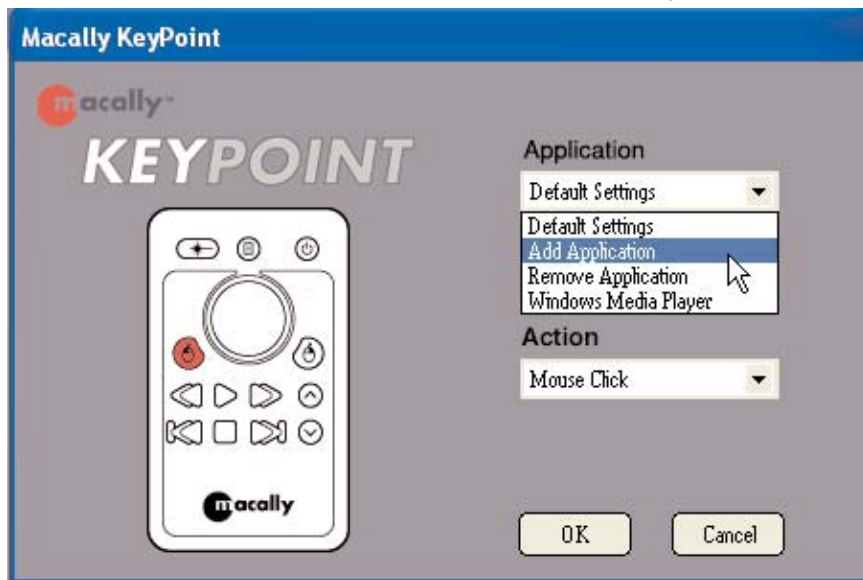


Fig 10.1

2. You will be prompted to open an application. Locate and highlight the application you want (e.g., Acrobat Reader 6.0), and click “Open” (Fig 10.2). The application will be added to the Application list. In this example, we will be using Adobe Acrobat Reader as an example.

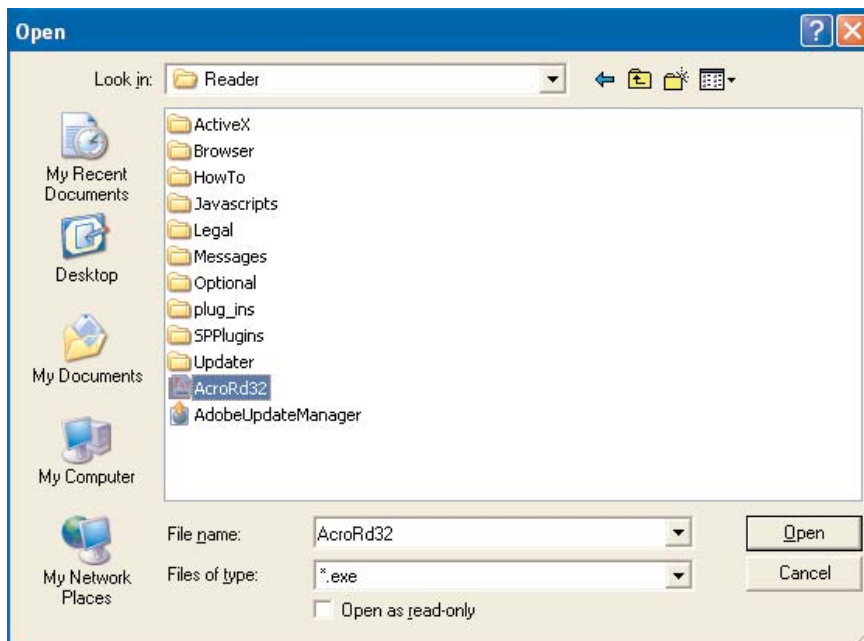


Fig 10.2

3. Select Acrobat Reader 6.0 from the “Application” pop-up menu. Press “Play” Button on the KeyPoint or select “Play” Button from the “Select Button” pop-up menu. Select “Keystroke” from the “Action” pop-up menu (Fig 10.3)

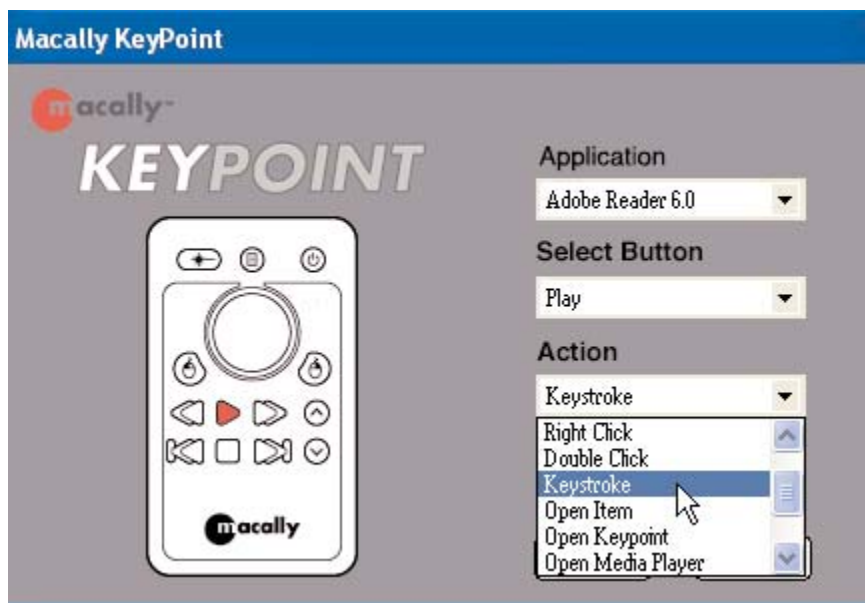


Fig 10.3

4. Press the “Shift,” “Ctrl” and “H” keys at the same time. The combination of the two keys will be shown on the Keystroke field (Fig 10.4) and now the “Play” button will be replaced by “Automatically Scroll” function.

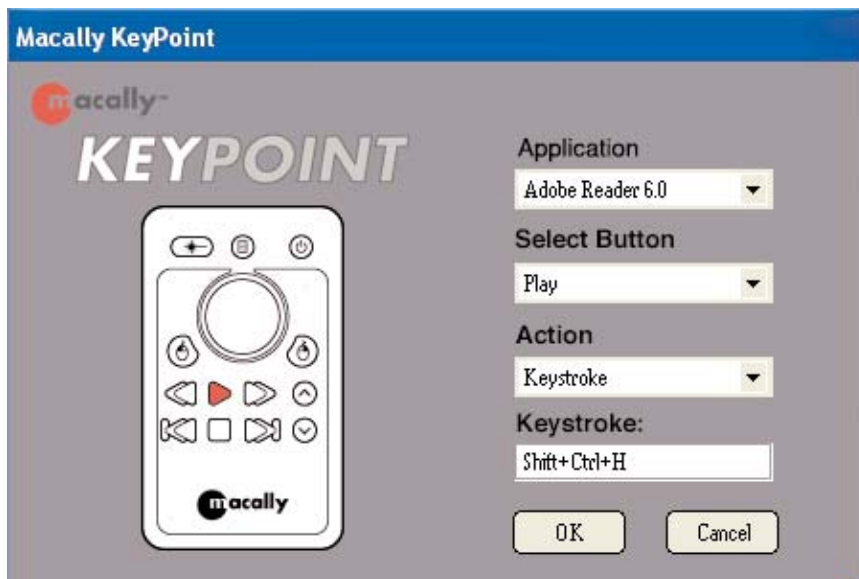


Fig 10.4

5. Repeat step 3 and step 4 to set other KeyPoint buttons within the application. Close the KeyPoint Control Panel windows when finish. To test the new settings, open a PDF document using Acrobat Reader.

**Q1. I am using Microsoft Windows, the menu button on the KeyPoint does not bring up the menu screen after I install the driver. How to fix this problem?**

- A1. Please unplug the USB KeyPoint Receiver, and uninstall the current driver first, then restart your computer. In Windows 2000/XP, during the re-installation, please **DO NOT** plug the receiver before the system asked to do so; In Windows 98SE/ME, please complete the driver re-installation first and then plug the USB Receiver to the computer.

**Q2. I am using Windows Media Player, when I press the Volume control; the volume bar on the player does not move at all, what should I do to make it work?**

- A2. The default setting for the volume control is for the system sound volume control, therefore, even the volume bar on the Windows Media Player window does not move, but the volume still will change on the Notification area.  
However, you may reset the volume control button as keystroke to control the volume bar on the Media Player window.

**Q3. In Windows Media Player, why does the Rewind and Fast Forward button does not work?**

- A3. Windows Media Player does not support Rewind and Fast Forward function, therefore, those two buttons DO NOT work, but you can program these two buttons to do other functions of your choice

## **World Wide Office**

### **Macally U.S.A**

Mace Group Inc.  
15861 Tapia Street,  
Irwindale, CA 91706, USA

Tel: 626. 338.8787  
Fax: 626. 338.3585  
e-mail: [sales@macally.com](mailto:sales@macally.com)  
website: [www.macally.com](http://www.macally.com)

### **Macally Europe**

Teklink Europe  
Unit 14, Kerkenbos 10-111  
6546 BJ Nijmegen,  
The Netherlands  
Tel: 31.24. 3731410  
Fax: 31.24. 3731134  
email: [sales@macally-europe.com](mailto:sales@macally-europe.com)  
website: [www.macally-europe.com](http://www.macally-europe.com)

### **Macally Taiwan**

Chia Shin Technology Corp  
6F, No. 57, Shing Jung Road,  
Taipei, Taiwan 114, R.O.C.  
Tel: 886. 2. 2793.7585  
Fax: 886. 2. 2793.7197  
e-mail: [sales@macally.com](mailto:sales@macally.com)  
website: [www.macally.com](http://www.macally.com)

