


# 2

## plug in the power cord



- A. Plug the power cord into an outlet near your computer and into the modem.
- B. Wait for the power light on the modem to turn solid green. Then go to step 3. It should take about a minute to stop blinking. Ignore any other lights for now.

# 5

## online installation

Access the online setup page and follow the online instructions. When finished, return to these instructions to complete step 6.

Open a web browser (for examples: Internet Explorer, Firefox, Safari, etc.) on the computer you connected by Ethernet. You should be taken to the CenturyLink setup page.

7. What if you don't see the CenturyLink setup page?  
Check the cable connections in steps 2 - 4 and refresh your browser.

Need help? 1.888.777.9569

## additional information

**Email**  
Your @centurylink.net email includes drag & drop to easily organize your messages; SPAM filters; virus scanning; and storage that grows with your needs. To add additional email boxes, go to <http://cslhelp.com>

Email Address	Password

**My Account**  
To make updates to your CenturyLink account information or to pay a bill online, go to <http://centurylink.com> and click on "My Account"

**Help**  
For more chat, go to <http://cslhelp.com>  
Telephone: 1.888.777.9569 (available 24/7)  
You will be asked for your phone number (also known as your account number), which is easily forgotten if you do not also have CenturyLink phone service. Find it on the letter that came in your modem kit and record it here.

# 1

## A. which phone outlets need filters?



phone filters

- B. Filters are important. Why?** A filter strips off (or filters out) the Internet signal on your phone line. Filters are essential to:
- Avoid Internet connection problems.
  - Prevent static on your phone line.

- C. Filters are NOT needed for:**
- The phone outlet you select for your modem. Instructions are in step 3.
  - Devices on a different phone line than your Internet service.

- D. Filters ARE needed for all other phone outlets in your home that have a device plugged into it. Instructions for phone outlets that need filters are in 1E.**

### Devices you have on the same line (same phone number) could include:

- Telephones
- Answered telephone
- Answering machine
- Caller ID box
- Automatic water meter
- Fax machine, if same line
- TVS box

## E. add a filter to, or disconnect, every device you identified in 1D



phone outlets

phone filters

all phones and other devices

- F. Plug a filter into a phone outlet.**
- G. Plug the telephone cord into the filter and test the telephone (or device) to ensure it's working.**

- H. Repeat steps F and G for every device sharing the same line as your High-Speed Internet. Double check step 1D.**

- I. Not enough filters?**

- **Disconnect** any device that does not have a filter until you get more filters.
- Order more filters by calling CenturyLink: 1.800.242.4242 (Residential) or 1.800.603.6000 (Business).

# 4

## connect the modem to computer

Later you can use wireless to connect this computer, but follow steps 4 - 6 using a cable first.



computer / laptop

modem

yellow Ethernet cable

- A. Plug the yellow Ethernet cable into any Ethernet port on the modem and your computer.**


This connects your computer to the modem by cable.

- B. The Ethernet light on the modem will turn green and may flicker.**

If your computer doesn't have an Ethernet port, call us for help:

1.888.777.9569

## Final Ethernet configuration:

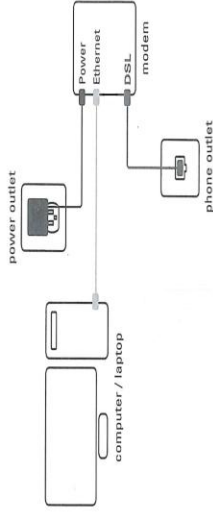

power outlet

computer / laptop

Power Ethernet DSL modem

phone outlet



- B. Windows PC: Select your wireless network.**
- Click (or double-click) the icon for your wireless connection software (see examples above). It should list your wireless network and possibly others. Select your network and follow your software's next steps.

If you see "Windows cannot configure this wireless connection," try a different icon in the system tray (see above for common icons). Another application is managing your wireless connections. You might have to contact your computer manufacturer and/or the wireless software company for additional help.

- C. Enter your wireless network security key (password).**
- It is case sensitive. If entered correctly, your computer should wirelessly connect to the modem.

- D. Test your wireless connection.**
- If this computer is connected to the modem using a cable, unplug it. Open your browser. If you do not see a web page from the Internet, make sure your wireless network name and security key are correct, then repeat steps C and D to reconnect.

- E. Go to <http://go.centurylink.com/addcomputer>**

- F. Repeat this step for each PC you want wirelessly connected.**

## Mac AirPort icon



- B. Mac OS X: Select your wireless network.**
- Click the AirPort icon in the top menu bar and turn it on. It should list your wireless network. Select your wireless network and click "Join Other Network" to manually enter your network name (SSID).


- C. Enter your wireless network security key (password).**
- It is case sensitive. If entered correctly, your computer should wirelessly connect to the modem.

- D. Test your wireless connection.**
- If this computer is connected to the modem using a cable, unplug it. Open your browser. If you do not see a web page from the Internet, make sure your wireless network name and password are correct, then repeat steps C and D to reconnect.

- E. Repeat this step for each Mac you want wirelessly connected.**



Your kit includes:

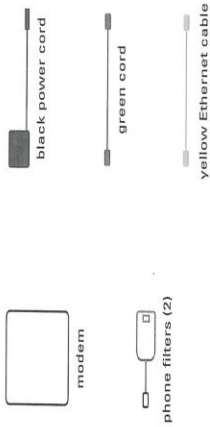

Printed on 100% recycled paper.

# Installation Guide

Before you start, check the date and time on the letter that came with this kit.

## 3 connect the modem to an outlet




- A. Find a phone outlet close to your computer.
- B. Temporarily unplug any phone and/or filter connected to this outlet.
- C. Plug one end of the green cord into the phone outlet. Plug the other end into the DSL port on the modem. This connects the modem to your High-Speed Internet line.
- D. Wait for the DSL light on the modem to turn solid green.
  - Ignoring the light, the DSL light isn't solid green after a minute.
  - Your service might not be active. Check your activation letter.
  - Otherwise, try a different phone outlet.

## 6 check before you're done do you have ...

- a security alarm system that automatically contacts your security company. If yes, contact them and tell them that you installed High-Speed Internet (DSL). They may need to test the alarm system to ensure it is still working properly.
- phones or other devices identified in step 1 that are not filtered? Order more regular filters or a special wall-mount filter by calling CenturyLink: 1-800-244-1111 (Residential) or 1-800-695-0000 (Business)
- more computers to connect?
  - If using a cable, repeat step 4, then go to step 7.
  - If using wireless, repeat step 7, then go to step 7.

## 7 wireless connection (optional)

Carefully follow step 7 to connect each wireless computer and printer to your home Wi-Fi network. The wireless setup process varies for each computer and its software varies by manufacturer.

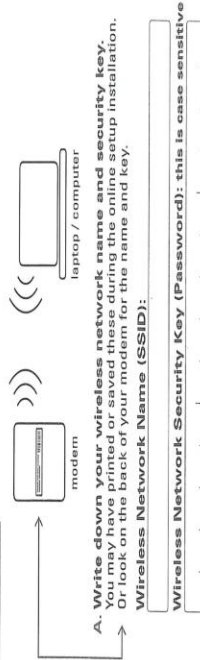

A. Write down your wireless network name and security key. You may have printed or saved these during the online setup installation. Or look on the back of your modem for the name and key.