





Sonic 2.0 Mobile HotSpot™

GETTING TO KNOW YOUR MOBILE HOTSPOT

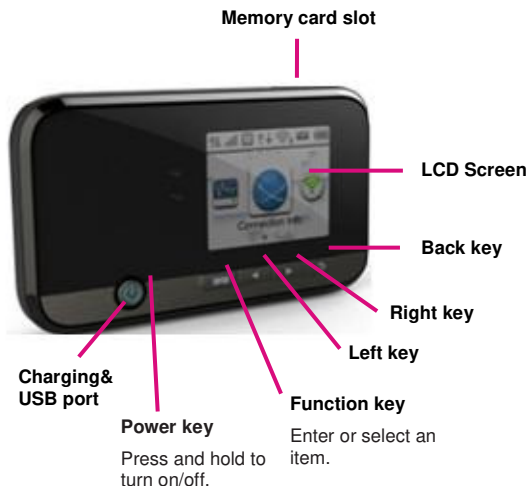

Reset point
Trigger this point to
reset your device.

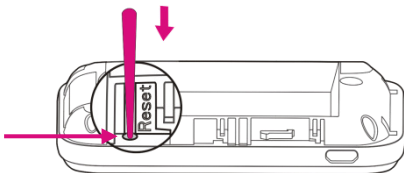

's 4G LTE network is not available everywhere. Please see coverage details at .com. Device and screen images are simulated. Capable device is required to achieve 4G LTE speed.

INDICATORS



2G

Indicates that your Mobile HotSpot is on 's 2G network.

3G

Indicates that your Mobile HotSpot is on 's 3G network.

4G

Indicates that your Mobile HotSpot is on 's 4G network.

**4G
LTE**

Indicates that your Mobile HotSpot is on 's 4G LET network.



Network signal strength.



Indicates that your device will connect to the Internet automatically.



Indicates that you need connect your device to the Internet by hand.



Indicates that your device is connected to the Internet.



New text message in your message Inbox. will periodically send you notifications about your account.




Indicates how many devices are connected to the Mobile HotSpot.




Battery power level. The indicator will flash when the battery is almost exhausted. The indicator will show as filling when the Mobile HotSpot is charging.

SET UP YOUR SONIC 2.0 MOBILE HOTSPOT


Remove back cover and battery.



Install SIM card.



Install battery & power on.




Press and hold
to power on.



Charge your Mobile HotSpot

You can charge your Mobile HotSpot using a wall outlet or by plugging it in to your computer using the USB cable.



CONNECT & GO

Connect your Wi-Fi device to your Sonic 2.0 Mobile HotSpot

1. Power on your Mobile HotSpot.
2. On your computer or other Wi-Fi enabled device, search for available Wi-Fi Networks and select the default **Network Name (SSID)** for your Mobile HotSpot.
3. Enter the default password and click **OK**.
Note:
 - The Default **Network Name (SSID)** and password are located on the back of your Mobile HotSpot.
 - It may take up to a minute to establish a connection.
4. Open a web browser and go!

Important Note: Did your browser take you to a Activation Page?

Yes: Simply follow the on-screen instructions to set up your No Annual Contract service.

No: Your service is already active and you are ready to go!

Note: By activating service, you acknowledge that you have read, understand, and agree to be bound by each of 's Terms and Conditions and your Service Agreement.

Managing Your Sonic 2.0 Hotspot

Access WebConnect

You can access WebConnect using a browser or by starting the WebConnect Companion, if you have it installed on your computer.

To access WebConnect from your browser, do the following:

1. Connect to your hotspot device via Wi-Fi using the network connection software on your computer. Provide the Wi-Fi network password, if requested.
2. Open a browser and enter <http://mobile.hotspot> in the address bar. The WebConnect Login screen appears.
3. Enter your WebConnect administrator password in the field provided.
4. Select the **Remember Password** checkbox if you wish to bypass the login screen in the future.
5. Click **Log In**. If you entered the correct password, the WebConnect Dashboard screen appears.

To access **WebConnect** using the **WebConnect** Companion application, do the following:

1. Connect to your hotspot device via Wi-Fi using the network connection software on your computer. Provide the Wi-Fi network password, if requested.
2. Start the **WebConnect** Companion application. The **WebConnect** Companion's icon appears in your system tray (Windows) or Menu bar (Mac).
3. Right-click the icon to display the menu.
4. Select the View **WebConnect** menu option. The **WebConnect** Companion Login screen appears.
5. Enter your **WebConnect** administrator password in the field provided.
6. Select the **Remember Password** checkbox if you wish to bypass the login screen in the future.
7. Click **LOGIN**. If you entered the correct password, the **WebConnect** Companion Main screen appears.
8. Click the Full View button. The **WebConnect** Dashboard screen appears in a browser window.

Change **WebConnect** Admin Password

1. Access **WebConnect**. The Dashboard screen appears.
2. Click **Configuration** in the navigation area to access the Configuration screen.
3. Select the **Hotspot Settings** tab on the Configuration screen.
4. Click **Change Password** in the Admin Password area. The Change Admin Password dialog appears.
5. Enter your current password in the **Password** field.
6. Enter the new password in the **New** field.
7. Re-enter the new password in the **Verify** field.
8. Click **Change**. If everything is entered correctly, the Admin Password Changed dialog appears indicating the password was successfully changed.

Change **WebConnect** Hotspot Network Name (SSID)

1. Access **WebConnect**. The Dashboard screen is displayed.

2. Click **Configuration** in the navigation area to access the Configuration screen.
3. Select the **Hotspot Settings** tab on the Configuration screen.
4. Change the name that appears in the **Network Name (SSID)** field in the Wi-Fi Settings area.
5. Select or deselect the **Broadcast network name** checkbox to enable or disable broadcasting the hotspot's Network Name (SSID).
6. Click **Save** to save your changes to on the Hotspot Settings tab of the Configuration screen.

Change **WebConnect** Hotspot Wi-Fi Password

1. Access **WebConnect**. The Dashboard screen is displayed.
2. Click **Configuration** in the navigation area to access the Configuration screen.
3. Select the **Hotspot Settings** tab on the Configuration screen.
4. Change the value that appears in the **Password** field in the Wi-Fi Settings area.
5. Click Save to save your changes to on the Hotspot Settings tab of the Configuration screen.

ADDITIONAL INFORMATION

Wi-Fi: Devices using wireless connections may be vulnerable to unauthorized attempts to access data and software stored on the device. Plan data allotment applies to use by connected devices sharing Wi-Fi. Use of connected devices subject to terms and conditions.

Messaging/Data: You will be charged for all messages and data sent by or to you through the network, regardless of whether or not data is received. Character length/file size of messages/attachments may be limited. is not liable for content of messages/attachments or for any failures, delays or errors in any generated alerts or notifications. Your data session, plan, or service may be slowed, suspended, terminated, or restricted if you use your service in a way that interferes with or impacts our network or ability to provide quality service to other users, if you roam for a significant portion of your usage, or if you use a disproportionate amount of bandwidth during a billing cycle. You may not use your plan or device for prohibited uses.

Postpaid Monthly Overage-Free Mobile Broadband Plans: 2 year agreements required. Domestic roaming not possible. Roaming charges may apply to use via non- owned Wi-Fi networks. International use requires international service activation; usage does not apply to Mobile Broadband Plan megabyte allotment; international rates apply.

No Annual Contract Mobile Broadband Plans: Does not require a commitment to a long-term contract. Pass required to use service. Service available for time period and/or usage amount provided by Pass. Service does not include voice, messaging or Wi-Fi services. Domestic only; no international or domestic roaming. Devices sold for use on service are to be activated on that service, not transferred for resale, modification, or export.

Coverage: Service, including 4G coverage, not available everywhere. See brochures and **Terms and Conditions (including arbitration provision)** at www.att.com, for coverage maps, rate plan information, charges for features and services, and restrictions and details. and the magenta color are registered trademarks of Deutsche Telekom AG. The 4G Mobile HotSpot logo is a trademark of USA, Inc. ©2012 USA, Inc.

ADDITIONAL HELP

- Mobile HotSpot URL: <http://mobile.hotspot/>
or IP address: 192.168.0.1.
- From the HotSpot Admin page, click User Manual.