

2. To ensure the correct orientation of the card, insert the WMC6300 Wireless Modem Card into the computer's PCMCIA card slot with the label side up as shown in Figure 11.

WARNING: Never force the card into the slot.

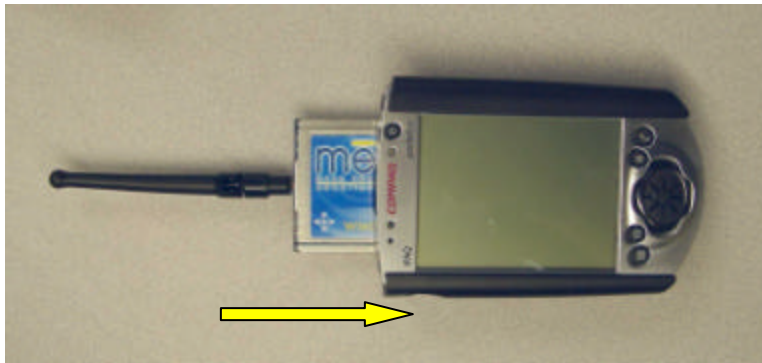


Figure 11. Installing the WMC6300 Wireless Modem Card

NOTE: For Pocket PC 2002, continue with Step 3.
For Pocket PC 2003, proceed to [Step 6](#).

3. When the MEA WMC6300 card is detected, a *Start* dialog box is displayed as shown in Figure 12. The *Use server-assigned IP address* radio button should be selected. Click on the **OK** button located in the upper right corner of the dialog box.



Figure 12. Start Dialog box

4. A MeshTray icon will be displayed on the screen of the Pocket PC. If the MeshTray Icon does not appear in the screen, go to Start → MEA Config and this will launch a MeshTray icon. A green icon indicates successful connection to the network.