


GBF SentryLink Smart Video Intercom Property Management Manual

(The **smart IP** intercom system)

Property Manager Login Account:

First please pass your property manager name and email address to GBF support team at info@gbfelectronics.com. GBF support team will create one login account for the property manager to login the following webpage at <https://doorbell.push2u.com/admin/index/index.html> for editing all tenants information and building information.

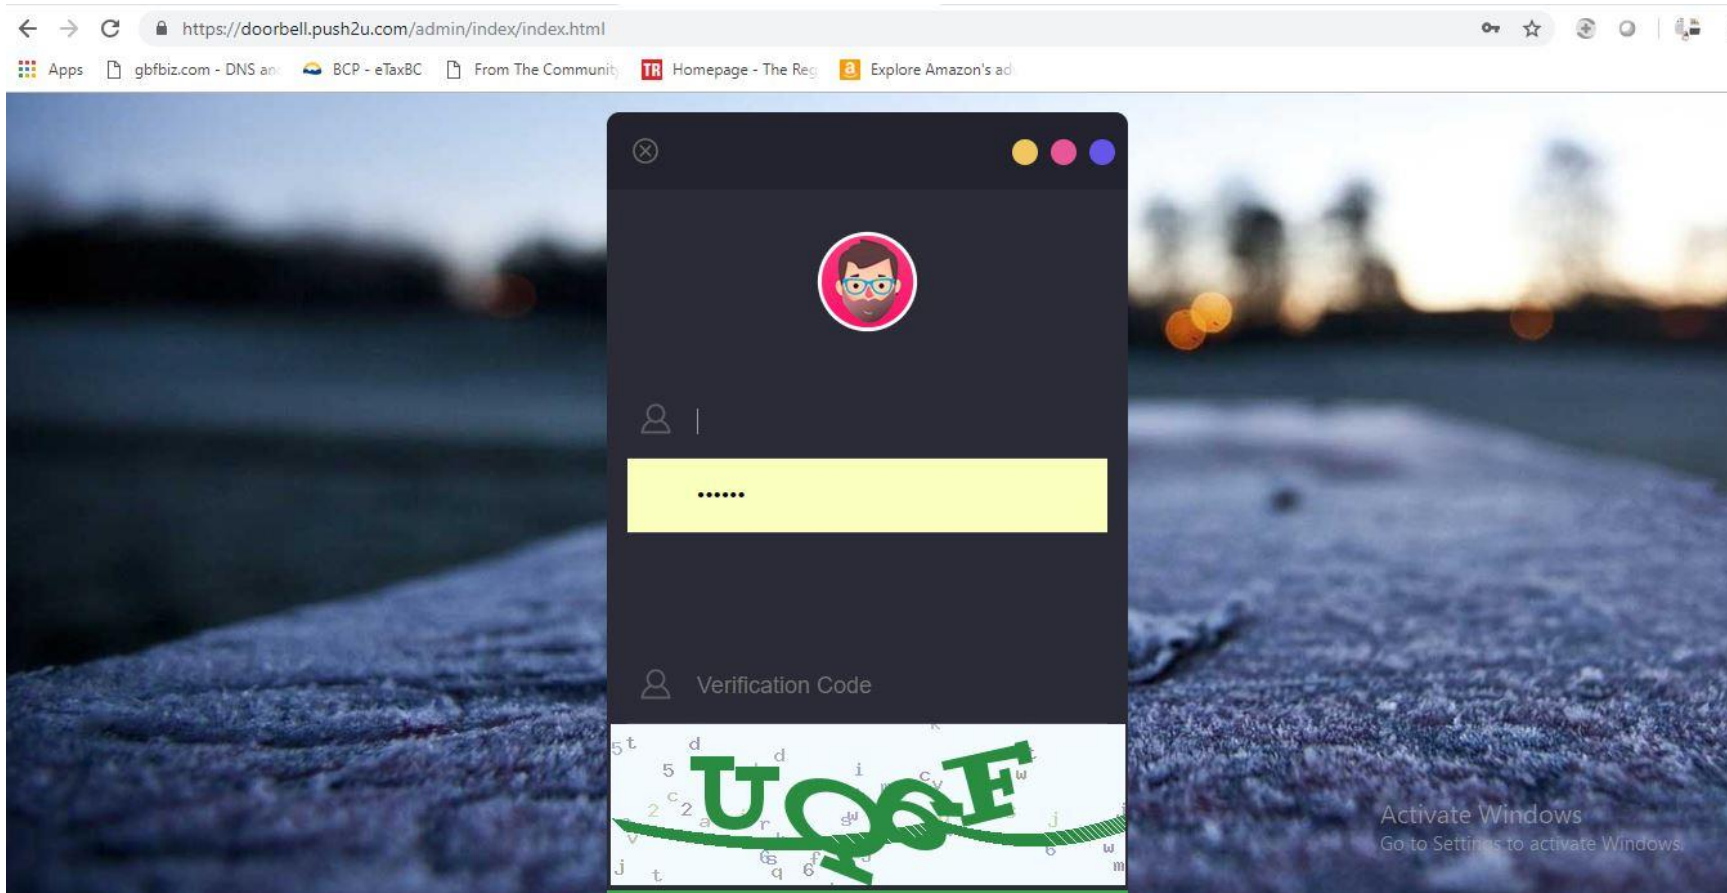

Property Manager Web Interface:

There are five main pages for Property manager account:

- **Building Information**--- Input this building information detail: address, property manage phone etc.
- **Room Information**--- Including all tenants information, name, email, phone no. and access keyfob no. etc.
- **NFC**--- Assign tenant access keycard or keyfob
- **Unlock record**--- For property manage to track the daily gate entry history to know who/when the gate is unlocked.
- **Changepass**--- Property manager can revise this webpage login password. The factory login password for this page is: 999999.

Building Information Page:

DOORDEER PMS

BUILDINGS INFORMATION

ROOMS INFORMATION

NFC

UNLOCK RECORD

RECHARGE

CHANGPASS

DANIEL B LOG OUT

Building Info

Input Name

Select Company

Input City

Input State

Input Country

	ID	Building	Company	Building Type	QR Support	NFC Support	
	57	San Diego-1	15	1	Yes	Yes	<div>subscribe service</div>

Prev

1

Next

10 / Page

Total: 1

Building Editing Page:

In this page, property manage can edit building name, building address, building manager contact information as well:

EDIT Building Information

Building Name

San Diego-1

Building Type

Apartment

QR Support

Support

NFC Support

Support

Send Report Support

Support

DEVICE PHONE

+60604278689

ADMIN PHONE

Building contac

ADDRESS

110A, 12811 Clarke Place

ZIP CODE

V6V 2H9

CITY

Richm

STATE

BC

COUNTRY

Canad

TIMEZONE

PST(UTC-8)

Affiliated company

Electro Specialty Systems

Submit

Room Information Page: (Tenant directory)

Each building property manager can add or edit, delete tenant name and information on this tenant directory. Once this page save, it will automatically save this tenant directory into the outdoor station screen.

DOORDEER PMS

BUILDINGS INFORMATION

ROOMS INFORMATION

NFC

UNLOCK RECORD

RECHARGE

CHANGPASS

DANIEL B LOG OUT

Rooms Info

Select Building

Select Company

input Unit Label

input phone

input Owner Email

input tenant Email

	ID	Building	UnitLabel	Unit Type	Floor Number	Owner Firstname		
<input type="checkbox"/>	322	San Diego-1	996	apartment	9	GBF	NFC	subscribe ...
<input type="checkbox"/>	321	San Diego-1	997	apartment	9	RAY	NFC	subscribe ...
<input type="checkbox"/>	320	San Diego-1	998	apartment	9	TEST	NFC	subscribe ...
<input type="checkbox"/>	317	San Diego-1	999	apartment	9	GBF	NFC	subscribe ...

Prev

1

Next

10 /Page

Total: 4

Editing Room Page:

In this page, property manager can create each tenant account and room no. in the database, each tenant will use his or her email address which is registered in this webpage to login their APP to access the intercom system.

EDIT room

×

Building Type

apartment

Room Label

996

Floor

9

FIRSTNAME

GBF

LASTNAME

Android.

Contact Phone

6042858721

Master Account(Email)

info@gbfelectronics.com

Affiliated company

Electro Specialty Systems ▼

Submit

NFC Page:

This page shows all access keycards or keyfobs for this building entry system, property manager can add or delete keycards or keyfobs from this NFC directory.

DOORDEER PMS

BUILDINGS INFORMATION

ROOMS INFORMATION

NFC

UNLOCK RECORD

RECHARGE

CHANGPASS

DANIEL B LOG OUT

NFC Info

select Building

input Unit Label

input NFC

	ID	Building	UnitLabel	NFC	UpdateTime
	25	San Diego-1	998	0006617011	2019-03-25 00:17:15
	24	San Diego-1	999	0006650907	2019-03-24 11:22:29

Prev

1

Next

10 /Page

Total: 2

Edit NFC INFO Page:

In this page, property manager can add keycard or keyfob to this system, each access keycard or keyfob will be assigned to specific room.

Edit NFC INFO

Building

San Diego-1

Unit Label

998

NFC
Serial
Number

0006617011

Submit

Unlock Record Page:

In this page, for property manage to track the daily gate entry history to know all activities for this smart intercom system, including who/when the gate is unlocked, who/when the door station is used etc.

DOORDEER PMS

BUILDINGS INFORMATION

ROOMS INFORMATION

NFC

UNLOCK RECORD

RECHARGE

CHANGPASS

DANIEL B LOG OUT

Unlock Record

Select Building

input Unit Label

select Event Type

	ID	Building	Unit Label	VKey	Type	Time
	12817	San Diego-1	999	324624		2019-03-24 16:29:12
	12816	San Diego-1	999		Answer	2019-03-24 16:29:08
	12815	San Diego-1	999		call	2019-03-24 16:28:56
	12814	San Diego-1	999	324624	Remote fixed password un...	2019-03-24 16:25:46
	12813	San Diego-1	999		Answer	2019-03-24 16:25:30
	12812	San Diego-1	999		call	2019-03-24 16:25:19
	12808	San Diego-1	999	324624	Remote fixed password un...	2019-03-24 03:19:58

Prev

1

2

3

4

5

...

Last

Next

10 / Page

Total: 101

Changepass Page:

In this page, property manage can change his or her login password for this page.

DOORDEER PMS

change Password

PASSWORD:

CONFIRM:

If you have any question, please directly contact GBF customer support:

GBF Customer Support Contact:

Phone: 1-604-278 6896 or 1-604-285 8721

Email: info@gbfelectronics.com



URL: www.gbfelectronics.com