


- press **start** to turn on the controller
- press & hold **start** for 3 seconds to turn off the controller
- press & hold **start** for 8 seconds to force turn off the controller

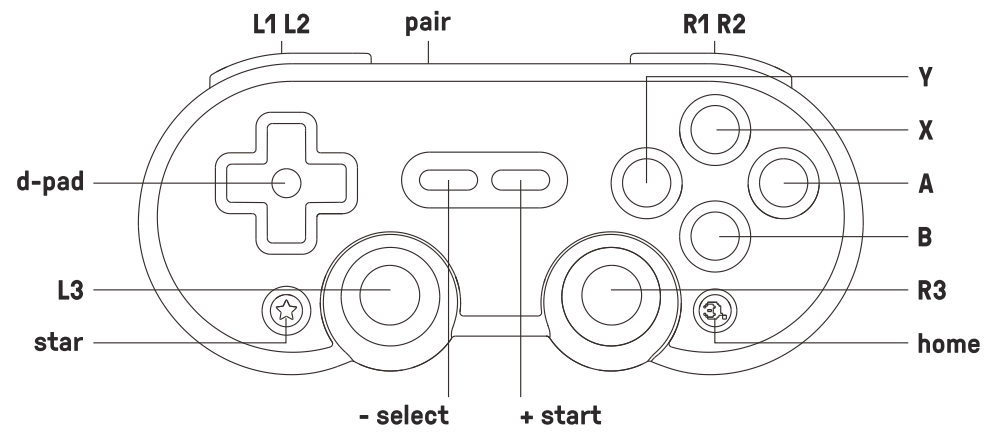

- * 开机: 按 [start] 键。
- * 关机: 按住 [start] 键 3 秒。
- * 按住 [start] 键 8 秒可强制关机。

Switch

- 1 – press & hold **Y** & **start** to turn on the controller, LEDs will start to rotate from left to right
 - 2 – press & hold **pair** for 2 seconds to enter pairing mode, LEDs will turn off for a second then start to rotate from left to right
 - 3 – go to your Switch home page to click on Controllers, then click on Change Grip/Order and wait for controller to sync up. LED will become solid when connection is successful
 - 4 – controller will auto reconnect to your Switch with the press of **start** once it has been paired
- **star** button = Switch screenshot button, **home** button = Switch home button

Switch

1. 按 [Y + start] 键开启手柄, 指示灯滚动闪烁。
 2. 按住 [pair] 键 2 秒, 指示灯熄灭 1 秒后继续滚动闪烁, 手柄进入配对状态。
 3. 打开 Switch 主机 Controllers 设置, 进入 Change Grip/Order 界面, 等待手柄连接, 连接成功后指示灯常亮。
 4. 成功配对后, 下次使用按 [start] 键可自动连接。
- * 星号键功能为 Switch 截图键, home 键功能为 Switch home 键

Android (D - input)

- 1 – press & hold **B** & **start** to turn on the controller, LED 1 will start to blink
 - 2 – press & hold **pair** for 2 seconds to enter pairing mode, LED will rotate from left to right
 - 3 – go to your Android device's Bluetooth setting, pair with [8Bitdo SN30 Pro]. LED will become solid when connection is successful
 - 4 – controller will auto reconnect to your Android device with the press of **start** once it has been paired
- USB connection: connect the controller to your Android device via USB cable after step 1

Android (D - input)

1. 按住 [B + start] 键开启手柄, 1 号指示灯闪烁。
 2. 按住 [pair] 键 2 秒进入配对状态, 指示灯滚动闪烁。
 3. 打开 Android 设备蓝牙, 搜索 [8Bitdo SN30 Pro] 设备, 点击连接, 连接成功后指示灯常亮。
 4. 成功配对后, 下次使用按 [start] 键可自动连接。
- * USB 有线连接: 请在第 1 步开启手柄之后, 用 USB 线连接设备。

Windows (X - input)

- 1 – press & hold **X** & **start** to turn on the controller, LEDs 1, 2 will start to blink
 - 2 – press & hold **pair** for 2 seconds to enter pairing mode, LEDs will rotate from left to right
 - 3 – go to your Windows device's Bluetooth setting, pair with [8Bitdo SN30 Pro]. LED will become solid when connection is successful
 - 4 – controller will auto reconnect to your Windows device with the press of **start** once it has been paired
- USB connection: connect the controller to your Windows device via USB cable after step 1

Windows (X - input)

1. 按住 [X + start] 键开启手柄, 1、2 号指示灯同时闪烁。
 2. 按住 [pair] 键 2 秒进入配对状态, 指示灯滚动闪烁。
 3. 打开 Windows 设备蓝牙, 搜索 [8Bitdo SN30 Pro] 设备, 点击连接, 连接成功后指示灯常亮。
 4. 成功配对后, 下次使用按 [start] 键可自动连接。
- * USB 有线连接: 请在第 1 步开启手柄之后, 用 USB 线连接设备。

macOS

- 1 – press & hold **A** & **start** to turn on the controller, LEDs 1, 2, 3 will start to blink
 - 2 – press & hold **pair** for 2 seconds to enter pairing mode, LEDs will rotate from left to right
 - 3 – go to your macOS device's Bluetooth setting, pair with [Wireless Controller]. LED will become solid when connection is successful
 - 4 – controller will auto reconnect to your Windows device with the press of **start** once it has been paired
- USB connection: connect the controller to your macOS device via USB cable after step 1

macOS

1. 按住 [A + start] 键开启手柄, 1、2、3 号指示灯同时闪烁。
 2. 按住 [pair] 键 2 秒进入配对状态, 指示灯滚动闪烁。
 3. 打开 macOS 设备蓝牙, 搜索 [Wireless Controller] 设备, 点击连接, 连接成功后指示灯常亮。
 4. 成功配对后, 下次使用按 [start] 键可自动连接。
- * USB 有线连接: 请在第 1 步开启手柄之后, 用 USB 线连接设备。

Turbo function

- 1 – hold the button you would like to set turbo functionality to and then press the **star** button to activate turbo functionality
 - 2 – home LED will blink when turbo functionality has been applied successfully
 - 3 – all buttons with turbo functionality activated will cause the home LED to blink, showing you that turbo functionality is active on that button
 - 4 – to deactivate turbo function, hold the button with turbo functionality activated press the **star** button to deactivate turbo functionality. the home LED will no longer blink if you have successfully disabled turbo functionality
- analog sticks are not included
 - this does not apply to Switch

Turbo 连发功能

1. 按住需要设置连发的功能键, 再按下星号键可开启按键的连发功能。
 2. 连发功能启动后, home 指示灯会闪烁。
 3. 在按下设有连发功能的按键时, home 指示灯会闪烁, 提醒用户此键已设有连发功能。
 4. 如果需要关闭按键的连发功能, 按住需要设置连发的功能键, 再按下星号键便可关闭其连发功能。
- * 左、右摇杆与方向键不支持连发。
 - * 连接 Switch 时不可用。

battery

status –		LED indicator –
low battery mode	—————>	power LED blinks
battery charging	—————>	LED stays solid
battery fully charged	—————>	power LED turns off

- built-in 480 mAh Li-on with 18 hours of play time
- rechargeable via USB cable with 1-2 hour charging time

电池

电量状态		指示灯状态
低电量	—————>	红灯闪烁
充电中	—————>	红灯常亮
充电完成	—————>	指示灯熄灭

- * 内置 480mAh 锂电池, 可持续使用约 16 小时。
- * 可使用配备的 USB 线进行充电, 充电时间约 1~2 小时。

power saving

- 1 minute with no Bluetooth connection, will power off
- 15 minutes with Bluetooth connection but no use, will power off

自动关机

- * 使用蓝牙连接时, 1 分钟内未连接蓝牙或连接后 15 分钟无操作时将自动关机。
- * 使用 USB 连接时, 手柄会保持开机。

support

- please visit support.8bitdo.com for further information & additional support

固件升级

- * 请访问 <http://support.8bitdo.cn/> 了解详细信息。