
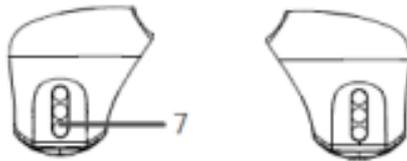


# User Manual



Model No: B217

## Parts overview

1. LED of charging case
2. Charging case button
3. Micro TYPE-C socket
4. LED of earphone
5. Touch control panel
6. Microphone of Earphone
7. Charging Pin of Earphone

### Charging the battery

Waking up the earphones and the charging case and Charging

the rechargeable batteries

1. Inserting the earphone into the charging case.
2. Connecting the TYP-C cable to the charging case and to power source.
3. Checking the battery charge status

When charging the earphone by using the charging case, the charging status LED (RED)

Is turned ON. LED (BLUE) is turned ON for a while then OFF when fully charged.

When a USB cable is connected during charging, the LED of the charging case displays

the charging process.

·When the earphone is at the power as lower as 3.44V, the voice prompt of “battery low”

is heard once per 3 seconds and the LEDs of the earphone flash red twice per 6 seconds.

. When the earphone is at the power as low as 3.10V, the earphone turn off after the message of “power off”.

·The LED of charging case (4 LEDs) shows the current battery capacity level

(such as 25, 50, 75 and more than 75 %).

## Power on and off

### Auto Power ON/OFF

The earphones are turned on automatically when you take them out from the charging case.

A "Power On" message is heard, and the LEDs of the earphone flash blue for second.

The earphone power off and are being charged automatically once the earphones are inserted into the charging case.

### Note

- Auto Power ON/OFF in the charging case will not work when the charging case is out of power.
- The earphone automatically power off if they do not find a paired Bluetooth device within 90 seconds or if they are connected via Bluetooth but no audio playback for approx. 3 minutes.

### Manual Power ON

Touch and hold the right and left touch control panel for second, the voice prompt "power on" is heard, the LEDs of the earphone flash blue for second.

## Using the earphones

### Pairing

When you use the earphones for the first time, follow the procedure below to pair them.

1. The earphones are turned on automatically when you take them out from the charging case.

Or turn the earphones on manually by touching and holding the right and left touch control panel for second, the voice prompt "power on" is heard, and the LEDs of the earphone flash blue for second.

2. The left and right earphone are paired automatically, a "Dong, dong" signal tone is heard.

When the earphones start pairing with a Bluetooth® device, a "Pairing" message is heard, the LEDs of earphone flash blue and red quickly. The voice prompt "Pairing success" is heard when the left and right earphone are paired for the first time.

3. Activate Bluetooth® on your Bluetooth device and search for "B217".

Select "B217" from the list of found Bluetooth devices to complete pairing. If necessary, enter the default pin code "0000". If pairing was successful, you hear the voice prompt "Connected" and the LEDs of the earphones turn off.

## Product feature

Pairing name	B217
Li-battery capability	Earphone 40mAh Charging case 400mAh
Talking time	3-4 hours
Playing time	3-4 hours
Charging time	2-3 hours
Charger mode	USB Type C 5V-0.5A
Straight-line distance	≥10m

## Operation and Functions

Function	Operation	Voice Prompt
Play / Pause	Tap the Touch Control on either of the earbuds twice under music	/
Volume +	Tap the Touch Control on the right earbud	Toots when highest setting is reached
Volume -	Tap the Touch Control on the left earbud	/
Next Track	Tap the Touch Control on the right earbud three times	/
Previous Track	Tap the Touch Control on the left earbud three times	/

Answer Phone Call	Tap the Touch Control on either of the earbuds once	/
Hang Up Phone Call	Tap and hold the Touch Control on either of the earbuds for 2 seconds	/

Function	Operation	Voice Prompt
Decline an Incoming Call	Tap and hold the Touch Control on either of the earbuds for 2 seconds	Call rejected
Turn On / Off Voice Control	Tap and hold the Touch Control on either of the earbuds for 2 seconds until a beep is heard	Toot
Clear Pairing List	Refer to the " <b>Clear Pairing List</b> " section	/
Go into Pairing Mode	Refer to the " <b>Pairing</b> " section	Pairing
Successfully paired with your device	/	Connected
Bluetooth out of Range / Failed to pair with your device	/	Disconnected

## FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.