


正面

物料名称: 说明书  
物料编号: 4.410-1T709000T16-0  
材质: 80书写纸黑白印刷，风琴折页，成品尺寸70x90mm

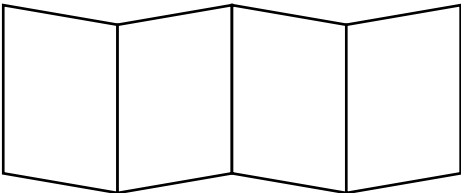

T16 User Manual

Hybrid ANC True Wireless Earphones  
Aska A²NC algorithm inside

Thank you for choosing T16 Hybrid ANC True Wireless Earphones. Before using T16, users should read this manual to familiarize themselves with the functions of your mobile phone or other devices.

Package List

1. Wireless Earphones  
2. One manual  
3. One USB C charge cable  
4. L、M、S silicone eartips

Touch Function / MFB

L x1  
M x1  
S x1

2

Earphone

IC Solution	AB1562A
Operating Mode	Touch Function
Bluetooth Ver. No	V5.2
Transmission Frequency	2.4G ~ 2.48G
Bluetooth Profile	HSP, HFP, A2DP, AVRCP
Audio Codec	AAC, SBC
Transmission Power	CLASS 2
Wireless Range	≥10m
Power Voltage	3.0 ~ 4.2V
Charging Voltage	5V
Charging Current	60mA
BT Music Current	5.8mA
BT Call Working Current	9mA
Talk Time	6H
BT Music Play Time	Approx. 9H under Full Charge
BT on+ ANC on	7H
Charging Time	2H
Battery In Earphones	60mAh x 2pcs, Polymer Lithium Battery
Speaker	2×10mm, 32±15%Ω
Sound Pressure Level (Sensitivity)	97±3dB At 1kHz 1mW/IEC711
Mic Sensitivity/Mic	-38dB
ANC Solution	FF+FB (Hybrid ANC)
ANC Performance	35 +/-5 dB
ANC Frequency Range	80-1K HZ
Weight	10.8g
Size	28*23*21mm

3

背面

Charger case

Battery In Case	450mAh Polymer Lithium Battery
Charging Time	2H
Charging Port	Type-C
Weight	34.4g
Size	64*24*44
Charge Case Can Charge The Earphones	2 times

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
– Reorient or relocate the receiving antenna.  
– Increase the separation between the equipment and receiver.  
– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
– Consult the dealer or an experienced radio/TV technician for help.  
FCC ID: 2ACXH-T16

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

4

Operation

Power on: 1. Open the top cover of the charging box and turn it on and enter automatic connection mode  
2. Long press the left and right earphone MFB buttons for 3s to power on (the earphones are outside the charging case)

Power Off: 1. Put the earphone into the charging box and close the lid to automatically shut down  
2. Press and hold the left and right earphone MFB buttons for 6s to power off (the earphone is outside the charging case)

1st Paring: Open the top cover of the charging case and enter the pairing mode, and activate your phone/device's bluetooth, search "T16", then click it to connect the earphones

Manual Paring: Open the cover (don't remove the earphones from the charging case), long press the case button for 3s to enter the pairing mode

Reset: Open the top cover of the charging case (don't remove the earphones from the charging case), press the case button for 10s

Ambient mode/ANC on/ANC off: Double-press the MFB button on the left earphone to shift

5

Auto paring: 1. Open the cover of the charging case, and the earphones will automatically connect back to the Bluetooth device. (Reconnection time: 3 minutes)  
2. Note: The earphones will first connect back to the last connected Bluetooth device  
3. The earphones is turned on manually and automatically reconnects (reconnect time: 3 minutes)

Play/Pause: Press the left/right earphones MFB button

Answer call: Press the left/right earphones MFB button

Previous: Long press the left MFB button for 1.8s

Next: Long press the right MFB button for 1.8s

Voice Assistant: Double-click the MFB button on the right earphones

6