


# User manual

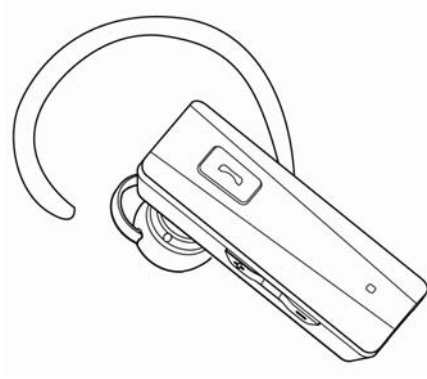

**Bluetooth® Headset H35**

## **1. Notice Before Using**

Thank you for purchasing the Bluetooth® Headset H35. Please read this User's Manual completely before you use the Headset. The H35 has been developed using Bluetooth® wireless technology and is capable of connecting with Bluetooth® devices designed with Audio Gateway. PDAs, Desktops and Notebook computers can be connected and paired with the Headset using a USB Bluetooth® Dongle or built-in Bluetooth capability (if applicable). Before using the Headset please verify your Bluetooth® device (Phone, PDA) complies with Bluetooth® V1.1/V1.2/V2.0/V2.1 and supports the Bluetooth® Headset or Hands-free profile.


## **2. Package Contents List**

Please inspect this package and refer to the package contents list below to verify all items were included in this package:

A. H35 Bluetooth® headset(Includes Ear hook) .....	1
B. AC Charger.....	1
C. USB Charging Cable.....	1
D. Extra Earpiece.....	1
E. Extra Ear cap.....	1
F. User's Manual.....	1

### 3. H35 Bluetooth® Headset Overview

1. Ear hook
2. On/Off
3. Speaker
4. Ear cap
5. Volume(+)
6. Volume(-)
7. Dual-color indicator
8. Microphone
9. Charging socket
10. Ear cap(Extra)

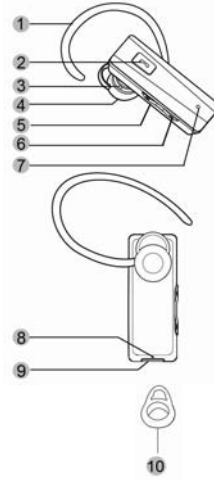

#### **4. Battery information**

The device is equipped with an integrated lithium-polymer battery. The battery cannot be replaced. Do not attempt to remove the battery from the device since it would damage the device. The full performance of a new battery is not achieved until after two or three complete charging-discharging cycles. The battery can be charged and discharged several hundred times, but it loses its capacity over time.


Disconnect the H35 from the power supply as soon as the battery is fully charged, overcharging would reduce the service life of the battery. A charged battery will lose its capacity if it is not used on a regular basis.

Important: Ensure that the battery is fully charged if you do not use the device for a long period of time. To avoid a complete discharge of the battery, the H35 should be charged at least every 3 months.

## 5. Charging the battery

The H35 is operated with a rechargeable battery. Charge the battery completely before its first use. Read the section "Battery information" before starting the charging process.

- 1) Connect USB cable to the AC charger.



- 2) When the charger is connected to the headset, the red indicator light will turn on. Charging the battery fully may take up to 2 hour.
- 3) When the battery is fully charged, the red indicator light will turn blue. Disconnect the charger from the headset and the outlet. The headset is ready to use.

NOTE:

- For first time use, please charge the headset fully.
- The fully charged battery has power for up to 5 hours of talk-time , and up to 120 hours of standby time. However, the talk and standby times may vary when used with different mobile phones or other compatible Bluetooth® devices, usage settings, usage styles, and environments. When the battery power is low, the headset will remind you by a "Beep" tone every 20 seconds, and the red indicator light starts to flash.

#### **6. Pair to your Bluetooth® phone**

Before you use your headset the first time, you must pair the unit with a Bluetooth® enabled mobile phone. Pairing is a one-time process and required only for the first connection with the cell phone The H35 can be paired with up to eight cell phones and be connected simultaneously with two cell phones.

- 1) Keep the H35 within range of a Bluetooth®-ready cell

- phone; the distance should not exceed a meter.
- 2) The headset must be turned off.
  - 3) Hold the On/Off button for approx. 5 seconds until you hear a short-low signal tone and the indicator light intermittently flashes red and blue. The device is in pairing mode. Pairing mode should engage automatically upon the first time turning on the headset.
  - 4) Find the Bluetooth® setting of your cell phone and start the search for Bluetooth® devices. (For further details, please read the operating instructions of your cell phone).
  - 5) From the list of devices found, select the "H35".
  - 6) If required, enter the PIN code "0000" and confirm the entry. If the pairing process was successful, you will hear a signal tone and the indicator lights blue for 3 seconds. (Note: The PIN code is preprogrammed and



cannot be changed.)

- 7) After pairing, the H35 automatically connect with the cell phone. For some cell phones, you have to manually confirm the connection. Once paired, the headset will change to standby mode and the indicator light will flash blue 2 times every 5 seconds.

Note: If pairing is not completed within 2 minutes, the headset will turn off. If this happens, repeat the pairing process.

## **7. Multi-connection function**

The multi-connection function allows for the simultaneous use of the H35 with two cell phones. This is an advantage for users with a personal and a business cell phone.

### **Establishing a connection with two cell phones**

There are several options of connecting the H35 with already paired cell phones.

- 1) Automatic connection

When turning on the H35, a connection is automatically established with the two most recently connected cell phones.

2) Establishing a connection via the H35

To manually establish a connection between the H35 and the two most recently connected cell phones, press the On/Off button. The H35 first connects itself with the most recently connected cell phone. Then it connects itself with the next most recently connected one.

3) Establishing a connection via the cell phone

If the cell phone is not one of the two most recently connected cell phones with the H35, you have to establish the connection via the Bluetooth® menu of the cell phone. After successful connection, you can establish another connection with a second cell phone. This allows you to determine the sequence of connections. If two cell phones are connected with the H35, the cell phone connected first

is the first device and the other one the second device. Another connection can be established only after first disconnecting one of the two cell phones. The cell phone that is still connected afterwards becomes the first device in the sequence.

Note that voice dialing is available only for the first device and the operation for redialing the last number differs for the first and the second device. The other functions are executed the same way using the H35 as a connection with only one cell phone.

## **8. Turning headset on /off**

### **Turning on your headset**

Press and hold On/Off for 3 seconds until you hear a tone from low to high. The headset is now on. The Blue indicator light will flash blue 3 times.

### **Connecting to a Bluetooth® phone**

If your headset has completed the pairing process

successfully, when the headset is turned on, it will connect to the phone you last connected with automatically. Please ensure your phone's Bluetooth® function is active.

#### **Turning off the headset**


At any working state after the headset is powered on, press and hold On/Off for 5 seconds. You will hear a tone from high to low, and the Red indicator light will flash red 3 times. The headset has now powered off.

Note:

To conserve power, if the headset is not connected to a device for approximately 10 minutes, the headset will turn off automatically.

#### **9. Wearing your headset**

According to your preference, you can wear the headset on your left or right ear. The adjustable head strap design



allows for a comfortable fit

.

## **10. Using the H35**

### **Making a call**

#### 1) Using phone's keypad

In standby mode, dial the number on your phone's keypad to make a call.

#### 2) Use Voice-Dialing

In standby mode, press the On/Off shortly, you will hear a short tone from the headset, and the phone will prompt you to say the voice tag which you have already attached to your contact. If the voice tag is identified by the phone, the related number will be dialed. Please ensure that your mobile phone supports this voice dialing function, and voice tags have been set up on your mobile phone prior to attempting this. Refer to your mobile phone's user guide or contact your service provider.

Note: the voice dialing is available only for the first device if two cell phones are connected.

3) Last number re-dialing

In standby mode, double press the On/Off button, The last number you dialed will be re-dialed.

Note: If two cell phones are connected with the H35, hold the Volume (-) button for 2 seconds to dial the last number of the cell phone connected previously.

**Answering a call**

When you receive an incoming call, press the On/Off button shortly to answer the incoming call; you can also answer the call directly from your phone.

**Reject an incoming call**

When you receive an incoming call, press and hold On/Off button for 3 seconds to reject the incoming call.

**Transferring a call**

While a call is in progress, press and hold Volume (+) for 3

seconds. The call will be transferred from your phone to your headset. Repeating the operation can transfer the call from your headset back to your phone.

**Ending a call**

While on a call, press the On/Off button shortly to end the call; you can also end the call directly from your phone.

**Call-waiting (Three-Way Calling)**

Before using the Call-Waiting function on your headset, please ensure that your phone supports this Hands-free profile and you have access to the service by a wireless provider.

- If there is an incoming call while a call is in progress, press On/Off shortly. This will accept the waiting call and end current calling.
- If there is an incoming call while a call is in progress, press and hold On/Off for 3 seconds to accept the incoming call and place the current call on hold.

- While a call is on hold and you are engaged in an additional call, press On/Off shortly to end the current call and resume the call holding.
- While a call is on hold and you are engaged in an additional call, press and hold On/Off for 3 seconds to shift the current call to hold and connect you with the previously held call.
- While you are engaged in one call with another call on hold, press Volume (+) button to add the held call to the current conversation to make a three-way call.
- While you engaged in a three-way call, double press On/Off to end all calls.

**Volume control**

While on a call, you can adjust the volume by pressing the Volume(+) and Volume(-)button or you can adjust the volume directly from your phone.

**Mute**



While a call is in progress press and hold Volume(-) button, for 2s, you will hear a tone from low to high. The headset's MIC is now muted. You will hear a remindful tone every 10 seconds, notifying you that your MIC is still muted and a call is still in progress. Repeat the operation and you will hear the tone from high to low. The mute function is now canceled.

#### **Streaming music**

The H35 supports A2DP profile that allows for wireless streaming of stereo music from a phone or other Bluetooth enabled music device. For stereo listening please connect the extra earpiece. The music will pause automatically while a call is dialed out/incoming, and resume when the conversation has ended.

#### **11. Safety and general information**

- 1) Please read this User's Manual carefully and follow all instructions.

- 2) To avoid any damage or malfunction of the device do not drop the device from high places.
- 3) Keep device away from humidity, water and any other liquid. If the device is exposed to water, moisture and other liquids do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.
- 4) Do not place or keep this device near any heat sources, such as, direct sunlight, radiators, stoves or other apparatus that produce heat. This may cause an explosion, degrade the performance and/or reduce battery life.
- 5) Do not modify, repair or disassemble device (Especially the battery). Doing this will void the warranty.
- 6) Do not place heavy objects on the device.
- 7) Use only the supplied and approved chargers.
- 8) Please contact the retailer for replacement or support with this product.

- 9) Unplug this device when unused for long periods of time or during lightening storms.
- 10) The battery used in this device may present a risk of fire or chemical burn if mistreated.

### **12. FCC & IC Statement**

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

### **13. EC Declaration of Conformity**

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation. Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment. This product is CE certified according to the provision of the R&TTE Directive (99/5/EC). This declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. Please note that this product uses radio frequency bands not harmonized within EU. Within the EU this product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, and United Kingdom and within EFTA in Iceland, Norway and Switzerland.

#### **14. Warranty**

The condition of this warranty and supplier's responsibilities under this warranty are as follows:

Warranty is non-transferable and is limited to the original purchaser only.

- You must be able to prove the date of original purchase of the unit with a dated receipt.
- The warranty is not applicable if the product has been subject to physical abuse, improper installation, modification or repair by an unauthorized third party.
- Supplier's responsibility shall be limited to the repair or replacement of the product at its sole discretion.
- Specifically exempt from any warranty are limited-life consumable components subject to normal wear and tear such as batteries, decorates and other accessories.
- Supplier is not responsible, for failure resulting from accident, abuse, misuse, or any unauthorized repair, or

modification.

- Modification and repair of the unit should be done by an authorized and qualified service center or returned to the manufacturer.

- This warranty gives you specific legal rights, and you may also have other rights, which vary under local laws.

- To replace a defective device please contact customer service . Visit our website for more information

Bluetooth® is a trademark owned by the Bluetooth® SIG, Inc.