



RE251 Honeywell & 2GIG-Compatible Hidden Panic

Features


- Hidden mounting
- 1-button arming and disarming
- Large, easy-to-differentiate buttons
- Mounts in hidden locations via VHB® tape, or screws
- Strong, reliable RF signal.
- 4-6 year battery life on CR2032 battery.

Key Instructions

- Enrolling:
 - Refer to the Honeywell control unit installation manual.
 - Put the control panel in RF Learning mode.
 - Each button (or “loop” - see picture) must be enrolled as a separate zone.
 - The Input Type is Button type “BR”.
 - Press intended button until the Fob LED blinks. Wait 5 seconds and press same button again. Panel knows what loop each button is when it is pressed (need not be entered).
 - After 2nd button press, Panel should indicate successful learn.
 - ...Or put the control panel in Serial Number entry mode
 - Enter the Loop number associated with the intended key.
 - Enter the Serial Number of the device (located on a label on the unit’s back).

Operation

Lock & Unlock buttons simultaneously for 3 seconds → Panic Alarm.

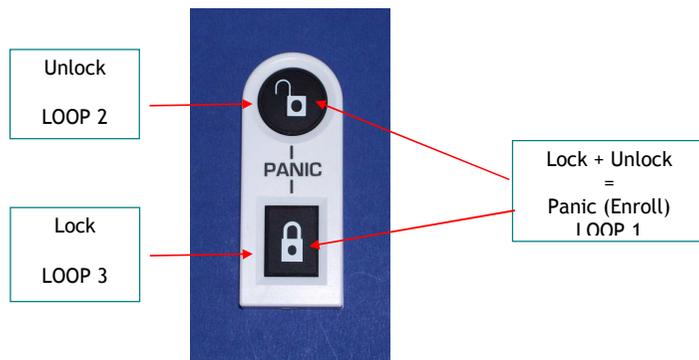

Specifications

Crystal compatible operation
Not supervised.
Replacement Battery: CR2032 Lithium / Manganese Dioxide
Temperature Range: 0F to 120F
Housing dimensions: 3 x 1.2 x 0.52 inches


Specifications subject to change without notice.

Pictures

Battery Replacement



Insert
Screwdriver here
to open

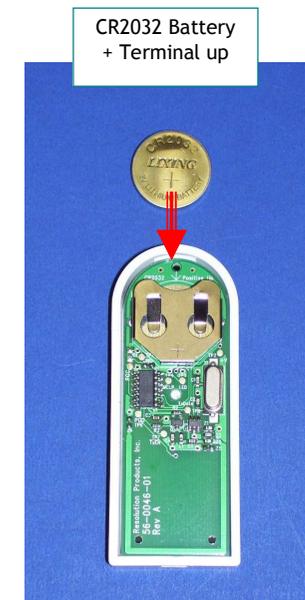

Notices

“GE”, “Honeywell”, “DSC”, “2GIG” and “Napco” are trademarks owned by General Electric Company, Honeywell International Inc., Tyco Safety Products Canada LTD, 2GIG Technologies Inc., and NAPCO Security Systems, Inc., respectively.

Resolution Products, Inc. products will function with one of either GE, Honeywell, DSC or Napco systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell, DSC or Napco. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first year.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE252

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec d'Industrie Canada RSS standard exempts de licence. Son fonctionnement est soumis aux deux conditions suivantes:

1. Ce dispositif ne peut causer des interférences, et
2. Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

IC: 8310A-RE252