

1. Product Description

Avantalk TrexPro is an elegant designed noise cancelling Bluetooth Headset. The dual microphones and advanced Digital Signal Processing technology help to eliminate the background noise so you can be heard clearly from even the very noisy environment. You can comfortably wear this headset inside the ear, or discreetly on the neck stripe to avoid attention when not using. Overall, TrexPro offers good sound quality, trendy design / finish, and comfortableness for long time wearing.

- 1 -

2. Product Overview

- (1) Charging Socket
- (2) Volume Down Button
- (3) Speaker
- (4) Ear Hook
- (5) Multi-function Button (MFB)
- (6) Volume Up Button
- (7) Indicator Light
- (8) Main Microphone



What's in the box:

- A. Avantalk TrexPro Headset
- B. USB charging Cable
- C. User Guide
- D. Ear Hook
- E. Ear piece Sponge cover *2

Optional:

- F. Car Charger
- G. Travel Charger
- H. Neck Strap & clip

- 2 -

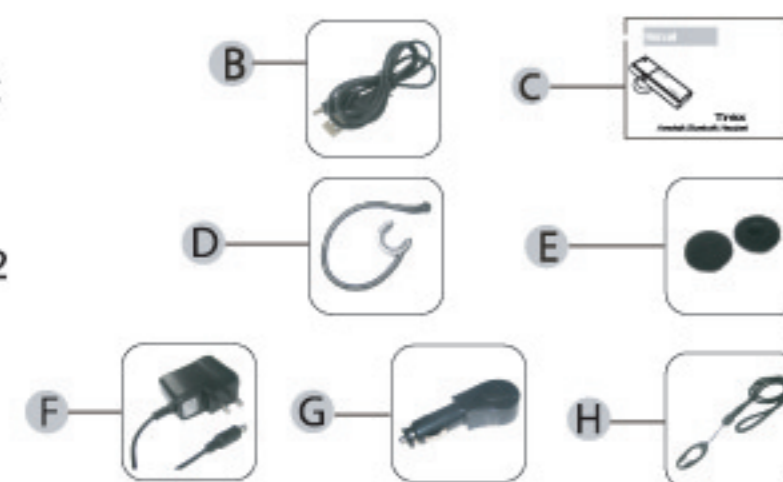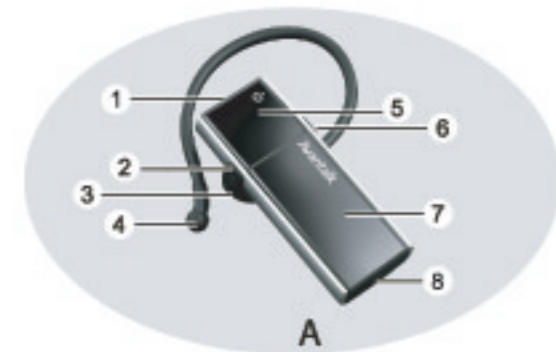

3. Charging

Avantalk TrexPro uses a popular mini USB charging socket.

- 1) Before use, please charge the device for 3 hours to make sure the headset is fully charged and the battery reach its full capacity.
- 2) Afterwards, each charge cycle may take up to 2 hours.
- 3) LED will indicate red in charging and off when charging is complete.
- 4) If you have not use the item for a few months, LED might not turn red when first charging. It might take 15-35 minutes before the LED turn red.



Notice:

- When battery power is low, the headset will notify you with beeping every 20 seconds, and the red indicator light will start to flash.

- 3 -

4. Pairing / Connect (Tutorial online)

- 1) It is important to pair the headset with your Bluetooth device for the first time use.
- 2) Pairing procedure:
 - A. Ensure the headset is off
 - B. Press and hold the multi-functional button for 5 seconds until LED blink blue and red alternatively.
 - C. Search the device from your phone / PC;
 - D. Once found "Avantalk TrexPro", follow the steps and enter pin code 0000 to pair;
 - E. Connect the headset to the device.
 - F. Headset is ready for use now.
- 3) Once paired and connected, the headset will be automatically connected to the device whenever you turn the headset on again, provided the device is in the range.

We found most of the online technical support questions are caused by improper pairing between the headset and the Bluetooth device. Please follow the instruction step-by-step.

- 4 -

5. Basic Operations

5.1 Headset on / off

Turn on the headset – Pres and hold the MFB for 2 seconds until blue LED flash.

Turn off the headset – Press and hold the MFB for 3 seconds until red LED flash.

Please Note: To save power, the headset will automatically turn off if it is not connected to any device for more than 10 minutes.

5.2 Answer a call – press the MFB briefly to pick up the call.

5.3 Reject a call – press and hold the MFB for 2 seconds.

5.4 Re-dialing – Press the Volume Down for 2 seconds.

5.5 Ending a call – Press the MFB briefly once.

5.6 Transfer a call –

- (1) Headset to phone: Press MFB button for 3 seconds.

- 5 -

- (2) Phone to headset: Press MFB button for 3 seconds.

5.7. Voice dialing

Please check if your mobile phone supports voice dialing function. If your phone does support this function, please follow your mobile phone manual instructions for set up.

- 1) Press the MFB briefly, then you can hear a short beep.
- 2) Say the name of person you wish to call.
- 3) If the voice tags are paired to the related phone number stored in your mobile phone, the number will be dialed.

6. Advanced Operations - Multipoint (Tutorial online)

6.1. Pairing with two phones

- From OFF, press and hold the MFB button for 4 seconds, pair with the first phone.
- Power off the headset. Then press and hold the MFB button for 4 seconds, pair with the second phone.
- Power OFF the headset again, then turn ON, the headset will automatically connect with last 2 paired phones.

- 6 -

6.2. Using the headset

- Answer a call - Press FMB button once to answer the call.
- If there is a second call from other phone during the conversation, you have to answer the call on phone.

6.3. Voice dialing:

- For the 1st Phone: Press the MFB button twice successive, then say the name of person you wish to call.
- For the 2nd Phone: Press the MFB button once, then say the name of person you wish to call.

6.4. Last number redialing

- For the 1st Phone: Press and hold the "volume -" for 2 seconds
- For the 2nd Phone: Press and hole the "volume +" for 2 seconds

- 7 -

7. Product Specification

- * Bluetooth V2.1+EDR
- * Chipset: CSR BC5
- * Support profile: headset profile and hands-free profile
- * Class 2
- * Operation Range: 10 meters (extended)
- * Talk time: up to 5 hours
- * Standby time: up to 6 days
- * Charging time: 1.5-2.5 hours
- * Battery: Rechargeable polymer battery

* The talk and standby times may vary when used with different mobile phones or other compatible Bluetooth devices, usage settings, usage styles and environments.

- 8 -

8. Safety Information

- To avoid any damage or malfunction of the device do not drop device from high places.
- Keep device away form humidity, water and any other liquid. If the device is exposed to water, moisture and other liquid, do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.
- Do not place or keep this device near any heat source, such as, direct sun light, radiators, stoves or other apparatus which produces heat. It may cause explosion, degrade the performance and/or reduce battery life.
- Do not modify, repair or disassemble device at discretion (Especially battery: It may cause an explosion). Doing this will avoid the warranty.
- Do not place heavy objects on the device.
- Use only supplied and approved charger.
- Replacement or service must be done by qualified service center or manufacturer.
- Unplug this device when unused for long periods of time or during lightning storms.

CAUTIONS: ELECTRIC SHOCK HAZARD

The battery used in this device may present a risk of fire or chemical burn if mistreated.

- 9 -

9. Declaration of Conformity

9.1. FCC & IC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

9.2. EU

This product is CE certified according to the provision of the R&TTE Directive (99/5/EC). Declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

- 10 -

9.3. Trademark Statement

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. Avantalk is a trademark owned by Avatronics limited.

10. Warranty

The condition of this warranty and our responsibilities under this warranty are as follows:

Warranty is non-transferable and is limited to the original purchaser only.

- You must be able to prove the date of original purchase of the unit with a dated receipt.
- The warranty is not applicable if the product has been subject to physical abuse, improper installation, modification or repair by unauthorized third party.
- The responsibility of supplier's products shall be limited to the repair or replacement of the product at its sole discretion.
- Specifically exempt from any warranty are limited-life consumable components subject to normal wear and tear, such as, batteries and other accessories.
- Supplier will not take any responsibility if the failure of the unit has resulted from accident, abuse, misuse, or any unauthorized repair, modification or

- 11 -

disassemble.

- Modification and repair of the unit should be done by authorized and qualified service center or returned to the manufacturer.
- This warranty gives you specific legal rights, and you may also have other rights which vary under local laws.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Changes or modifications not expressly approved by the party responsible for compliance. Could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Avantalk®
Designed for Freedom

Bluetooth Headset (TrexPro)



User Guide

Technical Support & Product Tutorial

More information about this product and other Avantalk Bluetooth Products, including the video user guides, product tutorials and online technical support, please refer to www.avantalk.com 'Product Tutorial' Page and 'Download' Page.

- 12 -