

Bluetooth 3.0 Stereo Headset

藍牙立體聲耳機

User Manual

使 用 說 明 書



恩悠數位股份有限公司

新北市汐止區康寧街169巷29-1號9樓

客服專線: (02) 6616-0899 傳真: (02) 2695-9559

上海广悠数码科技有限公司

上海市闵行区上中西路1285弄5号301室

TEL: 86-021-34621098

NUA (USA) Nu Technology, Inc.

2726 Bayview Drive, Fremont, CA 94538 Phone:(510) 226-1450 ext.103 Fax:(510) 226-6107

www.nu-global.com

>>>> English <<<<<

SPECIFICATIONS

Model NO.	NU-BTH (BH-07)	
Bluetooth Profiles	HSP,HFP,A2DP,AVRCP	
Music Time 20 Hours		
Standby Time	Up to 250 Hours	
Charge Time	4 Hours	
Bluetooth Ver.	V3.0 + EDR	
Effective Range 10 Meters		
Talk Time	20 Hours	
Iuput	DC: 5V/160mA	
Dimensions	16.6 x 16.8 x 7.9 cm	

» About NU-BTH(BH-07)

Wireless Headset

NU-BTH (BH-07) action stereo headset with Bluetooth 3.0 (Compatible with Bluetooth 2.1) technology which supports the following Bluetooth profiles:

HSP

Headset Profile

HFP


Hand-free Profile

A2DP

Advanced Audio Distribution Profile

AVRCP

Audio/Video Remote Control Profile



- v key : next song
- 3 LED Indicator
- Multifunction button for answer, end and reject call, pause and play music
- 6 + key : Volume Up
- 6 key : volume down
- Micro USB Charging port
- Built-in Embedded microphone
- 9 Foldable design

2. Recharge Headset via USB · · · · · · · ·

- Step 1 : Insert USB cable into USB port which provide 5V 160mA or higher power such as PC USB port or USB wall charger (recommended).
- ▶ Step 2 : Connect the other end of the cable to the earphone's charging port (Micro USB socket).
- ▶ Charging when the red LED light is on and fully charged when the red LED light turns blue.
- It takes about 4 hours to fully charge to headset.

Notes Fully charge it before use for the first time

How to use

1. Switching on / off headset · · · · · · · · ·

Function	Operation	LED indicator	Indication tone
Switch on	Press and hold the	Blue LED is	You wi ll hear a
	Multifunction button	blinks three	voice prompt
	for 4 seconds	times	saying "Power on"
Switch off	Press and hold the	Red LED is	You wi ll hear a
	Multifunction	blinks three	voice prompt
	buttonfor 4 seconds	times	saying "Power off"

2. Pairing the headset with Bluetooth devices

A How to enter pairing mode

Make sure headset power is turned off, press and hold the multifunction button for 6 seconds till red and blue LED blink alternately and the voice command "pairing" comes out, and then release the Multifunction button. The headset will be pairing with the Bluetooth device.

Notes Make sure your Bluetooth function is turned on when pairing. The headset device name is NU-BTH(BH-07). Pairing procedures are not the same among different mobile phones. Please refer to your mobile phone user manual for Bluetooth pairing procedures.

After successful connect the headset to your Bluetooth device, the blue LED on the headset will quickly blinks every 4 seconds and "pairing complete" command will be heard.

B Pairing with NFC technology · · · · · · · · ·

- For Android device, please make sure your NFC function has been to turned on.
- Simply tap your mobile to the "NFC" sensor area of the headset for a second, once you see the pairing message on the screen just press "yes" for setup the connection.



C Multi-link technology · · · · · · ·

Multi-link technology allows two Bluetooth devices to be connected simultaneously. Press and hold multifunction button on the headset and finish the pairing procedures as described above. Both devices will be connected at the same time.



 The string of this headset is retractable; please adjust according to the actual use. "L" of headset represents left ear, "R" of headset represents right ear. Please wear the headset according to the indication of the sign.



3. Making calls with the headset · · · · · ·

One touch to multifunction button to receive incoming call while listening music and the music will be put on pause automatically. Built-in microphone will pick up your voice when answering a phone call. Music will resume after phone call is finished.

Function	Status of headset	Operation
Voice dial	Standby mode	Press and hold the Multifunction button for 2s, release it till hearing indication sound.
Redial last number	Standby mode	Short press the Multifunction button twice quickly.
Volume up	Conversation mode	Short press + key. When the volume is adjusted to maximum, you will hear an indication tone.
Volume down	Conversation mode	Short press – key. When the volume is adjusted to minimum, you will hear an indication tone.
Answer ca ll ing	Ringing	Short press the Multifunction button.
Reject calling	Ringing	Press and hold the Multifunction button for 1s, and release till hearing indication sound.

Warning

Excessive volume from the headphones can cause hearing damage.

Notes For some mobile phones, when you press the key of accepting on the phone, the conversation will be sent to the mobile phone. At this time, you can switch the call to headset by using the conversation switch button or through operating on the mobile phone. Please refer to the instruction of your mobile phone for further information.

Function	Status of headset	Operation	
Play	Playing music	Short press the Multifunction button.	
Pause	Pausing	Short press the Multifunction button.	
Last song	Playing last music	Short press \wedge key.	
Next song	Playing next music	Short press v key.	
Volume up	Playing music volume up	Short press + key. When the volume is adjusted to maximum, you will hear an indication tone.	
Volume down	Playing music volume down	Short press – key. When the volume is adjusted to minimum, you will hear an indication tone.	

5. LED indicator ······

A Charging

LED indicator	Status of the headset	
Red LED is on	Charging	
Blue LED is on	Finish charging	

B In use

LED indicator	Status of the headset
Red and blue LEDs blink alternately	Pairing mode
Blue LED quickly blinks once every 2 seconds	Not connected to a device
Blue LED gradually turns on and off	Conversation mode
Red LED blinks twice every 20 seconds	Low power

A Automatic connecting

Every time the headset is switched on, it will connect to the nearest, and the last connected device automatically, and you have the choice to reject the connection of the headset NU-BTH((BH-07).

- When the headset is in standby mode and doesn't connect to any devices, short press the Multifunction button once, it will connect to last connected device automatically.
- Related Products information,Q&A.
 Please help linking with NU website.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

>>>> 繁體中文 <<<<

規 格

藍牙版本	Bluetooth V3.0+EDR SUPPORT : HSP, HFP, A2DP and AVRCP
按鍵功能	聲音:大/小 歌曲:上一首/下一首 多功能鍵:對碼/接聽電話/保留電話/回撥
工作時間	播放音樂:可達 20小時 通話時間:可達 20個小時 待機時間:可達 250小時
工作距離	10 公尺
輸入電源	DC : 5V/160mA
充電時間	大約 4 小時
麥克風	內建
充電方式	USB 線
尺寸	16.6 x 16.8 x 7.9 cm

≫ 歡迎使用藍牙立體聲耳機NU-BTH(BH-07)

NU-BTH(BH-07) 是藍牙 3.0 立體聲耳機 (相容於藍牙 2.1 規範) ·支援下列藍牙規格:


HSP 耳麥 Headset Profile

HFP 免持聽筒Hand-free Profile

A2DP 高音質通道 Advanced Audio Distribution Profile

AVRCP 音訊/視頻遠端遙控 Audio/Video Remote Control Profile 你可以藉由NU-BTH(BH-07)通過無線技術·享受高音質的音樂以及良好的通話品質。

1. 按鍵功能 ••••••

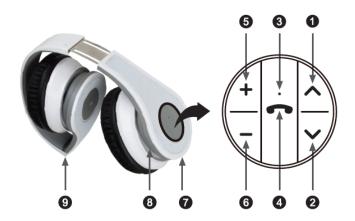

↑ ∧按鍵:上一首歌曲

2 ∨按鍵:下一首歌曲

3 LED 指示燈

❹ 多功能鍵:電源開關/接電話/掛電話/回撥電話/暫停/播放/配對

5 + 按鍵:音量增大6 - 按鍵:音量減小

™ Micro USB 充電孔位

⑧ 隱藏式麥克風

9 折疊式設計

▶ 第一次充電:使用前請確認第一次是充滿電源的。

▶ 下次充電:當你聽到警示音「嘟~嘟~嘟~嘟~」,並且指示 燈呈現紅色連續閃 2 次,就表示電源將要耗盡,請進行 充電。

使用USB線材充電

- ▶ 將USB 充電線插入可提供電源的設備(如AC/DC USB電源或是PC USB)
- ▶ 將電源線接入耳機的充電孔位
- ▶ 當指示燈呈現紅色長亮,表示正在充電
- ▶ 當藍色燈長亮時,代表已經充滿
- ▶ 充電時間大約需要 4 個小時

備註

- 耳機使用時進行充電,會造成耳機重新開機。
- 請勿將電池放在離火源太近,或是太陽直射的地方,有可能會造成電池爆炸。

如 何 使 __用

功能	啟動	關閉	
操作	長按 多功能鍵 約4秒	長按 多功能鍵 約4秒	
指示燈	直到紅色燈亮紅色燈閃 3 次	直到藍色燈亮藍色燈閃 3 次	
指示音	您將會聽到 「Power on~咚」	您將會聽到 「嘟~Power off」	

2. 與藍牙設備配對 ****

A如何進入配對模式

功能	配對模式
操作	先確認耳機是否處於 關機 狀態·長按 多功能鍵 6 秒 直至指示燈紅藍雙閃
指示燈	指示燈紅色藍色雙閃
指示音	「嘟~嘟~」

B與手機進行配對

連接的程式會根據手機有所不同,請參考您手機的使用說明

步驟1 請先保持耳機及手機處於一公尺內的配對距離

步驟2 確定耳機進入配對模式:確認指示燈為紅藍雙閃

步驟3 將手機藍牙設備設置成搜索藍牙設備後,選擇 NU-BTH(BH-07)

步驟4 根據指示輸入密碼:「0000」,或不需密碼直接配對,並點選確認

步驟5 配對成功後,點選清單上的NU-BTH(BH-07),以確認連接設備

步驟6 連接成功後,指示燈會持續閃爍藍燈

C使用NFC功能配對

- 於Android手機,確認 NFC 功能是否開啟。
- 將手機放在藍牙耳機NFC感應處,你的手機螢幕會出現配對訊息 ,請按下「確認」,與耳機連結。



D 多方連接技術

多方連結技術允許在同一時間連接兩個藍牙設備。按住**多功能**按鍵到聽到「Pairing」了。從你的第二個設備選擇NU-BTH(BH-07),然後等待,直到聽到「Pairing completed」。回到步驟 1 和從藍牙設備列表中選擇NU-BTH(BH-07),直到看到「連接」狀態。現在,這兩個設備已經連接。

備註

- 假使沒有配對成功,請先重新啟動耳機,再重複配對動作。
- 當配對成功後,配對的設備會自動記憶。下次再使用的時候,無需重新配對,若需要配對到其他設備,請重新進行步驟 1~6。

3. 藉由耳機進行電話操作・・・・・・・

當電話來電時·您會聽到「Incoming call」提示音及手機鈴聲響起。若您在聽音樂時·手機來電·音樂將自動暫停·您會聽到「Incoming call」·通話結束後·音樂將繼續播放。

功能	耳機狀態	操作說明
回撥最後一次通話	待機模式	短按 多功能鍵 2 次
聲音大	通話模式	短/長 按 + 鍵
聲音小	通話模式	短/長 按 - 鍵
接電話	鈴聲	短按 多功能鍵
拒 絕 來 電	鈴聲	長按 多功能鍵 1 秒 · 直至出現指示音

- ▶ 不是所有的手機都支援這些功能,請參考您手機的使用說明
- ▶ 在不同的手機上,會有不同的指示音
- ▶ 當調整音量至最大聲或最小聲時,您可以聽到指示音

功能	耳機狀態	操作說明
暫停	播放音樂	短按 多功能鍵
播放	播放音樂	短按 多功能鍵
上一首	播放音樂	短按 ^ 鍵
下一首	播放音樂	短按 ٧ 鍵
音量大	播放音樂	短按 + 鍵
音量小	播放音樂	短按 - 鍵

備註

- 在某些手機中,當你播放音樂時,音樂會從手機喇叭中放出,需在 藍牙清單中,選擇將經由藍牙傳輸至NU-BTH(BH-07),請參考您手 機的使用說明。
- 當調整音量至最大聲或最小聲時,您可以聽到指示音。
- 上一首、下一首的功能·必須要求藍牙設備支援 AVRCP 的功能,請參考您手機的使用說明。

A 充電時, LED指示燈狀態

LED指示燈	狀 態	LED指示燈	狀態
紅色燈亮	充電中	藍色燈亮	完成充電

B使用中,LED指示燈狀態

LED指示燈	狀態	
紅色藍色雙閃	配對模式	
藍燈持續閃	通話模式	
藍色燈 1 秒鐘閃 2 次	沒有連接至設備	
紅燈閃爍每 20 秒閃 2 次	低電源	

▶ 自動連結:每次啟動耳機時,會自動與最後一次連結設備進行連結,請確定連結設備的藍牙裝置 為啟動狀態。

備註

- 連結設備前,請將設備的藍牙裝置啟動。
- 在部分設備中·需先將藍牙設備中的選項選擇為自動連結·請參考 您手機的使用說明。
- 相關產品的問題及答覆, 請至NU官網查詢。

>>>> 简体中文 <<<<

规 格

蓝牙版本	Bluetooth V3.0+EDR SUPPORT : HSP, HFP, A2DP and AVRCP
按键功能	声音:大/小 歌曲:上一首/下一首 多功能键:对码/接听电话/保留电话/回拨
工作时间	播放音乐:可达 20 小时 通话时间:可达 20 个小时 待机时间:可达 250 小时
工作距离	10 公尺
输入电源	DC: 5V/160mA
充电时间	大约 4 小时
麦克风	内建
充电方式	USB 线
尺寸	16.6 x 16.8 x 7.9 cm

>>> 欢迎使用蓝牙立体声耳机NU-BTH(BH-07)

NU-BTH(BH-07) 是蓝牙 3.0 立体声耳机(相容於蓝牙 2.1 规范), 支援下列蓝牙规格:


HSP 耳麦 Headset Profile

HFP 免持听筒 Hand-free Profile

A2DP 高音质通道 Advanced Audio Distribution Profile

AVRCP 音讯/视频远端遥控 Audio/Video Remote Control Profile

你可以藉由NU-BTH(BH-07)通过无线技术,享受高音质的音乐以及良好的通话品质。

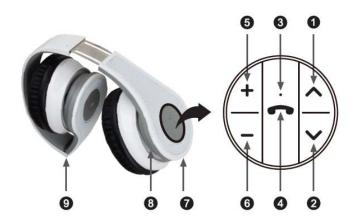

- ∧ 按键:上一首歌曲
- 2 ∨ 按键:下一首歌曲
- 3 LED 指示灯
- 多功能键:电源开关/接电话/挂电话/回拨电话/暂停/播放/配对
- + 按键:音量增大 按键:音量减小
- Micro USB 充电孔位
- 8 隐藏式麦克风
- 9 折叠式设计
- ▶ 第一次充电:使用前请确认第一次是充满电源的。
- ▶ 下次充电:当你听到警示音「嘟~嘟~嘟~」,并且指示灯呈现 红色连续闪 2次,就表示电源将要耗尽,请进行充电。

使用USB線材充電

- ▶ 将USB充电线插人可提供电源的设备(如AC/DC USB电源或是PC USB)
- ▶ 将电源线接入耳机的充电孔位
- ▶ 当指示灯呈现红色长亮,表示正在充电
- ▶ 当蓝色灯长亮时,代表已经充满
- ▶ 充电时间大约需要 4 个小时

备注

- 耳机使用时进行充电,会造成耳机重新开机。
- 请勿将电池放在离火源太近·或是太阳直射的地方·有可能会造成电池爆炸。

如 何 使 用

功能	启动	关闭	
操作	长按多功能键约 4 秒	长按多功能键约 4 秒	
指示灯	直到红色灯亮红色灯闪 3 次	直到蓝色灯亮蓝色灯闪 3 次	
指示音	您将会听到 「Power on~咚」	您将会听到 「嘟~Power off」	

A如何进入配对模式

功能	配 对 模 式
操作	先确认耳机是否处於关机状态·长按多功能键 6 秒 直至指示灯红蓝双闪
指示灯	指示灯红色蓝色双闪
指示音	「嘟~嘟~」

B 与手机进行配对

连接的程式会根据手机有所不同、请参考您手机的使用说明

步骤1 请先保持耳机及手机处於一公尺内的配对距离

步骤2 确定耳机进入配对模式:确认指示灯为红蓝双闪

步骤3 将手机蓝牙设备设置成搜索蓝牙设备後,选择 NU-BTH(BH-07)

步骤4 根据指示输入密码:「0000」・或不需密码直接配对・并点选确认

步骤5 配对成功後,点选清单上的 NU-BTH(BH-07),以确认连接设备

步骤6 连接成功後,指示灯会持续闪烁蓝灯

C 使用NFC功能配对

- a 於 Android 手机,确认 NFC 功能是否开启。
- ▶ 将手机放在蓝牙耳机 NFC 感应处,你的手机萤幕会出现配对讯息 ,请按下「确认」,与耳机连结。



D 多方连接技术

多方连结技术允许在同一时间连接两个蓝牙设备。按住多功能按键到听到「Pairing」了。从你的第二个设备选择NU-BTH(BH-07)·然後等待·直到听到「Pairing completed」。回到步骤 1 和从蓝牙设备列表中选择NU-BTH(BH-07)·直到看到「连接」状态。现在·这两个设备已经连接。

备注

- 假使没有配对成功 · 请先重新启动耳机 · 再重复配对动作 。
- 当配对成功後,配对的设备会自动记忆。下次再使用的时候,无需 重新配对,若需要配对到其他设备,请重新进行步骤 1~6。

当电话来电时·您会听到「Incoming call」提示音及手机铃声响起。若您在听音乐时·手机来电·音乐将自动暂停·您会听到「Incoming call」·通话结束後·音乐将继续播放。

功能	耳机状态	操作说明
回拨最後一次通话	待机模式	短按多功能键 2 次
声音大	通话模式	短/长 按 + 键
声音小	通话模式	短/长 按 - 键
接电话	铃声	短按多功能键
拒绝来电	铃声	长按多功能键 1 秒 · 直至出现指示音

- ▶ 不是所有的手机都支援这些功能,请参考您手机的使用说明
- ▶ 在不同的手机上,会有不同的指示音
- ▶ 当调整音量至最大声或最小声时,您可以听到指示音

功能	耳机状态	操作说明
暂停	播放音乐	短按多功能键
播放	播放音乐	短按多功能键
上一首	播放音乐	短按 ^ 键
下一首	播放音乐	短按 ∨ 键
音量大	播放音乐	短按 + 键
音量 小	播放音乐	短按 - 键

備 註

- 在某些手机中·当你播放音乐时·音乐会从手机喇叭中放出·需在蓝牙清单中·选择将经由蓝牙传输至NU-BTH(BH-07)·请参考您手机的使用说明。
- 当调整音量至最大声或最小声时,您可以听到指示音。
- 上一首、下一首的功能,必须要求蓝牙设备支援AVRCP的功能, 请参考您手机的使用说明。

5.LED 指示燈說明····

A 充電時,LED指示燈狀態

LED指示燈	狀 態	LED指示燈	狀 態
紅色燈亮	充電中	藍色燈亮	完成充電

B使用中,LED指示灯状态

LED指示灯	状态
红色蓝色双闪	配对模式
蓝灯持续闪	通话模式
蓝色灯 1 秒钟闪 2 次	没有连接至设备
红灯闪烁每 20 秒 2 次	低电源

- ▶ 自动连结:每次启动耳机时,会自动与最後一次 连结设备进行连结,请确定连结设备的蓝牙装置 为启动状态。

備註

- 连结设备前,请将设备的蓝牙装置启动。
- 在部分设备中,需先将蓝牙设备中的选项选择为自动连结, 请参考您手机的使用说明。
- 相 关 产 品 的 问 题 及 答 覆 · 请 至 N U 官 网 查 询 。