

MPOW Bluetooth® SPEAKER

**USER MANUAL**  
**BOOMIN** with incredibly big sound!  
**BT5500**



Please Read the Manual Before use

**Welcome**  
Thank you for purchasing the MPOW BOOMIN. We hope you enjoy it!


**BOOMIN CAN:**  
Connect wirelessly by Bluetooth to Phones, Tablets and Laptops.

Play music with a big clear sound and volume control.

Chat with your friends on your phone, tablet or PC  
• Use the BOOMIN as a speakerphone to make calls, answer calls and more...

ENGLISH	Contents	Page
1	ABOUT BOOMIN	1
2	ACCESSORIES	2
3	OPERATIONS	3
4	DEFERATION & VOICE PROMPT	4-7
5	PUT ON THE HAND STRAP	8
6	TURN ON / TURN OFF	9
7	PAIRING with your 1st Phone	10-13
8	PAIRING with your 2nd Phone	14-15
9	PLAY MUSIC - paired with One Phone	16-17
10	TALKING - paired with your One Phone	18-20
11	TALKING - paired with your Two Phone	20
12	LED INDICATOR	21
13	CHARGING	22
14	TROUBLE SHOOTING & FAQ	22
15	CARE INSTRUCTIONS	24
16	ENVIRONMENTAL PROTECTION	25
17	FCC STATEMENT	26-27
18	WARRANTY CARD	28
19	CUSTOMER SERVICE CENTER	29

**2 ACCESSORIES**  
**BOOMIN**

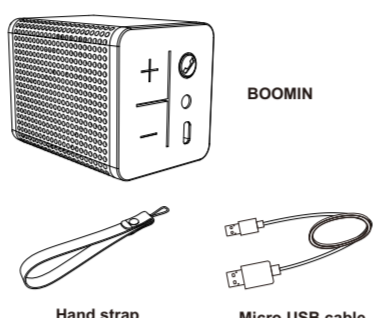

Hand strap 2

Micro USB cable 3

**3 SPECIFICATIONS**  
**BOOMIN**

Model : BT5500

Talk time : Up to 9 hours

Music playing Time : Up to 9 hours depending on volume and music type

Standby : 45 days

Charging time : 2-3 hours (for full)

Weight : 180g

Dimensions : 55.6(W)\*73(L)\*55.6(H)mm

Colors : light blue/ chocolate/ red/ pink / orange / black/ silver/ yellow/ etc

Wireless range : 10m (33 feet)

Support: A2DP/A2DP/HFP

Charging Plug: 3 PIN micro-USB, B Type

**4 OPERATION**  
**BOOMIN**

Function	Operation	Voice prompt/Tone
Pairing	Press & hold  for 7s "Boot music", pairing	
Turn On	Press & hold  for 3s "Boot music"	
Turn Off	Press & hold  for 4s "Turn off music"	
Answer call	Tap the  button	"Beep"
Hang up	Tap the  button	"Beep"
Reject call	Double-Tap  button	"Beep Beep"
Redial	Double-Tap  button	"Beep"
Cancel call	Tap the  button	"Beep"


4

**4 OPERATION...Continued**  
**BOOMIN**

Function	Operation	Tone
Volume Up	Tap the  button	"Beep"
Volume Down	Tap the  button	"Beep"
Answer/stop music play	Tap the  button	---
EQ Select	Simultaneously press  &  (both buttons while playing music)	"Beep"


6

**5 PUT ON THE HAND STRAP**  
**BOOMIN**

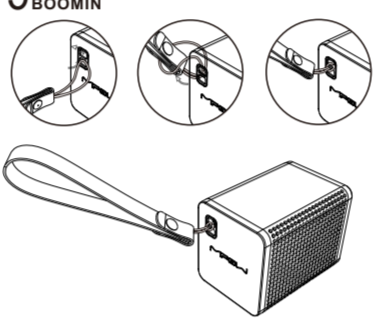

8

**6 TURN ON / TURN OFF**  
**BOOMIN**

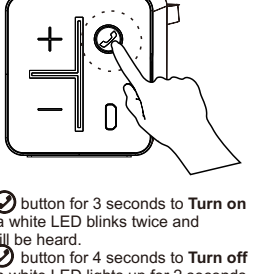

• Press & Hold for 3 seconds to Turn on the BOOMIN, a white LED blinks twice and "boot music" will be heard.

• Press & Hold for 4 seconds to Turn off the BOOMIN, a white LED lights up for 2 seconds and "Turn off music" will be heard.

9

**7 PAIRING with your 1st Phone**  
**BOOMIN**

Pair BOOMIN with your 1st phone

**Step 1. Activate Bluetooth on your phone**

**On an iPhone, iPod or iPad**  
Go to SETTINGS > GENERAL > and enable Bluetooth

**On a Blackberry**  
Go to SETTINGS/OPTIONS > BLUETOOTH and enable Bluetooth

**On an Android Phone**  
Go to SETTINGS > WIRELESS & NETWORK > Bluetooth Settings and enable Bluetooth.

**Other Cell Phones**  
Review the user manual that came with your phone


10

**7 PAIRING with 1st Phone...Continued**  
**BOOMIN**

Turn on your BOOMIN

• Press & Hold for 7 seconds on the BOOMIN to activate pairing mode of the BOOMIN

\* you will hear the "boot music" at the 3rd second and the voice prompt "pairing" at the 7th second and white LED will blink during pairing.

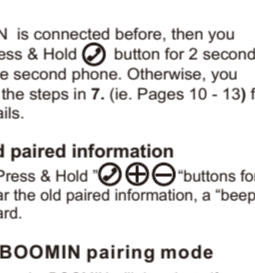

11

**7 PAIRING with 1st Phone...Continued**  
**BOOMIN**

• Open your phone's Bluetooth settings, add or search for devices when "MPOW\_BOOMIN" appears, select it or enter pass code "0000" if asked.

CONNECTED	PAIRING MODE	OPERATION MODE	RECHARGING
CONNECTED	PAIRING MODE	OPERATION MODE	RECHARGING
SELECT	SELECT	OK	SELECT


• You will hear "beep" sound from BOOMIN when paired with your phone, the LED flashes once every 7 seconds when paired.

• If BOOMIN is connected before, it can be re-connected again when it is in standby mode.

12

**7 PAIRING with 1st Phone...Continued**  
**BOOMIN**

Battery meter on iPhone shows up automatically when paired and connected.

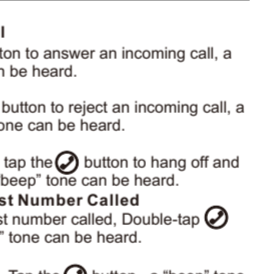

13


**8 PAIRING with your 2nd Phone**  
**BOOMIN**

Pairing with TWO phones for the first time

• When BOOMIN needs to pair with a second device, it needs to be restarted and reactivate the pairing mode.

• Go to your phone's Bluetooth settings, add or search for devices when "MPOW\_BOOMIN" appears, select it or enter passcode "0000" if asked.

• "beep" tone will be heard when paired.

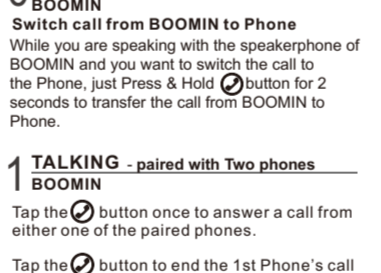

14

**8 PAIRING with 2nd Phone...Continued**  
**BOOMIN**


**NOTE:**  
If your BOOMIN is connected before, then you just need to Press & Hold for 2 seconds to reactivate the second phone. Otherwise, you need to repeat the steps in 7. (ie. Pages 10 - 13) for the pairing details.

**Clear the old paired information**  
Simultaneous Press & Hold & buttons for 6 seconds to clear the old paired information, a "beep" tone will be heard.

**Deactivate BOOMIN pairing mode**  
• Under pairing mode, BOOMIN will deactivate if there is no connection within 90 seconds.  
• For 3 minutes without connection, BOOMIN will power off automatically.

15

**9 PLAY MUSIC**  
**BOOMIN**

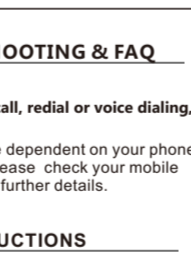

• In pairing mode, Press & Hold for 1 second to play or stop music, "beep" tone will be heard.

• During music play, Press & Hold for 2 seconds, to play the previous song and Press & Hold to play the next song.

• During a call or music play, press button to volume up and button to volume down.

16

**9 PLAY MUSIC...Continued**  
**BOOMIN**

• The music will pause if there is an incoming call, Tap the button to answer the call. The music will play again once you end the call.

**EQ Select (Equalizer-Audio effect)**  
2 types of EQ - "Mega Bass" and "Rock" can be selected.

While playing music, simultaneously Press & Hold & both buttons, "beep" tone can be heard and "Mega Bass" is selected.


Simultaneously Press & Hold & both buttons again, "beep" tone can be heard and "Rock" is selected.

17

**10 TALKING - paired with One phone**  
**BOOMIN**

Speakerphone

You can use the BOOMIN mini as a speakerphone by connected wirelessly with Bluetooth to your phone, tablet or PC so that you can make calls or answer calls by speaking to the built-in microphone as shown below.

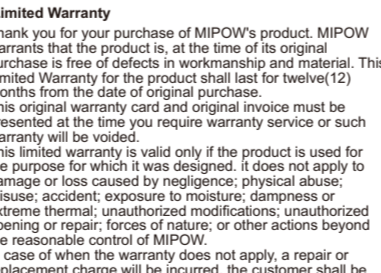

18

**10 TALKING - paired with One phone...Continued**  
**BOOMIN**

**Answer a Call**  
Tap the button to answer an incoming call, a "beep" tone can be heard.

**Reject a Call**  
Double-tap button to reject an incoming call, a "beep" tone can be heard.

**End a Call**  
While on a call, tap the button to hang off and end the call, a "beep" tone can be heard.

**Redial the Last Number Called**  
To redial the last number called, Double tap button, a "beep" tone can be heard.

**Cancel a Call**  
To cancel a call, Tap the button, a "beep" tone can be heard.

**Initiate a Voice Dial**  
To initiate a voice dial, Press & Hold button for 2 seconds, then speak a command or a name.

19

**10 TALKING - paired with One phone...Continued**  
**BOOMIN**

**LED INDICATOR**  
**BOOMIN**

Connected	LED blinks twice every 7 seconds
Disconnected	LED blinks twice every 2 seconds
Incoming call	LED blinks once every 1 seconds
Talking	LED blinks once every 7 seconds
Turn on	LED lights for 3 times
Turn Off	LED lights for 2 seconds
Pairing mode	LED blinks quickly
Music play	LED twinkles continually
Charging	LED is always on
Charging completed	LED is off

21

**13 CHARGING**  
**BOOMIN**



Use the included micro USB cable to connect BOOMIN to a USB wall charger or computer USB

• When BOOMIN has low battery level, there will be voice prompt "Battery low".

• LED is "ON" during charging.

• LED is "OFF" when charging is completed.

• Fully charging BOOMIN takes 2-3 hours.

• If you charge BOOMIN without turning it off it is still connected to your mobile devices

22

**14 TROUBLE SHOOTING & FAQ**  
**BOOMIN**

**I hear crackling noises**  
For the best audio quality, always put the BOOMIN close to your mobile device.

**I cannot hear anything from BOOMIN**  
• Ensure that the BOOMIN is paired with the phone.  
• Make sure that the phone is connected to the BOOMIN, it does not connect either from the phone's Bluetooth menu or by pressing the button. Follow the pairing instructions in Section 7.

**I have pairing problems**  
You may deactivate BOOMIN pairing connection in your mobile phone.  
Follow the pairing instructions in Section 7.

**Will the BOOMIN work with other Bluetooth devices?**  
The BOOMIN is designed to work with Bluetooth mobile phones. It can also work with other devices that are compliant with Bluetooth version 2.0 and support a hands-free profile, A2DP music play.

23

**15 TROUBLE SHOOTING & FAQ**  
**BOOMIN**

**I cannot use reject call, redial or voice dialing, battery App meter**  
These functions are dependent on your phone supporting them. Please check your mobile phone's manual for further details.

**17 CARE INSTRUCTIONS**  
**BOOMIN**

Taking care of your BOOMIN

- Always store the BOOMIN with the power off and safely protected.
- Avoid storage at extreme temperatures (above 45°C or below -10°C). This can shorten battery life and may affect operation.
- Do not expose the BOOMIN to rain or other liquids.

24

**16 Environmental Protection**  
**BOOMIN**

After the implementation of the European Directive 2002/96/EC in the national legal system, the following applies: Electrical and electronic devices must not be disposed of as domestic waste. Consumers are obliged by law to return electrical and electronic devices at the end of their service life to the public collection points that are set up for this purpose or designated points of sale. However, such details are defined by the national law of the respective country. This symbol on the product, the instruction manual or the packaging indicates that the product is subject to these regulations. By recycling, reusing the materials, or other forms of utilizing old devices, you are making an important contribution in protecting our environment.

25

**18 FCC STATEMENT**  
**BOOMIN**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received, including interference that may cause undesired operation.

26

**18 FCC STATEMENT...Continued**  
**BOOMIN**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.

27

**19 WARRANTY CARD**  
**BOOMIN**

Limited Warranty

Thank you for your purchase of MPOW's product. MPOW warrants that the product is, at the time of original purchase is free of defects in workmanship and material. This Limited Warranty for the product shall last for twelve (12) months from the date of original purchase. The original warranty card and original invoice must be presented at the time you require warranty service or such warranty will be voided.

This limited warranty is valid only if the product is used for the purposes for which it was designed. It does not apply to damage or loss caused by negligence, physical abuse, misuse, accident, exposure to moisture, dampness or extreme thermal, unauthorized modifications, unauthorized opening or repair, forces of nature, or other actions beyond the reasonable control of MPOW.

In case of any of the warranty conditions apply, a repair or replacement charge will be incurred. The customer shall be responsible for sending the defective product to and collecting the repaired or replaced product from the service center.

NB: MPOW reserves the right to interpret the terms and conditions contained herein, and the right for any changes without prior notice.

28

**20 CUSTOMER SERVICE CENTER**  
**BOOMIN**

29