


User Manual

VoxTube 500 Bluetooth Headset




Please Read the User Manual before Use

1 Overview

VoxTube 500

Thank you for purchasing MIPOW VoxTube 500, we hope you enjoy it!


About Vox Tube 500

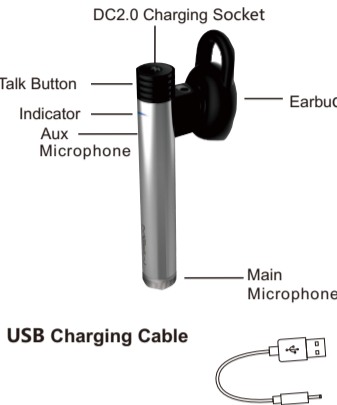

2 Accessories

VoxTube 500


We have supplied you with 3 earbuds. Try all the size, Pick the one that is most comfortable and fit for you.



Earbuds
3 different sizes

Put on your Earbud

To fit a new earbud, position the earbud over the speaker housing and gently press down on the earbud.



3 Specification

VoxTube 500

Model	BTV500
Talk time	Up to 7 hours
Standby time	Up to 10 days
Charge time	1.5-2 hours (for full)
Wireless range	33ft (10m)
Bluetooth	V4.0
Connection	Supports up to 8 paired devices and 2 active HP and A2DP connections with Multipoint
Speaker	Wideband capable
Voice quality	HD Audio (16KHz)
Weight	6g
Dimension	54.0(L) x 22.5(W) x 9.0 (Ø)mm

4 Turn On Bluetooth

VoxTube 500

Pair VoxTube 500 with your FIRST phone


1. Activate pairing mode on your Vox Tube 500.
2. Turn on Bluetooth
 - On an iPhone**
Go to SETTINGS > GENERAL > and enable Bluetooth.
 - On an Blackberry**
Go to SETTINGS/ OPTIONS > BLUETOOTH and enable Bluetooth.
 - On an Android Phone**
Go to SETTINGS > WIRELESS & NETWORK > Bluetooth Settings and enable Bluetooth.
3. Press & Hold the TALK Button for 7 Seconds to activate pairing mode on your VoxTube 500.
 - Go to your phone's Bluetooth settings, ADD or SEARCH FOR DEVICES when "MIPOW_Vox500" appears, select it or enter passcode "0000" if asked.
 - Announced "Beep" when paired.

When pairing, the white indicator light flashes quickly.

4 Pairing Two Phones

VoxTube 500

Battery capacity on iPhone shows up automatically after it is connected.



Auto Re-connect

If VoxTube 500 is already paired with your phone before, it will automatically re-connect your phone when you press TALK button for 3 seconds to power on your VoxTube 500.

Pair Vox Tube 500 with your SECOND Phone

Pairing two phones for the first time

- When VoxTube needs to pair with a second device, it needs to be restarted and reactivate the pairing mode.
- Go to your phone's Bluetooth settings, ADD or SEARCH FOR DEVICES when "MIPOW_VOX500" appears, select it or enter passcode "0000" if asked.
- Announce "Beep" when paired.

4 Pairing Two Phones

VoxTube 500

Pair VoxTube by Voice Guide

Wear your Vox Tube 500 and press the TALK button as the picture shown as below. Press & Hold the TALK button for 7 seconds - about 3 seconds interval, it will announce "Power On" and carry on another 4 seconds interval, it will announce "Pairing""Phone One Connected."

Mobile phone's Bluetooth settings:

- ADD or SEARCH FOR DEVICES when "MIPOW_VOX500" appears, select it or enter passcode "0000" if asked.
- Announced "Beep" when paired.



5 Adjust Volume

VoxTube 500

Adjust the Vox Tube 500 Speaker Volume

Press to decrease the VoxTube 500 speaker's volume

Press to increase the VoxTube 500 speaker's volume

Battery capacity on iPhone shows up automatically after it is connected.

6 Talking

VoxTube 500

POWER ON

Press & hold TALK Button for 3 seconds, voice prompt "Power On" is heard, headset is in standby mode.

POWER OFF

Press & Hold TALK Button for 4 seconds, voice prompt "Power Off" is heard, headset is standby mode.

ANSWER A CALL

Tap TALK Button, continuous tone is heard.

HANG UP A CALL

Tap TALK Button once while on call, beep tone is heard.

REJECT A CALL

Double-Tap TALK Button to reject a call, beep...beep tone is heard.

CANCEL A CALL

Tap TALK Button to cancel a call when dial out a number, beep tone is heard.

REDIAL LAST NUMBER CALLED

Double-Tap TALK Button to redial last number called when you hear music or in standby mode.

6 Talking

VoxTube 500

INITIATE VOICE DIALING

While in standby mode, press & hold TALK Button for 2 seconds, beep tone is heard and then speak a command.

STOP VOICE DIALING

While in voice dialing, press and hold TALK Button for 2 seconds to stop voice dialing.

TRANSFER A CALL

When you are talking, press and hold TALK Button for 2 seconds to transfer the call between the phone and headset.

ANSWER CALLS FROM TWO PHONES

Tap the TALK button once to answer a call from either one of the connected phones.

While on a call, Tap the TALK button once to end it and answer the other incoming call, beep tone is heard.

If you want to hold a call and answer the other incoming call, Tap the TALK button twice, beep tone.

NOTE

When connected to multiple phones, Redial and Voice Dial will work on the first connected mobile phone

7 Other functions

VoxTube 500

Play music

Vox Tube 500 is capable of streaming over Bluetooth either from a mobile phone or any other Bluetooth device supporting A2DP. Once you have paired your Vox Tube 500 with your mobile phone or with a Bluetooth music player, use your phone or music player to play and pause. When you receive a call, the music will automatically be suspended and you will be able to answer or reject a call through the Vox Tube 500. Once you end a call, the music should recommence.

Play / Pause

Tap the TALK button once to play or pause music, "beep" prompt tone.

Charge to rese

If you charge Vox Tube 500 without turning it off, it is still connected to your mobile devices.

Exit pairing mode

Under the pairing mode Vox Tube 500 will deactivate the mode if there is no connection in 90 seconds.

Auto power off

After 5 min connectionless mode, Vox Tube 500 will auto power off.

Clear pairing history

when the Vox Tube 500 is in standby, pressing the TALK button for 6 seconds can clear the pairing history on it.

8 Voice Guidance

VoxTube 500

The VoxTube 500 is loaded with voice announcements that talks you through setup and daily operation. In the table below you can see the most common announcements

Turn On	Power On
Pairing	Pairing
Redial	Last Number Redial
Turn Off	Power off
Connected	Beep
Disconnected	Beep
Battery low	Battery low

9 LED Indicator



Vox Tube 500

Connected	LED blinks twice every 7 seconds
Disconnected	LED blinks twice every 2 seconds
Coming call	LED blinks once every 1 seconds
Talking	LED blinks once every 7 seconds
Turn on	LED blinks twice
Turn off	LED lights for 2 seconds
Pairing mode	LED blinks quickly
Music play	LED blinks once every 7 seconds
Charging	LED is on
Finished charging	LED is off

10 Charging

Vox Tube 500

Use the included USB cable to connect VoxTube500 to any powered USB equipment.

- When VoxTube 500 has low battery level, there will be "Battery low" voice prompt.
- White LED is on during charging.
- LED is off when charging is completed.
- To fully charge VoxTube 500 takes 1.5-2 hours.
- If you charge VoxTube 500 without turning it off, it is still connected to your mobile devices.

11 FCC Statement

VoxTube 500

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

11 FCC Statement...Continued

VoxTube 500

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution

The manufacture is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.

12 Troubleshooting & FAQ

VoxTube 500

I hear crackling noises

For the best audio quality, always wear your headset on the same side of your body as your mobile phone.

I cannot hear anything in my headset

- Ensure that the headset is paired with the phone.
- Make sure that the phone is connected to the headset- if it does not connect either from the phone's Bluetooth menu or by pressing the TALK button, following the pairing instructions in Section 4.

I have pairing problems

you may deleted your headset pairing connection in your mobile phone. Follow the pairing instructions in section 4.

Will the VoxTube 500 work with other Bluetooth devices ?

The VoxTube500 is designed to work with Bluetooth mobile phones. It can also work with other devices that are compliant with Bluetooth version 3.0 and support a headset, hands-free profile, A2DP music play.

I cannot use reject call, redial or voice dialing, battery App meter

These functions are dependent on your phone supporting them. Please check your mobile phone's manual for further details.

13 Maintenances

VoxTube 500

VoxTube 500

- Always store the Vox Tube 500 with the power off and safely protected.
- Avoid storage at extreme temperatures (above 45°C or below -10°C). This can shorten battery life and may affect operation.
- Do not expose the Vox Tube 500 to rain or other liquids.

Notes on Environmental Protection

After the implementation of the European Directive 2002/96/EU in the national legal system, the following applies: Electrical and electronic devices must not be disposed of with domestic waste. Consumers are obliged by law to return electrical and electronic devices at the end of their service lives to the public collection points that are set up for this purpose or designated points of sale.

However, such details are defined by the national law of the respective country. This symbol on the product, the instruction manual or the packaging indicates that the product is subject to these regulations.

By recycling, reusing the materials, or other forms of utilizing old devices, you are making an important contribution in protecting our environment.

Warranty Card


Thank you for your purchase of MIPOW's product. MIPOW warrants that the product is at the time of its original purchase free of defects in workmanship and material. This Limited Warranty for the product shall last for twelve(12) months from the date of original purchase.

This original warranty card and original invoice must be presented at the time you require warranty service or such warranty will be voided.

This limited warranty is valid only if the product is used for the purpose for which it was designed. It does not apply to damage or loss caused by negligence; physical abuse; misuse; accident; exposure to moisture; dampness or extreme thermal; unauthorized modifications; unauthorized opening or repair; forces of nature; or other actions beyond the reasonable control of MIPOW.

In case of when the warranty does not apply, a repair or replacement charge will be incurred. The customer shall be responsible for sending the defective product to and collecting the repaired or replaced product from the service center.

NB: MIPOW reserves the right to interpret the terms and conditions contained herein; and the right for any changes without prior notice.



Service Center

Bluetooth **MiPOW**
使用手冊
Vox Tube 500 藍牙耳機



感謝購買MIPOW Vox Tube 500藍牙耳機，希望該款V4.0低功耗時尚藍牙耳機能帶給您愉快的體驗。使用之前請仔細閱讀該手冊。

1 產品介紹

Vox Tube 500

Vox Tube 500產品展示



特別設計3種大小耳帽，方便選取最合適的一款佩戴

3種尺寸



耳帽安裝

MiPOW Vox Tube 500配有多種耳帽方便選取最合適的一款佩戴，將耳帽蓋到耳機上然後輕輕按下直至貼合為止。

2 產品規格

Vox Tube 500

產品型號: 8TV500
通話時間: 7小時
待機時間: 10天
充電時間: 1.5-2小時
無線傳輸距離: 10米(max)
藍牙: 藍牙 4.0
連接: 可同時與8個設備連接配對，但只能同時控制2部手機的音樂播放和來電
揚聲器: 支持音頻寬帶
音質: 高品質音質 (16KHz)
重量: 6克
尺寸: 54.5(L)x22.5(W)x9.0(ø)mm

4 開啟藍牙

Vox Tube 500

將Vox Tube 500與一部手機配對

開啟Vox Tube 500配對模式
開啟iPhone藍牙
設置 > 通用 > 開啟藍牙
開啟Blackberry藍牙
設置/選項 > 藍牙 > 開啟藍牙
開啟Android Phone藍牙
設置 > 無線和網路 > 藍牙設置 > 開啟藍牙
其他手機
參見手機的使用手冊

按下開機鍵7秒開啟Vox Tube 500配對模式(3秒時會聽到語音提示 "Power On",即開機,再過4秒會聽到"Pairing"之後鬆開,即為配對)


打開手機藍牙設置, 點擊添加或搜索藍牙設備, 搜索到 "配對設備: MiPow_Vox500" 後選中它(如果要求輸入密碼請輸入"0000"), 當Vox Tube 500與手機配對後會語音提示 "嚶".

藍牙配對過程中白色指示燈閃爍。

4 同配二部手機

Vox Tube 500

與iPhone藍牙配對後螢幕上自動顯示Vox Tube 500剩餘電量



自動配對: 若Vox Tube 500與您的手機配對過, 藍牙開機3s後即自動配對連接。

將Vox Tube 500與第二部手機配對

首次連接兩部手機
當Vox Tube 500需要連接第二部手機時, 需重新開啟Vox Tube 500並進入配對模式。
打開需連接的第二部手機藍牙設置, 點擊添加或搜索藍牙設備, 搜索到 "配對設備: MiPow_Vox500" 後選中它(如果要求輸入密碼請輸入 "0000"), 語音提示 "嚶".
然後在第一部手機的藍牙設置中點選連接到Vox Tube 500, 語音提示 "嚶".

提示: 若Vox Tube 500與兩部手機配對過, 則都可直接在手機藍牙設置中連接Vox Tube 500。

5 語音嚮導

Vox Tube 500

語音嚮導配對Vox Tube 500

戴上Vox Tube 500後按下開機鍵7秒(右圖所示): 3秒後語音提示 "Power On", 再4秒後語音提示 "Pairing" 之後鬆開, 最後設置手機藍牙。



手機藍牙設置:

- 點擊添加或搜索藍牙設備, 搜索到 "配對設備: MiPow_Vox500" 後選中它(如果要求輸入密碼請輸入 "0000")
- 當Vox Tube 500與手機配對後會語音提示 "嚶"

5 音量調節

Vox Tube 500

調節Vox Tube 500麥克風音量

按下手機上的 調大麥克風音量
按下手機上的 調小麥克風音量




與iPhone藍牙配對後螢幕上自動顯示Vox Tube 500剩餘電量

6 通話

Vox Tube 500

通話

- **開機** 長按開機鍵3秒, 聽到語音提示 "Power On" 即為開機, 開機後耳機進入未連線待機狀態。
- **關機** 長按開機鍵4秒, 聽到語音提示 "Power Off" 即為關機, 關機後耳機進入未連線待機狀態。
- **來電接聽** 耳機來電響鈴後, 短按開機鍵1下, 聽到連續的提示音, 即可接聽來電。
- **掛斷電話** 通話中, 短按開機鍵1下, 聽到 "嚶" 提示音即掛斷電話。
- **來電拒接** 來電響鈴, 按兩下開機鍵2下, 聽到 "嚶嚶" 提示音, 即拒絕接聽來電。
- **尾號重撥** 音樂收聽或待機狀態下按兩下開機鍵2下, 聽到 "Last Number Redial" 的提示音, 撥打出最後撥出過的電話號碼。
- **取消撥號** 撥出電話時, 短按開機鍵1下, 聽到 "嚶" 的提示音, 即取消正在撥出的電話。

6 通話

Vox Tube 500

- **語音撥號** 待機已連接狀態時, 長按開機鍵2秒, 聽到 "嚶" 的提示音, 根據提示說出手機通訊錄人名可給他撥打電話。
- **停止語音撥號** 語音撥號中, 長按開機鍵2秒, 即停止語音撥號狀態。
- **聲音切換** 通話中, 長按開機鍵2秒, 聽到 "嚶" 的提示音, 即手機與耳機聲音切換。
- **一拖二** 當1個手機通話, 第二部手機來電時, 若短按開機鍵1下, 聽到 "嚶" 提示音, 即接通第二部手機來電, 掛斷第一個通話, 若按兩下開機鍵2下, 聽到 "嚶" 提示音, 即接通第二部手機來電, 保持第一個通話, 1個手機音樂, 任一手機來電, 短按開機鍵1下, 聽到連續的提示音, 即接通來電, 通話時音樂暫停, 通話結束後音樂繼續。

提示 當Vox Tube 500與多部手機連接時進行重撥和語音撥號控制的是最先連接的那個手機

7 其他功能

Vox Tube 500

音樂播放

設備上的音樂將Vox Tube 500與手機或藍牙音樂播放設備連接配對後可以通過Vox Tube 500來控制播放/暫停音樂, 音樂播放過程中如有電話打入, Vox Tube 500將暫停播放音樂方便通過Vox Tube 500操作接聽/掛斷電話, 通話完畢後Vox Tube 500自動播放音樂

充電復位功能

充電耳機不復位關機, 充電時耳機與手機保持連接

退出配對模式

90秒退出配對模式, 處於無連接待機狀態

自動關機

無連接約5分鐘自動關機

清空配對信息

開機無連接充電狀態, 長按開機鍵6秒, 聽到提示音後清除之前已配對過的信息

8 語音提示

Vox Tube 500

Vox Tube 500內設有各種語音嚮導來指示設置和其他操作, 以下表格內是常見語音提示及其意義。

開機	Power On
配對	Pairing
重撥	Last Number Redial
關機	Power Off
連接	嚶
斷開連接	嚶
低電顯示	Battery low

9 LED指示燈閃爍狀態

Vox Tube 500

耳機連接狀態LED指示	7秒閃2次白燈
耳機無連接狀態	2秒閃2次白燈
來電LED	1秒閃1次白燈
通話LED	7秒閃1次白燈
開機	白燈閃爍三次
關機	白燈亮2秒
配對模式	白燈連續快閃
播放音樂	7秒閃1次白燈
充電中	白燈常亮
充電完成	白燈熄滅

10 充電

Vox Tube 500

將USB充電線的一端插入電腦或擴充USB輸出端接口, 另一端插入藍牙耳機DC充電端口。



Vox Tube 500充電

- 當Vox Tube 500的電量低時, 語音提示 "Battery low".
- 使用USB充電線給Vox Tube 500充電。
- 充電過程中Vox Tube 500上的白色指示燈常亮。
- 充電完成時Vox Tube 500上的指示燈熄滅。
- 充電時間大約需要1.5-2小時。
- 充電時Vox Tube 500不復位關機, 會保持與設備的連接。

11 FCC 聲明

Vox Tube 500

任何未經負責合規性檢查方明確批准的變更或修改行為都將取消使用者操作該設備的權利。

聯邦通信委員會合規性聲明
依照聯邦通信委員會條款, 該設備經測試證實符合B類電碼設備標準。該限制條款對該設備應用於家用裝置中可能造成的危害性干擾提供了合理的保護措施。該設備會生成、使用並放射出射頻能量, 如果不按照說明書上的方法進行安裝和使用, 則可能對無線通訊造成危害性的干擾。但不保證在特殊情況下沒有干擾。
若該設備對收音機、電視之收訊造成有害干擾 (可開/關設備之電源確認), 建議使用者以下列一種或多種方式改善干擾狀況:

1. 重新調整或安置接受天線。
2. 增加該設備與接受裝置間的距離。
3. 將該設備連接與該接受裝置不同回路的電源插座。
4. 諮詢經銷商或向資深廣播電視技術人員尋求說明。

11 FCC 聲明

Vox Tube 500

FCC輻射暴露聲明
該設備符合FCC 射頻輻射暴露不可抗力條款。該設備不可與其他任何接收或發射裝置同時操作使用。該設備的最小安裝和操作距離為20釐米 (介於輻射源與身體之間)。
該設備符合聯邦通信委員會條款第15條規定。其操作需依照以下兩個條件:
(1) 該設備不得產生有害干擾, 且
(2) 該設備必須接受任何其他干擾, 包括產生非預期操作之干擾。
警告
該生產廠家將不對任何未經許可而對該設備進行修改所產生的收音機、電視干擾負責。該修改行為可能導致該使用者操作本設備的權利被取消。
加拿大聲明
該設備適用加拿大工業R55-210 條款。其操作需依照以下兩個條件:
(1) 該設備不得產生有害干擾, 且
(2) 該設備必須接受任何其他干擾, 包括產生非預期操作之干擾。
該設備滿足RSS 102限制條款 第二部分第五條中的常規評估豁免權, 同時適用RSS 102射頻輻射規定。該設備使用者可從加拿大射頻輻射暴露履行條例中獲取該部分資訊。

12 故障排除與常見問題解答

Vox Tube 500

耳機聲音伴有噪音

為了保障最好的音訊效果, 請將Vox Tube 500和手機戴同邊。

耳機沒有任何聲音

- 確保Vox Tube 500已與手機連接配對。
- 如果Vox Tube 500已經與手機連接配對仍然沒有聲音, 請重複第4部分重新配對連接。

無法與藍牙設備配對

斷開手機藍牙連接, 按照第4部份的步驟重新配對。

Vox Tube 500 是否可以與其他藍牙設備兼容

Vox Tube 500 專為藍牙移動設備設計, 它同時能與其他兼容藍牙3.0的設備兼容。

無法使用Vox Tube 500掛斷電話、重撥、語音撥號, 手機上無法顯示Vox Tube 500電量

以上這些功能取決於手機是否支持, 請查閱手機說明書以獲取相關信息。

13 保養說明

Vox Tube 500

- 不使用Vox Tube 500的時候將其關機後妥善放置
- 避免極端天氣時使用Vox Tube 500(大於45°C 或低於 -10°C), 否則會縮短電池續航能力或者影響Vox Tube 500功能
- 不要將Vox Tube 500暴露在雨和液體中

環保條款

在歐盟指令2002/96/EU生效後, 根據法律規定電器和電子設備應和生活垃圾分開處理。在電器和電子設備超過使用壽命後消費者應該將此類產品送到專門電子回收站或指定銷售點, 然而, 此類產品的處理回收則因所在國家的法律規定而異。產品、使用手冊和包裝上的環保標識根據各個國家的具體規定而異。我們提倡對此類電子設備進行回收再利用率或用於其他途徑, 每個人的小小一步都能成就環保事業的一大步。

Warranty Card

有限保養
多謝選購MIPOW產品。MIPOW保證本產品於購買時並無任何材質或製品的瑕疵。本產品的有限保養自購買起十二(12)個月內, 當需要保養服務時, 顧客必須出示保養證正本和發票正本, 否則保養將被作廢。保養服務只限於產品在正常使用下有效。此有限保養不適用於因人為疏忽、粗魯的操作、不正確的使用、意外事故、暴曬於濕氣之下、潮濕或過度高溫、未經授權的修正、未經授權的開啟或修復、不可抗力; 或任何其他MIPOW無法合理控制的行為所導致的損壞或損失。如損壞未能合乎本保養條例, 顧客將被收取維修或更換零件的費用。顧客必須自行將有瑕疵的產品交到客戶服務中心, 並自行取回已修復或更換的本產品。注: MIPOW擁有對本人所述的條件和條件之最終裁決權, 及有權隨時對條款和條件作出更改, 而無需另行通知。

MiPOW
MAKE IT DIFFERENT

Service Centre