



CLASSICAL INTELLIGENCE



Model S1C Plus Smart Watch

USER GUIDE

Thank you for purchasing the bit Watch. In addition to being a full function smart watch, the bit Watch enjoys elegant styling. Its design fits comfortably on your wrist whether male or female. However elegant and smart the bit Watch is, it's also durable. The watch has a metal bezel and handles moisture and water splashes with no worry.

The bit Watch is designed to work with either iPhone or Android phones. Please read these instructions carefully to insure maximum benefit of your bit Watch. Be sure to download the Bit Watch app available in both Apple App store and Google Play store.

We wish you years of enjoyment with your bit Watch, and good health!

[www.beantech.net](http://www.beantech.net)

Bit is the trademark of Bean Information Technology Co., Ltd. Apple, iPhone, Siri and Apps Store are the trademarks of Apple, Inc. in the US and worldwide. Android and Google Play Store are the trademarks of Google Inc. in the US and or worldwide.

## TABLE OF CONTENTS

### Important-Follow these steps before using

Your S1C Plus Smart Watch	3
Model S1C Plus, What's Included	4
Charging S1C Plus Smart Watch	5
Power and Sleep Functions	6
Navigating S1C Plus Smart Watch	7
Use with Android smart phone	8
Use with iPhone	9
Apps	10
Frequently Asked Questions	21

### Important-Follow these steps before using your S1C Plus Smart Watch

I. Download App-Go to the app store on your phone and search for "Fundo wear". Download it to your smartphone. The app is available in both the Apple App store and the Google Play store.

II. Register on the Fundo wear app-Click the "Register" tab and follow the instructions. This will insure accurate and through tracking of your data.



III. Connect S1C Plus Smart Watch with your smart phone via Bluetooth -

**step one:** Make sure Bluetooth is turned ON on both your smartphone and on S1C Plus Smart Watch.

**step two:** Once S1C Plus appears as discoverable on your smart phone, select it from the phone. S1C Plus Smart Watch and smart phone will now pair.

Note: For iPhone, it's common for Smart Watch to pair twice.

**step three:** Open the app and select green circle with + in it, and then it start to automatic searching the device and select "S1 PLUS". The bluetooth symbol will now turn green and S1C Plus Smart Watch. Smart Watch will now wirelessly interact with the app on the smart phone.


## Model S1C Plus- What's Included



## Charging S1C PlusSmart watch

**IMPORTANT:** Please charge your S1C PlusSmart watch fully before using. Normal full charge takes about 2 hours.

Bit S1C Plus Watch comes with a charge cradle, a USB charge cable and a USB AC adapter.

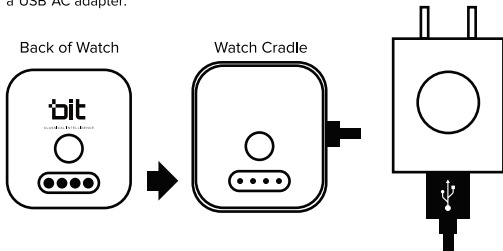

To charge, placed the watch into the cradle and make sure the contacts on the back of the watch align with the contacts in the cradle. Connect the Large end of the USB charging cable to the AC Adapter, and the small end into the port on the cradle. Plug the AC adapter into an AC outlet. Note: for portable convenience, S1C Plus Watch can charge from a powered USB port without the use of the AC Adapter.

## Power and Sleep Functions

**Turn S1C Plus ON** - Press and hold the Power / Function button on the side of the watch until the bit logo appears on screen.

**Turn S1C Plus OFF** – Press and hold the Power / Function button until the bit logo appears. The watch will now shut down.

**Turn screen ON or OFF** – If the screen is dark, tap the Power / Function button to turn it on. Likewise, if the screen is on, tap the button to turn it off. Note, screen will automatically turn off based on the setting for Timeout. You can adjust to your preferred timeout by going to: Settings>Display>Screen time out.

**Motion wake** – You may choose to turn the screen on by arm motion, such as checking the time. Go to Settings>Motion>Wake-up gesture and select On.



Power/Function  
Button

## Navigating S1C Plus Smart Watch

Apps on the S1C Plus Smart Watch are arranged by category into a series of screens. Each Apps screen contains 3-4 Apps. While viewing clock, Swipe left or right, or up or down to access Apps screens. Swipe left or right to change Apps screens. Within Apps, swipe to the directions of arrows to access different levels. To return to clock, swipe up or down. Exit apps back to Apps screens by swiping left to right. You may also use the Power / Function button to exit apps and return to the clock.

## Operation Through Bluetooth Device

S1C Plus Smart Watch can interface through bluetooth headphones giving added convenience and benefit. Before making this type of connection, make sure S1C Plus Smart Watch is paired to your smart phone, and is connected (Please refer to step III. on page 3). Next, make sure your bluetooth headphones are also paired to your smart phone, but not connected. Then follow these steps carefully:

**step one:** Connect S1C Plus Smart Watch via bluetooth to smart phone (follow procedure outlined on step III on page 3).

**step two:** Select desired bluetooth app from Smart Watch, such as BT music, Phonebook, Siri etc.

**step three:** From your smart phone, connect the bluetooth headphones.

## Use with Android smart phone

**IMPORTANT:** S1C Plus Smart Watch will interface with Android 4.4 or higher. to check your Android phone, go to Settings About Device, then view Android version.

1. Time & Date Synchronization - S1C Plus Smart Watch will synchronize time and date with your smart phone.
2. Language Synchronization - S1C Plus Smart Watch synchronizes language with your smart phone. Note: default language is English.
3. Find my Device - S1C Plus Smart Watch and smart phone can search and find each other (within 10 meters).
4. Answer and place phone calls from S1C Plus Smart Watch.
5. Synchronize contacts and call records of smart phone.
6. Music Control - Controls music from smart phone.
7. Remote Photography - Trigger taking pictures from your smart phone through S1C Plus Smart Watch.

## Use with iPhone

**IMPORTANT:** S1C Plus Smart Watch will interface with iOS 7.1 or higher and model 5S or newer. To determine you phone's software version, go to Settings > General > About.


1. Time & Date Synchronization - S1C Plus Smart Watch will synchronize time and date with your smart phone.
2. Language Synchronization - S1C Plus Smart Watch synchronizes language with your smart phone. Note: default language is English.
3. Find my Device - S1C Plus Smart Watch and smart phone can search and find each other (within 10 meters).
4. Texts & Email Preview - Preview text messages and email from S1C Plus Smart Watch. Watch will display up to 200 bytes to allow you to decide whether to go to smart phone to fully interact.
5. SIRI Interaction - S1C Plus Smart Watch can connect to SIRI to make phone calls and respond to texts and emails.
6. Answer and place phone calls from S1C Plus Smart Watch.
7. Synchronize contacts and call records of smart phone.
8. Music Control - Controls music from smart phone.
9. Remote Photography - Trigger taking pictures from your smart phone through S1C Plus Smart Watch.

## Apps

S1C Plus Smart Watch has several built-in Apps that will provide the following functions:

1. Real time voice communication, sending and receiving messages via bluetooth, synchronization of messages and address book, and remote photography.
2. Synchronize exercise and sleep functions.
3. Record daily steps taken, sleep patterns and heart rate. Track your data and compare with statistics.
4. Share exercise, sleep and heart rate data on Facebook and Twitter with your contacts.
5. Remote Photography. S1C Plus Smart Watch triggers smart phone to take the picture
6. Calendar, Stop Watch and Calculator functions.
7. Receive email and text messages. Note: if using with an iPhone, you can use Siri to send emails and texts.
8. Make and receive phone calls.

## Apps



### Theme

Choose to select from 3 background themes for apps screens. Tap Theme and make your selection.




### Stopwatch

Time up to 20 individual segments. Tap Stopwatch then tap start icon to start the timing. Press start icon again to stop.



Press Stop icon to clear previous time. Press Stop icon during timing to record segment.

## Apps



### Settings

To adjust, tap Settings icon to enter the app, then follow instructions below.

**Bluetooth Settings:** Activate or turn off bluetooth, or disconnect paired devices. Tap BT settings, then select Power On or Off option. Note, battery charge will last longer with BT Off. Also choose

whether or not you wish for Bit S1C Plus to be visible to other BT devices. Tap BT settings>Visibility, then make your selection.

**Clock:** Select clock style, tap Clock>Clock type, then scroll and make your selection. To set time and date, Time Synch must be closed. For Date, tap Clock>Date, then vertically scroll year, month & day columns to today's date and select OK. For Time, tap Clock>Time, then vertically scroll hour, minute & AM/PM then select OK.

**Sound:** Customize ring tones and notifications. For Alert tone tap Sound>Ring type then make your selection. For Ringtone, tap Sound>Ringtone, make your selection then tap OK. For Notification tone, tap Sound>Notification tone, make your selection then tap OK.

## Apps

(Settings continued)

**Volume:** Adjust volume of ringtones, notifications and media. Tap Volume, then select from Multimedia, Ring or Notification. Tap + or – to adjust volume up or down, then tap OK.

**Display:** Select apps per page, brightness and screen time out. For Apps per page, tap Display>Mainmenu style, then choose 1 app or 4 apps. For Brightness, tap Display>Brightness, tap + or – to increase or decrease, then tap OK. For Screen Timeout, tap Display>Screen Timeout and make your selection.

**Motion:** Allows arm motion to wake up the screen and mute ring and alarm. To adjust, tap Display>Motion, choose the motion function you wish to adjust, then select On or Off.



## Apps




### Calculator

Select and operate like a simple calculator.



### Phonebook

Select, then tap Synch with phone to synch all contacts from your smart phone. Note: Bluetooth must be connected. Scroll to select contact then tap to dial. Swipe to right to select by letter.



### Dialer

Select to dial any number. Tap green phone icon to send the call. Bluetooth must be connected to your smart phone.

## Apps




### Call Logs

Logs recent calls made or received. If in Contacts, log will identify other party. Date and time of calls are listed. Incoming calls are preceded by a left green arrow, and outgoing calls are preceded by a right orange arrow. Redial any logged call by tapping the log.



### Messaging

Select Menu and view inbox messages. (Android platform will show full message and allow reply from S1C Plus Smart Watch. Android platform will also show previously received messages).



### Remote Notifier

Select to view and manage notifications, including texts, emails and other notifications you have set up in your smart phone. Tap to view notifications, then tap notification to view details. Swipe left then tap delete to delete notification.

## Apps




### Find my Device

Select Menu then select "Search". Must be connected via Bluetooth from Bit Watch app, and smart phone must be within 10 meters. When selected, the phone will emit an alarm and vibrate. If phone is further away than 10 meters or if the Bluetooth signal is otherwise weakened, bit Watch will send a reminder to assist in locating.



### Alarm

Select, set and manage alarms. Choose from alarm tone, vibrate, ring and repeat. Set up to 5 alarms. Tap icon then tap + to add new alarm. Tap each alarm attribute and make your selection.



### Calendar

Select to view day, month and date. Tap the calendar icon to scroll through the calendar month by month.

## Apps



### Music vault

Select to play music loaded on your smart phone. Tap the play button (▶) to play. Song title is shown on screen. To advance or go back, select right or left arrow. To adjust volume select + or -. To use bluetooth speakers or headphones, follow instructions on "Operation of bit Watch through Bluetooth Headphones or Speakers".



### Remote Capture


Use to take remote pictures from your smart phone. Make sure S1C Plus Smart Watch is connected through bluetooth to your smart phone. Set your phone position to prepare for the picture, (For use with iOS, open camera in the phone first) go get in the picture, tap the app icon, then select your phone type. Your smart phone will take the picture. Store pictures on a paired device (Android only). Note: Pictures may be stored in albums and on memory cards. Most phone versions allow you to instantly view pictures. Some phone versions delay viewing and others may require phone re-start before viewing.

## Apps



### Bluetooth Connection

Select to connect or disconnect Bluetooth connection with smart phone. You may also perform this from the Smart phone. For initial connection tap Search new device. For re-connection, tap your phone name. Use to also disconnect bluetooth connection. Tap device then select OK when asked to disconnect device.



### Pedometer

S1C Plus Smart Watch will count and record your daily steps. Tap the icon. Normal swing of arm will start step counting (first 10 steps will be counted as 1 step to insure you are walking).

- Target steps: Tap Goal and scroll to select- bit Watch will alert you when you achieve this.

- Historical record: bit Watch will keep a daily record of steps taken. Tap History.

Select Options to review recent history, determine your goal and input your height and weight.


Note: Screen timeout may cause steps readout to momentarily pause. It will catch up quickly as the app re-loads.

## Apps



### Sleep Monitor

Tap icon and select Start. While wearing S1C Plus Smart Watch, go to bed. The Watch will monitor your sleep by severity of vibrations during your sleep and will report how well you slept every morning. Tap Stop when you awake. You can store up to 20 historical sleep records.



### Sedentary Reminder

Tap icon then vertically scroll to select time interval for reminder of sitting too long. Reminder can be set to half hour intervals up to 300 minutes long. Watch will ring and vibrate when you sit too long.



### Heart Rate Monitor

Select Heart Rate monitor to measure your heart rate. Touch Start to take a measurement. S1C Plus Smart Watch will store up to 20 historical records. Note: S1C Plus Smart Watch must be thoroughly touching wrist for accurate measurement.

## Apps






### Siri Interface

Tap icon to use S1C Plus Smart watch to interface with Siri (iPhone users only). Send messages, make calls, ask questions.



### Sound Recorder

Tap icon to open recording interface. Tap red dot to begin recording, Then tap again to end recording (red dot becomes  during recording). Save the recording for playback by tapping the save icon . Tap menu  to access recordings (List) and Settings for audio quality.

## S1C Plus Frequently Asked Questions

1. S1C Plus smart watch will not turn ON.

Check the connection when charging. It's likely either the USB cable does not have a secure connection or the AC charger is not completely plugged into the AC outlet. Also, if using an extension cord, please check for secure connections. Also insure the watch is fully seated in to the charging cradle.

2. How to change the clock style?

Go to Settings>Clock>Clock type; swipe left or right to view available styles, then select OK for your choice.

3. How to change background theme?

Go to Theme App, Select Theme1, Theme 2 or Theme 3.

4. Having trouble pairing Bluetooth with smart phone.

Be sure Bluetooth power is ON in S1C Plus smart watch. Go to Settings>BT Settings>. If Power shows OFF, tap to turn to ON. Make sure Bluetooth is ON in smart phone.

5. How to change ringtone and alert types?

Go to Settings>Sound, then select desired function and make your choice.

6. How to change audio volume of S1C Plus smart watch?

Go to Settings>Volume>Multimedia, then either increase or decrease.

7. How to turn S1C Plus display ON by moving your wrist?

Go to Settings>Motion, then select from available options.

8. How to synch time on S1C Plus smart phone?

Go to Bit Watch App on smart phone. Make sure Bluetooth is connected from the S1C Plus to the App. From the App Home page, tap the "synchrodata" icon in upper right side, and it can Synch.

9. How do I regulate which notifications I receive on S1C Plus smart phone?

S1C Plus smart watch will receive all notifications that your smart phone receives. If you wish to adjust these you will need to make the adjustments from your phone.



CLASSICAL INTELLIGENCE



Printed in China  
Doc No. MS1GC6

## **FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.