

BELKIN®

www.belkin.com

Belkin Tech Support
US: 800-223-5546, ext. 2263
310-898-1100, ext. 2263
UK: 0845 607 77 87
Australia: 1800 235 546
New Zealand: 0800 235 546
Singapore: 65 64857620
Europe: www.belkin.com/support

Belkin International, Inc.
501 West Walnut Street
Los Angeles, CA 90220, USA
310-898-1100
310-898-1111 fax

Belkin Ltd.
Express Business Park, Shipton Way
Rushden, NN10 6GL, United Kingdom
+44 (0) 1933 35 2000
+44 (0) 1933 31 2000 fax

Belkin B.V.
Boeing Avenue 333
1119 PH Schiphol-Rijk, The Netherlands
+31 (0) 20 654 7300
+31 (0) 20 654 7349 fax

Belkin Ltd.
4 Pioneer Avenue
Tuggerah Business Park
Tuggerah, NSW 2259, Australia
+61 (0) 2 4350 4600
+61 (0) 2 4350 4700 fax

© 2008 Belkin International, Inc. All rights reserved.
All trade names are registered trademarks of respective manufacturers listed.
iPod is a trademark of Apple Inc., registered in the U.S. and other countries.

BELKIN®


User Manual
TuneFM™ for iPod

Introduction

The innovative TuneFM from Belkin is designed to play your iPod through your car, home, or portable stereo. Please review this User Manual carefully so that you can be sure to get the most from your iPod, virtually anywhere you go.

Package Includes:

- TuneFM for iPod
- Auto Power Cord
- User Manual
- Quick Install Guide


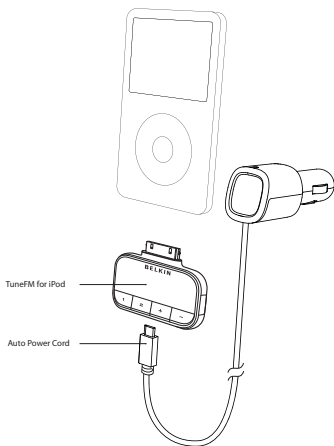


Car Setup Instructions

1. Turn down your car stereo's volume.
2. Plug the Belkin TuneFM to your iPod (at the bottom of the iPod).




3. Plug the included Auto Power Cord to your cigarette lighter outlet in your car and to the bottom of your TuneFM for optional powering and charging in the car.



Using the TuneFM Transmitter

The TuneFM transmitter function automatically turns on when the iPod is connected. It automatically turns off when the iPod is removed.

1. Insert the TuneFM into your iPod. The backlight of the TuneFM will turn on after pressing “Play” on the iPod, or any buttons on the TuneFM, and the current transmitter frequency will be displayed on its screen.
2. Tune your stereo frequency to a channel with a weak broadcast signal. The ideal channel is one that is not broadcasting a radio program, or is doing so weakly. To identify the best available frequencies in your area, visit www.belkin.com/mybestfm.




3. Match station using plus and minus buttons.
4. Press the “+” or “-” button on the TuneFM to select the transmission frequency chosen in step 2. The frequency will be visible on the screen of the TuneFM. Pressing and holding either button will provide faster tuning.
5. Adjust the volume of your FM radio to the desired listening level.

NOTE: We recommend that you remove the TuneFM from the iPod when not in use.

Storing and Using Presets

1. To store a preset, select the desired frequency using "+" or "-" buttons. Push and hold the memo button for 1 or 2 seconds until you hear a beep to store the station. An audible beep sounds in the transmitted audio when the new frequency is programmed.
2. To transmit over one of your preset frequencies, momentarily press "1" or "2". This will instantly tune the FM transmitter to the frequency stored in that preset.

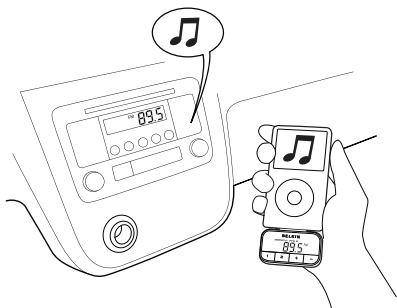


Using the PRO Setting to Improve Performance


When you connect your iPod, your TuneFM will automatically detect the iPod model and adjust the volume. Although the default volume setting will be ideal for most conditions, you may be able to improve the audio performance of your TuneFM by using the PRO setting. The PRO setting can make your music sound louder and fuller by decreasing the amount of attenuation in the audio signal. Professional FM stations use dynamic compression to make music louder and fuller while limiting distortion. You can use the three PRO settings on your TuneFM to add dynamic compression to your audio:

Normal – No change to the audio. This setting works well with all types of audio.

PRO 1 – Increases the average volume of the audio. This setting works well with most types of music.

PRO 2 – Increases the average volume even further. This setting works well with quieter music, but it may cause distortion with louder music.

PRO  – Increases the average volume and transmits in mono (instead of stereo). This setting works well for podcasts and audio books. It can also be used to improve reception if you are not receiving a clear signal from your TuneFM.

When you press the “PRO” button, your TuneFM will display the current PRO setting. Pressing the “PRO” button again will change the setting to PRO1, PRO2, and **PRO**  as follows:



Troubleshooting

The audio is distorted.

Solution

- Tune your car stereo and the TuneFM to a different frequency.

I am unable to get clear FM reception.

Solution 1

- Tune your car stereo and the TuneFM to a different frequency.

Solution 2

- In some instances, lowering the car antenna (available in some cars) improves the clarity of the TuneFM's signal.

Solution 3

- Change PRO setting to **PRO** mode. This may improve signal reception, but the audio will be monaural instead of stereo.

Solution 4

- If used indoors, attach or reposition the antennas on the stereo receiver.

Playback of my iPod stays paused after I've changed a setting on the TuneFM.

Solution

- Simply press the "Play/Pause" button on your iPod to resume playback.

The TuneFM does not appear to be saving my settings.

Solution

- Be sure NOT to remove the iPod from the cradle or remove power to the TuneFM while adjusting the TuneFM settings.

Troubleshooting

When I attach a USB cable from my computer to the TuneFM, my computer does not recognize that the iPod is attached.

Solution

- The USB connector on the TuneFM can only be used to charge the iPod.

My iPod does not seem to be charging.

Solution 1

- Make sure that the TuneFM is correctly connected to your car's power outlet with the included Auto Power Cord.

Solution 2

- Ensure that your car's power outlet is receiving power. Some cars are designed so that power is not provided to the power outlet unless the car is in ignition mode or the engine is started. If none of these solutions solves the problem, the fuse in the Auto Power Cord might be burned out and need to be replaced.

After a playlist finishes, the display freezes on the “OK to Disconnect” screen.

Solution 1

- If the TuneFM is not removed, simply press a button on the TuneFM and normal operation will resume.

Solution 2

- If the TuneFM is accidentally removed, reattach the TuneFM to return the iPod to normal operation. If the iPod does not return to normal operation, manual reset of your iPod may be required. To manually reset your iPod, simultaneously press and hold the “Menu” and “Select” buttons on your iPod until its screen resets.

Information

Warning

Do not insert any objects other than the cigarette lighter adapter into the power outlet of the car without disconnecting the battery of the car first. Failure to observe this safety warning can result in possible injury or property damage.

Belkin does not assume any responsibility for personal injury or property damage incurred due to hazardous driving as a result of interaction with the TuneFM, the iPod, or the power outlet of the car.

FCC Statement

Declaration of Conformity with FCC Rules for Electromagnetic Compatibility

We, Belkin International, Inc., of 501 West Walnut Street, Compton, CA 90220, declare under our sole responsibility that the product:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

F8Z179

to which this declaration relates:

Has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Belkin International, Inc., is not responsible for any interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate this equipment.

IC

This Class B digital apparatus complies with Canada RSS-210

ICES

This Class B digital apparatus complies with Canadian ICES-003.



Belkin International, Inc., Limited 3-Year Product Warranty

What this warranty covers. Belkin International, Inc. ("Belkin") warrants to the original purchaser of this Belkin product that the product shall be free of defects in design, assembly, material, or workmanship.

What the period of coverage is. Belkin warrants the Belkin product for three years.

What will we do to correct problems? Product Warranty. Belkin will repair or replace, at its option, any defective product free of charge (except for shipping charges for the product). Belkin reserves the right to discontinue any of its products without notice, and disclaims any limited warranty to repair or replace any such discontinued products. In the event that Belkin is unable to repair or replace the product (for example, because it has been discontinued), Belkin will offer either a refund or a credit toward the purchase of another product from Belkin.com in an amount equal to the purchase price of the product as evidenced on the original purchase receipt as discounted by its natural use.

What is not covered by this warranty? All above warranties are null and void if the Belkin product is not provided to Belkin for inspection upon Belkin's request at the sole expense of the purchaser, or if Belkin determines that the Belkin product has been improperly installed, altered in any way, or tampered with. The Belkin Product Warranty does not protect against acts of God such as flood, lightning, earthquake, war, vandalism, theft, normal-use wear and tear, erosion, depletion, obsolescence, abuse, damage due to low voltage disturbances (i.e. brownouts or sags), non-authorized program, or system equipment modification or alteration.

How to get service. To get service for your Belkin product you must take the following steps:

1. Contact Belkin International, Inc., at 501 W. Walnut St., Compton CA 90220, Attn: Customer Service, or call (800)-223-5546, within 15 days of the Occurrence. Be prepared to provide the following information:
 - a. The part number of the Belkin product.
 - b. Where you purchased the product.
 - c. When you purchased the product.
 - d. Copy of original receipt.
2. Your Belkin Customer Service Representative will then instruct you on how to forward your receipt and Belkin product and how to proceed with your claim.

Belkin reserves the right to review the damaged Belkin product. All costs of shipping the Belkin product to Belkin for inspection shall be borne solely by the purchaser. If Belkin determines, in its sole discretion, that it is impractical to ship the damaged equipment to Belkin, Belkin may designate, in its sole discretion, an equipment repair facility to inspect and estimate the cost to repair such equipment. The cost, if any, of shipping the equipment to and from such repair facility and of such estimate shall be borne solely by the purchaser. Damaged equipment must remain available for inspection until the claim is finalized. Whenever claims are settled, Belkin reserves the right to be subrogated under any existing insurance policies the purchaser may have.

How state law relates to the warranty. THIS WARRANTY CONTAINS THE SOLE WARRANTY OF BELKIN. THERE ARE NO OTHER WARRANTIES, EXPRESSED OR, EXCEPT AS REQUIRED BY LAW, IMPLIED, INCLUDING THE IMPLIED WARRANTY OR CONDITION OF QUALITY, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND SUCH IMPLIED WARRANTIES, IF ANY, ARE LIMITED IN DURATION TO THE TERM OF THIS WARRANTY.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

Belkin International, Inc., Limited 3-Year Product Warranty

IN NO EVENT SHALL BELKIN BE LIABLE FOR INCIDENTAL, SPECIAL, DIRECT, INDIRECT, CONSEQUENTIAL OR MULTIPLE DAMAGES SUCH AS, BUT NOT LIMITED TO, LOST BUSINESS OR PROFITS ARISING OUT OF THE SALE OR USE OF ANY BELKIN PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This warranty gives you specific legal rights, and you may also have other rights, which may vary from state to state. Some states do not allow the exclusion or limitation of incidental, consequential, or other damages, so the above limitations may not apply to you.