





HCP 0006 A Modular Panel Housing for 6 Modules

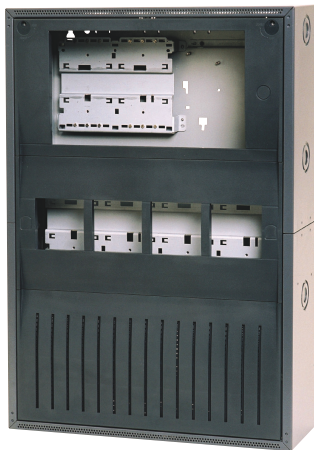

The HCP 0006 A can accommodate an MPC Operating and Display Unit with Panel Controller, up to six modules, as well as batteries and Power Supplies.

The modular configuration means easy extension.

System Overview

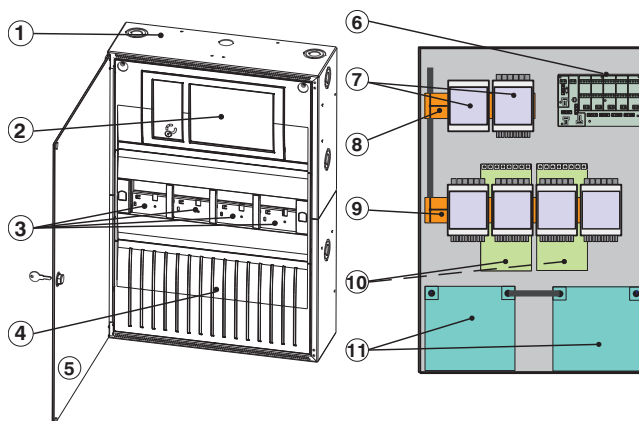

Pos.	Description
1	Housing
2	MPC Operating and Display Unit
3	Modules 3-6
4	Space for 2 batteries

Pos.	Description
5	Front Door Transparent (optional)
6	HPD 0000 A Power Distributor (optional)
7	Modules 1-2
8	Panel Rail for modules 1-2
9	Panel Rail for modules 3-6
10	Power Supply
11	2 x 12 V/28 Ah batteries

Installation/Configuration Notes

- Can be equipped with:
 - 1 MPC Operating and Display Unit with Panel Controller
 - 1 PRS 0002 A Panel Rail Short, for 2 modules
 - 1 PRD 0004 A Panel Rail Long, for 4 modules
 - HPD 0000 A Power Distributor
 - 1 FPO-5000-PSB-CH Power Supply Bracket for panel housings
 - 2 x 12 V/28 Ah batteries
- Can be extended with:
 - FDT 0000 A Front Door Transparent, lock right side
 - FDT 0003 Front Door Transparent, lock left side

Parts Included

Pos.	Description
------	-------------

1	Housing
---	---------

Ordering Information

HCP 0006 A Modular Panel Housing for 6 Modules **HCP 0006 A**

for surface-mounting, flush-mounting or installation in 482.6 mm (19") racks

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by