

PEUGEOT Connect Nav



GPS navigation - Applications - Multimedia audio system - Bluetooth® telephone

i The functions and settings described vary according to the vehicle version and configuration.

! For safety reasons and because they require sustained attention by the driver, the following operations must be carried out with the **vehicle stationary** and the ignition on:

- Pairing the smartphone with the system in Bluetooth mode.
- Using the smartphone.
- Connection to the CarPlay®, MirrorLink™ or Android Auto applications (certain

applications interrupt their display while the vehicle is moving).

- Watching a video (the video stops when the vehicle starts to move again).
- Changing the system settings and configuration.

i The system is protected in such a way that it will only operate in the vehicle. The **Energy Economy Mode** message is displayed when the system is about to enter the corresponding mode.

i System and map updates can be downloaded from the Brand's website. The update procedure is also available on the website.

i The system's Open Source Software (OSS) source codes are available at the following addresses:
<https://www.groupe-psa.com/fr/oss/>
<https://www.groupe-psa.com/en/oss/>

First steps

⏻ With the engine running, a press mutes the sound.

With the ignition off, a press turns the system on. Increase or decrease the volume using the wheel or the "plus" or "minus" buttons (depending on the equipment).

Use the menu buttons on either side of or below the touch screen for access to the menus, then press the virtual buttons in the touch screen. Depending on the model, use the "Source" or "Menu" buttons to access the rolling menus, then press the virtual buttons in the touch screen. Display the rolling menus at any time by pressing the screen briefly with three fingers. All of the touch areas of the screen are white. Press the back arrow to go back a level. Press "OK" to confirm.

! The touch screen is of the "capacitive" type.

To clean the screen, use a soft, non-abrasive cloth (e.g. spectacles cloth) with no additional product.


Do not use sharp objects on the screen. Do not touch the screen with wet hands.

Certain information is displayed permanently in the side bars or in the upper bar of the touch screen (depending on equipment):

- Air conditioning status information (depending on version), and direct access to the corresponding menu.
- Go directly to the audio source selection option, to view the list of radio stations (or list of titles depending on the source).
- Go to the "Notifications" of messages, emails, map updates and, depending on the services, the navigation notifications.
- Go to the settings for the touch screen and the digital instrument panel.

Audio source selection (depending on equipment):

- FM/DAB/AM radio stations (depending on equipment).
- Telephone connected via Bluetooth and Bluetooth multimedia broadcast (streaming).
- USB memory stick.
- Media player connected via the auxiliary socket (depending on equipment).
- Video (depending on equipment).

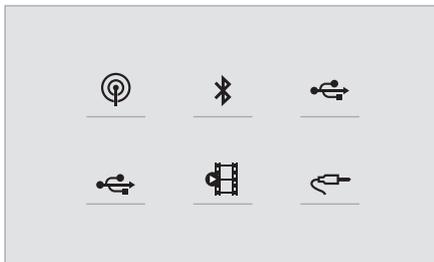

I In the "Settings" menu, it is possible to create a profile for an individual or for a group of people with shared interests, and configure a wide range of settings (radio presets, audio settings, navigation history, favourite contacts, etc.). Settings are applied automatically.

I In very hot conditions, the volume may be limited to protect the system. It may

enter standby mode (with the screen and sound off) for 5 minutes or more.

The system will resume normal operation when the temperature in the passenger compartment has dropped.

Steering mounted controls

 **Voice control:**

This control is located on the steering wheel or at the end of the lighting control stalk (depending on equipment).

Short press, system voice control.

Long press, voice control for smartphone or CarPlay®, MirrorLink™ (availability depending on country), Android Auto via the system.

+ Increase volume.

- Decrease volume.

Mute by pressing the volume increase and decrease buttons simultaneously (depending on equipment).

Restore the sound by pressing one of the two volume buttons.

SRC **Media** (short press): change the multimedia source.

 **Telephone** (short press): start telephone call.

Call in progress (short press): access telephone menu.

Telephone (long press): reject an incoming call, end call; when no call is in progress, access telephone menu.

 **Radio** (rotate): automatic search for the previous / next station.

Media (rotate): previous / next track, move in a list.

Short press: confirm a selection; if nothing selected, access to presets.


LIST Radio: display the list of stations.

Media: display the list of tracks.

Radio (press and hold): update the list of stations received.

Menus


Connected navigation

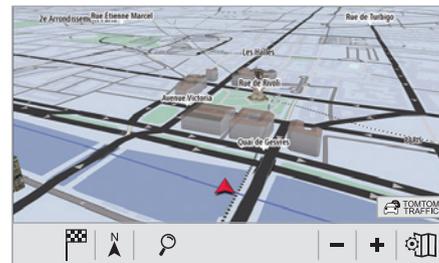

 Enter navigation settings and choose a destination.


Use real-time services, depending on equipment.

Applications

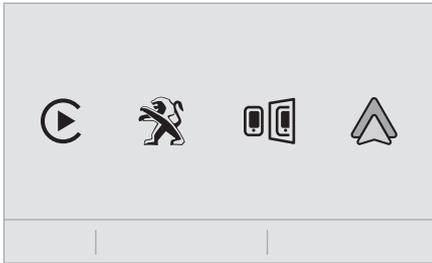


 Run certain applications on a smartphone connected via CarPlay®, MirrorLink™ (available in some countries) or Android Auto. Check the status of Bluetooth® and Wi-Fi connections.

Radio Media

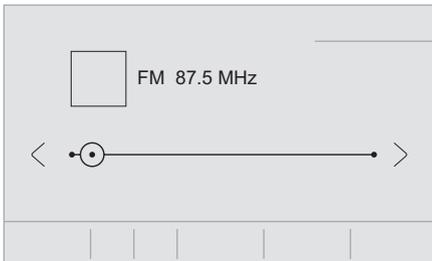


 Select an audio source or radio station, or display photographs.

Telephone

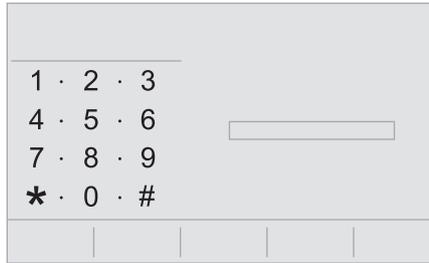

 Connect a telephone via Bluetooth®, read messages and emails and send quick messages.

Settings

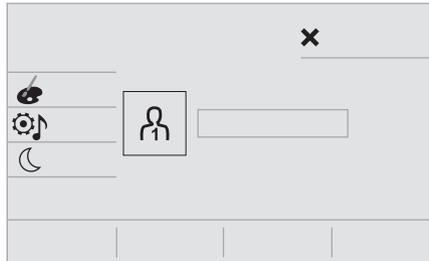


 Configure a personal profile and/or configure the sound (balance, ambience, etc.) and the display (language, units, date, time, etc.).

Vehicle



 Activate, deactivate or configure certain vehicle functions.

Air conditioning

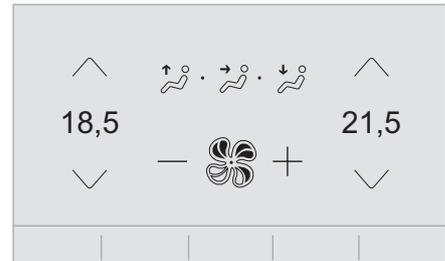

 Manage various temperature and air flow settings.

Voice commands

Steering wheel-mounted controls



Voice commands:

Voice commands can be issued from any screen page after a short press on the "Voice commands" button located on the steering wheel or at the end of the lighting control stalk (depending on equipment), as long as there is no telephone call in progress.



To ensure that voice commands are always recognised by the system, please follow these recommendations:

- **use natural language in a normal tone without breaking up words or raising your voice.**
- always wait for the "beep" (audible signal) before speaking.
- for best results, closing the windows and sunroof is recommended, to avoid extraneous interference (depending on version).
- before issuing a voice command, ask any other passengers to refrain from speaking.

First steps



Example of a "voice command" for navigation:

"Navigate to address 11 regent street, London"

Example of a "voice command" for the radio and media:

"Play artist Madonna"

Example of a "voice command" for the telephone:

"Call David Miller"




The voice commands, with a choice of 17 languages (Arabic, Brazilian, Czech, Danish, Dutch, English, Farsi, French, German, Italian, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Turkish), are made using the language previously chosen and set in the system. For some voice commands, there are alternative synonyms.

Example: Guide to / Navigate to / Go to / ...
The voice commands in Arabic for: "Navigate to address" and "Display POI in the city", are not available.


Information - Using the system



When voice commands are activated, by briefly pressing the button, help is displayed on the touch screen, offering various menus and enabling voice-based interaction with the system.

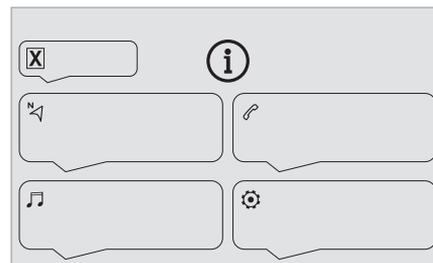

A number of commands are available when a menu is selected.

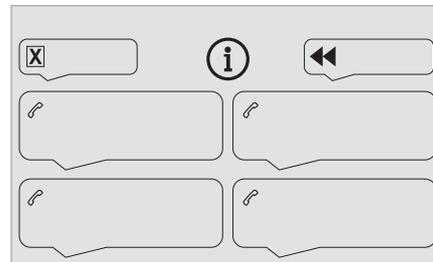

Press the Push To Talk button and tell me what you'd like after the tone. Remember you can interrupt me at any time by pressing this button. If you press it again while I'm waiting for you to speak, it'll end the conversation. If you need to start over, say "cancel". If you want to undo something, say "undo". And to get information and tips at any time, just say "help". If you ask to me do something and there's some information missing that I need, I'll give you some examples or take you through it step by

step. There's more information available in "novice" mode. You can set the dialogue mode to "expert" when you feel comfortable.

Global voice commands



Voice commands

Set dialogue mode as novice - expert
Select user 1 / Select profile John
Increase temperature
Decrease temperature



Help messages

There are lots of topics I can help you with. You can say: "help with phone", "help with navigation", "help with media" or "help with radio". For an overview on how to use voice controls, you can say "help with voice controls". Say "yes" if I got that right. Otherwise, say "no" and we'll start that again.

"Navigation" voice commands



Voice commands

Navigate home
Navigate to work
Navigate to preferred address, Tennis club
Navigate to contact, John Miller
Navigate to address 11 regent street, London



Help messages

To plan a route, say "navigate to" followed by the address, the contact name or an intersection. For example, "navigate to address 11 Regent Street, London", "navigate to contact, John Miller", or "navigate to intersection of Regent Street, London". You can specify if it's a preferred address, or a Point of Interest. For example, say "navigate to preferred address, Tennis club", or "navigate to POI Heathrow Airport in London". Or, you can just say, "navigate home". To see Points of Interest on a map, you can say things like "show POI hotels in Banbury". For more information say "help with points of interest" or "help with route guidance".

To choose a destination, say something like "navigate to line three" or "select line two". If you can't find the destination but the street's right, say for example "select the street in line three". To move around a displayed list, you can say "next page" or "previous page". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.



Voice commands

Tell me the remaining distance
Tell me the remaining time
Tell me the arrival time
Stop route guidance



Help messages

You can say "stop" or "resume route guidance". To get information about your current route, you can say "tell me the remaining time", "remaining

distance" or "arrival time". To learn more commands, try saying "help with navigation".



Voice commands

Show POI "hotel" at the destination
Show nearby POI petrol station
Navigate to POI Heathrow Airport in London
Navigate to POI petrol station along the route



Help messages

To see points of interest on a map, you can say things like "show hotels in Banbury", "show nearby parking", "show hotel at the destination" or "show petrol station along the route". If you prefer to navigate directly to a point of interest, you can say "navigate to nearby petrol station". If you feel you are not being well understood, try to say the word "POI" in front of the point of interest. For example say "navigate to POI restaurant at the destination".

To choose a POI, say something like "select line 2". If you've searched for a Point of Interest and don't see the one you're after, you can filter further by saying something like "select POI in line 2", or "select the city in line 3". You can also scroll through the list by saying "next page" or "previous page".



Depending on the country, give destination (address) instructions in the language configured for the system.

"Radio Media" voice commands



Voice commands

Turn on source radio - Streaming Bluetooth

- ...



Help messages

You can select an audio source by saying "turn on source" followed by the device name. For example, "turn on source, Streaming Bluetooth", or "turn on source, radio". Use the command "play" to specify the type of music you'd like to hear. You can choose between "song", "artist", or "album". Just say something like "play artist, Madonna", "play song, Hey Jude", or "play album, Thriller".



Voice commands

Tune to channel BBC Radio 2

Tune to 98.5 FM

Tune to preset number five



Help messages

You can pick a radio station by saying "tune to" and the station name or frequency. For example "tune to channel Talksport" or "tune to 98.5 FM". To listen to a preset radio station, say for example "tune to preset number five".



Voice commands

What's playing?



Help messages

To choose what you'd like to play, start by saying "play" and then the item. For example, say "play song Hey Jude", "play line 3" or "select line 2". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.



Voice commands

Play song Hey Jude

Play artist Madonna

Play album Thriller



Help messages

I'm not sure what you'd like to play. Please say "play" and then a song title, an album title, or an artist name. For example, say "play song Hey Jude", "play artist Madonna" or "play album Thriller". To select a line number from the display, say "select line two". To move around a displayed list, you can say "next page" or "previous page". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.



Media voice commands are available only with a USB connection.

"Telephone" voice commands



If there is no telephone connected by Bluetooth, a voice message announces: "Please first connect a telephone", and the voice session is closed.



Voice commands

Call David Miller*

Call voicemail*

Display calls*



Help messages

To make a phone call, say "call" followed by the contact name, for example: "Call David Miller". You can also include the phone type, for example: "Call David Miller at home". To make a call by number, say "dial" followed by the phone number, for example, "Dial 107776 835 417". You can check your voicemail by saying "call voicemail". To send a text, say "send quick message to", followed by the contact, and then the name of the quick message you'd like to send. For example, "send quick message to

* This function is available only if the telephone connected to the system supports downloading of contacts and recent calls and the corresponding download has been performed.

David Miller, I'll be late". To display the list of calls, say "display calls". For more information on SMS, you can say "help with texting". To choose a contact, say something like "select line three". To move around the list say "next page" or "previous page". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.

"Text message" voice commands

i If there is no telephone connected by Bluetooth, a voice message announces: "Please first connect a telephone", and the voice session is closed.

i The "Text messages" voice commands function allows you to dictate and send an SMS. Dictate the text, taking care to pause briefly between each word. When you have finished, the voice recognition system will automatically generate an SMS.

Voice commands

Send quick message to Bill Carter, I'll be late

 **Help messages**

From the list of quick messages, say the name of the one you'd like to send. To move around the list you can say "go to start", "go to end", "next page" or "previous page". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.

Voice commands

Send SMS to John Miller, I'm just arriving
Send SMS to David Miller at the office, don't wait for me

Help messages

Please say "call" or "send quick message to", and then select a line from the list. To move around a list shown on the display, you can say "go to start", "go to end", "next page" or "previous page". You can undo your last action and start over by saying "undo", or say "cancel" to cancel the current action.

Voice commands

Listen to most recent message*

Help messages

To hear your last message, you can say "listen to most recent message". When you want to send a text, there's a set of quick messages ready for you to use. Just use the quick message name and say something like "send quick message to

Bill Carter, I'll be late". Check the phone menu for the names of the supported messages.

i The system only sends pre-recorded "Quick messages".

Navigation

Choice of a destination

To a new destination

Intuitive method:



Press **Navigation** to display the main page.



Press **"Search..."**.



Enter an address or key words for your destination.

OK

Press **"OK"** to select the **"Guidance criteria"**.

Or

Guided method:



Before you can use the navigation feature, you must enter the **"City"**, the **"Street"** (suggestions are displayed automatically when you begin typing), and the **"Number"** on the virtual keypad, or select an

* This function is available only if the telephone connected to the system supports downloading of contacts and recent calls and the corresponding download has been performed.

address from the **"Contact"** list or the address **"History"**.

i If you do not confirm the house number, the navigation system will show one end of the street.

Press the **"MENU"** button to access the secondary page.



Select **"Enter address"**.

Then



Select the **Country**



Select the keyboard "language".



Change the keyboard "type" according to the selected "language": ABCDE;

AZERTY; QWERTY or QWERTZ.



Enter the **"City"**, the **"Street"** and the **"Number"**, and confirm by pressing on the displayed suggestions.

OK

Press **"OK"** to select the **"Guidance criteria"**.

And/or



Select **"See on map"** to choose the **"Guidance criteria"**.

OK

Press **"OK"** to start guided navigation.

i Zoom in/out using the touch buttons or with two fingers on the screen.

To a recent destination



Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.



Select **"My destinations"**.

Select the **"Recent"** tab.

Select the address chosen in the list to display the **"Guidance criteria"**.

OK

Press **"OK"** to start guided navigation.



Select **"Position"** to see the point of arrival on the map.

To "Home" or "My work"



Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.



Select **"My destinations"**.

Select the **"Preferred"** tab.



Select **"Home"**.

Or



Select **"My work"**.

Or

Select a preset favourite destination.

To a contact



Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.



Select **"My destinations"**.

Select the **"Contact"** tab.

Select a contact in the list to start guided navigation.

To points of interest (POI)

Guided method:

Points of interest (POI) are listed in different categories.



Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.



Select **"Points of interest"**.



Select the **"Travel"**, **"Leisure"**, **"Commercial"**, **"Public"** or **"Geographic"**

tab.

Or



Select **"Search"** to enter the name and address of a POI.

Press **"OK"** to calculate the route.

OK

Or

Intuitive method:

i You can only select this method in order to use the service if a network connection is active; this may be either a "network connection provided by the vehicle", if you use the Peugeot Connect Packs solution, or else a "network connection provided by the user" via a smartphone. In both cases, the system is automatically connected to the Internet, if network coverage permits.

 Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.

 Select **"Search"**.

Press on the mode shown in the bottom right of the screen (On-Board or Connected) to change "Database".

 Select the "Database" in "On-Board" mode (integrated into the map), or in "Connected" mode (connected to the Internet).

 Press the back arrow to confirm.

 Enter an address or key words for your destination (POI).

OK Press **"OK"** to start the search.

 Select the **"On the route"**, **"Around the vehicle"** or **"At destination"** tab to refine your search.

Select the desired address to calculate the route.

To a point on the map

 Press **Navigation** to display the main page.

Explore the map by sliding a finger on the screen.

Select the destination by pressing on the map.

 Tap the screen to place a marker and display the sub-menu.

 Press this button to start guided navigation.

Or

 Press this button to save the displayed address.

i A long press on a point opens a list of nearby POIs.

To GPS coordinates

 Press **Navigation** to display the main page.

Explore the map by sliding a finger on the screen.

Touch the screen with a finger to go to the next image.

 Press this button to display the world map.

Using the grid, select the desired country or region by zooming.

 Press this button to display or enter the GPS coordinates.

 A marker is displayed in the middle of the screen, with the **"Latitude"** and **"Longitude"** coordinates.

Choose the type of coordinates:
DMS for: Degrees, Minutes, Seconds.
DD for: Degrees, Decimals.

 Press this button to start guided navigation.

Or

 Press this button to save the displayed address.

OR

 Press this button to enter the **"Latitude"** value using the virtual keypad.

And

 Press this button to enter the **"Longitude"** value using the virtual keypad.

TMC (Traffic Message Channel)

Available in some countries.

TMC (Traffic Message Channel) messages are based on a European standard for traffic information broadcasting via the RDS system on FM radio, sending traffic information in real time. The TMC information is then displayed on a GPS Navigation system map and taken into account straight away when routes are calculated, to avoid accidents, traffic jams and closed roads.

i Danger zone alerts may or may not be displayed, depending on the applicable

legislation and subscription to the corresponding service.

Connected navigation

Depending on version, vehicle trim level and subscription to online services and options.

Connected navigation connection

Network connection provided by the vehicle

 If you use the Peugeot Connect Packs solution, the system is automatically connected to the Internet and connected services, and does not require the user to provide a connection via their smartphone.

OR

Network connection provided by the user



i For the list of suitable smartphones, visit the Brand's national website.

Activate and enter settings for sharing the smartphone connection.

i As processes and standards are constantly changing, we recommend you

update the smartphone operating system as well as the date and time on the smartphone and system, to ensure that the communication process between the smartphone and the system functions correctly.

USB connection



Connect the USB cable.
The smartphone charges when connected by the USB cable.

Bluetooth connection



Activate the Bluetooth function on the telephone and ensure that it is visible to all (see the "Connect-App" section).

Wi-Fi connection



Select a Wi-Fi network detected by the **WIFI** system and connect to it.



This function is only available if it has been activated either via the "Notifications" or via the "Applications" menu.



Press "**Notifications**".



Select Wi-Fi to activate it.

OR



Press **Connect-App** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.



Select "**Wi-Fi network connection**".



Select the "**Secured**", "**Not secured**" or "**Stored**" tab.



Select a network.



Using the virtual keypad, enter the Wi-Fi network "**Key**" and "**Password**".

OK

Press "**OK**" to establish a connection between the smartphone and the

vehicle's system.



Usage restrictions:

- With CarPlay®, connection sharing is only available with a Wi-Fi connection.
 - With MirrorLink™, connection sharing is only available with a USB connection.
- The quality of services depends on the quality of the network connection.

Authorize sending information



Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.



Select "**System configuration**".



Select the "**Private mode**" tab.

OR



Press "**Notifications**".

 Press **"Private mode"**.

THEN

Activate or deactivate:

- **"No sharing (data, vehicle position)"**.
- **"Only data sharing"**
- **"Sharing data and vehicle position"**

Settings specific to connected navigation

 Press **Navigation** to display the main page.

Press the **"MENU"** button to access the secondary page.

 Select **"Settings"**.

 Select the **"Map"** tab.

Activate or deactivate:
- **"Allow declaration of danger zones"**.

- **"Guidance to final destination on foot"**.

These settings must be configured for each profile.

OK Press **"OK"** to confirm your selection.

 Select the **"Alerts"** tab.

Activate or deactivate:

- **"Advise of car park nearby"**.
- **"Filling station alert"**.

- **"Risk areas alert"** then press the warning icon (triangle) to configure alerts.

- **"Give an audible warning"**.
- **"Advise proximity of POI 1"**.
- **"Advise proximity of POI 2"**.

OK Press **"OK"** to confirm your selection.

 The "Notifications", in the upper bar, can be accessed at any time.

 Danger zone alerts may or may not be displayed, depending on the applicable legislation and subscription to the corresponding service.

 When "TOMTOM TRAFFIC" appears, the services are available.

 The services offered with connected navigation are as follows.

A Connected Services pack:

- Weather,
- Filling stations,
- Car park,
- Traffic,
- POI local search.

A Danger area pack (optional).

Declaration: "Risk areas alert"

 To send information about danger zones, select the option: **Allow declaration of danger zones**

 Press **Navigation** to display the main page.

 Press the **"Declare a new danger zone"** button located in the side bars or the upper bar of the touch screen (depending on equipment).

 Select the **"Type"** option to select the type of "Danger area".

 Select the **"Speed"** option and enter it using the virtual keypad.

OK Press **"OK"** to save and send the information.

Displaying fuel information

 Press **Navigation** to display the main page.

 Press this button to display the list of services.

 Press **"POI on map"** to display the list of points of interest.

 Press one of the buttons to search for **"Stations"**.

 Activate/deactivate **"Stations"**.



 Press this button to display a secondary page.



Select the **"Settings"** tab.



Select the desired fuel.

OK

Press **"OK"** to save.

Displaying charging station details



Press **Navigation** to display the main page.



Press this button to display the list of services.



Press **"POI on map"** to display the list of points of interest.



Press one of the buttons to search for **"Stations"**.



Activate/deactivate **"Stations"**.



Press this button to display a secondary page.



Select the **"Settings"** tab.



Select the desired connector type.

OK

Press **"OK"** to save.

Displaying weather information



Press **Navigation** to display the main page.



Press this button to display the list of services.



Select **"View map"**.



Select **"Weather"**.



Press this button to display basic information.



Press this button to display detailed weather information.

i The temperature displayed at 6 a.m. will be the maximum temperature for the day. The temperature displayed at 6 p.m. will be the minimum temperature for the night.

Applications

USB ports

Depending on equipment, for more information on the USB ports compatible with **CarPlay**[®], **MirrorLink**[™] or **Android Auto** applications, refer to the "Ease of use and comfort" section.

i For the list of suitable smartphones, visit the Brand's national website.

i Synchronising a smartphone enables users to display applications that support the smartphone's MirrorLinkCarPlay[®], [™] or Android Auto technology on the vehicle's screen. For CarPlay[®] technology, the

CarPlay[®] function must first be activated on the smartphone.

In all cases, the smartphone must be unlocked, to enable the communication process between the smartphone and the system to function.

As principles and standards are constantly changing, **we recommend keeping the smartphone's operating system up-to-date, together with the date and time on the smartphone and the system.**

Connectivity

Press **Applications** to display the main page.

Press **"Connectivity"** to access the **CarPlay**[®], **MirrorLink**[™] or **Android Auto** functions.

CarPlay[®] smartphone connection

Connect a USB cable. The smartphone charges when connected by a USB cable.

Press **"Telephone"** to display the CarPlay[®] interface.

Or

Connect a USB cable. The smartphone charges when connected by a USB cable.

From the system, press **"Applications"** to display the main page.

Press **"Connectivity"** to access the "CarPlay[®]" function.

 Press **"CarPlay"** to display the CarPlay® interface.

 On connecting the USB cable, the CarPlay® function deactivates the system's Bluetooth® mode.

 When the USB cable is disconnected and the ignition is switched off then back on, the system will not automatically switch to Radio Media mode; the source must be changed manually.

MirrorLink™ smartphone connection

 The **"MirrorLink™"** function requires a compatible smartphone and compatible applications. You can check that your telephone is compatible on the Brand's website (services).

 When connecting a smartphone to the system, we recommend enabling Bluetooth® on the smartphone.

 Connect a USB cable. The smartphone charges when connected by a USB cable.

 From the system, press **"Applications"** to display the main page.

Press **"Connectivity"** to access the "MirrorLink™" function.

 Press **"MirrorLink™"** to start the application in the system.

Depending on the smartphone, it may be necessary to activate the **"MirrorLink™"** function.

OK During the procedure, several screen pages relating to certain features are displayed.

Accept to start and complete the connection. Once the connection is established, a page is displayed, showing the applications already downloaded to the smartphone that are compatible with MirrorLink™ technology. Access to the different audio sources remains available in the margin of the MirrorLink™ display, using the touch buttons located in the upper bar.

Access to the menus for the system is possible at any time using the dedicated buttons.

 There may be a pause before applications become available, depending on the quality of the network.

Android Auto smartphone connection

 Install the **"Android Auto"** application on the smartphone via "Google Play".

The **"Android Auto"** function requires the use of a compatible smartphone and applications.

 Connect a USB cable. The smartphone charges when connected by a USB cable.

 From the system, press **"Applications"** to display the main page.

Press **"Connectivity"** to access the "Android Auto" function.

 Press **"Android Auto"** to start the application in the system.

OK During the procedure, several screen pages relating to certain features are displayed.

Accept to start and complete the connection. Access to the different audio sources remains available in the margin of the Android Auto display, using the touch buttons located in the upper bar.

Access to the menus for the system is possible at any time using the dedicated buttons.

 In Android Auto mode, the function that displays rolling menus by briefly pressing the screen with three fingers is disabled.

 There may be a pause before applications become available, depending on the quality of the network.

Car Apps

 Press **Applications** to display the main page.

Press **"Car Apps"** to display the applications home page.

Internet Browser

 Press **Applications** to display the main page.

Press "**Connectivity**" to access the "**Connected Apps**" function.

Press "**Connected Apps**" to display the browser home page.

 Select the country of residence.

OK Press "**OK**" to save and start the browser.

 Connection to the internet is via one of the network connections provided by the vehicle or the user.

Bluetooth connection®

 The services available depend on the network, the SIM card and the compatibility of the Bluetooth devices used. Consult the smartphone user guide and the service provider to check which services are available.

 The Bluetooth function must be activated and the smartphone configured as "Visible to all".

To complete the pairing, whichever procedure is used (from the smartphone or from the system), ensure that the code is the same in the system and in the smartphone.

 If the pairing procedure fails, we recommend deactivating and then reactivating the Bluetooth function on the smartphone.

Procedure from the smartphone

 Select the name of the system in the list of detected devices.

In the system, accept the connection request from the smartphone.

Procedure from the system

 Press **Connect-App** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Press "**Bluetooth connection**".

 Select "**Search**".
The list of detected smartphones is displayed.

 Select the name of the chosen smartphone in the list.

 Depending on the type of smartphone, you may be prompted to accept the transfer of contacts and messages.

Connection sharing

The system offers to connect the smartphone with 3 profiles:

– "**Telephone**" (hands-free kit, telephone only),

– "**Streaming**" (streaming: wireless playing of audio files on the smartphone),
– "**Mobile internet data**".

 The "**Mobile internet data**" profile must be activated for connected navigation (if the vehicle does not have "Emergency and assistance call" services), after first activating smartphone connection sharing.

Select one or more profiles.

OK Press "**OK**" to confirm.

Wi-Fi connection

Network connection via the smartphone's Wi-Fi.

 Press **Connect-App** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Wi-Fi network connection**".

WIFI



Select the "**Secured**", "**Not secured**" or "**Stored**" tab.



Select a network.



Using the virtual keypad, enter the Wi-Fi network "**Key**" and "**Password**".

OK Press "**OK**" to establish the connection.

 The Wi-Fi connection and Wi-Fi connection sharing are exclusive.

Wi-Fi connection sharing

Creation of a local Wi-Fi network by the system.

 Press **Connect-App** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Share Wi-Fi connection**".

Select the "**Activation**" tab to activate or deactivate Wi-Fi connection sharing.

And/or

Select the "**Settings**" tab to change the system's network name and password.

OK Press "**OK**" to confirm.

 To protect against unauthorised access and to make all systems as secure as possible, the use of a security code or a complex password is recommended.

Managing connections

 Press **Connect-App** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Manage connection**".

With this function, you can view the access to connected services, the availability of connected services and modify the connection mode.

Radio

Selecting a station

 Press **Radio Media** to display the main page.

Press "**Frequency**".

  Press one of the buttons to perform an automatic search for radio stations.

Or

 Move the slider to manually search for frequencies up or down.

Or

 Press **Radio Media** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Radio stations**" on the secondary page.

Press "**Frequency**".

 Enter the values using the virtual keypad.

First enter the units then click on the decimals field to enter the figures after the decimal point.

OK Press "**OK**" to confirm.

 Radio reception may be affected by the use of electrical equipment not approved by the Brand, such as a USB charger connected to the 12 V socket.

The exterior environment (hills, buildings, tunnels, basement car parks, etc.) may block reception, including in RDS mode.

This phenomenon is perfectly normal in the context of radio wave transmission, and in no way indicative of an audio system malfunction.

Presetting a station

Select a radio station or frequency. (refer to the corresponding section) Press "**Presets**".

 Make a long press on one of the buttons to preset the station.

Changing the waveband

 Press **Radio Media** to display the main page.

To change the waveband, press "Band...", displayed at the top right of the screen.

Activating/Deactivating RDS

RDS, if activated, allows you to continue listening to the same station by automatic retuning to alternative frequencies.

 Press **Radio Media** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Radio settings**".

Select "**General**".

 Activate/deactivate "**Station follow**".

OK Press "**OK**" to confirm.

i RDS station tracking may not be available nationwide, as many radio stations do not cover 100 % of the country. This explains the loss of reception of the station during a journey.

Displaying text information

The "Radio Text" function displays information transmitted by the radio station relating to the station or the currently playing song.

 Press **Radio Media** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Radio settings**".

Select "**General**".

Activate/deactivate "**Display radio text**".

OK Press "**OK**" to confirm.

Playing TA messages

The TA (Traffic Announcement) function gives priority to TA alert messages. To operate, this function needs good reception of a radio station that carries this type of message. While traffic information is being broadcast, the current media is automatically interrupted so that the

TA message can be heard. Normal play of the previously playing media resumes at the end of the message.

Select "**Announcements**".

Activate/deactivate "**Traffic announcement**".

OK Press "**OK**" to confirm.

DAB (Digital Audio Broadcasting) radio

Terrestrial Digital Radio

Terrestrial Digital Radio

Digital radio provides higher quality sound. The various "multiplexes/ensembles" offer a choice of radio stations organised in alphabetical order.

 Press **Radio Media** to display the main page.

Press "Band ..." at the top right of the screen to display the "**DAB**" waveband.

FM-DAB tracking

"DAB" does not cover 100 % of the territory. When the digital radio signal is poor, "FM-DAB auto follow-up" enables you to continue listening to the same station by automatically switching to the corresponding FM analogue station (if there is one).

 Press **Radio Media** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Radio settings**".

Select "**General**".

Activate/deactivate "**FM-DAB Follow-up**".

Activate/deactivate "**Station follow**".

OK Press "**OK**".

i If "FM-DAB auto tracking" is activated, there may be a time offset of a few seconds when the system switches to "FM" analogue radio, and in some cases a change in volume.

When the digital signal quality is restored, the system automatically changes back to "DAB".

! If the "DAB" station being listened to is not available on "FM" ("**FM-DAB**" option shaded), or "FM-DAB auto tracking" is not activated, the sound will cut out while the digital signal is too weak.

Media

USB port



Insert the USB memory stick into the USB port or connect the USB device to the USB port using a suitable cable (not supplied).



To protect the system, do not use a USB hub.

The system builds playlists (in temporary memory); this operation can take from a few seconds to several minutes at the first connection.

Reduce the number of non-music files and the number of folders to reduce the waiting time. Playlists are updated whenever the ignition is switched off or a USB memory stick is connected. The audio system memorises these lists, which will subsequently load faster if they have not been changed.

Auxiliary socket (AUX)

Depending on equipment



Connect a portable device (MP3 player, etc.) to the auxiliary jack socket using an audio cable (not supplied).

This source is only available if "Auxiliary input" has been selected in the audio settings.

First adjust the volume on the portable device (to a high level). Then adjust the volume of the audio system.

Controls are managed via the portable device.

Selecting the source



Press **Radio Media** to display the main page.

Select **"SOURCES"**.

Select the source.

Watching a video

Depending on equipment/Depending on version/Depending on country.

Insert a USB memory stick in the USB port.



Video control commands are accessible only through the touch screen.



Press **Radio Media** to display the main page.

Select **"SOURCES"**.



Select **Video** to start the video.



To remove the USB memory stick, press the pause button to stop the video, then remove the memory stick.

The system can play video files in the MPEG-4 Part 2, MPEG-2, MPEG-1, H.264, H.263, VP8, WMV and RealVideo formats.

Streaming Bluetooth®

Streaming allows you to listen to the audio feed from your smartphone.

The Bluetooth profile must be activated.

First adjust the volume on the portable device (to a high level).

Then adjust the volume of the audio system.

If play does not start automatically, it may be necessary to start the audio playback from the smartphone.

Control is from the portable device or by using the system's touch buttons.



Once connected in streaming mode, the smartphone is considered to be a media source.

Connecting Apple® players

Connect the Apple® player to the USB port using a suitable cable (not supplied).

Play starts automatically.

Control is via the audio system.



The classifications available are those of the portable device connected (artists/albums/genres/playlists/audio books/podcasts).

The default classification used is by artist. To modify the classification used, return to the first level of the menu then select the desired classification (playlists for example) and confirm to go down through the menu to the desired track.

The version of software in the audio system may not be compatible with the generation of the Apple® player.

Information and advice

The system supports USB mass storage devices, BlackBerry® devices and Apple® players via the USB ports. The adapter cable is not supplied.

Devices are managed using the audio system controls.

Other devices, not recognised on connection, must be connected to the auxiliary socket using a jack cable (not supplied) or via Bluetooth streaming, if compatible.

The audio system will only play audio files with ".wma", ".aac", ".flac", ".ogg" and ".mp3" file extensions, at bit rates between 32 Kbps and 320 Kbps.

It also supports VBR (Variable Bit Rate) mode. No other file types (".mp4", etc.) can be read. All ".wma" files must be standard WMA 9 files. The supported sampling rates are 32, 44 and 48 KHz.

To avoid reading and display problems, we recommend choosing file names less than 20 characters long that do not contain any special characters (e.g. " ? . ; ù).

Use only USB memory sticks in FAT32 format (File Allocation Table).

- We recommend using the original USB cable for the portable device.

Telephone

Pairing a Bluetooth® telephone

! The services available depend on the network, the SIM card and the compatibility of the Bluetooth devices used. Consult the telephone user guide and the service provider to check which services are available.

i The Bluetooth function must be activated and the telephone configured as "Visible to all" (in the telephone settings).

To complete the pairing, whichever procedure is used (from the telephone or from the system), ensure that the code is the same in the system and in the telephone.

i If the pairing procedure fails, we recommend deactivating and then reactivating the Bluetooth function on the telephone.

Procedure from the telephone

✖ Select the system name in the list of detected devices.

In the system, accept the connection request from the telephone.

Procedure from the system

☎ Press **Telephone** to display the main page.



Press **"Bluetooth search"**.

Or



Select **"Search"**.

The list of detected telephones is displayed.



Select the name of the chosen telephone in the list.

Connection sharing

The system offers to connect the telephone with 3 profiles:

- **"Telephone"** (hands-free kit, telephone only),
- **"Streaming"** (streaming: wireless playing of audio files on the telephone),
- **"Mobile internet data"**.

i The **"Mobile internet data"** profile must be activated for connected navigation, after first activating smartphone connection sharing.

☑ Select one or more profiles.

OK Press **"OK"** to confirm.

Depending on the type of telephone, you may be prompted to accept the transfer of contacts and messages.

 The ability of the system to connect just one profile depends on the telephone. All three profiles may connect by default.

 The profiles compatible with the system are: HFP, OPP, PBAP, A2DP, AVRCP, MAP and PAN.

Visit the Brand's website for more information (compatibility, additional help, etc.).

Automatic reconnection

On returning to the vehicle, if the last telephone connected is present again, it is automatically recognised and within about 30 seconds after switching on the ignition, the pairing is established automatically (Bluetooth activated).

To modify the connection profile:

 Press **Telephone** to display the main page.

Press the **"OPTIONS"** button to access the secondary page.

 Select **"Bluetooth connection"** to display the list of paired devices.

 Press the "Details" button.

Select one or more profiles.

OK Press **"OK"** to confirm.

Managing paired telephones

This function lets you connect or disconnect a device or delete a pairing.

 Press **Telephone** to display the main page.

Press the **"OPTIONS"** button to access the secondary page.

 Select **"Bluetooth connection"** to display the list of paired devices.

 Press on the name of the telephone selected in the list to disconnect it.

Press again to connect it.

Deleting a telephone

 Select the basket at top right of the screen to display a basket alongside the telephone chosen.

 Press the basket alongside the telephone chosen to delete it.

Receiving a call

An incoming call is announced by a ring and a superimposed display in the screen.

 Make a short press on the steering mounted telephone button to accept an incoming call.

And

 Make a long press

 on the steering mounted telephone button to reject the call.

Or

 Select **"End call"** on the touch screen.

Making a call

 Using the telephone is not recommended while driving.

Park the vehicle.

Make the call using the steering mounted controls.

Calling a new number

 Press **Telephone** to display the main page.

 Enter the phone number using the digital keypad.

 Press **"Call" to start the call.**

Calling a contact

 Press **Telephone** to display the main page.

 Or press and hold

 the steering mounted telephone button.

Select **"Contact"**.

Select the desired contact from the displayed list.

 Select **"Call"**.

Calling a recently used number

-  Press **Telephone** to display the main page.
- Or
-  Press and hold the steering mounted telephone button.

Select "**Calls**".
Select the desired contact from the displayed list.

i It is always possible to make a call directly from the telephone; as a safety measure, first park the vehicle.

Managing contacts/entries

-  Press **Telephone** to display the main page.
- Select "**Contact**".
-  Select "**Create**" to add a new contact.
-  Press the "**Telephone**" tab to enter the contact's telephone number(s).
-  Press the "**Address**" tab to enter the contact's address(es).
-  Press the "**Email**" tab to enter the contact's email address(es).
- Press "**OK**" to save.



Press this button to sort contacts by Surname+first name or by First name+surname.

i The "**Email**" function allows email addresses to be entered for a contact, but the system is not able to send emails.

Managing messages

-  Press **Telephone** to display the main page.
- Press the "**OPTIONS**" button to access the secondary page.
-  Select "**Messages**" to display the list of messages.
-  Select the "**All**", "**Incoming**" or "**Sent**" tab.
-  Select the details of the message chosen in one of the lists.
-  Press "**Answer**" to send a quick message stored in the system.
-  Press "**Call**" to start the call.
-  Press "**Play**" to listen to the message.

! Access to "**Messages**" depends on the compatibility between the smartphone and the onboard system. Some smartphones retrieve messages or email messages more slowly than others.

Managing quick messages

-  Press **Telephone** to display the main page.
- Press the "**OPTIONS**" button to access the secondary page.
-  Select "**Quick messages**" to display the list of messages.
-  Select the "**Delayed**", "**My arrival**", "**Not available**" or "**Other**" tab, enabling you to create new messages.
-  Press "**Create**" to write a new message.
-  Select the message chosen in one of the lists.
-  Press "**Transfer**" to select one or more recipients.
-  Press "**Play**" to start playing the message.

Managing email

-  Press **Telephone** to display the main page.
- Press the "**OPTIONS**" button to access the secondary page.
-  Select "**Email**" to display the list of messages.
-  Select the "**Incoming**", "**Sent**" or "**Not read**" tab.
- Select the message chosen in one of the lists.
-  Press "**Play**" to start playing the message.

 Access to email messages depends on the compatibility between the smartphone and the onboard system.

Settings

Audio settings

 Press **Settings** to display the main page.

 Select "**Audio settings**".

Then select "**Ambience**", "**Position**"; "**Sound**", "**Voice**" or "**Ringtone**".

OK Press "**OK**" to save the settings.

 The balance/distribution (or spatialisation with the Arkamys® system) uses audio processing to adjust the sound quality according to the number of passengers in the vehicle.
Available only with the front and rear speaker configuration.

 The **Ambience** setting (choice of 6 ambiances) and the **Bass**, **Medium** and **Treble** sound settings are different and independent for each audio source.
Activate or deactivate "**Loudness**".

The "**Position**" settings (All passengers, Driver and Front only) are common to all sources.

Activate or deactivate "**Touch tones**", "**Volume linked to speed**" and "**Auxiliary input**".

 Onboard audio: Arkamys Sound Staging® optimises the sound distribution inside the passenger compartment.

Configuring profiles

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Setting of the profiles**".

Select "**Profile 1**", "**Profile 2**", "**Profile 3**" or "**Common profile**".

 Press this button to enter a name for the profile using the virtual keypad.

OK Press "**OK**" to confirm.

 Press this button to add a photograph to the profile.

 Insert a USB memory stick containing the photograph in the USB port.

Select the photograph.

OK Press "**OK**" to accept the transfer of the photograph.

OK Press "**OK**" again to save the settings.

 The location for the photograph is square; the system reshapes the original photograph if in another format.

 Press this button to reset the selected profile.

 Resetting the selected profile activates the English language by default.

Select a "**Profile**" (1 or 2 or 3) to link "**Audio settings**" with it.

 Select "**Audio settings**".

Then select "**Ambience**", "**Position**"; "**Sound**", "**Voice**" or "**Ringtone**".

OK Press "**OK**" to save the selected profile's settings.

Modifying system settings

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Screen configuration**".

Select "**Animation**".

Activate or deactivate: **Automatic scrolling**

Select "**Brightness**".

..... Move the slider to adjust the brightness of the screen and/or the instrument panel.

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**System settings**".

Select "**Units**" to change the units of distance, fuel consumption and temperature.
Select "**Factory settings**" to restore the initial settings.

 Resetting the system to "Factory settings" activates English and degrees Fahrenheit and deactivates summer time.

Select "**System info**" to display the versions of the various modules installed in the system.

Selecting the language

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Languages**" to change the language.

Setting the date

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Setting the time-date**".

Select "**Date**".
 Press this button to set the date.

OK
Press "**OK**" to confirm.

 Select the display format for the date.

 Time and date setting is only available if "GPS synchronisation" is deactivated.

Setting the time

 Press **Settings** to display the main page.

Press the "**OPTIONS**" button to access the secondary page.

 Select "**Setting the time-date**".

Select "**Time**".
 Press this button to set the time using the virtual keypad.
OK
Press "**OK**" to confirm.

 Press this button to set the time zone.

 Select the display format for the time (12h/24h).
 Activate or deactivate summer time (+1 hour).
 Activate or deactivate GPS synchronisation (UTC).

OK Press "**OK**" to confirm.

 The system may not automatically manage the change between winter and summer time (depending on the country of sale).

Colour schemes

Depending on equipment/Depending on version.

 As a safety measure, the procedure for changing the colour scheme is only possible when the **vehicle is stationary**.

 Press **Settings** to display the main page.

 Select "**Color schemes**".

 Select a colour scheme in the list then press "**OK**" to confirm.

 Whenever the colour scheme is changed, the system restarts, temporarily displaying a black screen.

Frequently asked questions

The following information groups together the answers to the most frequently asked questions concerning the system.

Navigation

I cannot enter the navigation address.

The address is not recognised.

- ▶ Use the "intuitive method" by pressing the "Search..." button at the bottom of the "Navigation" page.

The route calculation is not successful.

The route settings may conflict with the current location (for example, if toll roads are excluded but the vehicle is on a toll road).

- ▶ Check the route settings in the "Navigation" menu.

I do not receive "Danger zone" alerts.

You have not subscribed to the online services option.

- ▶ If you have subscribed to the option:
 - a few days may elapse before the service is activated,
 - services may not be selected in the system menu,
 - online services are not active ("TOMTOM TRAFFIC" not shown on the map).

The POIs do not appear.

The POIs have not been selected.

- ▶ Set the zoom level to 600 ft (200 m) or select POIs in the POI list.

The "Danger zone" audible warning feature is not working.

The audible warning is not active or the volume is too low.

- ▶ Activate the audible warning in the "Navigation" menu and check the voice volume in the sound settings.

The system does not suggest a detour around an incident on the route.

The route settings do not take account of TMC messages.

- ▶ Configure the "Traffic info" function in the route settings list (Without, Manual or Automatic).

I receive a warning about a "Danger area" that is not on my route.

As well as providing guided navigation, the system announces all "Danger areas" positioned in a cone located in front of the vehicle. It may provide an alert for "Danger areas" located on nearby or parallel roads.

- ▶ Zoom the map to show the exact location of the "Danger area". You can select "On the route" to stop receiving warnings or decrease the warning duration.

Certain traffic jams along the route are not indicated in real time.

On starting, a few minutes may elapse before the system begins to receive traffic information.

- ▶ Wait until traffic information is being received correctly (traffic information icons shown on the map).

In certain countries, only major routes (motorways, etc.) are listed for the traffic information.

This is perfectly normal. The system is dependent on the traffic information available.

The altitude is not displayed.

On starting, GPS initialisation may take up to 3 minutes to receive more than 4 satellites correctly.

- ▶ Wait until the system has started up completely so that there is GPS coverage by at least 4 satellites.

Depending on the geographical environment (tunnel, etc.) or the weather, the conditions of reception of the GPS signal may vary.

This behaviour is normal. The system is dependent on the GPS signal reception conditions.

My navigation is no longer connected.

During start-up and in certain geographical areas, the connection may be unavailable.

- ▶ Check that the online services are activated (settings, contract).

Radio

The reception quality of the tuned radio station gradually deteriorates or the station presets are not working (no sound, 87.5 MHz is displayed, etc.).

The vehicle is too far from the selected station's transmitter, or no transmitter is present in the geographical area.

- ▶ Activate the "" function by means of the short-cut menu to enable the system to check whether there is a more powerful transmitter in the geographical area.

The aerial is missing or has been damaged (for example while entering a car wash or underground car park).

► Have the aerial checked by a dealer. The environment (hills, buildings, tunnels, basement car parks, etc.) is blocking reception, including in RDS mode.

This is a perfectly normal phenomenon, and is not indicative of an audio system malfunction.

I cannot find some radio stations in the list of stations received.

The name of the radio station changes.

The station is no longer received or its name has changed in the list.

Some radio stations send other information in place of their name (the title of the song for example).

The system interprets these details as the station name.

► Press the "Update list" button in the "Radio stations" secondary menu.

Media

Playback of my USB memory stick starts only after a very long wait (around 2 to 3 minutes).

Some files supplied with the memory stick may greatly slow down access to reading the memory stick (multiplication by 10 of the cataloguing time).

► Delete the files supplied with the memory stick and limit the number of sub-folders in the file structure on the memory stick.

There may be an extended pause after inserting a USB stick.

The system reads a variety of data (folder, title, artist, etc.). This can take from a few seconds to a few minutes.

This is perfectly normal.

Some characters in information about the currently playing media may not be displayed correctly.

The audio system is unable to process certain types of character.

► Use standard characters to name tracks and folders.

Playback of streaming files does not start.

The connected device does not automatically launch playback.

► Start playback from the device.

Track names and playing times are not displayed on the audio streaming screen.

The Bluetooth profile does not allow the transfer of this information.

Telephone

I cannot connect my Bluetooth telephone.

The telephone's Bluetooth function may be switched off or the telephone may not be visible.

► Check that the telephone has Bluetooth switched on.

► Check in the telephone settings that it is "visible to all".

► Deactivate then reactivate the telephone's Bluetooth function.

The Bluetooth telephone is not compatible with the system.

► You can check that your telephone is compatible on the Brand's website (services).

The volume of the telephone connected in Bluetooth mode is inaudible.

The volume depends on both the system and the telephone.

► Increase the volume of the audio system, to maximum if required, and increase the volume of the telephone if necessary.

Ambient noise affects the quality of the telephone call.

► Reduce the ambient noise level (close windows, reduce ventilation, slow down, etc.).

Some contacts are duplicated in the list.

The options for synchronising contacts are: synchronise the contacts on the SIM card, the contacts on the telephone, or both. When both synchronisations are selected, some contacts may be duplicated.

► Select "" or "".

The contacts are not listed in alphabetical order.

Some telephones offer display options. Depending on the settings chosen, contacts can be transferred in a specific order.

► Modify the telephone directory display settings.

The system does not receive SMS.

SMS text messages cannot be sent to the system in Bluetooth mode.

Settings

When the treble and bass settings are changed, the ambience is deselected.

When the ambience is changed, the treble and bass settings are reset.

Selecting an ambience imposes the treble and bass settings, and vice versa.

► Modify the treble and bass or ambience settings to obtain the desired musical ambience.

When the balance settings are changed, the distribution is deselected.

When the distribution setting is changed, the balance settings are deselected.

Selecting a distribution setting imposes the balance settings, and vice versa.

► Modify the balance setting or the distribution setting to obtain the desired sound quality.

There is a difference in sound quality between audio sources.

To allow for optimal listening quality, the sound settings can be tailored to different audio sources, which can generate audible differences when changing source.

► Check that the sound settings are appropriate to the sources listened to. We recommend setting the sound functions (Bass:, Treble:, Balance) to the middle position, setting the musical ambience to "None", setting loudness correction to "Active" in USB mode and "Inactive" in Radio mode.

► In all cases, after applying sound settings, adjust the volume level on the portable device (to

a high level) first. Then adjust the volume level on the audio system.

When the engine is off, the system switches off after several minutes of use.

When the engine is switched off, the system's operating time depends on the state of charge of the battery.

The switch-off is normal: the system automatically goes into energy economy mode and switches off to maintain an adequate charge in the battery.

► Start the vehicle's engine to increase the charge of the battery.

The date and time cannot be set.

Setting of the date and time is only available if the synchronisation with the satellites is deactivated.

► Settings menu / Options / Time-Date setting. Select the "Time" tab and deactivate the "GPS synchronisation" (UTC).

Annex

Regulatory Notices

Type: Car Multimedia System

Model: NAC EUR 19W4

Manufacturer: Continental Automotive Czech Republic, s.r.o.

Europe

2014/53/EU Directive regulatory notices

This device has been evaluated against the essential requirements of the 2014/53/EU Directive.

Country	Directive 2014/53/EU SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:																				
Austria	<i>see German</i>																				
Belgium	<i>see Dutch/ / French / German</i>																				
Bulgaria	<p>С настоящото Continental декларира, че този тип радиосъоръжение NAC EUR 19W4 е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес:</p> <p>http://continental-homologation.com/psa</p> <p>Честотна лента:</p> <table border="0"> <tr> <td>AM band:</td> <td>LF Band</td> <td>153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0"> <tr> <td>Честотна лента:</td> <td>[2400 – 2483.5] MHz</td> </tr> <tr> <td>Максимална мощност на предаване:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0"> <tr> <td>Честотна лента:</td> <td>[2400 – 2483.5] MHz</td> </tr> <tr> <td>Максимална мощност на предаване:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Честотна лента:	[2400 – 2483.5] MHz	Максимална мощност на предаване:	< +10 dBm	Честотна лента:	[2400 – 2483.5] MHz	Максимална мощност на предаване:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Честотна лента:	[2400 – 2483.5] MHz																				
Максимална мощност на предаване:	< +10 dBm																				
Честотна лента:	[2400 – 2483.5] MHz																				
Максимална мощност на предаване:	< +20 dBm																				
Croatian	<p>Continental ovime izjavljuje da je radijska oprema tipa NAC EUR 19W4 u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi:</p> <p>http://continental-homologation.com/psa</p> <p>Frekvencijski pojas:</p> <table border="0"> <tr> <td>AM band:</td> <td>LF Band</td> <td>153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0"> <tr> <td>Frekvencijski pojas:</td> <td>[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimalna snaga odašiljanja:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0"> <tr> <td>Frekvencijski pojas:</td> <td>[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimalna snaga odašiljanja:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvencijski pojas:	[2400 – 2483.5] MHz	Maksimalna snaga odašiljanja:	< +10 dBm	Frekvencijski pojas:	[2400 – 2483.5] MHz	Maksimalna snaga odašiljanja:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frekvencijski pojas:	[2400 – 2483.5] MHz																				
Maksimalna snaga odašiljanja:	< +10 dBm																				
Frekvencijski pojas:	[2400 – 2483.5] MHz																				
Maksimalna snaga odašiljanja:	< +20 dBm																				
Cyprus	<i>see Greek</i>																				

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																				
Czech Republic	<p>Tímto Continental prohlašuje, že typ rádiového zařízení NAC EUR 19W4 je v souladu se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Kmitočtové pásmo:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Kmitočtové pásmo:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximální výšilací výkon:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Kmitočtové pásmo:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximální výšilací výkon:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Kmitočtové pásmo:	[2400 – 2483.5] MHz	Maximální výšilací výkon:	< +10 dBm	Kmitočtové pásmo:	[2400 – 2483.5] MHz	Maximální výšilací výkon:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Kmitočtové pásmo:	[2400 – 2483.5] MHz																				
Maximální výšilací výkon:	< +10 dBm																				
Kmitočtové pásmo:	[2400 – 2483.5] MHz																				
Maximální výšilací výkon:	< +20 dBm																				
Denmark	<p>Hermed erklærer Continental, at radioudstyrstypen NAC EUR 19W4 er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvensbånd:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvensbånd:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimal sendeeffekt:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvensbånd:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimal sendeeffekt:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvensbånd:	[2400 – 2483.5] MHz	Maksimal sendeeffekt:	< +10 dBm	Frekvensbånd:	[2400 – 2483.5] MHz	Maksimal sendeeffekt:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frekvensbånd:	[2400 – 2483.5] MHz																				
Maksimal sendeeffekt:	< +10 dBm																				
Frekvensbånd:	[2400 – 2483.5] MHz																				
Maksimal sendeeffekt:	< +20 dBm																				
Estonia	<p>Käesolevaga deklareerib Continental, et käesolev raadioseadme tüüp NAC EUR 19W4 vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Sagedusriba:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Sagedusriba:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimaalne ülekandevõimsus:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Sagedusriba:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimaalne ülekandevõimsus:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Sagedusriba:	[2400 – 2483.5] MHz	Maksimaalne ülekandevõimsus:	< +10 dBm	Sagedusriba:	[2400 – 2483.5] MHz	Maksimaalne ülekandevõimsus:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Sagedusriba:	[2400 – 2483.5] MHz																				
Maksimaalne ülekandevõimsus:	< +10 dBm																				
Sagedusriba:	[2400 – 2483.5] MHz																				
Maksimaalne ülekandevõimsus:	< +20 dBm																				

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																								
Finland	<p>Continental vakuuttaa, että radiolaitetyyppi NAC EUR 19W4 on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Taajuusalue:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Taajuusalue:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimaalinen lähetysteho:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Taajuusalue:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimaalinen lähetysteho:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Taajuusalue:		[2400 – 2483.5] MHz	Maksimaalinen lähetysteho:		< +10 dBm	Taajuusalue:		[2400 – 2483.5] MHz	Maksimaalinen lähetysteho:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Taajuusalue:		[2400 – 2483.5] MHz																							
Maksimaalinen lähetysteho:		< +10 dBm																							
Taajuusalue:		[2400 – 2483.5] MHz																							
Maksimaalinen lähetysteho:		< +20 dBm																							
France	<p>Le soussigné, Continental, déclare que l'équipement radioélectrique du type NAC EUR 19W4 est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Bande de fréquences:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Bande de fréquences:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Puissance d'émission maximale:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Bande de fréquences:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Puissance d'émission maximale:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Bande de fréquences:		[2400 – 2483.5] MHz	Puissance d'émission maximale:		< +10 dBm	Bande de fréquences:		[2400 – 2483.5] MHz	Puissance d'émission maximale:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Bande de fréquences:		[2400 – 2483.5] MHz																							
Puissance d'émission maximale:		< +10 dBm																							
Bande de fréquences:		[2400 – 2483.5] MHz																							
Puissance d'émission maximale:		< +20 dBm																							
Germany	<p>Hiermit erklärt Continental, dass der Funkanlagentyp NAC EUR 19W4 der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frequenzband:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frequenzband:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximale Sendeleistung:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frequenzband:</td> <td style="width: 40%;"></td> <td style="width: 45%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximale Sendeleistung:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frequenzband:		[2400 – 2483.5] MHz	Maximale Sendeleistung:		< +10 dBm	Frequenzband:		[2400 – 2483.5] MHz	Maximale Sendeleistung:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Frequenzband:		[2400 – 2483.5] MHz																							
Maximale Sendeleistung:		< +10 dBm																							
Frequenzband:		[2400 – 2483.5] MHz																							
Maximale Sendeleistung:		< +20 dBm																							

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																				
Greece	<p>Με την παρούσα ο/η Continental, δηλώνει ότι ο ραδιοεξοπλισμός NAC EUR 19W4 πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Ζώνη συχνοτήτων:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Ζώνη συχνοτήτων:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Μέγιστη ισχύς εκπομπής:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Ζώνη συχνοτήτων:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Μέγιστη ισχύς εκπομπής:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Ζώνη συχνοτήτων:	[2400 – 2483.5] MHz	Μέγιστη ισχύς εκπομπής:	< +10 dBm	Ζώνη συχνοτήτων:	[2400 – 2483.5] MHz	Μέγιστη ισχύς εκπομπής:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Ζώνη συχνοτήτων:	[2400 – 2483.5] MHz																				
Μέγιστη ισχύς εκπομπής:	< +10 dBm																				
Ζώνη συχνοτήτων:	[2400 – 2483.5] MHz																				
Μέγιστη ισχύς εκπομπής:	< +20 dBm																				
Hungary	<p>Continental igazolja, hogy a NAC EUR 19W4 típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvencia-szalag:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvencia-szalag:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximális jeladási teljesítmény:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvencia-szalag:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximális jeladási teljesítmény:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvencia-szalag:	[2400 – 2483.5] MHz	Maximális jeladási teljesítmény:	< +10 dBm	Frekvencia-szalag:	[2400 – 2483.5] MHz	Maximális jeladási teljesítmény:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frekvencia-szalag:	[2400 – 2483.5] MHz																				
Maximális jeladási teljesítmény:	< +10 dBm																				
Frekvencia-szalag:	[2400 – 2483.5] MHz																				
Maximális jeladási teljesítmény:	< +20 dBm																				
Ireland	<p>Hereby, Continental declares that the radio equipment type NAC EUR 19W4 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frequency bands:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequency band:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximum transmitter power:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequency band:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximum transmitter power:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frequency band:	[2400 – 2483.5] MHz	Maximum transmitter power:	< +10 dBm	Frequency band:	[2400 – 2483.5] MHz	Maximum transmitter power:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frequency band:	[2400 – 2483.5] MHz																				
Maximum transmitter power:	< +10 dBm																				
Frequency band:	[2400 – 2483.5] MHz																				
Maximum transmitter power:	< +20 dBm																				

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																				
Italy	<p>Il fabbricante, Continental, dichiara che il tipo di apparecchiatura radio NAC EUR 19W4 è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Banda di frequenza:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Banda di frequenza:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Potenza di trasmissione massima:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Banda di frequenza:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Potenza di trasmissione massima:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Banda di frequenza:	[2400 – 2483.5] MHz	Potenza di trasmissione massima:	< +10 dBm	Banda di frequenza:	[2400 – 2483.5] MHz	Potenza di trasmissione massima:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Banda di frequenza:	[2400 – 2483.5] MHz																				
Potenza di trasmissione massima:	< +10 dBm																				
Banda di frequenza:	[2400 – 2483.5] MHz																				
Potenza di trasmissione massima:	< +20 dBm																				
Latvia	<p>Ar šo Continental deklarē, ka radioiekārta NAC EUR 19W4 atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvenču josla:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvenču josla:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimālā raidīšanas jauda:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frekvenču josla:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimālā raidīšanas jauda:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvenču josla:	[2400 – 2483.5] MHz	Maksimālā raidīšanas jauda:	< +10 dBm	Frekvenču josla:	[2400 – 2483.5] MHz	Maksimālā raidīšanas jauda:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frekvenču josla:	[2400 – 2483.5] MHz																				
Maksimālā raidīšanas jauda:	< +10 dBm																				
Frekvenču josla:	[2400 – 2483.5] MHz																				
Maksimālā raidīšanas jauda:	< +20 dBm																				
Lithuania	<p>Aš, Continental, patvirtinu, kad radijo įrenginių tipas NAC EUR 19W4 atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Dažnių juosta:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Dažnių juosta:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimali siųstuvo galia:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Dažnių juosta:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksimali siųstuvo galia:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Dažnių juosta:	[2400 – 2483.5] MHz	Maksimali siųstuvo galia:	< +10 dBm	Dažnių juosta:	[2400 – 2483.5] MHz	Maksimali siųstuvo galia:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Dažnių juosta:	[2400 – 2483.5] MHz																				
Maksimali siųstuvo galia:	< +10 dBm																				
Dažnių juosta:	[2400 – 2483.5] MHz																				
Maksimali siųstuvo galia:	< +20 dBm																				
Luxembourg	<p><i>see German</i></p>																				

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																								
Malta	<p>B'dan, Continental, niddikjara li dan it-tip ta' tagħmir tar-radju NAC EUR 19W4 huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Medda ta' frekwenza:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Medda ta' frekwenza:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Energija Massima tat-Trasmissjoni:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Medda ta' frekwenza:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Energija Massima tat-Trasmissjoni:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Medda ta' frekwenza:		[2400 – 2483.5] MHz	Energija Massima tat-Trasmissjoni:		< +10 dBm	Medda ta' frekwenza:		[2400 – 2483.5] MHz	Energija Massima tat-Trasmissjoni:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Medda ta' frekwenza:		[2400 – 2483.5] MHz																							
Energija Massima tat-Trasmissjoni:		< +10 dBm																							
Medda ta' frekwenza:		[2400 – 2483.5] MHz																							
Energija Massima tat-Trasmissjoni:		< +20 dBm																							
Netherlands	<p>Hierbij verklaar ik, Continental, dat het type radioapparatuur NAC EUR 19W4 conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frequentieband:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequentieband:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximaal zendvermogen:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequentieband:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximaal zendvermogen:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frequentieband:		[2400 – 2483.5] MHz	Maximaal zendvermogen:		< +10 dBm	Frequentieband:		[2400 – 2483.5] MHz	Maximaal zendvermogen:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Frequentieband:		[2400 – 2483.5] MHz																							
Maximaal zendvermogen:		< +10 dBm																							
Frequentieband:		[2400 – 2483.5] MHz																							
Maximaal zendvermogen:		< +20 dBm																							
Poland	<p>Continental niniejszym oświadcza, że typ urządzenia radiowego NAC EUR 19W4 jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Pasmo częstotliwości:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Pasmo częstotliwości:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksymalna moc nadawania:</td> <td></td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Pasmo częstotliwości:</td> <td style="width: 30%;"></td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maksymalna moc nadawania:</td> <td></td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Pasmo częstotliwości:		[2400 – 2483.5] MHz	Maksymalna moc nadawania:		< +10 dBm	Pasmo częstotliwości:		[2400 – 2483.5] MHz	Maksymalna moc nadawania:		< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Pasmo częstotliwości:		[2400 – 2483.5] MHz																							
Maksymalna moc nadawania:		< +10 dBm																							
Pasmo częstotliwości:		[2400 – 2483.5] MHz																							
Maksymalna moc nadawania:		< +20 dBm																							

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																								
Portugal	<p>O(a) abaixo assinado(a) Continental declara que o presente tipo de equipamento de rádio NAC EUR 19W4 está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Faixa de frequência:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Faixa de frequência:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Potência máxima de transmissão:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Faixa de frequência:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Potência máxima de transmissão:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Faixa de frequência:	[2400 – 2483.5] MHz		Potência máxima de transmissão:	< +10 dBm		Faixa de frequência:	[2400 – 2483.5] MHz		Potência máxima de transmissão:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Faixa de frequência:	[2400 – 2483.5] MHz																								
Potência máxima de transmissão:	< +10 dBm																								
Faixa de frequência:	[2400 – 2483.5] MHz																								
Potência máxima de transmissão:	< +20 dBm																								
Romania	<p>Prin prezenta, Continental declară că tipul de echipamente radio NAC EUR 19W4 este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Bandă de frecvențe:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Bandă de frecvențe:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Putere maximă de emisie:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Bandă de frecvențe:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Putere maximă de emisie:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Bandă de frecvențe:	[2400 – 2483.5] MHz		Putere maximă de emisie:	< +10 dBm		Bandă de frecvențe:	[2400 – 2483.5] MHz		Putere maximă de emisie:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Bandă de frecvențe:	[2400 – 2483.5] MHz																								
Putere maximă de emisie:	< +10 dBm																								
Bandă de frecvențe:	[2400 – 2483.5] MHz																								
Putere maximă de emisie:	< +20 dBm																								
Slovak Republic	<p>Continental týmto vyhlasuje, že rádiové zariadenie typu NAC EUR 19W4 je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvenčné pásmo:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Frekvenčné pásmo:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Maximálny vysielač výkon:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;">Frekvenčné pásmo:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 40%;"></td> </tr> <tr> <td>Maximálny vysielač výkon:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvenčné pásmo:	[2400 – 2483.5] MHz		Maximálny vysielač výkon:	< +10 dBm		Frekvenčné pásmo:	[2400 – 2483.5] MHz		Maximálny vysielač výkon:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Frekvenčné pásmo:	[2400 – 2483.5] MHz																								
Maximálny vysielač výkon:	< +10 dBm																								
Frekvenčné pásmo:	[2400 – 2483.5] MHz																								
Maximálny vysielač výkon:	< +20 dBm																								

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																								
Slovenia	<p>Continental potrjuje, da je tip radijske opreme NAC EUR 19W4 skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvenčni pas:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frekvenčni pas:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Maksimalna moč oddajanja:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frekvenčni pas:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Maksimalna moč oddajanja:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvenčni pas:	[2400 – 2483.5] MHz		Maksimalna moč oddajanja:	< +10 dBm		Frekvenčni pas:	[2400 – 2483.5] MHz		Maksimalna moč oddajanja:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Frekvenčni pas:	[2400 – 2483.5] MHz																								
Maksimalna moč oddajanja:	< +10 dBm																								
Frekvenčni pas:	[2400 – 2483.5] MHz																								
Maksimalna moč oddajanja:	< +20 dBm																								
Spain	<p>Por la presente, Continental declara que el tipo de equipo radioeléctrico NAC EUR 19W4 es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Banda de frecuencias:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Banda de frecuencias:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Máxima potencia de transmisión:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Banda de frecuencias:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Máxima potencia de transmisión:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Banda de frecuencias:	[2400 – 2483.5] MHz		Máxima potencia de transmisión:	< +10 dBm		Banda de frecuencias:	[2400 – 2483.5] MHz		Máxima potencia de transmisión:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Banda de frecuencias:	[2400 – 2483.5] MHz																								
Máxima potencia de transmisión:	< +10 dBm																								
Banda de frecuencias:	[2400 – 2483.5] MHz																								
Máxima potencia de transmisión:	< +20 dBm																								
Sweden	<p>Härmed försäkrar Continental att denna typ av radioutrustning NAC EUR 19W4 överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frekvensband:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">AM band:</td> <td style="width: 40%;">LF Band</td> <td style="width: 45%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frekvensband:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Maximal sändningseffekt:</td> <td>< +10 dBm</td> <td></td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 15%;">Frekvensband:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> <td style="width: 45%;"></td> </tr> <tr> <td>Maximal sändningseffekt:</td> <td>< +20 dBm</td> <td></td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frekvensband:	[2400 – 2483.5] MHz		Maximal sändningseffekt:	< +10 dBm		Frekvensband:	[2400 – 2483.5] MHz		Maximal sändningseffekt:	< +20 dBm	
AM band:	LF Band	153 kHz to 279 kHz																							
	MF Band	531 kHz to 1602 kHz																							
FM band:	VHF Band II	87.5 MHz to 108 MHz																							
DAB band:	VHF Band III	174 MHz to 240 MHz																							
Frekvensband:	[2400 – 2483.5] MHz																								
Maximal sändningseffekt:	< +10 dBm																								
Frekvensband:	[2400 – 2483.5] MHz																								
Maximal sändningseffekt:	< +20 dBm																								

Country	<p style="text-align: center;">Directive 2014/53/EU</p> <p style="text-align: center;">SIMPLIFIED EU DECLARATION OF CONFORMITY The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:</p>																				
United Kingdom	<p>Hereby, Continental declares that the radio equipment type NAC EUR 19W4 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:</p> <p style="text-align: center;">http://continental-homologation.com/psa</p> <p>Frequency bands:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">AM band:</td> <td style="width: 30%;">LF Band</td> <td style="width: 40%;">153 kHz to 279 kHz</td> </tr> <tr> <td></td> <td>MF Band</td> <td>531 kHz to 1602 kHz</td> </tr> <tr> <td>FM band:</td> <td>VHF Band II</td> <td>87.5 MHz to 108 MHz</td> </tr> <tr> <td>DAB band:</td> <td>VHF Band III</td> <td>174 MHz to 240 MHz</td> </tr> </table> <p>Bluetooth v3.0+HS:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequency band:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximum transmitter power:</td> <td>< +10 dBm</td> </tr> </table> <p>WiFi 802.11 bgn HT20</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 30%;">Frequency band:</td> <td style="width: 40%;">[2400 – 2483.5] MHz</td> </tr> <tr> <td>Maximum transmitter power:</td> <td>< +20 dBm</td> </tr> </table>	AM band:	LF Band	153 kHz to 279 kHz		MF Band	531 kHz to 1602 kHz	FM band:	VHF Band II	87.5 MHz to 108 MHz	DAB band:	VHF Band III	174 MHz to 240 MHz	Frequency band:	[2400 – 2483.5] MHz	Maximum transmitter power:	< +10 dBm	Frequency band:	[2400 – 2483.5] MHz	Maximum transmitter power:	< +20 dBm
AM band:	LF Band	153 kHz to 279 kHz																			
	MF Band	531 kHz to 1602 kHz																			
FM band:	VHF Band II	87.5 MHz to 108 MHz																			
DAB band:	VHF Band III	174 MHz to 240 MHz																			
Frequency band:	[2400 – 2483.5] MHz																				
Maximum transmitter power:	< +10 dBm																				
Frequency band:	[2400 – 2483.5] MHz																				
Maximum transmitter power:	< +20 dBm																				

The conformity assessment procedure referred to in Article 17 and detailed in Annex III of Directive 2014/53/EU has been followed with the involvement of the following Notified Body:

DEKRA Testing and Certification, S.A.U.

Parque Tecnológico de Andalucía
Severo Ochoa, 2 & 6
29590– Málaga
SPAIN

Notified Body No: 1909

Thus, the following marking is included in the product (**Label on top**):



There is no restriction for the commercialization of this device in all the countries of the European Union.

➤ **Specific instructions of installation and proper use of the equipment**

This Multimedia System Equipment must be fixed in a car dashboard.

This Equipment is intended to be installed by service persons or qualified operators in a restricted access location that can only be accessed by using a tool.

Demounting or disassembly of the NAC EUR 19W4 from the car is only allowed by qualified and trained personnel.

The external devices and accessories connected to the equipment shall comply with its product standard to prevent fire risks.

The equipment is suitable for direct current only:



Voltage rated:	12V (Volts)
Maximum Current:	15 A (Amperes)
Direct Current symbol:	

Fuse characteristics:

MINI AUTO FUSE W Yellow 20:

Voltage rated: 32V (Volts)

Current rated: 20A (Amperes)

600	0.30 seconds	0.100 seconds
350	0.080 seconds	0.250 seconds
200	0.15 seconds	5 seconds
135	0.75 seconds	600 seconds
110	100 hours	-
% of rating	Minimum	Maximum
	Blow Time	

Temperature ranges of the product:

- Full specification range: -40°C to +65°C
- Functional temperature range: -40°C to +75°C
- Storage temperature range: -40°C to +90°C

➤ [List of countries within the EU or geographical zones where it can be used.](#)

There is no restriction for the commercialization of this device in all the countries of the European Union:

Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, United Kingdom,

➤ [Information about the license that apply to it.](#)

There is no specific license.

➤ [Restrictions or possible additional restrictions when trying to achieve the authorisation of use of the equipment.](#)

There is no specific restriction to achieve the authorisation of use of the equipment.

USA – Federal Communications Commission (FCC)

FCC ID: ZFW-HW19W4

1. Modification Statement

“Continental Automotive Rambouillet France S.A.S.” has not approved any changes or modifications to this device by the user. Any changes or modifications could void the user’s authority to operate the equipment.

2. Interference statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

3. Wireless notice:

This device complies with FCCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all the persons must not be co-located or operating in conjunction with any other antenna or transmitter.

4. FCC Class B digital device or peripheral notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.