

Press and hold the Multifunction button for about 2 seconds.

End a call

Call

Press the Multifunction button once. End current call and answer new call

When a new call rings during a call, press the Multifunction

button once to answer new call and end current call

On hold current call and answer new call

When a new call rings during a call, Double the Multifunction

Reject the new call hold the current call

During the call there is a new call, press the multifunction button to reject a new call, keeping the active call.

Press the multifunction button for about 2 seconds during a call, the call will be switched to the mobile phone, redo this operation again, the call will be switched to the earphone.

Redial the last call

Double-press the Multifunction button in standby mode. The mobile phone will redial the last call number.

Voice dial (Need phone support) In standby mode Press the Multifunction button about 2 seconds, wait for phone prompt and then tell the phone to dial the name of a stored contact.

## Music –

(Need media player support).

Music play / pause

Press Multifunction button once to play / pause music. (Some phones may require you to start a media player first) .

Track back/forward

Press the Volume "-" for 2 seconds once to skip track backward, press Volume "+" for 2 seconds once to skip track forward.

Switch Music and Call

Status indicator


When a call rings during a music playing, the music automatically pauses to allow you to answer or ignore the call. Once the call is ignored or ends, the music is resumed.

## Basic operation -

Charging

Your new earphone has enough power to pair and make a few calls. It takes 2 hours to fully charge the earphone; while charging, the battery indicator light is red, the indicator light flashes blue once charging is complete.

Note: The lifetime of the battery will be significantly reduced if your earphone is left uncharged for a long period. We recommend that you recharge your earphone at least once a month.



## Safety and care

Using earphone at high to moderate volumes for extended periods of time will result in permanent hearing damage .lt is advised you keep volume levels moderate to low at all times for your safety.

Do not use while driving a car, cycling, operating machinery, or performing other activities that require hearing surrounding sounds.

Do not use earphone in thunderstorm weather, the earphone may not work properly in the condition, and increase the risk of being hit by lightning.

Earphone may not work properly under high temperature or high humidity conditions.

Do not use any corrosive cleaner/oil to clean the earphone.


If the earphone comes in contact with liquids, quickly wipe away .If submersed in water, do not turn the earphone on until completely dried. Tips:liquid submersion voids the warranty.

Keep the earphone and packaging out of reach of children

# cannice

Bluetooth Headset Model:M1E FCC ID:2ADTV-M1E

INSTRUCTION

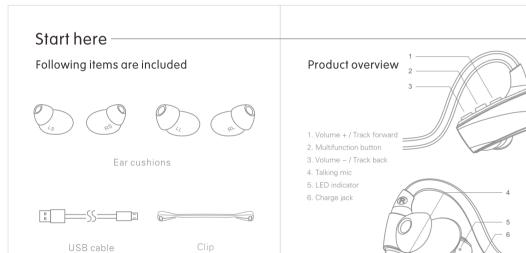

| Instruction   | LED status                       | Voice prompts |
|---------------|----------------------------------|---------------|
| Power on      | Stay blue about one second       | Power on      |
| Power off     | Stay red about two second        | Power off     |
| Standby       | Blink blue once every 5 seconds  | /             |
| Pairing       | Flashes red and blue alternately | Pairing       |
| Incoming call | Flashes blue quickly             | Tinkle        |
| Battery low   | Blink red                        | Battery low   |
|               |                                  |               |

Charging Stays on red while charging Stays on blue after fully charged Volume up/down Press the volume \*+\* to turn volume up Press the volume \*-\* to turn volume down

Press and hold Multifunction button for about 3 seconds. The earphone says "power on" and the LED flashes blue once.

Power off Press and hold Multifunction button for about 5 seconds. The earphone says "power off" and the LED flashes red once.

## Pairing

### Pair one phone

Note: When the earphone and phone have been paired once, they will automatically connect when the earphone is on and Bluetooth is activated on the phone.

1.Make sure the earphone is turned off and within 1 meter of your phone, press and hold the Multifunction button until the LED indicator flashes red and blue alternately (About 5 seconds), then 2.Activate Bluetooth on your phone (See below for more details).

a.On your phone, open the Settings menu. b.Select Bluetooth. If Bluetooth is off, turn it on. The iPhone will search for new devices automatic

Android phone

a.On your phone, open the Settings menu. b.Select Bluetooth (For old Android phone, Bluetooth is found in the Wireless & Networks). If Bluetooth is off, turn it on. Select Search for Devices if your phone does not automatically search for new devices

### Windows Phone 8

a.On your phone, open the Settings menu. b.Select Bluetooth. If Bluetooth is off, turn it on. The Phone will search for new devices automat

Turn off voice prompts: enter pairing mode: Press the volume\*-button for 3 seconds, the red LED lights flash 3 times.

Make sure the earphone is turned off, press and hold the Multifunction button until the LED indicator flashes red and blue alternately (About 5 seconds), then release Multifunction button. Press volume "+" and volume "-" button at the same time until LED flashes blue, then LED

flashes red and blue alternately, the paired list was cleared, the earphone will enter pairing mode after power on next time.

If the earphone cannot be turned on even when fully charged or does not respond during use, follow the instructions below to reset it.

1.While pressing and holding the multifunction button, connect the

earphone to your PC's USB port or a USB power adapter with the

charging cable.

2. Keep pressing and holding the Multifunction button until the


earphone turns on. The earphone is now reset.

Clear paired list

Hard reset









## Pair another phone

Multipoint technology enables you to pair another phone and take a

To pair with another mobile phone, follow the steps for "Pair one phone". After pairing successfully, restart the earphone to connect to 2 paired mobile phone automatically.



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- —Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.