



QUICK GUIDE




Cardo S-800™
Bluetooth® Headset

Congratulations and thank you for choosing the **Cardo S-800 Bluetooth® headset**. This Quick Guide will help you learn about the **Cardo S-800's** many features, allowing you to make the best use of your headset.

Cardo S-800 Overview

- 1 Microphone
- 2 Multi-Function Wheel (MFW)
- 3 LED Status Indicator
- 4 Power and Hot Dial Button
- 5 Charging Jack
- 6 Control Button (CTRL)
- 7 Speaker
- 8 Earloop

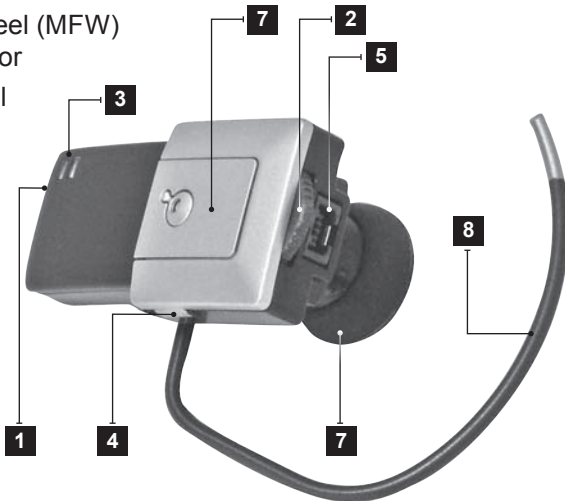

Getting Started

To use your **Cardo S-800** (“the headset”), please follow these initial steps:

- Charge your headset
- Pair your headset with a *Bluetooth*®-enabled mobile phone.

1. Charging your Headset

The headset comes with a built-in rechargeable battery. Prior to using the headset, make sure to charge the headset for at least 4 hours. Normally it takes approximately 2 hours to fully charge the headset.

1. Connect the charger to an AC wall outlet and the charger plug to the headset's Charging Jack. The headset's LED status indicator will be **red** during charging.
2. When the battery is fully charged, the **red** LED will turn off.
3. Disconnect the charger from AC wall outlet and the headset.

NOTE: Charging indication may be delayed for a few seconds if the headset has not been used for a long time or the battery is drained.

The fully charged battery offers up to 8 hours talk time and up to one week standby time.

2. Pairing your Headset

Before you can use your headset you must pair the headset to your *Bluetooth*-enabled mobile phone. If you do not have a *Bluetooth*-enabled mobile phone, please visit <http://cardosystems.com/adapter2.php> for information on the **Cardo BTA II Bluetooth Adapter**.

1. Turn on your phone and turn ON its *Bluetooth* function.
2. Make sure the headset is turned OFF, then press and hold the Power Button for approximately 8 seconds until the LED status indicator begins alternating **blue and red**, indicating that the headset is in Pairing Mode.
3. Set the phone to **search** for *Bluetooth* devices by following the instructions in the phone's user guide. This is usually found in the phone's **Bluetooth** menu and may referred to as "**discover**" or "**add**" a device.
4. After a few seconds, the phone will list the "**Cardo S-800**" as a discovered device. Select it from the list and press "**OK**" or "**Yes**".

5. When prompted, enter the **passkey “0000” (4 zeros)** and press **“OK”** to complete the pairing.
6. When the pairing is complete, your phone will confirm that the pairing was successful and the headset’s LED status indicator will begin flashing slowly in **blue**.

You should now be able to make and receive calls using your headset. To initially connect the headset to your phone, you may need to tap the CTRL Button once on the headset.

IMPORTANT: If the pairing is not completed within 2 minutes while the Pairing Mode is activated, the headset will return to Standby mode, flashing **blue** once every three seconds and you must start the Pairing process again from Step 2 above.

NOTE: Your headset can pair with up to 8 phones, and will automatically connect to the last phone connected to the headset. To connect to a different paired phone, go to the **Bluetooth** menu of the active phone and disconnect the headset. Then go to the **Bluetooth** menu of the phone you wish to connect and connect the headset by selecting it from the list of Paired Devices.

3. Wearing your Headset


The S-800 headset can be worn on either your left or right ear.

There are two ways in which you can wear the S-800 headset.

- 1. Without the earloop:** Gently insert the headset without an earloop into your ear, and it will hold itself in place securely.
- 2. With the earloop:** Insert the straight portion of the pin of the earloop to a suitable depth so that the speaker fits snugly in your ear. The earloop is flexible, and may be adjusted for maximum comfort.

The lanyard for the S-800 provides an easy and convenient way of carrying your headset while it is not in use.

- 1. To attach the headset to the lanyard,** insert the speaker into the upper loop of the lanyard. Then pull the headset downwards into the lower loop, until it is held securely in place.
- 2. To release the headset from the lanyard,** simply pull the headset upward.



4. Using your Headset – Basic Functions

Function	Required Action
Turn ON/OFF the headset	Press and hold the Power Button for at least 4 seconds
Answer a call	Tap the CTRL Button*
End a call	Tap the CTRL Button
Make a call from your phone	Dial normally from your phone and the call will be transferred to the headset (subject to phone settings).
Make a call using Voice Dial	During Standby, tap the CTRL Button, wait for the tone and say the name of the person you wish to call. (<i>Your mobile phone must support the Voice Dial feature.</i>)
Increase the volume	Move the MFW up by steps. When you hear a beep, it is at maximum.
Decrease the volume	Move the MFW down by steps. When you hear a beep, it is at minimum.
Mute the microphone	During a call, tap the MFW inwards to turn on/off mute.

* **NOTE:** Wait until you hear the incoming call on the headset (not only on the phone)

5. Using your Headset – Advanced Functions

1. Redial the last dialed number*

During Standby, press the MFW inwards to redial the last dialed number.

2. Reject an incoming call*

During an incoming call, press and hold the CTRL Button for 3 seconds.

3. Call waiting / Toggling between calls*

During an incoming call and one call on hold or waiting, tap the MFW inwards to answer the incoming call or toggle between calls.

4. Conference call*

During an active call and one call on hold or waiting, tap the MFW inwards for 3 seconds to combine both calls into a Conference call.

5. Transfer calls to/from headset*

During a call, press and hold the CTRL Button for 3 seconds to transfer the call between the headset and the mobile phone.

NOTE: On some phones, transferring a call to the headset requires just a tap of the CTRL Button.

* These features are only supported by mobile phones that include the Bluetooth Handsfree profile.

6. Hot Dial Function

The S-800 allows you easily call any of three different phone numbers at the press of a button.

In order to use the Hot Dial function, you must first configure your mobile phone's Speed Dial settings. Please refer to your mobile phone's user guide or our website (www.cardosystems.com) for instructions on saving Speed Dial numbers.

To Hot Dial:

- Speed dial #2: Tap the Hot Dial Button once.
- Speed dial #3: Tap the Hot Dial Button twice rapidly.
- Speed dial #4: Tap the Hot Dial Button three times rapidly.

7. SWAP (Swapping connection between two active mobile phones)

The S-800 allows you to swap, i.e. to alternately use one among the last two phones to which it has been connected.

To SWAP between phones:

- While both phones are turned on and the headset is in Standby mode, double-press the MFW inwards.

- The headset will switch to the second phone.
- Each time you double-press the MFW, the alternate phone connects to the headset.

NOTE: This feature may only be used when the headset and both phones are in Standby mode.

8. Battery Status Indicator

To check the status of the headset's battery, press and hold the CTRL Button for at least four seconds while the headset is in Standby mode.

The LED Status Indicator will flash for two seconds as follows:

- | | |
|-----------------------|---------------|
| • Blue | Full charged |
| • Red and Blue | Medium charge |
| • Red | Weak charge |

9. Locating the Headset (Buzzer Function)

The S-800 allows you to locate the headset by activating an audible buzzer.

To activate the Buzzer:

- Dial a number with the mobile phone and press Send/Talk.
- While the call is in progress (or even while still ringing), turn

the mobile phone's volume buttons up, then down, repeating the up/down sequence five or more times.

- The headset will start buzzing.

10. Call back the last incoming caller (Callback Function)

The S-800 allows you to place a call to the phone number of the last incoming call. The headset will store the phone number of the last answered, missed or rejected call.

To use the Callback function:

- While in Standby mode, rapidly move the MFW down twice and release (double down-click).

NOTE: The Callback number memory will be cleared if:

1. The headset is disconnected from the current phone and connected to a different phone.
2. The headset is turned off or has been charged.
3. The last incoming caller had a blocked or restricted number.

NOTE: This feature is not supported by some mobile phones.

11. Auto-Answer Function

The S-800 allows you to automatically answer all incoming calls

using the Auto-Answer function. Please note that once this feature is activated you are subject to unintended eavesdropping. Use of this feature is at your own risk!

Learn more at www.cardosystems.com/faq/autoanswer

When Auto-Answer mode is enabled on an incoming call, the Headset will ring for a few seconds and then automatically answer the call without the need to press the CTRL Button. Auto-Answer is disabled by default.

To enable/disable Auto-Answer:

- While in Standby mode, press and hold the MFW upwards for seven seconds.
- When the Auto-Answer function is enabled, the **blue** Status Indicator will begin flashing rapidly.

NOTE:

- Auto-Answer will not answer an incoming call if you are currently on a call (Call Waiting).
- Turning off the headset will disable the Auto-Answer function.
- Auto-answer can be enabled again after turning on the headset by following the instructions above.

12. Button Lock

The S-800 allows you to lock its buttons, preventing the buttons from being accidentally pressed.

To lock/unlock the buttons on the Headset:

- While in Standby mode, simultaneously press the MFW and the CTRL Button for at least four seconds.

13. Disabling / enabling the LED Status Indicator

The S-800 allows you to turn off the flashing LED Status

Indicator. • While in Standby mode, move the MFW down and hold for at least four seconds.

- The Status Indicator will stop/begin flashing, depending on whether you are disabling/enabling the Status Indicator.

14. Changing the Wheel orientation

The default configuration of the headset is designed for use on your right ear. This means that clicking up on the MFW towards the small '+' sign on the headset increases the volume one step at a time, while clicking down towards the '-' sign on the headset decreases the volume one step at a time.

If you wear the Headset on your left ear, the S-800 allows you to change the MFW orientation from right to left ear, so that pressing the MFW up still increases the volume, and pressing down decreases the volume. Only volume orientation is affected.

To set the Headset for left ear orientation:

- Make sure the headset is turned off.
- Now turn it on by pressing the CTRL Button and the Power Button simultaneously for 4 seconds.
- Once you see 3 **blue** flashes followed by a single simultaneous flash of the red and blue lights, the headset is powered on and you may release the buttons.

NOTE: The headset will revert to its default right ear configuration once it is turned off. In order to regularly use the headset in left ear configuration, always turn on the headset using the CTRL + Power Button procedure above.

ADVANCED FUNCTIONS REFERENCE

Function	Required Action
Redial the last dialed number	During Standby, tap the MFW inwards.
Reject an incoming call	During an incoming call, press and hold the CTRL Button for 3 seconds.
Call waiting / Toggling between calls	During an incoming call and one call on hold or waiting, tap the MFW inwards.
Conference Call	During an active call and one call on hold or waiting, tap the MFW inwards.
Transfer calls to / from headset	During a call, press and hold the CTRL Button for 3 seconds.
Hot Dial	Tap the Hot Dial Button 1, 2, or 3 times rapidly to call Speed Dial #2, #3, or #4 respectively.
SWAP between active phones	During Standby, double-press the MFW inwards.
Battery Status Indicator	Press and hold the CTRL Button for 4 seconds; Blue=Full, Red/Blue=Medium, Red=Weak.
Locating the headset (Buzzer)	Dial a call, then press VolUp/VolDn on the phone 5 times.
Call back the last incoming caller (Callback)	During Standby mode, rapidly move the MFW down twice and release (double down-click).

Function	Required Action
Auto-Answer On/Off	During Standby mode, press and hold the MFW upwards for 7 seconds.
Button Lock On/Off	During Standby mode, simultaneously press the MFW and the CTRL Button for at least 4 seconds.
Disabling / enabling the LED Status Indicator	During Standby mode, move the MFW down and hold for at least four seconds.
Changing the Wheel orientation	Turn on the headset by pressing and holding the CTRL Button and the Power Button simultaneously for 4 seconds.

6. Status Lights

Missed Call Indicator

Whenever a call is missed or rejected, the **red and blue** Status Indicator will begin flashing simultaneously, notifying you of the missed call.

To clear this Missed Call Indicator, press any button on the headset.

NOTE: This feature is not supported by some mobile phones.

The headset uses the following Status Indicators to display its status:

Status Light	Auto-Answer	Status
Single blue flashing slowly (every 3 sec)	Disabled	Standby mode
Double blue flashing slowly (every 3 sec)	Disabled	During a call
Red and blue simultaneously flashing slowly	Disabled	Missed call
Red flashing slowly (every 3 sec)	Disabled	Low battery
Single blue flashing rapidly	Enabled	Standby mode
Double blue flashing rapidly	Enabled	During a call
Red and blue simultaneously flashing rapidly	Enabled	Missed call
Red flashing rapidly	Enabled	Low battery
Alternating red/blue flashing		Pairing mode
3 blue flashes		Power ON

Status Light	Auto-Answer	Status
3 red flashes		Power OFF
None		Headset is off or Status Indicator is disabled

7. Audio Tones

With the exception of the actions described in the following table, all actions are followed by a **single tone** to confirm that the headset has accepted the action. A **double tone** means that the action has failed.

Action	Tone
Mute	On/off tone and mute reminder tone every 20 seconds
Volume up	Tone on maximum volume
Volume down	Tone on minimum volume
Locate the headset	Buzzing
Call back list is empty	Two short beeps

8. Troubleshooting

NOTE: For most problems, it is recommended as a first step that you turn the headset off for one minute and then on again. If that fails, try pairing the headset and phone again.

Problem	Action
Pairing fails	<ol style="list-style-type: none">1. Delete S-800 from your paired device list in your phone (if it is listed).2. Turn off the mobile phone and Headset.3. Take the battery out of the phone and put it back.4. Repeat the pairing process as described in Pairing your Headset section above.
Can't answer phone calls or perform voice dialing	<p>(Assuming your mobile phone supports Voice Dialing) :</p> <ol style="list-style-type: none">1. Make sure your Headset is turned ON and in Standby mode while the blue light indicator flashes slowly.2. Verify that the <i>Bluetooth</i> function on your phone is set to ON.3. Verify that the S-800 is the correctly paired Headset to your mobile phone (refer to the phone manual).4. Connect the headset to the phone as described above.5. Check "Definitions" or "Settings" on your mobile phone for Voice Dial Enablings.6. Perform the pairing process as described in Pairing your Headset section and check again.

Problem	Action
Battery does not provide at least six hours of talk time	<p>Make sure your headset is fully charged. Charging time is up to 2 hours for an empty battery. When fully charged and charger is connected to headset, the red light indicator turns off.</p> <p>NOTE: <i>You may have compromised the battery's capacity if you did not fully charge it prior to initial use.</i></p>
Red Status Light does not light steady when charger is connected.	<ol style="list-style-type: none"> 1. Make sure the wall charger is firmly plugged into the Charging Jack. 2. Disconnect the charger from the Charging Jack, wait a few seconds and plug it back in. 3. When the headset is fully charged, the red light turns off.
Bad sound quality	<ol style="list-style-type: none"> 1. Possibly caused by nearby interference. 2. If you have a GSM phone and your headset is too close to the phone, interference may occur. 3. Headset and mobile phone are more than 30 ft. (10m) apart. Range will be shortened if there are major obstacles between the Headset and mobile phone.
I press the buttons and nothing happens	<p>Your headset is probably in key lock mode. Unlock the Headset as described above.</p>

Problem	Action
I am unable to connect the headset with the mobile phone or <i>Bluetooth</i> enabled device	<ol style="list-style-type: none">1. Ensure your headset is turned on and is properly charged.2. Ensure the headset is paired with your mobile phone.3. Ensure your mobile phone's <i>Bluetooth</i> feature is activated. Please refer to your mobile phone's user guide for specific instructions.4. Ensure the headset is within a maximum of 33 feet (10 meters) of your mobile phone(s) and there are no obstructions, such as walls or other electronic devices in between.
The person with whom I am speaking with is not able to hear me clearly	Ensure the headset is connected with your mobile phone by verifying that the audio of your call is playing through the headset, and not your phone's speaker.

9. Support

For additional information visit our website at

www.cardosystems.com or contact us at:

Phone: Toll-free USA 1-800 488-0363

Europe +1 412 788 4533

Email: **support@cardosystems.com**

FAQ: **www.cardosystems.com/faq**

The **Cardo S-800™ Headset** is compliant with and adopts the *Bluetooth*® Specification 2.0. However, interoperability between the device and other *Bluetooth*®-enabled products is not guaranteed. For more information on the compatibility between the device, please visit our website at:

www.cardosystems.com/declaration

10. Accessories

Accessories for your Cardo S-800™ headset may be ordered online at www.cardosystems.com/S800/Accessories.

Copyright © 2007

The Cardo S-800™ is developed and manufactured by Cardo Systems, Inc. All rights reserved.

The *Bluetooth*® word mark and logos are owned by the Bluetooth SIG, Inc.

Other trademarks and trade names are those of their respective owners.

IMPORTANT SAFETY INSTRUCTIONS

1. Make sure the voltage specs of your Wall Charger fit your power grid (110 V or 220 V).
2. Don't touch the Wall Charger while your hands are wet.
3. Never try to open the wall charger.
4. Do not expose the Wall Charger to high temperatures or very humid conditions.
5. In the event of overheating, disconnect the Wall Charger and forward it to any CARDO authorized Service Center.
6. Please read carefully the safety instructions regarding your headset, located in the enclosed Manual.

Please maintain basic safety precautions when using your Cardo Product ("Product"). This will reduce the risks of fire, electric shock and injury to users. Among others, you should comply with the following:

1. Use a damp cloth to clean the Product. DO NOT use liquid or aerosol cleaners.
2. Use caution when using your Product near water such as bathtubs, kitchen sinks or swimming pools.
3. Do not expose your Product to extreme temperature, moisture or high voltage.
4. Your Product is rugged, but can be damaged or broken if not handled with care.
5. Do not expose the Product to liquids, nor place heavy objects on it.
6. Do not disassemble the Product or any of its components for any reason.
7. Do not open the Product's casing, as this will void the warranty and may damage the electronic circuits. If assistance is needed, contact the store from which you have purchased the Product or contact us via e-mail at: support@cardosystems.com

To reach us via phone, please call: In the USA and Canada toll-free 1-800-488-0363 or 412-788-4533. In Europe, call: +4989 450 36819

For additional Service Centers near you, please visit our website at <http://www.cardosystems.com/>

Note: Prior to contacting us, make sure you have a valid registration number available.

8. Discontinue the use of your Product if:
 - a. Your Product is damaged.
 - b. Liquid has been spilled on or into the Product.
 - c. Your Product has been dropped and the case has been damaged.
 - d. Your Product exhibits a distinct change in performance.

- e. Your Product does not operate normally and adjusting the controls does not resolve the issue.
9. Unplug your wall charger from the Product if:
- a. Liquid has been spilled into the charger, Product or mobile phone.
 - c. The Wall Charger does not operate normally after following the operating instructions.
 - d. Your Wall Charger has been dropped and the case has been damaged.
 - e. The Wall Charger exhibits a change in performance.

Automobile Travel Please be mindful that certain activities such as automobile travel require your complete attention and concentration. Check the rules and regulations regarding the use of wireless devices in the area where you drive and obey the laws at all times. Pull over to the side of the road and park before making or answering a call if driving conditions require it. Do not initiate calls, perform pairing, linking or similar operations while driving. Most electronic equipment is shielded from RF signals. However, certain electronic equipment may not be shielded against the RF signals emanating from your wireless equipment.

Pacemakers The Health Industry Manufacturers Association recommends that a minimum separation of about six inches (or 16 cm) to be maintained between a mobile phone or wireless device and a pacemaker to avoid potential interference with the pacemaker. Be sure not to interfere with the functionality of personal medical devices.

Hearing Aids Some devices may interfere with certain hearing aids. In the event of such interference, you should consult your hearing aid manufacturer to discuss alternatives.

Other Medical Devices If you use any other personal medical device, consult the manufacturer of your device and/or your physician to determine if it is adequately shielded from interference caused by external RF energy. Your physician may be able to assist you in obtaining this information.

LIMITED WARRANTY

Your Product is covered with a One-Year Limited product warranty from the date of original purchase. Please retain the retail sales receipt and your registration data for proof of purchase.

What this limited warranty covers and for how long: Cardo Systems, Inc. (the "Company" or "Cardo") warrants the Product and Wall Charger against defects in material and workmanship under normal use and service for a period of

one (1) year from date of purchase (proof of purchase and registration required). The Company at its sole discretion, will at no charge either repair, replace or refund the purchase price of the Product to the original purchaser during the warranty period, provided the Product has not been damaged or tampered with and has been returned in accordance with the terms of this warranty to an authorized Company Repair Center. Repair, at the Company's option, may include the replacement of parts, boards or batteries with functionally equivalent reconditioned or new parts.

Warranty Conditions This express limited warranty is extended by Cardo Systems, Inc. solely to the original purchaser and is not assignable or transferable to others. This is the complete warranty for your Product. The Company assumes no obligation or liability for additions or modifications to this warranty unless made in writing and signed by an officer of the Company. Batteries are warranted only if the battery capacity falls below 70% of rated capacity or if the battery develops leakage. This warranty becomes void if: a. any of the seals on the case or battery are broken or Product or battery show signs of tampering, b. The battery is used in equipment other than the equipment for which it was intended. The Company disclaims all responsibility for any equipment not furnished by Cardo Systems Inc., which is attached to or used in connection with the Product. Furthermore, the Company is not responsible for any damage to any part of the Product resulting from the use of ancillary equipment not furnished by Cardo for use with the Product.

What this warranty does not cover:

1. Defects or damage resulting from the use of this Product in other than its normal and customary manner.
2. Defects or damage from misuse, accident or neglect.
3. Defects caused by improper operation, maintenance, installation, adjustment or modification of any kind.
4. Products opened, disassembled or repaired by non-authorized parties.
5. Defects or damage due to exposure to excessive temperatures, adverse weather conditions, external impacts or spills of food or liquid.
6. All plastic surfaces and all other externally exposed parts that are scratched or damaged after purchase.

Warranty Service To receive warranty service, your Product must be registered. Fax either the attached registration card or register online at: www.cardosystems.com/registration.php. Please present the Product, along with your registration number, bill of sale (receipt) at any authorized Service Center or at the store from which you have purchased the Product. Returns to the Company pursuant to the limited warranty can only be accepted with a Return Authorization number obtained from Cardo's customer service department.

General Provisions This warranty is given in lieu of all other express or implied warranties, including without limitation, implied warranties of merchantability and fitness for a particular purpose.

1. *Cardo is not liable for any incidental or consequential damages arising from the use or misuse of any of the Company's Products.*
2. *The user should never attempt to perform service, adjustments or repairs of the Product by him/herself. Doing so will void all warranties. During the term of the warranty, all Products must be returned to the point of purchase or the authorized service center for all necessary work.*
3. *The Company is not responsible for any loss or damage incurred during shipping. All repair work on the Product by parties not explicitly authorized by the Company will void any and all warranties.*
4. *The information in this Manual is furnished strictly for informational purposes and is subject to change without notice. Cardo assumes no liability or responsibility for any errors or inaccuracies that may appear in the Manual or Quick Start Guide.*

NOTE: Look for appropriate displays to verify that you are being serviced by an Authorized Cardo Dealer or Service Center. Cardo retains the right to amend and change its Products, manuals and specifications at any time without notice.

IMPORTANT: Cardo assumes no responsibility for direct and consequential damages, harm, merchantability or loss of any kind, including those resulting from the use of non-Cardo components or products in conjunction with its Products, and specifically the use of third party Bluetooth headsets or chargers. Using non-Cardo products in connection with the BTA II is at your own risk.

WARRANTIES

FCC Notice This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this Product may not cause harmful interference, and (2) this Product must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the User's authority to operate the equipment. Use only approved batteries and chargers. This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. Your Product is designed to operate at the maximum strength allowed by the FCC. This means that your Product can communicate only over

a certain distance subject on the location of the cell phone, base unit and Headset, your vehicle, the construction and layout of your home or office. Weather conditions can also affect performance.

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

ALERTE : Risque d'explosion si la batterie est remplacée par un model qui ne convient pas. Il faut traiter les batteries usées selon les instructions.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

European CE Notice - Certification and Safety Approvals/ General Information

This Product is CE marked according to the provisions of the R & TTE Directive (99/5/EC). Hereby Cardo Systems, Inc. declares that this Product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. For further information please visit <http://www.cardosystems.com>. Please note that this Product uses radio frequency bands not harmonized within the European Union ("EU"). Within the EU this Product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, The United Kingdom and within EFTA in Iceland, Norway and Switzerland. Users are not permitted to make changes or modify the Product in any way. Changes or modifications not expressly approved by Cardo will void the user's authority to operate the equipment.

Service

In the USA and Canada, call toll-free: 1 800 488-0363 or 412 788-4533;

In Europe, call: +49 (89) 450 368 19.

Service is provided under limited warranty. Cardo Systems, Inc. will only accept Products returned in compliance with our Warranty Provisions and submitted with a Return Authorization Number issued by a Cardo authorized service department. The Company retains the right to return all shipments not in compliance with our Warranty Provisions.

Patent, Copyright, Trademark Information

U.S. and Worldwide Patent Pending: ©2003 Cardo Systems Inc.; Assembled in China. Bluetooth® is a trademark owned by Bluetooth® SIG, Inc., scala™ is a trademark owned by Cardo Systems, Inc. All rights reserved by Cardo Systems, Inc.

State Law Rights

Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts. Therefore depending on where you use the Product, certain of the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may be entitled to other rights, which vary from state to state.

Contact Information

*Cardo Systems, Inc.,
100 High Tower Blvd.,
Pittsburgh, PA 15205 (USA)
www.cardosystems.com.*

In the US and Canada call toll-free: 1 800 488-0363 or 412 788-4533, Fax: 412 788-0270;

In Europe, call: +49 (89) 450 368 19, Fax: +49 (89) 404-817

Need more help? Please visit [www. cardosystems.com](http://www.cardosystems.com)

Developed and Manufactured by:



All rights reserved

03800_004/04-7_J