

H100 Bluetooth Headset Instruction Manual

Contents

Introduction	2
Headset Features	2
Turning on/off Headset	2
Answering Calls	3
Ending Calls	3
Making Calls	4
Adjusting the Volume	4
Mute Mode/Canceling Mute Mode	4
Transferring Sound from Phone to Headset and Vice Versa	4
Lost Connection to Headset	4
Troubleshooting	5
Safety Acknowledgement and Warranty	5
Warranty	5

Introduction

The H100 Bluetooth Headset provides you with the most advanced Bluetooth technology for outstanding performance, comfort, simple operation interface and high reliability of this product


Before using this product, please ensure that the devices are intended to be used with the products that are compatible with Bluetooth specifications v1.1 or above and can support the Headset profile.

The kit includes:

- H100 Bluetooth Headset
- H100 Ear Hook
- AC Power Charger
- Speaker protector
- Instruction Manual

Headset Features

About your Headset

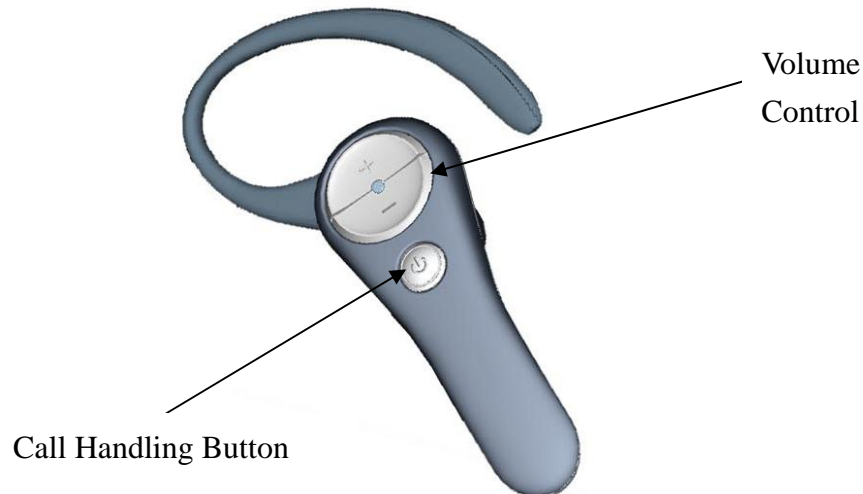

Instructions for Operating Bluetooth Headset

1. Turning on/off Headset

To turn on the Headset:

- a. Press and hold the call handling button on the headset. The LED indicator will flash with blue light 5 times.
- b. The headset is in standby mode after being turned on. The LED indicator flashes with blue light once every 3 seconds.

To turn off the Headset:

- a. Press and hold the call handling button on the headset. The LED indicator will flash with red light 5 times.
- b. The headset is turned off and the LED indicator light is switched off.

Pairing the Headset with a Phone

Before using, you should pair the headset with Bluetooth devices, such as a Bluetooth phone, a laptop computer or a PDA. After pairing, the two devices then recognize each other and make wireless connection. Once you have paired your headset with the Bluetooth device, you do not need to run the pairing process again. When the two paired devices are turned on with Bluetooth function, the headset will connect to the Bluetooth device automatically. When you want to use your headset together with other Bluetooth mobile phones or other Bluetooth devices, perform the pairing steps. Steps for pairing:

- I. The headset must be powered off before initiating the pairing.
- II. Ensure the mobile phone is turned on with Bluetooth devices searching function activated (Please see details in the instruction manual for the mobile phone).
- III. Press and hold the call handling button until the LED indicator flashes with red and blue lights alternatively. The phone is now performing pairing.
- IV. When the mobile phone has detected the headset, "H100" will then appear in the display.
- V. Accept pairing, and follow the instructions provided by the phone. Enter the headset passkey 0000 when you are asked to do so.
- VI. You should repeat the above steps if the devices cannot be paired within 60 seconds (You may check the status on the phone display).
- VII. When pairing is finished, you will be notified that the pairing was successful on the phone's display and the LED indicator will flash with blue light continuously. The headset will also go into standby mode.
- VIII. The headset is now ready for making or answering calls.
- IX. When the Bluetooth is disconnected, not only will the headset attempt to connect with the phone automatically, you may also press the call handling button when the LED indicator light flashes blue continuously (standby mode), so as to connect the headset with the phone again manually.

Note: If the headset is not in pairing mode, your mobile phone won't find the headset. Please set the headset into pairing mode before letting your mobile phone search for the headset.

2. Answering Calls

When there are incoming calls, the headset will ring with music from low to high and the blue LED indicator will quickly flash 3 times every 3 seconds. Press the call handling button on the headset to answer calls. Use the volume control button to adjust the volume.

Note:

- If the phone rings first, wait until the headset rings, then press the call handling button.
- Due to different design of the mobile phones, an auto-disconnect may happen even when the headset is powered on. In that case, the headset won't ring when there is an incoming call. You may press the call handling button once to reconnect the headset with the mobile phone for an incoming call.

3. Ending Calls

End the call by pressing the call handling button on the headset or the Disconnect button on the phone. The headset will return to standby mode after ending the call.

4. Making Calls

You may make calls by the following steps:

Voice dialing--

Make sure your mobile phone supports the voice dialing function. For details on voice dialing, please read the instruction manual of your mobile phone.

1. Press the call handling button on the headset.
2. After a beep, voice dial as you normally would (the call recipient's name should have been saved in the voice dial setting).
3. The mobile phone will dial the number automatically. You can read the details of the call on the display.
(For Nokia mobile phones, please press and hold "Name" key, voice dial after the beep.)

To make a call using the mobile phone:

1. Make the call by using keys on the mobile phone.
2. You may hear the call on the headset.

5. Adjusting the Volume

You can adjust the headset speaker volume during a call with the volume control button on the headset. A beep is sounded for every change in the volume level.

6. Mute Mode/Canceling Mute Mode

To activate the mute mode, Press and hold the volume up or volume down button for about 2 seconds until a low beep 2 times every 2 seconds is heard.

To cancel, press the volume up or volume down button once.

7. Transferring Sound from Phone to Headset and Vice Versa

To transfer the sound from the headset to the phone, initiate the call with the mobile phone. (Please refer to the instruction manual of the phone)

To transfer the sound from the phone to the headset, press the call handling button once. (You may transfer the sound even if the headset is turned on after a call has

been initiated)

8. Lost Connection to Headset

If the headset is out of range, which is about 10 meters, a beep will be sounded to remind you. When you are within the effective range, the headset will connect to the phone automatically, or you may press the call handling button once to reconnect the headset with the phone manually.

Troubleshooting

- Why does the red LED indicator flash continuously?

It indicates that the headset is running low on the battery. Charge the headset for 2 hours until the red LED indicator turns off.

- Why can't the headset be turned on after been charged for 20 minutes?

To activate the headset, you need to charge the headset for 40 minutes. However, it is highly recommend to full charge the battery before use.

- Why is there no indication light when the headset is being charged?

For the headset battery that is empty, or has not been used for a long time, it may take a couple of minutes for the headset indicator to show charging status with a steady red light.

- Why is there no voice despite that pairing between the headset and other Bluetooth devices has been made?

- a) Please ensure that the pairing between your headset and the Bluetooth device is completed.
- b) Please ensure that the headset is turned on.
- c) Please ensure that the headset and the Bluetooth device are placed within an effective range of 10 meters.
- d) Please ensure that the signal reception of the Bluetooth device performs well.
- e) Some Bluetooth mobile phones can support only one Bluetooth headset. Disconnection may happen when there is more than one headset paired with your mobile phone.

Safety Acknowledgement and Warranty

This product has passed and complies with the CE and FCC specifications.

Warranty

This warranty is valid for 15 months from the manufacturing date. If defects are found during the warranty period, our Company will repair or replace the product for free. We reserve the rights for replacing the discounted product with an equivalent product. Proof of purchase may be required.

This warranty does not apply if the product has been damaged by accident, abuse, misuse or misapplication; if the product has been modified or dismantled without written permission; or if any serial number has been removed or defaced.

The warranty and remedies set forth above exclusive and in lieu of all others, whether oral or written, expressed or implied. It is specifically disclaimed any and all other warranties, including implied warranties of merchantability, fitness for particular purpose, and non-infringement of third party rights are expressly excluded.

It is not responsible for special, incidental or consequential damages resulting from any breach of warranty or under any other legal theory, including, without limitation, damages resulting from use of or reliance on this information presented, loss of profits or revenues or costs of replacement goods, even if informed in advance of the

Possibility of such damages.

FCC RF Radiation Exposure Statement

The equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.