



# Installing the SIM card and battery

1. Remove the battery cover and insert the SIM card.



2. Install the battery and reattach the cover.





## **Charging the battery**


1. Plug the supplied travel adapter.



2. When charging is finished, unplug the adapter.



Note: Do not remove the battery from the phone without unplugging the adapter first. Otherwise, the phone may be damaged.

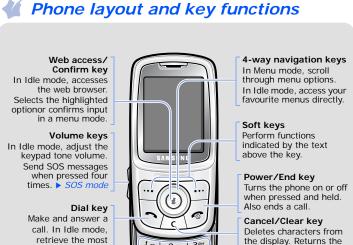

recent calls.

Alphanumeric keys

4. Press the OK soft key.



While a call is in progress, press the Volume keys to adjust the earpiece

Changing a ringtone for calls

display to the previous

menu level. Infrared port


Press and hold # in Idle mode to disable all sounds on the phone. To exit, press and hold this key again.

Press and hold 1 in Idle mode to access your voicemail server.

With the phone closed, press the Volume keys four times in Idle mode to send an SOS message to preset phone numbers. Once the SOS message is sent, the phone will change to SOS mode and will receive calls only from the SOS message recipients until the SOS mode is cancelled. Upon receiving a call from the SOS message recipients, the phone will automatically answer the call, after one vibration, relaying the emergency situation to the caller

## Display

Your phone is in Idle mode when you are not on a call or using a menu You must be in Idle mode to dial a phone number.



Your phone displays the following status indicators on the top of the screen:

### Received signal strength

Call in progress

Tail

- Out of your service area; you cannot make or receive calls except for emergency calls
- G **GPRS** network
- $\mathbb{R}$ Roaming network
- 倡 Call ringer set to vibrate
- )(( Silent mode
- Mute mode, during a call 0×
- $\Rightarrow$ Call diverting feature active
- $\Rightarrow$ IrDA feature active
- SOS message feature active A
- $\boxtimes$ New text message 碅 New multimedia message
- 0 New voicemail message
- $\Delta$ Alarm set
- Battery power level

# **Switching on or off the phone**

- 1. Press and hold for more than one second to switch on the phone.
- 2. To switch off the phone, press and hold for more than two seconds.

# Changing the display language

- 1. In Idle mode, press the Menu soft key.
- Select Phone settings → Language.
- 3. Select a language.

# Making a call

- 1. In Idle mode, enter an area code and phone number, and press
- 2. When you want to end the call, press

# Answering a call

1. When the phone rings, press the Accept soft key or 🕟 to answer a

To reject the call, press the **Reject** soft key or

2. When you want to end the call, press

# Redialling recent numbers

Adjusting the volume

3. Press Up or Down to adjust the volume level.

1. In Idle mode, press the Menu soft key.

2. Select Sound settings → Ring volume

1. In Idle mode, press the Menu soft key.

2. Select Sound settings → Ring tone.

1. In Idle mode, press


3. Select a ringtone.

- 2. Press Up or Down to scroll to the number you want.
- 3. Press ( to dial the number.

# Using the menus

In Idle mode, press the Menu soft key to enter the main menu.

Labels at the bottom corners of the display show the current soft key functions. Press the left soft key (...) or right soft key (...) to perform the function indicated.



To exit the menu without changing the menu settings, press this key.

Use the 4-way navigation keys (  $\bigcirc\!\!\!\bigcirc$   $\bigcirc\!\!\!\!\bigcirc$  ) as shortcuts to access your favourite menus.

- 1. In Idle mode, press the Menu soft key.
- Select Phone settings → Shortcuts
- Select a key
- 4. Select a menu to be assigned to the key.

## To select or modify a menu or feature:

- 1. In Idle mode, press the Menu soft key.
- 2. Press the Navigation keys to reach a desired menu and then press the **Select** soft key or (i)
- 3. If the menu contains any submenus, locate the one you want by pressing the Navigation keys. Press the Select soft key or (i) to enter the submenu

If the selected menu contains additional submenus, repeat this step.

- 4. Press the Navigation keys to find the setting of your choice.
- 5. Press the **Select** soft key or (i) to confirm your chosen setting.

### **Shortcut numbers**

You can quickly access the menu you want by using shortcut numbers. The shortcut number displays in front of the menu name in Menu mode.

# Menu map

## 1. SIM AT\*

- 2. Call records
- 2.1 Missed calls
- 2.2 Received calls 2.3 Dialled calls
- 2.4 Delete all 2.5 Call time
- 2.6 Call cost
- 3. Network services
- 3.1 Call diverting 3.2 Call barring
- 3.3 Call waiting
- 3.4 Network selection 3.5 Caller ID
- 3.6 Closed user group 3.7 Band selection
- 4. Sound settings
- 4.1 Ring tone
- 4.2 Ring volume
- 4.3 Alert type 4.4 Keypad tone
- 4.5 Message tone
- 4.6 Alert on call 4.7 Slide tone

8.2 My photos

8. Camera

8.1 Take photos

9.1 Infrared activate

9.2 Display settings

9.4 Slide settings

9.8 Extra settings

9.5 Own number

9.6 Language

9.9 Shortcuts

9.0 Volume key

9.\* Reset settings

Press the Phoneb kev in Idle mode.

Search

2 New entry3 Group search

4 Edit group

6 Delete all

Speed dial

7 Memory status

9.7 Security

9.3 Greeting message

- 5. Messages 8.3 Memory status 5.1 Text messages 9. Phone settings
- 5.2 Multimedia messages 5.3 Push messages 5.4 SOS messages
- 6. Funbox
- 6.1 WAP browser 6.2 Games

4.8 Power on/off

4.9 Extra tones

- 6.3 Sounds 6.4 Images
- 6.5 Delete all 6.6 Memory status
- 7. Organiser 7 1 Alarm
- 7.2 Calendar
- 7.3 Time & Date
- 7.5 To do list
- 7.6 Voice memo
- 7.7 Currency exchange

  - 8 SDN\* Show only if supported by your SIM card.

## Entering text Changing the text input mode

In a text input field, press the right soft key until the input mode indicator

- **T9**: T9 mode
- A : ABC mode

you want appears:

- 1 : Number mode
- · None: Symbol mode

1. Press 2 to 9 to start entering a word. Press each key once for one letter. Example: To enter "Hello" in T9 mode, press 4, 3, 5, 5, and 6.

T9 predicts the word that you are typing, and it may change with each key that you press.

2. Enter the whole word before editing or deleting characters.

- 3. When the word displays correctly, go to step 4. Otherwise, press 0 to display alternative word choices for the keys that you have pressed. For example, Of and Me use 6 and 3.
- 4. Press # to insert a space and enter the next word.

### **ABC** mode

Press the keys labelled with the character you want:

- once for the first character
- twice for the second character
- and so on.

For example, press 2 three times to enter "C" and 5 two times to enter

### **Number mode**

Press the keys corresponding to the digits you want.

### Symbol mode

Press the number keys corresponding to the symbol you want and press the OK soft key. You can press Up or Down to display more symbols.

### Tips for entering text

· To move the cursor, press the Navigation keys.

Feature	Description	Select
Call time display	View the duration of recent calls you have dialled and received. Also reset the time counter.	Menu > Call records > Call time
Call cost display	View the cost of your calls.	Menu > Call records > Call cost
Network services	Access network services offered by your service provider.	Menu > Network services
Select ringtone and volume	Select a ringtone for incoming calls, or a volume level.	Menu > Sound settings > Ring tone or Ring volume
Alert type	Select an alert type for the call ringer.	Menu > Sound settings > Alert type
Select key tone	Select a tone which the phone sounds when you press a key.	Menu > Sound settings > Keypad tone
Select message tone	Select the alert ringtone for incoming SMS, MMS, and broadcast messages, or set how open you are informed of a new message.	Menu > Sound settings > Message tone
Alert on call	Set the phone to alert you when you receive a new message or when the time for an alarm comes during a call.	Menu > Sound settings > Alert on call
Slide tone	Select the tone that the phone sounds when you open or close the phone.	Menu > Sound settings > Slide tone
Power on/ off tone	Select the melody that the phone sounds when it is switched on or off.	Menu > Sound settings > Power on/off
Extra tones	Set additional tones for the phone.	Menu > Sound settings > Extra tones

Feature	Description	Select
Slide settings	Use this menu to set how the phone reacts when you open it for an incoming call, and when you close it while using a function.	Menu > Phone settings > Slide settings
Check your own phone numbers	Check your phone numbers or assign a name to them.	Menu > Phone settings > Own number
Display language	Select a language to be used for the display text.	Menu > Phone settings > Language
Security	Protect the phone against unauthorised use.	Menu > Phone settings > Security
Mobile Tracker	Track your phone when it is stolen or lost. When someone tries to use your phone with other SIM card, the phone will automatically send the preset tracking message to your family or friends.	Menu > Phone settings > Security > Mobile tracker
Extra settings	Set the automatic redialling feature or the answering method.	Menu > Phone settings > Extra settings
Menu shortcuts	Set the Navigation keys as shortcuts to access your favourite menus directly.	Menu > Phone settings > Shortcuts
Volume key	Set whether the phone mutes the call ringer or rejects a call if you press and hold the Volume keys when a call comes in	Menu > Phone settings > Volume key
Reset the phone	Reset the phone to the factory default settings.	Menu > Phone settings > Reset settings

- To delete characters one by one, press C. To clear the display, press and hold C.
- To insert a space between characters, press #.
- To change case in T9 mode or ABC mode, press \* .
- To enter punctuation marks in T9 mode or ABC mode, press 1.

# Sending an SMS message

- 1. In Idle mode, press the Menu soft key.
- 2. Select Messages → Text messages → Write new.
- 3. Enter the message text.
- 4. Press the Options soft key and add items using the following options:
  - · Add objects: add sounds, melodies, images, or animated images
- · Add templates: add text templates.
- · Add emoticon: add emoticons.
- Add phonebook: add Phonebook contacts.
- · Add bookmark: add bookmark items.
- 5. Press the Options and select Send only, Save and send, or Save
- 6. If you select Save and send or Save only, select a memory location.

Feature	Description	Select
Read SMS or MMS messages	Read received, sent, or saved messages.	Menu > Messages > Text messages or Multimedia messages > Inbox, Outbox, or Draft
Send SMS or MMS messages	Create and send messages to other mobile phones.	Menu > Messages > Text messages or Multimedia messages > Write new
Message templates	Preset templates of frequently used messages or emoticons.	Menu > Messages > Text messages or Multimedia messages > Templates or Emoticon templates
Messaging options	Set options for using messaging services.	Menu > Messages > Text messages or Multimedia messages > Settings or Setup
Delete messages	Delete messages in each message box, or all messages at once.	Menu > Messages > Text messages or Multimedia messages > Delete all
Message memory status	Check memory information for messages.	Menu > Messages > Text messages or Multimedia messages > Memory status
Voicemail	Access your voicemail server and listen to messages on the network.	Menu > Messages > Text messages > Voice mail

Read these guidelines before using your wireless phone. Failure to comply with them may be dangerous or illegal.
Drive safely at all times Do not use a hand-held phone while driving; park the vehicle first.
Switching off when refuelling Do not use the phone at a refuelling point (service station) or near fuels or chemicals.
Switching off in an aircraft Wireless phones can cause interference. Using them in an aircraft is both illegal and dangerous.
Contraction of Contract of Con

Important safety precautions

### Switching off near all medical equipment

Hospitals and health care facilities may be using equipment that could be sensitive to external RF energy. Follow any regulations or rules in force

All wireless phones may be subject to interference, which could affect their performance

### Follow any special regulations in force in any area and always switch off your phone whenever it is forbidden to use it

Your phone is not water-resistant. Keep it dry.

Use only in the normal position (held to the ear). Avoid unnecessary contact with the  $\,$ antenna when the phone is switched on

Key in the emergency number for your present location, then press 🔊 . Do not end the call until given permission to do so

- 7. Enter destination numbers.
- 8. Press the Options soft key and select Send message to send the

# **Taking a photo**

- 1. In Idle mode, press the Menu soft key.
- 2. Select Camera → Take photos
- 3. Aim the lens at the subject and make any desired adjustments.
- 4. Press (i) to take a photo.
- 5. Press the Save soft key to save the photo, or press the Cancel soft key to delete the photo.
- 6. After saving the photo, press the 5 soft key to take another photo.

## **Quick feature reference**

This section provides brief explanations of features on your phone.

Feature	Description	Select
Find a contact	Search for contacts in Phonebook.	Phonebook > Search

Feature	Description	Select
Broadcast message	Change settings for the service and access broadcast messages.	Menu > Messages > Text messages > Broadcast
MMS profile	Select or configure a connection profile to be used for MMS.	Menu > Messages > Multimedia messages > MMS profile
Push message	Change the settings for the service, and access or delete push messages.	Menu > Messages > Push messages
SOS messages	Activate the SOS message feature. Enter recipients and select the repeat mode.	Menu > Messages > SOS messages
Web browser	Launch and configure the web browser.	Menu > Funbox > WAP browser
Access media files	Access games, sounds, images in your phone's memory.	Menu > Funbox > Games, Sounds, Images,
Delete all media files	Delete games, sounds, images in each media box, or all media files at once.	Menu > Funbox > Delete all
Funbox memory status	Check the amount of memory in use for games, sounds and images.	Menu > Funbox > Memory status
Alarm	Set an alarm to sound at a specific time.	Menu > Organiser > Alarm
Calendar	Keep track of daily or monthly schedules.	Menu > Organiser > Calendar

Keep the phone and all its parts including accessories out of reach of small children

### Accessories and batteries

Use only Samsung-approved batteries and accessories, such as headsets and PC data cables. Use of any unauthorised accessories could damage your phone and may be dangerous



Risk of explosion if a battery is replaced by an incorrect type. Dispose used batteries according to the instructions



At very high volume, prolonged listening to a headset can damage your hearing.

Only qualified service personnel may repair your phone.



### SAR information

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the European Union (EU) Council. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on the safety standards that were developed by independent scientific organisations through periodic and through evaluation of scientific studies

The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless phones employs a unit of measurement known as Specific Absorption Rate (SAR). The SAR limit set by the EU Council is 2.0W/kg. The highest SAR value for this model phone was 0.371 W/kg.

Feature	Description	Select
Add a new contact	Add a new contact to Phonebook.	Phonebook > New entry
Search group	Search for Phonebook contacts in caller groups.	Phonebook > Group search
Change properties of a caller group	Select a ringtone for incoming calls and messages from members of a group. Also change the group name.	Phonebook > Edit group
Speed dial	Assign speed dial numbers (2 to 9) for eight of your most frequently dialled numbers.	Phonebook > Speed dial
Delete Phonebook contacts	Delete all Phonebook contacts stored in the phone's memory, on the SIM card, or both.	Phonebook > Delete all
Phonebook memory status	View the total number of Phonebook contacts in the phone's memory or on the SIM card.	Phonebook > Memory status
SDN(Service Dialling Numbers)	Access the list of service numbers assigned by your service provider. (Shows only if supported by your SIM card.)	Phonebook > SDN
Use the SIM service	Use a variety of additional services offered by your service provider.	Menu > SIM AT
View recent calls	View the most recent calls you have dialled, received, or missed.	Menu > Call records > Missed calls, Received calls, Dialled calls
Delete recent calls	Delete the call logs in each call type, or all logs at once.	Menu > Call records > Delete all

Feature	Description	Select
Time and date	Set the current time and date manually.	Menu > Organiser > Time & Date
Automatic time update	Set your phone to update the current time automatically when you travel abroad. Time information may not be updated when you move to one time zone to another within a country.	Menu > Organiser > Time & Date > Auto update
Calculator	Perform basic arithmetic functions.	Menu > Organiser > Calculator
Task list	Create a list of tasks and assign a deadline to each task.	Menu > Organiser > To do list
Voice memo	Record voice memos and listen them.	Menu > Organiser > Voice memo
Currency converter	Do currency conversions.	Menu > Organiser > Currency exchange
Camera	Take photos in various modes, and access saved photos in jpeg format. You can also check memory information for the photos.	Menu > Camera
IrDA	Send and receive data to or from IrDA-compatible computers or phones through the infrared port.	Menu > Phone settings > Infrared activate
Display settings	Change settings for the display and backlight.	Menu > Phone settings > Display settings
Greeting message	Enter the greeting message to be displayed when the phone is	Menu > Phone settings > Greeting message

# Declaration of Conformity (R&TTE)

Model description: Portable Cellular Telephone (GSM 900/1800/1900)

Model name: SGH-X530

Manufactured at: Samsung Electronics Co., Ltd, 94-1, Imsoo-Dong, Gumi City, Kyung-Buk,

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

Safety : EN 60950-1:2001 EN 50360: 2001

EN 301 489-01 v1.4.1 (08-2002) EN 50361:200 : EN 301 489-07 v1.2.1 (08-2002) Network: EN 301 511 v9.0.2 (03-2003) We hereby declare that [all essential radio test suites have been carried out and that] the

above named product is in conformity to all the essential requirements of Directive 1999/5/ The conformity assessment procedure referred to in Article 10 and detailed in Annex[IV] of

Directive 1999/5/EC has been followed with the involvement of the following Notified Body(ies):

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, UK Identification mark: 0168

The technical documentation kept at: Samsung Electronics Euro QA Lab.

which will be made available upon request

(Representative in the EU)

## Place and date of issue:

Samsung Electronics Euro QA Lab. Blackbushe Business Park, Saxony Way, Yateley, Hampshire, GU46 6GG UK

D. C. palez Yong-Sang Park/S.Manage

CE0168

2006.10.25
\* It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your phone.