


COUMI




TWS-860
Wireless Noise-cancelling Stereo Earbuds
User Guide

① Package Content




② Product Overview



01



Charging Case

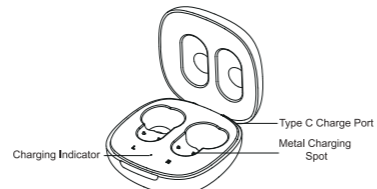

Charging Indicator

Type C Charge Port
Metal Charging Spot


③ Fitting(Very Important)

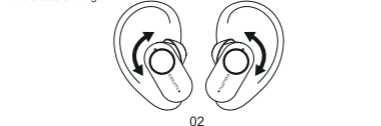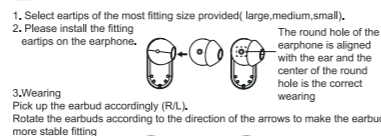

02

④ Instruction

- Initial Use**
Firstly, remove the insulation sticker on the earbuds charging spot. Then, put the earbuds into the charging case to charge.
- Power On**
Pick up both earbuds from the charging case, and then hear the "Power On" sound.
- Pairing**
Open the device's Bluetooth to search* COUMI ANC-860* and hear the "Connected" sound after confirm to connect.



*The earbuds will be automatically connected after turned on and ready to use if the device has been paired before.
*The left ear or the right ear can be used alone after the pairing is successful.

⑤ Technical Specification

Item Number: COUMI ANC-860
Bluetooth Version: 5.1
BT Profiles: HFP/HSP/A2DP/AVRCP/SPP/IPBAP
Wireless Range: 360°s10m
Playtime: ANC Open 5.5H, ANC Off 7.5H
Playtime with charging case: ANC Open 30H, ANC Off 41H
Charging time: Up to 1.5H

Charging Parameter:
Earbuds: 5v/50mA
Charging case: 5v/600mA
Battery type: Lithium ion battery
Earbuds: 3.7V, 60mAh
Charging case: 3.7V, 720mAh
Frequency response: 20Hz-20KHz
Sensitivity: 97+3dB

Battery Life:
Due to different systems, audio formats, personal usage habits (such as volume) of mobile phones and other devices, the battery life in the usage may vary depending on the specific situation.


03

⑥ Operation

Earbuds Operation Guide

Function	Left Ear	Right Ear	Tone
Power On	Take out from charging case/ Press for 3 Second		Power On
Play/Pause	/	Double Taps	/
Previous	Press for 2 Second	/	/
Next	/	Press for 2 Second	/
Volume+	/	Tap	AI Maximum Tone
Volume-	Tap	/	AI Minimum Tone
Answer	Tap	Tap	/
Hang Up	Tap	Tap	/
Reject	Press for 2 Second	Press for 2 Second	/
Power Off	Put back to charging case/ Press for 6 Second		Power Off
Enable Voice Assistant	Press for 1 Second	Press for 1 Second	/

04

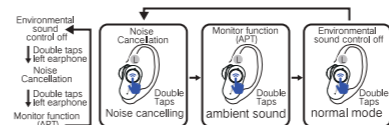

⑦ Light Indication

Charging Case Indicator

Charging Case Status	Indicator Light Status
Charging	Led flashes
Fully Charged	Lights are always on
Charging the Earbuds	Lights are always on
Fully Charged	The lights last 10s and then goes out when fully charged.

Earbuds Light Indicator

Earphone status	Earbuds light state
Charging	White light flashes
Fully charged	Light goes out
Power on	White Light for 1s
Power off	The red light turns on 1s and turn off
Pairing Status	The Host Red and white lights flashes alternately, the auxiliary without light
Connected	Light goes out
Phone's Bluetooth Disconnected	The Host Red and white lights flashes alternately, the auxiliary without light
Turn on/off ANC	Light goes out

05

⑧ FAQ

- The earbuds cannot turn on.
Please confirm whether the earbuds have power, Please fully charge before use.
- Bluetooth pairing is unsuccessful.
Reboot the earbuds, make sure the distance keep within 1m when the earbuds turn on and in the pairing state.
- Some Bluetooth devices require a pairing password.
Please enter "0000"
- Automatically Re-connect.
When Power on, it will automatically re-connect to the last connected device.
- How long will it turn off automatically when it doesn't connect?
The earbuds will automatically turn off after 3 mins if it doesn't connect with bluetooth devices.
- If the left and right earbud don't sync or connect the phone because the headset is in re-connection mode or other mode, or if you can't find your preferred bluetooth device, you can perform a factory reset:
Turn on the earbuds, longpress the earbuds for 10s, the LED Lights will blink for three times

06

Warning!

- Do not remove or modify the headphones for any reason, otherwise the headphones may malfunction or burn, electronic breakdown or even completely damage the product.
- This product has built-in electric lithium-ion battery. It is forbidden to disassemble, impact, squeeze or put into fire. If there is serious swelling, please do not continue to use it.
- Do not place the device at a temperature that is too low or too high (under 0 C or above 45 C).
- Do not use the device during thunderstorms. Thunderstorms can cause the device to malfunction and increase the risk of electric shock.

This product has been inspected and qualified

07

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.