


## 1. Before using your Hands-Free BHF-300

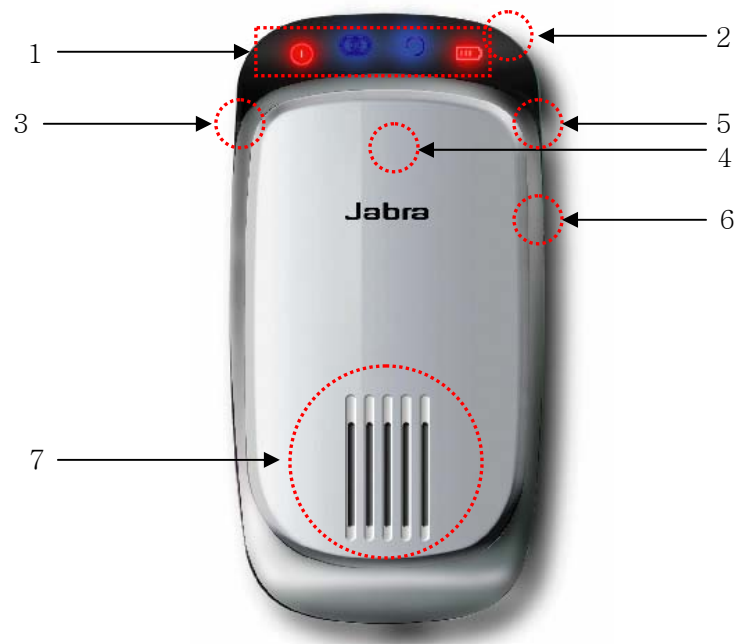

**1) Display LED :** Power ON(LED1), Link status(LED2), Call Connection status(LED3), Battery status(LED4)

**2) Internal Microphone**

**3) Volume-UP button**

**4) Volume-Down button**

**5) Multi-function button :** Power ON/OFF, Send call, End call

**6) External charger connector**

**7) Internal Speaker**

## 2. Charging Your Hands-Free

Use the vehicle power charger provided.

BHF-300 uses a rechargeable battery that must be fully charged before you use it For the first time.

Connect the supplied vehicle power charger to power socket and then to your Hands-Free. The status of indicator on Vehicle charger will be illuminated red while charging and change to Green when the Hands-Free is fully charged.

It takes approximately 2 hours to fully charge the Hands-free

**NOTICE:**

If battery is Low(1~2 hours Talk time) , Red light of the LED4 will blink in every five seconds.

If battery is Very Low(0~1 hours Talk time), Red light of the LED4 will blink in every second.

### 3. BLUETOOTH PAIRING

Before using your hands-free for the first time with a mobile phone or another Bluetooth device, you must first pair it with the device.

Follow the steps below for most devices. You can also refer your phone user guide.

- 1) Turn off the Hands-free, if Hands-free turned on.
- 2) Place the Hands-free in pairing mode by pressing and holding the Multi-function Button for seven seconds. Release the button when the status indicator begin to flash with beep sound.

**NOTICE:**

If the pairing is not success for two minutes, the Hands-free becomes to stands-by mode.

Hands-free enter pairing mode automatically if you use your hands-free for the first time or paired list empty

- 3) Use your phone's menu to search for Bluetooth audio devices and select "BHF-300"
- 4) When the phone display asks for a pass key, enter "0000".

The Bluetooth icon appears on the display, once the hands-free successfully paired.

If the Hands-free stops responding to button presses, you must reset the Hands-free.

### 4. USING YOUR HANDS-FREE

- 1) Power On / Off

Press the Multi-function buttons for two seconds in order to turn on the device.

Press the multifunction buttons for four seconds in order to turn off the device.

2) Connect the Hands-free to the phone

When disconnected, the Hands-free can be re-connected to the phone by simply short pressing the Multi-function button.

3) Answer / End / Place a call

To answer a call, short press the Multi-function button.

To end a call, short press the Multi-function button.

To place a call using voice dialing, pressing and holding the Multi-function button until you heard the short beep, and then release the Multi-function button.

If you are on a calling using your phone handset, you can transfer the call to your hands-free by press and hold the Multi-function button for a second

4) Call transfer back to phone

To transfer a call from your Hands-free back to your phone, press and hold the Multi-function button for a second

5) Call reject

To reject a call without answering when the Hands-free is ringing, press and hold the Multi-function button for a second

6) Last number redial

To redial the last number, two times press the multifunction button.

7) Volume Up / Down

Press the Volume-Up / Volume-Down button to adjust the volume

8) Mute the microphone

To mute the microphone when you are on a calling by hands-free, short press the Volume-up and Volume-down buttons simultaneously.

Note : To un-mute, short press the Volume-Up or Volume-Down button.

9) Clear paired list

If you want to delete the paired list, press and hold the Volume-Up, Volume-Down and Multi-function buttons simultaneously for seven seconds.

Note : If pairing list cleared , the hands-free becomes to pairing mode

10) Blind Mode

If you don't want to see LED indication, press and hold the Volume-Up and Volume-Down buttons simultaneously for a second.

Note : To escape the blind mode, press and hold the Volume-Up and Volume-Down buttons simultaneously for a second again

## **User's Information**

---

### **Cautions**

**Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.**

### **FCC compliance Information**

**This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference, and 2. This device must accept any interference received. Including interference that may cause undesired operation.**

### **Information to User**

**This equipment has been tested and found to comply with the limits for a Class B digital device, Pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio Frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:**

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help.**