




Quick Installation Guide

WatchAir OpenArms EPUS-LT |

■ Package Contents




Smart bar

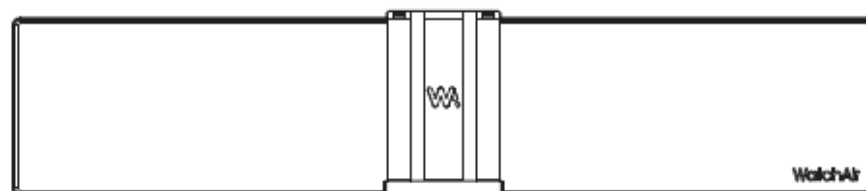

TV Antenna



Quick Installation
Manual




Desktop mode
bracket



Upright mode bracket
(with double-sided tape)





Screw 2p



AC/DC Adapter
(5V/2.5A)

■ Product Ports / Status by LED

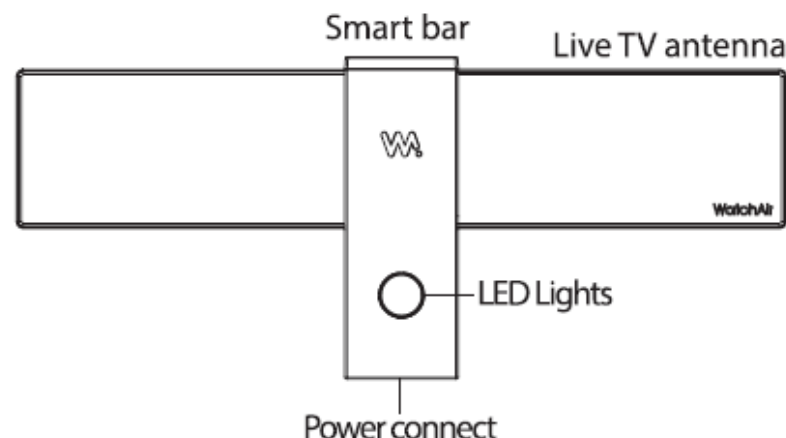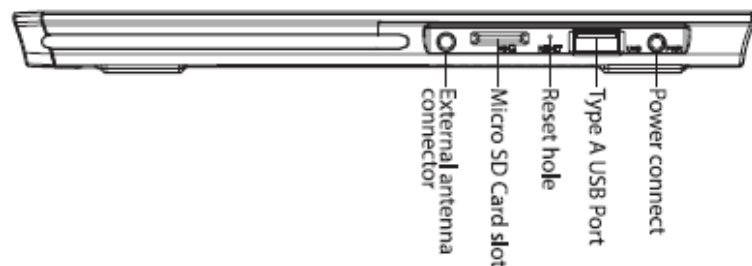


WatchAir Status	LED Color	Duration	Initiated by
Booting	Green Solid	About 30 seconds	Power cord reconnected, or resetting
Normally Operating	Blue Solid	Until abnormal	Any stand by, or streaming
Normally Recording	Purple Solid	Until finished	Starting recording
Lost Networking	Blue Blinking	Until reconnected	Something wrong with WiFi router
Updating Software	Red Solid	About 20 seconds	Automatic detection and update
Reset user data	Green/Red Solid	About 30 seconds	Push the reset hole for 7 second


Get Ready

Using The Built-in Antenna in WatchAir (Upright mode)


1. Unplug the desktop mode bracket from the smart bar.

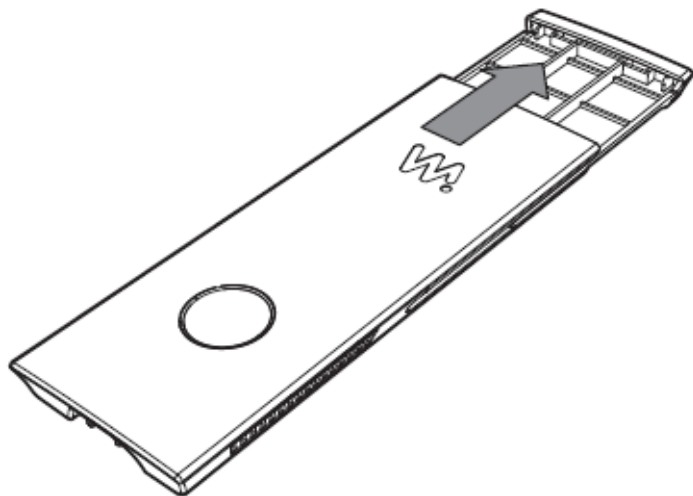


2. Plug the built-in antenna into the smart bar.

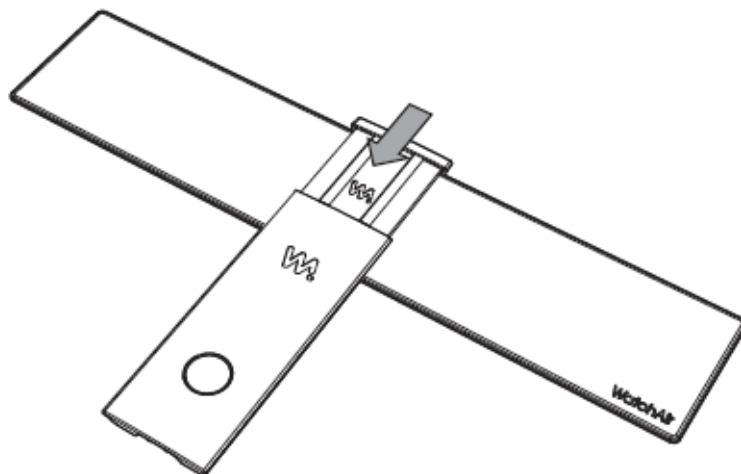

3. Make sure the antenna is connected to the smart bar without any gap.

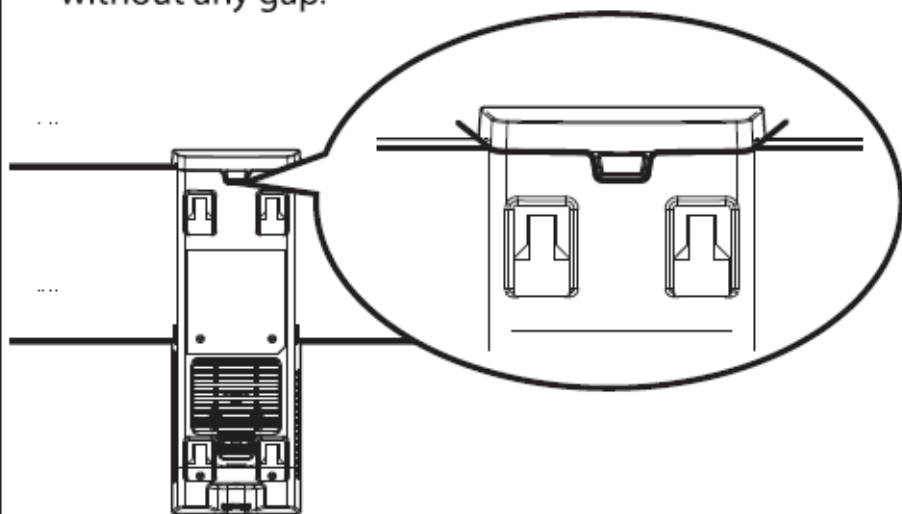


4. Mount the upright mode bracket on the rear side of the smart bar.

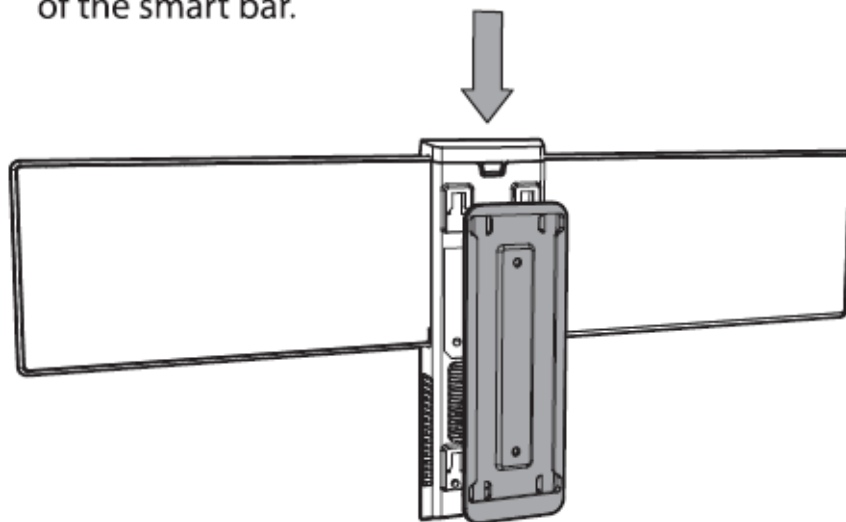


Get Ready

Using Your Existing Antenna (Desktop mode)


1. Connect the external antenna connector to your existing antenna.

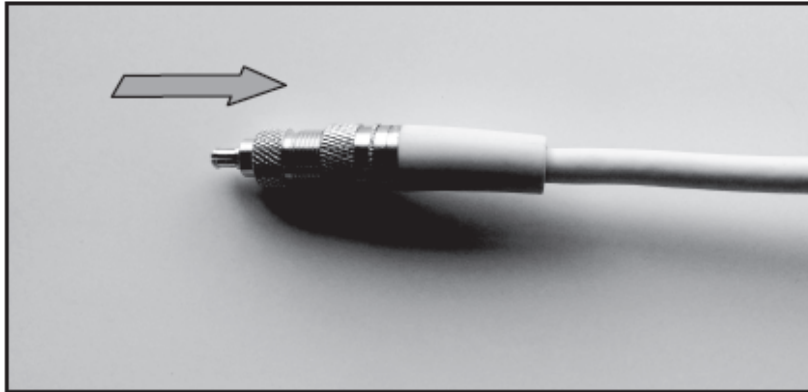


2. Plug the desktop mode bracket, the antenna connector and the power plug to the smart bar.

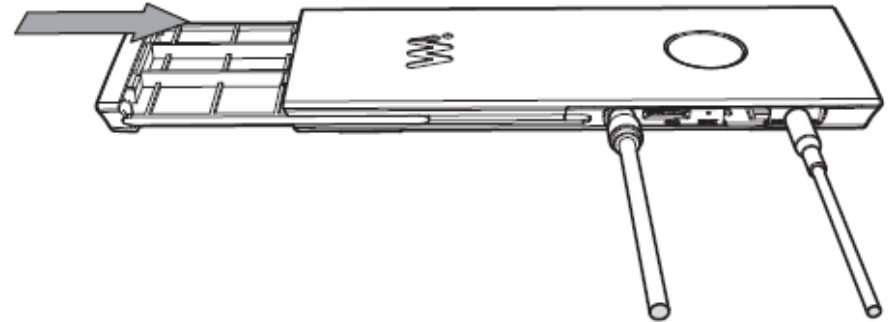

3. Locate the smart bar on an appropriate location such as table or cabinet.

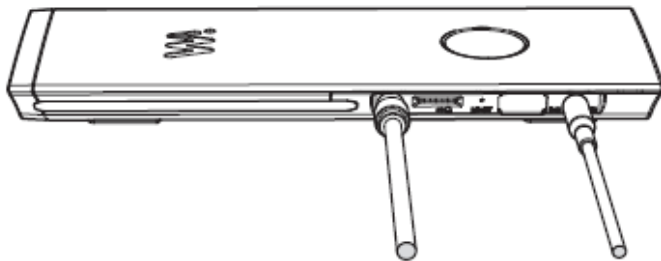

4. May use the upright installation bracket to tighten the installation.

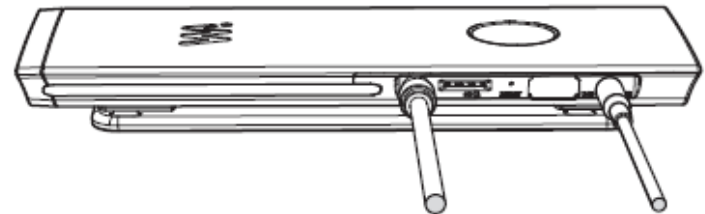

1. Sign Up

Download WatchAir App & Register

1. Please download WatchAir app on your mobile device. Do not use WatchAir app on your streaming boxes and smart TV's to set up WatchAir for the first time.



2. Sign up : one WatchAir needs at least one account.

A screenshot of the WatchAir Login screen. It features the WatchAir logo (a stylized 'W' with a dot) and two input fields: 'Email' (with a placeholder 'email adress') and 'Password' (with a placeholder 'password'). Below these fields is a 'Login' button. To the right of the 'Login' button is a link that says 'Forgot your password?'. At the bottom, there is a 'Sign up' button, which is highlighted with a dashed border and a large checkmark icon, indicating it is the recommended action.

3. Make your profile: one account can have up to eight profiles for eight different users.

A screenshot of the 'Default User Profile' form. It has a title 'Default User Profile' at the top. Below the title is a form with the WatchAir logo and three fields: 'Nickname:' (with a placeholder 'nickname'), 'Gender:' (with radio buttons for 'Male' and 'Female'), and 'Birth Year:' (with a placeholder 'ex) 1980').

The profile is only used to serve your better. Your personal information will not be shared with any 3rd party company.


4. Login: once you verified your email and reset your password, please login.

A screenshot of the WatchAir Login screen. It features the WatchAir logo (a stylized 'W' with a dot) and two input fields: 'Email' (with a placeholder 'email adress') and 'Password' (with a placeholder 'password'). Below these fields is a 'Login' button, which is highlighted with a dashed border and a large checkmark icon, indicating it is the recommended action. To the right of the 'Login' button is a link that says 'Forgot your password?'. At the bottom, there is a 'Sign up' button.


2. Installation

Hang WatchAir on a Window or Wall

1. Follow our GPS-based guideline.

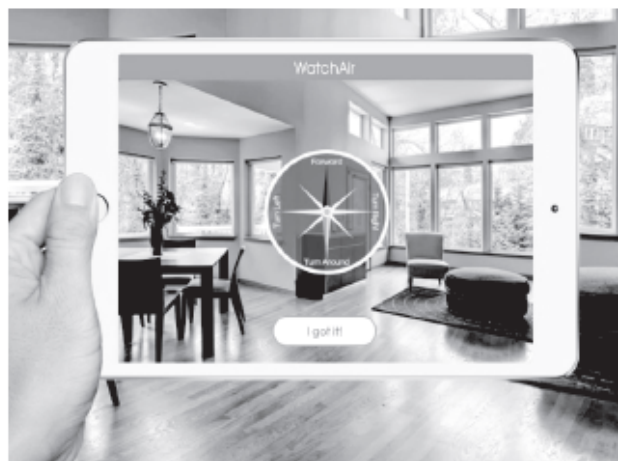

2. Find a better or good spot using the compass direction, as shown below.

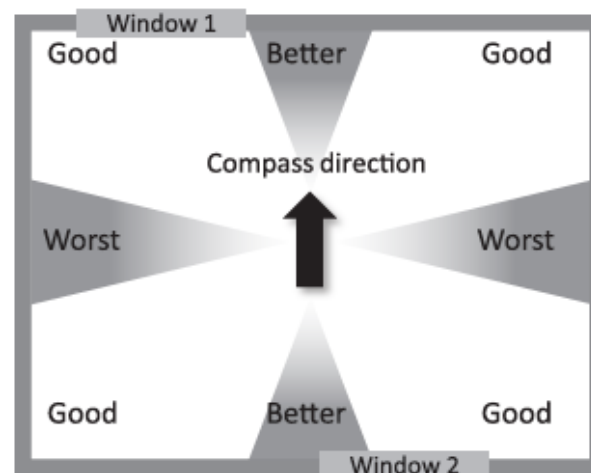

3. Install WatchAir on the window with double-sided tapes on the bracket. Please remember the higher and less metal, the better. (no windows with mosquito netting!)

If your location is over 110F° during the summer, please install WatchAir on a dry wall.




4. Or install WatchAir on the dry wall with screws through the bracket. Please make sure the dry wall does not have any metal beams at the installation position.



3. Connection

Wireless Connection Over Your WiFi Router

1. WatchAir app will take you to "Settings", as shown below. You need to choose WatchAir SSID from your WiFi list. Your WatchAir SSID is printed on your gift box, and it should start with "WA" with additional six more letters or numbers. The password is same as your WatchAir SSID.

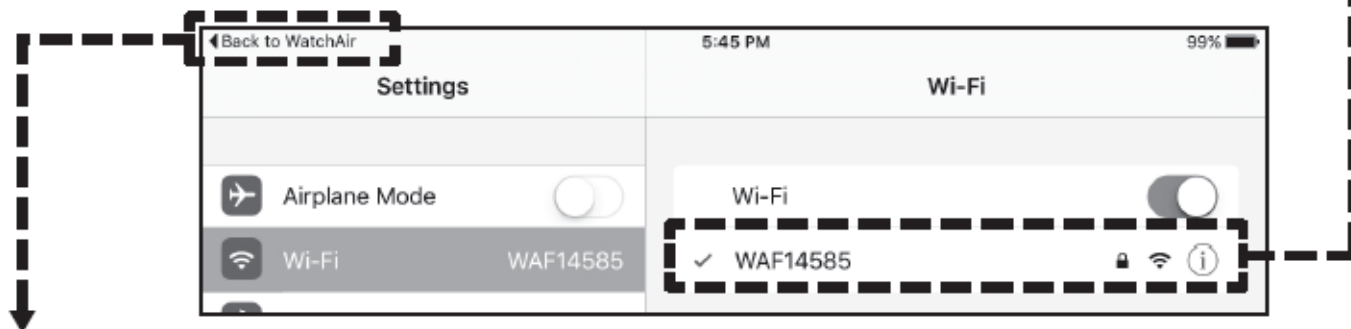

2. Touch "Back to WatchAir" to go back to WatchAir app, and choose your own WiFi router one more time. That's all.

4. Channel Scanning & More

1. Channel scanning can take a few minutes. You don't have to scan channels again unless you change the location of your antenna.
2. After channel scanning, WatchAir will automatically detect and download any additionally required software.

5. Done !

Now, enjoy your local live TV! This installation is an one-time process, so you don't have to repeat this on the other devices. Just log in once. That's it. Welcome to WatchAir!



WatchAir US Warranty Policy

EPICT®

Product	<i>Original WatchAir and other accessories packaged with product</i>
Warranty Period	<i>1 Year</i>
Scope of Warranty	<i>Labor & parts</i>
Warranty Service	<i>Carry in</i>

✱ *Such defect(s) will be repaired or replaced (with new or rebuilt parts) at the company's option without charge for parts or labor directly related to the defect(s). This Limited Warranty is conditioned upon proper use of the Products.*

This Limited Warranty does not cover:

- a. Defects or damage resulting from accident, misuse, abnormal use, abnormal conditions, improper storage, exposure to liquid, moisture, dampness, sand or dirt, neglect, or unusual physical, electrical, or electromechanical stress;*
- b. Scratches, dents, and cosmetic damage, unless caused by WatchAir;*
- c. Equipment that has the serial number or the enhancement data code removed, defaced, damaged, altered, or made illegible;*
- d. Ordinary wear and tear;*
- e. Defects or damage resulting from the use of the products in conjunction or connection with accessories, products, or ancillary/peripheral equipment not furnished or approved by WatchAir;*
- f. Defects or damage resulting from improper testing, operation, maintenance, installation, service, or adjustment not furnished or approved by WatchAir; or*
- g. Defects or damage resulting from external causes such as collision with an object, fire, flooding, dirt, windstorm, lightning, earthquake, exposure to weather conditions, theft, blown fuse, or improper use of any electrical source;*
- h. For questions regarding your product's warranty, contact WatchAir Support at support@watchairtv.com or via our support page at www.watchairtv.com/support. Once your warranty is verified, you will be issued a return authorization and instruction for return shipment.*

Note. This equipment has been tested and found to comply with the limit for a Class B digital device, pursuant to part 15 of the FCC Rules.

© EPICT, Inc. All rights reserved. WatchAir and the WatchAir Logo are trademarks of EPICT, Inc.

Any non-EPICT trademarks are used for reference purposes only.

