

SUPERTOOTH



SUPERTOOTH DISCO 2

The portable Bluetooth A2DP stereo speaker with 2 speakers on the front & 1 bass reflex system at the back. You'll be blown away by 16 Watts of high & outstanding audio quality!




The aptX® software is copyright CSR plc or its group companies. All rights reserved. The aptX® mark and the aptX logo are trademarks of CSR plc or one of its group companies and may be registered in one or more jurisdictions.

The SUPERTOOTH DISCO 2 is a portable, wireless stereo speaker featuring an avant-garde design and compact footprint. Users can stream music wirelessly from any cell phone, tablet, computer, laptop or Mp3 player supporting Bluetooth A2DP. The SUPERTOOTH DISCO 2 kicks out 16 watts RMS audio power, with two speakers on the front and a high efficiency bass reflex system situated at the back of the unit. The integrated rechargeable battery ensures 3 to 4 hours of non-stop, maximum-volume music, and up to 10 hours of moderately played melodies. The SUPERTOOTH DISCO 2 comes with a 3.5 mm stereo jack cable for devices that do not support Bluetooth A2DP.

Product Description


External Controls

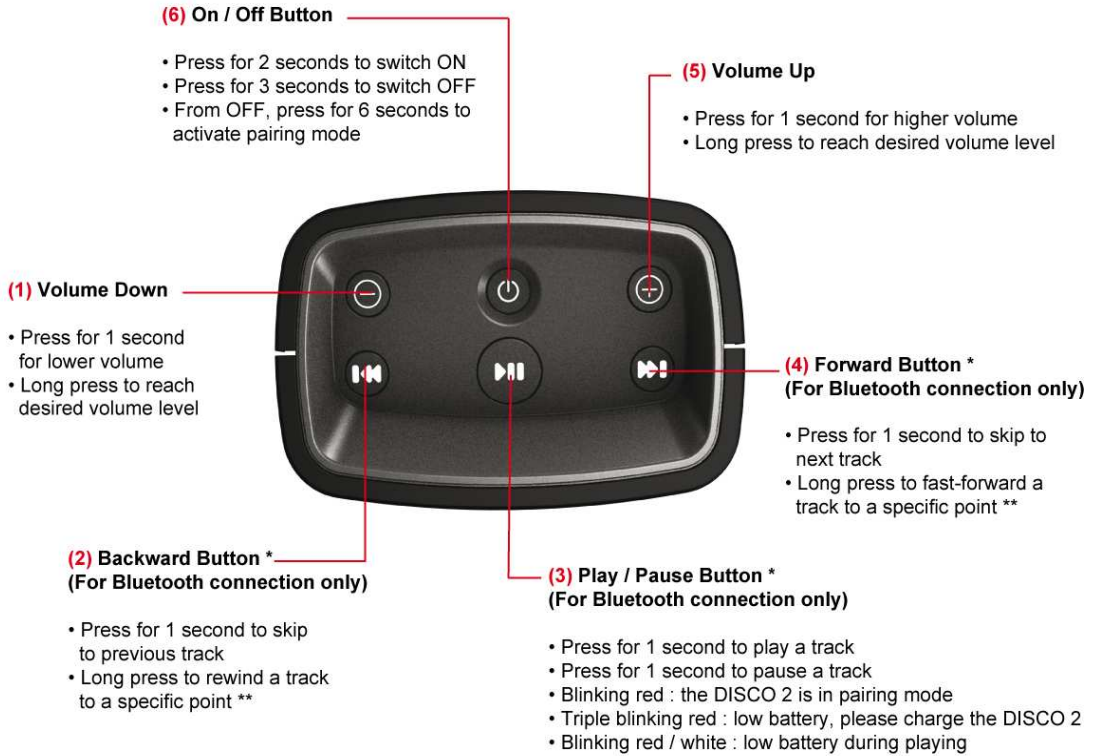

(*) To access those commands, your phone / device must support Bluetooth AVRCP* (Audio/Video Remote Control Profile), a technology enabling to control functions directly from the DISCO 2.

(**) If supported by phone

Back View

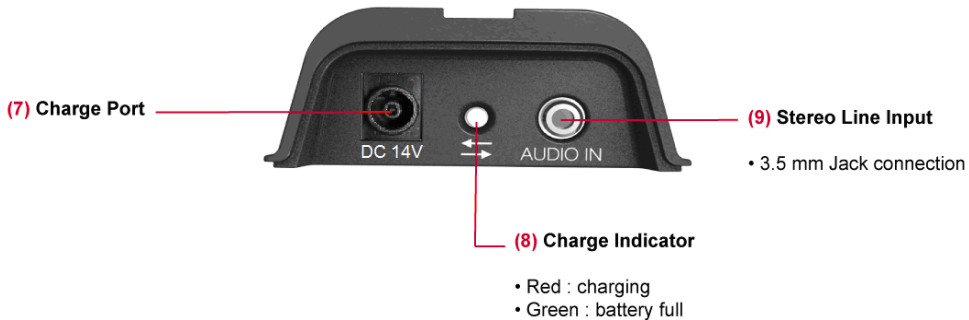

Charging

1. Connect the charger's plug into the **Charge Port (7)** of the SUPERTOOTH DISCO 2. Connect the charger to an external power source.
2. The **Charge Indicator (8)** is steady red while charging. Charging is complete when the **Charge Indicator (8)** goes green.

Turning the SUPERTOOTH DISCO 2 On and Off

Power On : Press and hold the **On / Off Button (6)** for 2 seconds. A power on beep is heard in the speaker, all the buttons switch on and off automatically.

Note 1 : At first time use, when you turn it on, the SUPERTOOTH DISCO 2 goes to pairing mode automatically (ready to be paired with your phone / device).

Note 2 : If you are not playing music, the SUPERTOOTH DISCO 2 goes to standby mode automatically after a few seconds and all the buttons switch off. To check it is turned on, press any button. All the buttons switch on and off instantaneously.

Power Off : Press and hold the **On / Off Button (6)** for 3 seconds. A power off beep is heard in the speaker.

Pairing the SUPERTOOTH DISCO 2 with your Bluetooth A2DP Phone/Device

Pair the SUPERTOOTH DISCO 2 with your phone/device to create the link or audio connection between the two. Pairing should be done at first connection to a phone/device.

Important : Make sure that your phone/device supports Bluetooth A2DP* (Advanced Audio Distribution Profile) before proceeding.

Note : Any other device previously paired with the SUPERTOOTH DISCO 2 must be turned off, or its Bluetooth must be disabled before proceeding.

1. The SUPERTOOTH DISCO 2 must be turned OFF. Press and hold the **On / Off Button (6)** for 6 seconds until the **Play / Pause Button (3)** blinks red fast. The SUPERTOOTH DISCO 2 is ready to be paired.
2. While the SUPERTOOTH DISCO 2 is in pairing mode, access the Bluetooth menu of your phone. Turn on its Bluetooth function then execute a Bluetooth search to find the SUPERTOOTH DISCO 2. (See your phone manual).
3. When your phone displays the list of Bluetooth devices, select ST DISCO 2.
4. If your phone asks for a password / pin code, enter 0000 and press OK.
5. The SUPERTOOTH DISCO 2 beeps twice. It is ready to use with your phone.

*A2DP (Advanced Audio Distribution Profile) is a technology enabling to stream stereo sound from an audio source (phone, PC, laptop, tablet, Mp3 player) to a stereo speaker or headset via Bluetooth. To do so both devices must support this profile.

Using the SUPERTOOTH DISCO 2 with your Bluetooth A2DP Phone/Device

Important : The SUPERTOOTH DISCO 2 needs to be 'paired' with your Bluetooth A2DP phone/device first. Please refer to "Pairing the SUPERTOOTH DISCO 2 with your Phone/Device" section.

Reconnecting the SUPERTOOTH DISCO 2 with a Bluetooth A2DP phone / device already paired

When you turn it on, the SUPERTOOTH DISCO 2 reconnects automatically with the latest paired device. When you leave the Bluetooth operating range, with the SUPERTOOTH DISCO 2 turned ON, it disconnects. When you come back into the Bluetooth operating range, press the **Play / Pause Button (3)** for 1 second to reconnect the latest paired device. The SUPERTOOTH DISCO 2 beeps twice.

Streaming Music from a Bluetooth A2DP Phone/Device

1. Go to your phone music player and play a track by pressing "Play" or the **Play / Pause Button (3)** for 1 second. If the SUPERTOOTH DISCO 2 is connected, the music will be heard directly in the speaker. See your phone manual if needed.
2. Audio is now on the SUPERTOOTH DISCO 2. All the buttons switch on steady white, indicating that the phone is connected and streaming music via the SUPERTOOTH DISCO 2.
3. When it is connected, you can control the music using the buttons of the SUPERTOOTH DISCO 2. Please refer to "SUPERTOOTH DISCO 2 Button Functions" section.

SUPERTOOTH DISCO 2 Button Functions (for Bluetooth connection only)

The following functions can be controlled using the buttons on the SUPERTOOTH DISCO 2.

To do so, your phone/device must support Bluetooth AVRCP* (Audio/Video Remote Control Profile), a technology enabling to control functions directly from the SUPERTOOTH DISCO 2.

For streaming Bluetooth A2DP Music

- ▶ To **play** a track, press the **Play/Pause Button (3)** for 1 second.
- ▶ To **pause** a track, press the **Play/Pause Button (3)** for 1 second.
- ▶ To skip to the **next** track, press the **Forward Button (4)** for 1 second.
- ▶ To skip to the **previous** track, press the **Backward Button (2)** for 1 second.
- ▶ To **fast-forward** a track at a specific point, press and hold the **Forward Button (4)** then release to resume.
- ▶ To **rewind** a track at a specific point, press and hold the **Backward Button (2)** then release to resume.
- ▶ To **increase the volume** level, press the **Volume Up Button (5)** for 1 second or hold the button until you reach the desired volume level.
- ▶ To **decrease the volume** level, press the **Volume Down Button (1)** for 1 second or hold the button until you reach the desired volume level.

* Audio/Video Remote Control Profile is a Bluetooth profile that allows Bluetooth devices to control media playback on remote devices.

Using the SUPERTOOTH DISCO 2 with a non Bluetooth A2DP Mp3 Player

You can connect directly an Mp3 player via the **Stereo Line Input (9)** situated at the back of the SUPERTOOTH DISCO 2.

Connecting directly a non Bluetooth A2DP Mp3 player with the SUPERTOOTH DISCO 2

1. Plug one end of the supplied audio cable into the **Stereo Line Input (9)** and the other end into the output of your music player.
2. Press "Play" on your Mp3 player to stream music directly via the SUPERTOOTH DISCO 2.
3. Non Bluetooth devices won't support Play / Pause / Previous / Next commands from the SUPERTOOTH DISCO 2. Please use the buttons of your Mp3 player directly.

Clearing settings or Reset

Clearing the pairing settings of the speaker

1. Put the speaker to pairing mode: from OFF, press and hold the **On/Off Button (6)** for 6 seconds until the **Play/Pause Button (3)** blinks red fast
2. Press and hold the **Play/Pause Button (3)** for over 5 seconds until a beep is heard. The pairing list is now erased.

Hardware resetting the speaker

Press and hold the **On/Off Button (6)** for over 35 seconds until the speaker turns off.

SUPERTOOTH DISCO 2 specifications

Bluetooth Compliance:

Bluetooth version 4.0 specifications

Supported Bluetooth Profiles:

- A2DP (Advanced Audio Distribution Profile)
- Stereo music streaming
- AVRCP (Audio/Video Remote Control Profile)
- aptX® (High quality Bluetooth audio codec)

Operating Range:

10 meters Bluetooth standard

Frequency:

2.4 GHZ

Battery and Battery Life:

- ▶ Battery type: NI MH Power pack
- ▶ Music playing time (maximum volume level): 3 to 4 hours
- ▶ Music playing time (medium volume): 10 hours
- ▶ Stand-by time: 1500 hours
- ▶ Charging time: 2 hours

Audio Features:

- ▶ Dual high efficiency speakers + bass reflex system
- ▶ 16 Watt RMS power
- ▶ Compatible with any Bluetooth A2DP phone, PC, laptop, tablet or MP3 player

- ▶ Jack 3.5 auxiliary input for non Bluetooth A2DP Mp3 players, iPods or computers
- ▶ Wireless Play / Previous / Next / Pause / Volume control (AVRCP standard)

Multipairing:

- ▶ Maximum 8 phones paired
- ▶ 1 phone connected at a time

Special Features:

- ▶ Low battery / Charging indicator
- ▶ Illuminated controls

Size and weight:

- ▶ Height: 182 mm
- ▶ Width: 108 mm
- ▶ Depth: 70 mm
- ▶ Weight: 552.7 g

CAUTION
RISK OF EXPLOSION IF BATTERY IS REPLACED
BY AN INCORRECT TYPE.
DISPOSE OF USED BATTERIES ACCORDING
TO THE INSTRUCTIONS

Correct Disposal of This Product
(Waste Electrical & Electronic Equipment)



(Applicable in the European Union and other European countries with separate collection systems). This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal. This product has an embedded, non-replaceable battery, do not attempt to open the product or remove the battery as this may cause injury and damage the product. Please contact the local recycling facility for removal of the battery. The embedded, non-replaceable battery is designed to last the life time of the product.

Hereby, EURO COMMUNICATION EQUIPEMENTS, represented by Michel MARCHANT, CEO, declares that the SuperTooth® CRYSTAL MODEL BTCRY6, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.

CE 0678

For the whole declaration please visit : <http://www.supertooth.net/download>

Euro Communication Equipements SAS

Route de Foix D117

11500 NEBIAS (FRANCE)



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Euro-CB is under license. Other trademarks and trade names are those of their respective owners.

Federal Communications Commission (FCC) Statement
Industry Canada (IC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC/IC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures :

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions :

- 1) This device may not cause interference and
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

FCC/IC RF Radiation Exposure Statement :

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Federal Communications Commission (FCC / ID) Statement

15.21

Vous êtes informé que tout changement ou modification non expressément approuvé par le responsable de la conformité peut annuler l'autorisation d'utilisation de cet équipement.

15.105(b)

Le présent appareil est conforme aux standards FCC / CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Exposition aux champs électromagnétiques :

Cet équipement est conforme aux limites FCC / Industrie Canada d'exposition aux rayonnements définies pour un environnement non contrôlé.

Les utilisateurs doivent se conformer aux instructions spécifiques de fonctionnement pour satisfaire à cette conformité.

Cet émetteur ne doit pas être co-localisé ou fonctionner conjointement avec une autre antenne ou un autre émetteur.