

BHC-2620 QIG

Bluetooth™ Stereo Headset


BHC-2620 is a headset that supports wireless music streaming with SBC and apt-X codec. By connecting the headset to the PC via a Bluetooth USB audio dongle, the user can listen to music in streaming mode. Also, the user can listen to music by connecting the headset to the MP3

via a Bluetooth audio adapter. The sports design of the headset with its light headband allow user to enjoy sheer and unsurpassed comfort. It is perfect for travel entertainment or as an add-on for your home entertainment system. People can switch to mobile phone automatic or manually when there is an incoming call headset connect with your cellular phone (with Bluetooth™ function) give you a safety way to none stop communication in driving.

The BHC-2620 build in NFC function easy connect to mobile phone with NFC function.



1 Headset Features

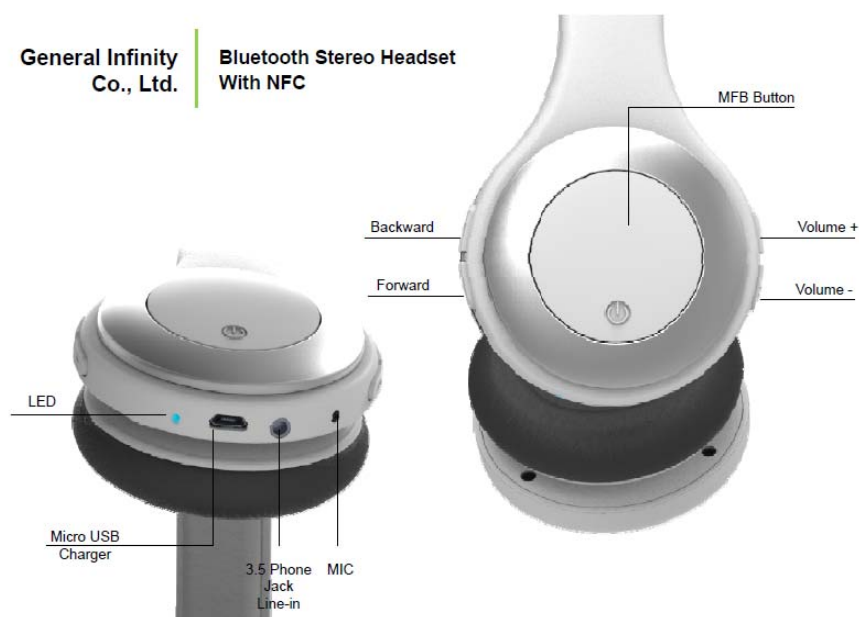

Function Keys

Location	Keys	Function
	Volume up	Volume up function
	Volume down	Volume down function
	Forward button	Play next song for AVRCP function
	Backward button	Play previous song for AVRCP function
	MFB button	Power on / off / call function

LED indicators

Color	LED Status	Function
Blue	Status LED lights up steady	Standby(no connection)
	Status LED flashes	Linked
	Status LED and Charging LED Flash alternative	Pairing state
Red	Charging LED flashes slowly	Low battery
	Charging LED lights up steady	Charging (Indicator turns off when charging is completed.)

2 Charge your headset

After opening the package, please make sure to do the following steps full charge the headset by charge it at least 4 hours. The Red LED will be steady on when charging. The LED will go off when battery is fully charged.

3 Power on or off your headset

Press MFB key about 3 seconds to power on the headset. When the headset power on the blue led will flash 3 times and you can hear a rising tone. When headset already power on, press MFB key about 3~5 seconds will power off the headset. When the headset power off the red led will flash 3 times and you can hear a falling tone.

4 Pairing device with your headset

Pairing headset to your Bluetooth™ mobile phone or other Bluetooth™ devices for the first time only. The headset will remember paired device, so you don't need pair it every time. To put headset into pairing mode, press and hold the MFB button for six seconds to wait for the Blue and red led flash alternative that indicates the headset is into the paring mode. Operate your Bluetooth™ mobile phone or other Bluetooth™ device to start Bluetooth™ function. Find the headset "BHC-2620", press the pairing code "0000" The blue LED is start flashing, the headset is in connected mode

NFC easy pairing

- Power On: Mobile phone short touch the BHC-2620, blue and red LED flash alternatively for into pairing mode. You can auto-connect to the headset.
- Connect: Mobile phone short touch with the BHC-2620 when headset is disconnected
- Power Off: Mobile phone short touch with the BHC-2620 when headset is connected.

5 Working in AV mode

When your headset connects a device with A2DP profile, you can listen to stereo music from transmitter side to your headset. You can connect a USB dongle or AV transmitter or cellular phone with A2DP profile supported. Almost A2DP source device support AVRCP that can use play/pause, next track and pre track function. If you use AV transmitter with 3.5mm audio jack then it doesn't support AVRCP function. Working in AV connection mode, you can

- Short press MFB key to toggle play/pause action
- Short press Vol+ or Vol- to adjust volume
- Short press forward or backward button to change songs

6 Working in headset mode

When your headset connect a device like cellular phone or a Bluetooth USB dongle working with Bluetooth PC stack. Your headset can working in headset mode. Working in headset mode, your headset can using 8 KHz channel to transmit and receive voice data? You can use it as a Bluetooth mono headset to talk phone call wirelessly. You also can connect PC with a USB dongle running skype or massager talking with your headset.

Standby mode:

- Double MFB button key to init voice dial function
- Short press MFB and Vol- keys to init last number redial function
- Long press volume down and backward button to clear paired information.

Incoming call (ring) mode:

- Short press MFB button key to accept phone call
- Long press MFB button key when hear a beep tone to reject call

In call active mode:

- Short press Vol+ or Vol- to adjust volume
- Long press MFB button key when hear a beep tone to toggle call between headset and cellular phone
- Short press MFB key to end call
- Short press Vol+ or Vol- key to toggle mute microphone

7 Led statuses

POWER ON	Blue led flash 3 times
POWER OFF	Red led flash 3 times
PAIRING	Blue and red led flash alternatively
STANDBY MODE	Blue led steady On
AV ACTIVE MODE	Blue led flash twice every 2 seconds
HEADSET ACTIVE MODE	Blue led flash once every 2 seconds
LOW BATTERY INDICATION	Red led flash once 2 sec continuous
AUTO SHUTDOWN	Red led flash 3 times and power off (5 minutes no any connection)

If the Bluetooth Headset does not work, try the following:

- Ensure connecting devices are charged
- Turn off all devices and then turn them on in order to shown in this guide
- Ensure devices are within 10 meter range
- Ensure the Headset is connected by check the blue LED flash

Note 1: Some A2DP source like 3.5mm interface transmitter cannot support AVRCP profile, so it cannot do remote control function.

Note 2: Only cellular phone supports hands free profile can use voice dial, last number redial, call transfer function

NCC 警語：

經型式認證合格之低功率射頻電機，非經許可，公司、商號使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

FCC:

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

Federal Communications Commission Requirements

The equipment has been tested and found to comply with the limits for Class B Digital Device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

THE CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and receiver.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

The equipment complies with FCC radiation exposure limits set forth for uncontrolled equipment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. The equipment has very low levels of RF energy that it is deemed to comply without testing of specific absorption ratio (SAR).