



Aiplay Unit User Manual

LED status and Description

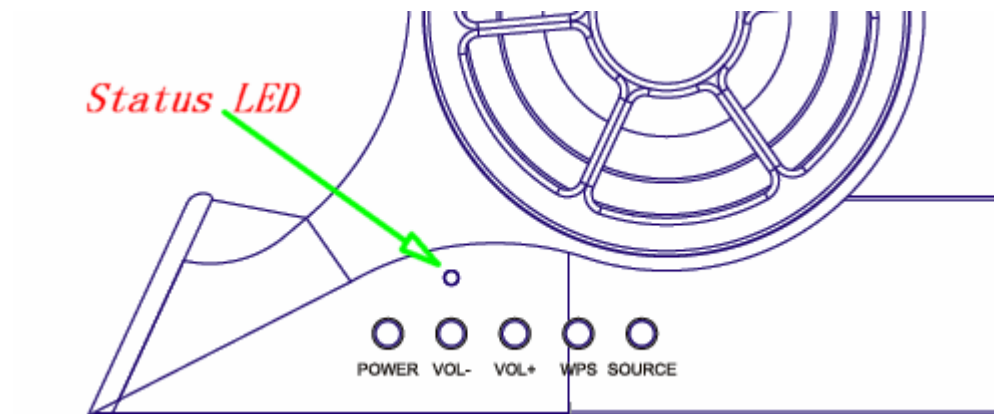

LED Color	Description
Solid Red	The unit is in power off state. No Audio can be played.
Blinking Blue	When the power button is pressed the led will blink. This indicates that the system is starting.
Solid Blue	This indicates that the system has connected with WI-FI router.
Solid Purple	The system will get into power save mode if there is no operation on it ,and LED will become solid purple

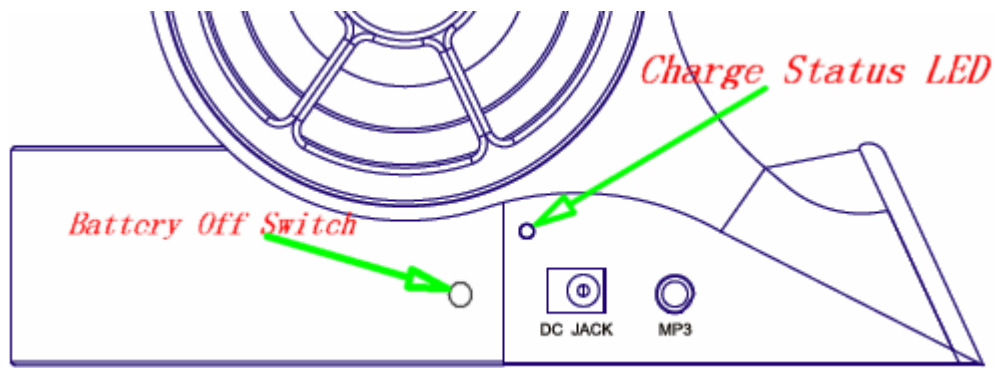

LED Color	Description
Solid Green	When the adaptor is plugged in and the unit is in charging mode.
Blinking Green	There is something wrong in charging process

Button Controls

Button	Description
Vol+	Volume up
Vol-	Volume down
Power	Power on the unit
WPS	Connect with WI-FI
SOURCE	Change Audio Source
Battery Off	disconnect with battery

Power Button

- The system can be turn on and off by “Power” button in short press

Volume Button

- The system has two volume buttons located on the left side. Volume up is labled “Vol+” volume down is labled”Vol-“.

WPS Button

- shrot Press: If your home or office network router has a WPS button then pressing this button allows you to authenticate onto your network

without entering any password/pass key information.

Source Button

- . If you plug in aux cable and play back, and now unit in airplay mode,
Press the Source button on side of the unit it can change to MP3 mode .

Battery off

- . If software crashes, firstly pull out the adaptor, then you should stab the key with pointed things for more than 3 seconds, later you can power on it again.

WI-FI Connection Method

① WPS network setup

- Press the Power button on the side of the unit
- The indicator light above the “Vol-“ button will flash rapidly to indicate that the unit is starting up . When the indicator light starts to flash slowly move on to the next step
- Follow the instructions on your WPS enable network router and start the WPS pairing function.
- Press the WPS button on side of the unit. The indicator will repeatedly flash red ,blue and purple to indicate that the WPS pairing has started.
- When the process is completed the WPS indicator will illuminate solid blue to indicate that the unit has successfully connected to your

network.

- You are now ready to use the Airplay

② *Log share network setup*

- Press the Power button on the side of the unit
- The indicator light above the “Vol-“ button will flash rapidly to indicate that the unit is starting up . When the indicator light starts to flash slowly move on to the next step.
- Plug in the Ipad or Iphone by Docket or USB, Press WPS button short, and then you should see a popup window means that do you want to share the wi-fi setup and let the accessories access the wi-fi network. Then you should press “Apply” button and the unit has successfully connected to your network.



③ *JB direct connect setup*

- Press the Power button on the side of the unit
- Press the WPS button until the led blinking rapidly.
- Turn on the WIFI from your apple device, and you will find the unit name. Connect it and you can playback the music by airplay unit.

Audio playback function setup

① *MP3 playback setup*


- Press the Power button on the side of the unit
- The indicator light above the Vol- button will flash rapidly to indicate that the unit is starting up. When the indicator light starts to flash slowly, put 3.5 mm headphone plug to MP3 socket, after a few seconds audio should be heard from the unit

② Docket playback setup

- Press the Power button on the side of the unit
- The indicator light above the Vol- button will flash rapidly to indicate that the unit is starting up . When the indicator light starts to flash slowly ,put ipad or iphone plug to the docket, and then play the ipod music you can listen to the music.

③ Airplay playback setup

- Press the Power button on the side of the unit
- The indicator light above the Vol- button will flash rapidly to indicate that the unit is starting up . When the indicator light starts to flash slowly move on to the next step
- Connect the unit to network following the above method
- After unit connected with the network and connect the ipad or iphone as well, you will found the unit in ipod window and select the unit name “56°Air“ playback the music and you will hear it .

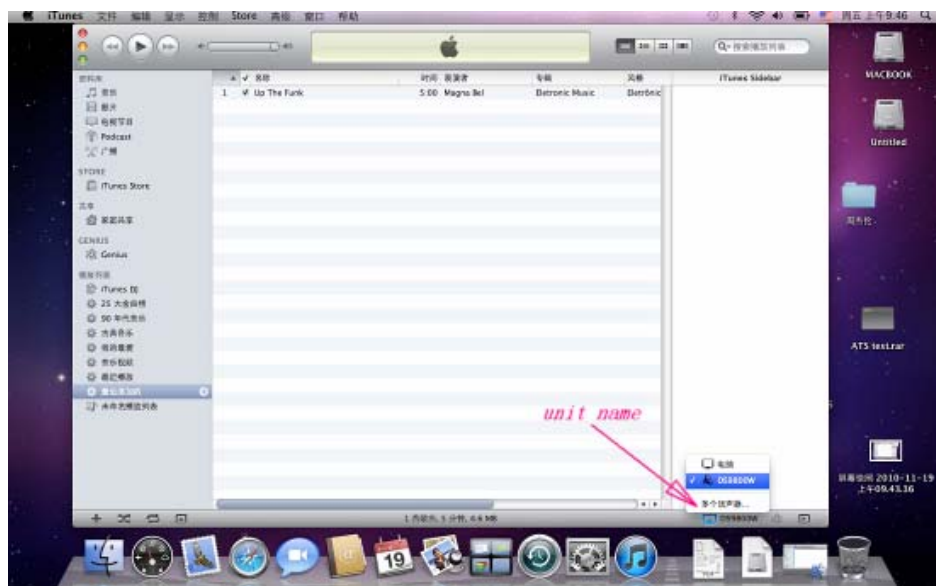

Caution:

This device complies with Part 15 of the FCC Rules / Industrie Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type

d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

MPE Reminding

To satisfy FCC / IC RF exposure requirements, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during device operation.

To ensure compliance, operations at closer than this distance is not recommended.

Les antennes installées doivent être situées de façon à ce que la population ne puisse y être exposée à une distance de moins de 20 cm. Installer les antennes de façon à ce que le personnel ne puisse approcher à 20 cm ou moins de la position centrale de l'antenne.

La FCC des états-unis stipule que cet appareil doit être en tout temps éloigné d'au moins 20 cm des personnes pendant son fonctionnement.

Only for detachable antennas:

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Gain of antenna: 1.5dBi max.

Type of antenna: Omni-directional

Impedance of antenna: 50ohm

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Gain d'antenne: 1.5dBi maximal

Type d'antenne: 50 ohm, Omni-directionnel