


# Personal Audio Enhancer


## PAE-300 Bluetooth Dongle User Manual



### Identifying the part

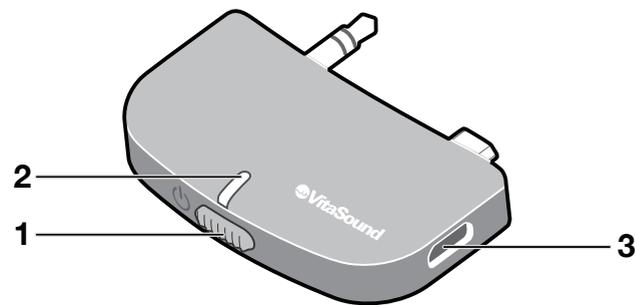


1. Power / Pairing Button
2. LED Indicator (Blue / Red)
3. Charging port
4. Micro-USB plug (No function)
5. Stereo plug

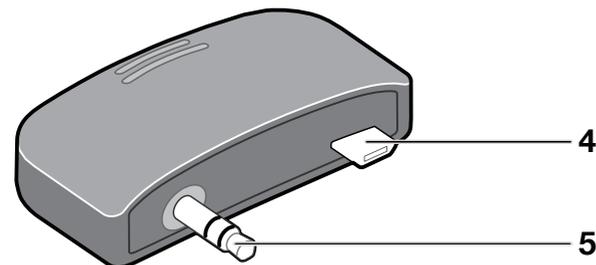

### Connecting with PAE-300


Plug the Stereo plug and the Micro-USB plug on the PAE Bluetooth Dongle all the way into the Stereo port and Micro-USB charger port on the PAE-300 respectively.

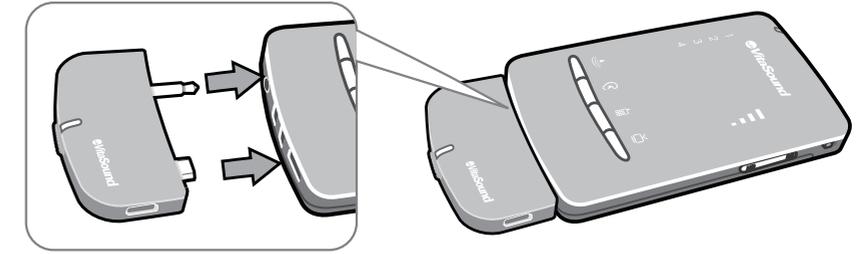

### Basic operation


#### 1. Power On

When the PAE Bluetooth Dongle is off, press and hold the Power/Pairing Button until **Blue** LED lights up and flash (approximate 5 seconds).

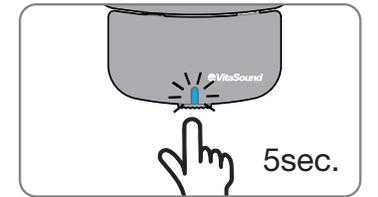


#### 2. Power Off

When the PAE Bluetooth Dongle is on, press and hold the Power/Pairing Button until **Red** LED is on (approximate 5 seconds) and then off.

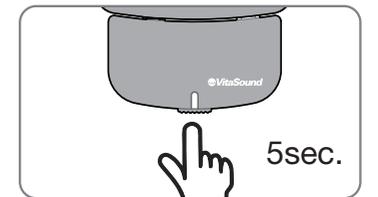


### Pairing with cell phone

1. Make sure that the PAE Bluetooth Dongle is powered off first.

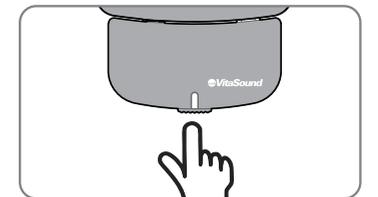

2. Press and hold the Power/Pairing Button for approximate 8 seconds until the LED flashes in **Red** and **Blue** alternately. This means the PAE Bluetooth Dongle is searching a device to pair.

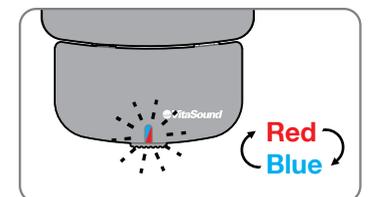

3. Only release the Power/Pairing button when the LED is in Red/Blue alternate flashing.


#### Note:

Note: The LED lights up and flashes in Blue before the Red/Blue alternate flashing, so please **DO NOT** release the Power/Pairing Button in this status during pairing process until the Red/Blue alternate flashing occurs.

4. From the cell phone setting menu, seek a Bluetooth device in pairing mode. Once "PAE Bluetooth Dongle" name is displayed, select it.


5. If password is required by the cell phone, enter "0000" for the password.

6. Once the pairing succeeds, the LED will flash in **Blue** in every 8 seconds.

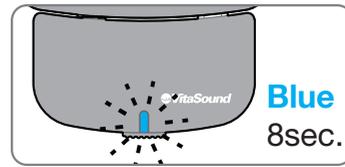


### Using PAE Bluetooth Dongle to make or receive a call

1. Make sure the PAE-300 is in Phone Mode before using the PAE Bluetooth Dongle to make or receive a call (Press and release the Phone Mode button on the PAE-300.)

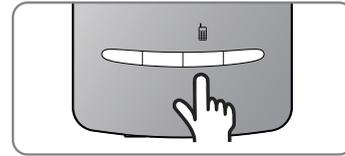


2. To make a call, dial a phone number on your cell phone. You will hear ringing tone on the PAE-300 headset when your cell phone is calling.


3. To receive a call, press and release the Power/Pairing Button on the PAE Bluetooth Dongle (or press the relevant button on your cell phone directly.)

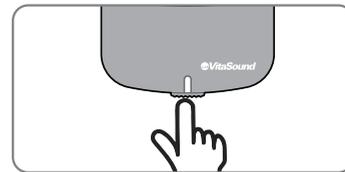


4. To hang up the call, press and release the Power/Pairing Button to finish the call (or press the relevant button on your cell phone directly.)

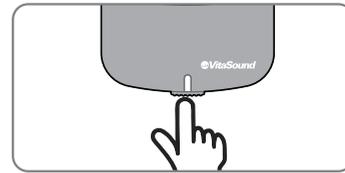


### LED Indicator Status - Operation

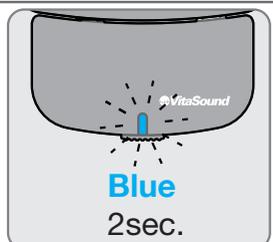


Flash in **Blue** in every 2 seconds:  
No connection with any device.

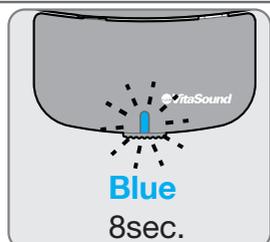

Flash in **Blue** in every 8 seconds:  
Connected with a device successfully.

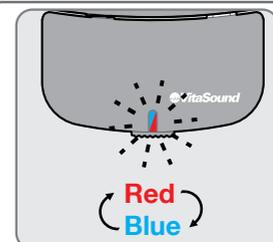


**Red / Blue** alternate flashing:  
PAE Bluetooth Dongle In pairing mode.

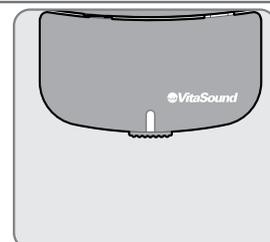


No light up:  
PAE Bluetooth Dongle is powered off.

### Battery charge


1. Plug a micro-USB cable (Optional) into the charging port on the PAE Bluetooth Dongle.
2. Connect the other side of micro-USB cable with a charger adaptor (Optional) with the output of 5V==1A (or 1000 mA)
3. Plug the charger adaptor into the wall socket to start charging.

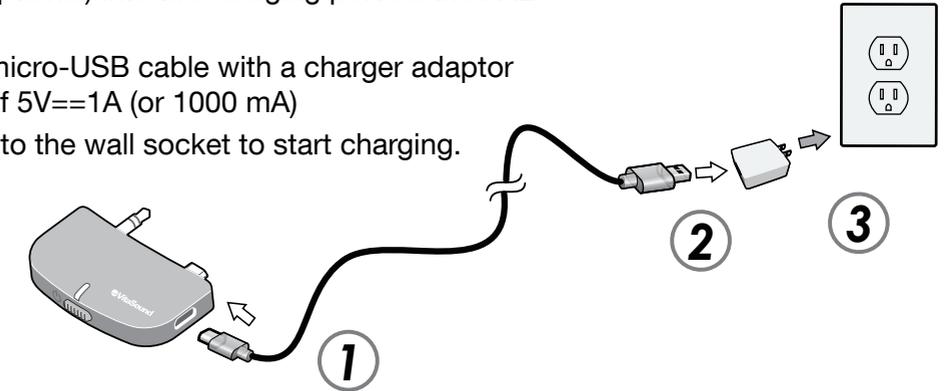

### LED Indicator Status - Charging

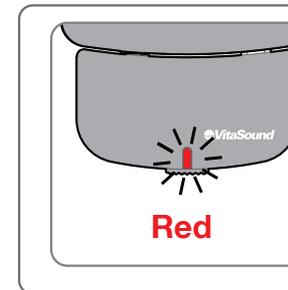


Solid **Red**:  
Charging

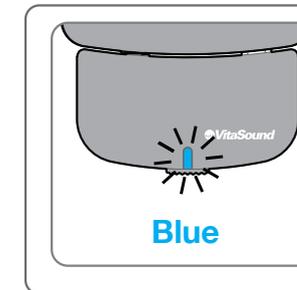

Solid **Blue**:  
Charging completed

### Low Battery

- The LED Indicator will flash in **Red** when battery level is low. Please turn off and charge immediately.
- A short Beep sound will be generated through the headset while battery level is low.

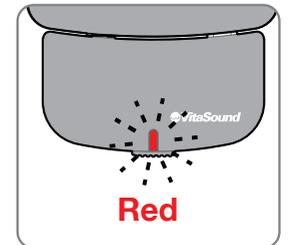

## Certification and Compliance

### FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

-----

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.