



BBQ GO ^{IBT-2X}

Bluetooth Cooking Thermometer

Inkbird Tech. C.L.



cs@ink-bird.com







www.ink-bird.com



Shenzhen, GD, 518000, China



Get to know the device

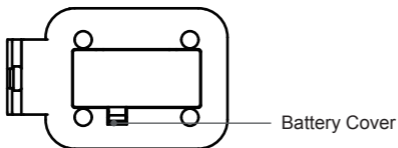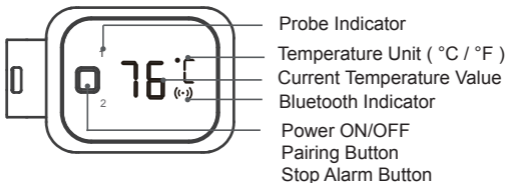


AAA Battery x 2
(Not Included)

This device provides 2 sockets for probes, which enable you to monitor 2 items at same time. If you need another probe besides the one in the standard package, please contact the dealer.

Put in the battery

Two AAA size batteries are needed for this device. Make sure they are put in the right direction by following the icons on the unit.



- 1 Open the battery cover.
- 2 Put in batteries, noticing the icons that show directions.



- 3 Lock the battery cover.

Download the APP

Search the keyword 'bbq go' in Appstore or Google Play, or scan the following QR code with your phone.

Download and install it for free.

Make sure your phone meet the requirements:

iPhone 4S, and later models;

iPod touch 5th, ipad 3rd generations and later models,

all ipad mini;

Android devices running version 4.4 or later, with blue-tooth 4.0 module.




BBQ GO APP



Install the probes

The device will keep scanning the sockets when its power is switched on, the Probe Indicators will blink one by one from 1 to 2 where probes are plugged in.

Then insert the probes into the food, make sure the front tip of the probe is in the center of the food to get accurate temperature.

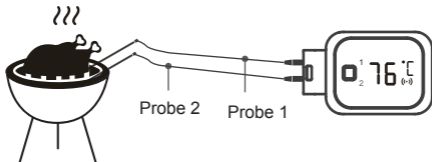

Pair with your phone

Bluetooth Indicator

- 1 Press and hold the power button on the device for 3 seconds to power it on.
- 2 Keep the bluetooth switch of your phone on.
- 3 Launch the app, and follow the instructions in the app to pair and activate the device.
- 4 Connected successfully.

No Icon

Icon Blinking


Icon Fixed

Once paired the device with your phone, you don't need to do it again, unless you change to other phones.

Enjoy your barbecue time

Choose the food type and preference for the food where each probe is inserted, the app and the device will display its current and target temperature.

When the food is ready, the app and the device will alarm.

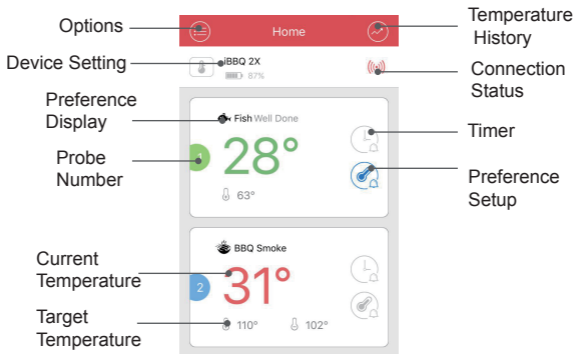

The user interface of the app may be changed when upgraded. Please follow the instructions in the app.

Power ON/OFF

Power ON:


Press and hold the power button for 3 seconds.

Power OFF:

- Press and hold the power button for 3 seconds.
- Auto-off after 8 hours out of connection with phone.

Warning

The heat resistance varies in different components of the probe, DO NOT put the probes directly in the fire frame. And probes are NOT dishwasher safe. Please DO NOT put the teflon cable and the connecting part (between the sensor and teflon cable) into the water.

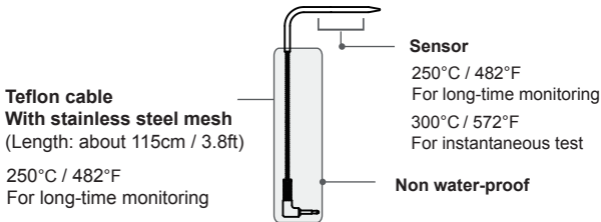

Annex I Accuracy Table of IBT-2X

Temperature Range	Accuracy	
	Centigrade	Fahrenheit
0~6°C / 32~43°F	4°C	6°F
7~15°C / 44~59°F	3°C	4°F
16~30°C / 60~86°F	2°C	3°F
31~170°C / 87~338°F	1°C	2°F
171~190°C / 339~374°F	2°C	3°F
191~220°C / 375~428°F	3°C	4°F
221~250°C / 429~482°F	4°C	6°F

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.