
# JVC

## MONITOR WITH DVD RECEIVER **KW-V850BT KW-V850BTM** MONITOR WITH RECEIVER **KW-M750BT KW-M750BTM**

### INSTRUCTION MANUAL

JVCKENWOOD Corporation

 Updated information (the latest Instruction Manual, system updates, new functions, etc.) is available from <http://www.jvc.net/cs/car/>.

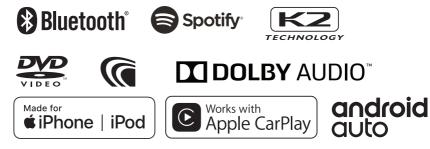

## Contents

#### **Before Use**

Precautions	4
How to read this manual	5

4

6

#### **Basic Operations**

Functions of the Buttons on the Front Panel	6
Turning on the Unit	.7
Initial Settings	.7
Adjusting the volume1	0
Touch screen operations1	0
Popup menu1	0
HOME screen descriptions1	1
Source selection screen description1	2
Source control screen descriptions1	4
List screen1	5

Information Window	16
Photo Frame	16

Disc	17
Playing a disc	17
DVD/ VCD Basic Operation	17
Music CD/ Disc media Basic Operation	19
File search Operation	20
DVD Disc Menu Operation	21
DVD Setup	22

#### APPS—Apple CarPlay/ Android Auto™

Apple CarPlay Operation	23
Android Auto <sup>™</sup> Operation	24
Spotify Operation	26

23

USB 28

Connecting a USB device	28
USB Basic Operation	28
Search Operation	30

### iPod/iPhone 31

Preparation
iPod/iPhone Basic Operation32
Search Operation33

Tuner 34

Tuner Basic Operation	34
Memory Operation	35
Selecting Operation	35
Traffic Information	36
Tuner Setup	36

#### Other External Components 38

View Camera	38
External audio/video players (AV-IN)	39
Using the external navigation unit	39
TV tuner	40

#### **Bluetooth Control**

41
12
12
14
16
51

41

52

58

#### Setup

Monitor Screen Setup5	52
System Setup5	52
User Interface Setup5	53
Special Setup5	5
Display Setup5	5
AV Setup5	57

#### Controlling Audio

3-way speaker system setup	58
Speaker / X'over setup	59
Controlling General Audio	61
Equalizer Control	61
Volume Offset	62
Zone Control	62
Sound Effect	63
Listening Position / DTA	64
Audio Setup memory	66

## Remote control 67 Functions of the Remote control Buttons .......67

# Connection/Installation 69 Before Installation 69 Installing the unit 71

#### Troubleshooting

Problems and Solutions76
Error Messages

76

#### Appendix 78

Playable Media and Files	78
Region Codes in the World	80
DVD Language Codes	81
Specifications	82
About this Unit	84

## **Before Use**

#### Precautions

#### A WARNINGS

## To prevent injury or fire, take the following precautions:

- To prevent a short circuit, never put or leave any metallic objects (such as coins or metallic tools) inside the unit.
- Do not watch or fix your eyes on the unit's display when you are driving for any extended period.
- If you experience problems during installation, consult your JVC dealer.

#### Precautions on using this unit

- When you purchase optional accessories, check with your JVC dealer to make sure that they work with your model and in your area.
- You can select a language to display menus, audio file tags, etc. See **User Interface Setup** (**P.53**).
- The Radio Data System or Radio Broadcast Data System feature won't work in areas where the service is not supported by any broadcasting station.

#### Protecting the monitor

• To protect the monitor from damage, do not operate the monitor using a ball point pen or similar tool with a sharp tip.

#### Cleaning the unit

 If the faceplate of this unit is stained, wipe it with a dry soft cloth such as a silicon cloth.
 If the faceplate is stained badly, wipe it with a cloth moistened with neutral cleaner, then wipe it again with a clean soft dry cloth.

#### NOTE

 Applying spray cleaner directly to the unit may damage its mechanical parts. Wiping the faceplate with a hard cloth or using a volatile liquid such as thinner or alcohol may scratch the surface or erase the screened print.

#### 🔳 Lens fogging

When you turn on the car heater in cold weather, dew may form on the lens in the disc player of the unit due to condensation. This condensation on the lens (also called lens fogging) may not allow discs to play. In such a situation, remove the disc and wait for the dew to evaporate. If the unit still does not operate normally after a while, consult your JVC dealer.

#### Precautions on handling discs

- Do not touch the recording surface of the disc.
- Do not stick tape etc. on the disc, or use a disc with tape stuck on it.
- Do not use disc type accessories.
- Clean the disc from the center toward the outside rim.
- When removing a disc from this unit, pull it out horizontally.
- If the disc center hole or outside rim has burrs, use the disc only after removing the burrs with a ballpoint pen etc.
- Discs that are not round cannot be used.



- 8-cm (3 inch) discs cannot be used.
- Discs with coloring on the recording surface or discs that are dirty cannot be used.

• This unit can only play the following types of CDs.

		DIGITAL AUDIO ReWritable
--	--	-----------------------------

- This unit may not correctly play discs which do not have the mark.
- You cannot play a disc that has not been finalized. (For the finalization process, see your writing software and your recorder's instruction manual.)

#### How to read this manual

• The screens and panels shown in this manual are examples used to provide a clear explanation of operations.


For this reason, they may be different from the actual screens or panels, or some display patterns may be different from the actual ones.

• **Display language**: English is used for the purpose of explanation. You can select a display language from the **SETUP** menu. See **User Interface Setup** (**P.53**).

## **Basic Operations**

#### Functions of the Buttons on the Front Panel

#### KW-V850BT/KW-V850BTM

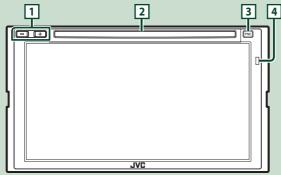

#### KW-M750BT/KW-M750BTM



#### NOTE


• The panels shown in this guide are examples used to provide a clear explanation of operations. For this reason, they may be different from the actual panels.

Number	Name	Motion
1	–, + (Volume)	<ul> <li>Adjusts the volume.</li> <li>The volume will go up to 15 when you keep pressing +.</li> </ul>
2	Disc insert slot	A slot to insert a disc media.
3	FNC	<ul> <li>Displays the popup menu screen.</li> <li>Pressing for 1 second displays the Voice Recognition screen (P.48).</li> <li>When the power is off, turns the power on.</li> </ul>
4	Remote Sensor	Receives the remote control signal.

#### **Turning on the Unit**

The method of turning on is different depending on the model.

#### **1** Press the **FNC** button.



> The unit is turned on.

#### NOTE

 If it is your first time to turn the unit on after installation, it will be necessary to perform Initial setup (P.7).

#### • To turn off the unit:

1 Press the **FNC** button.

> Popup menu appears.

2 Touch 💼.



► HOME screen appears.

3 Touch III.

#### 4 Touch Power Off.



#### **Initial Settings**

#### **Initial setup**

Perform this setup when you use this unit first time.

#### 1 Set each item as follows.

Initial SETUP Finish	
Language	-
Clock	Ē
Display	
Camera	
DEMO	▼
3way X'over	≖

#### Language

Select the language used for the control screen and setting items. Default is "British English(en)".

- 1) Touch Language.
- 2 Touch Language Select.
- (3) Select the desired language.
- (4) Touch **5**.

For details, see **User Interface Setup** (P.53).

#### Clock

Sets the synchronization of the clock and adjusts it.

For details, see **Calendar/clock settings** (**P.9**).

#### Display

Set the button illumination color. If it is hard to see the image on the screen even, adjust the viewing angle.

- 1 Touch Display.
- 2 Touch Viewing Angle.
- ③ Select an angle
- ④ Touch 🖌 .

For details, see Display Setup (P.55).

#### **Basic Operations**

#### Camera

Set the parameters for the camera.

- 1) Touch Camera

For details, see Camera Setup (P.38).

#### DEMO

Set the demonstration mode. Default is "ON". ① Touch **DEMO** to turn ON or OFF.

#### 3way X'over

Displays the message screen.

For details, see **3-way speaker system setup** (**P.58**).

#### 2 Touch Finish.




#### NOTE

• These settings can be made from the SETUP menu. See **Setup (P.52)**.

#### **Security Code Setup**

You can set up a security code to protect your receiver system against theft.

When the Security Code function is activated, the code cannot be changed and the function cannot be deactivated. Note that the Security Code can be set with a 4 to 8 digit number of your choice.



Popup menu appe

2 Touch 💼



➤ HOME screen appears.



#### 4 Touch Security.



> Security screen appears.

## 5 Touch Security Code Set on the Security screen.

- ➤ Security Code Set screen appears.
- 6 Enter a security code with 4 to 8 digits and touch **Enter**.



#### 7 Enter the same code again and touch Enter.

Now, your security code is registered.

#### NOTE

- Touch BS to delete the last entry.
- If you enter a different security code, the procedure returns to step 6 (for first code entry).
- If you have disconnected the Receiver from the battery, enter the correct security code as that you have entered in step 6 and touch Enter. You can use your receiver.

#### To change the security code:

1 Touch Security Code Change on the Security screen, then repeat step 6 and 7.

#### To clear the security code:

1 Touch Security Code Cancellation on the Security screen, then repeat step 6.

#### Calendar/clock settings

1 Press the **FNC** button.

Popup menu appears.

2 Touch 抗.



► HOME screen appears.

3 Touch 💓



#### 4 Touch User Interface.



➤ User Interface screen appears.

- 5 Touch Time Zone.
- 6 Select the time zone.
- 7 Set each item as follows.

Scroll the page to show hidden items.

User Interface	4
·····,····	
Time Format 12-Hour	Ŧ
Clock RDS-SYNC	
Time Zone Bangkok [GMT +7:00]	•
Clock Adjust	T

#### Time Format

Select the time display format.

12-Hour (Default)/ 24-Hour

#### Clock

**RDS-SYNC** (Default): Synchronizes the clock time with the RDS.

Manual: Set the clock manually.

Time Zone

Select the time zone.

#### Clock Adjust

If you select **Manual** for Clock, adjust the date and time manually. (**P.53**)

#### NOTE

 Please set the date and time. If they are not set, some functions may not work.

#### **Basic Operations**

#### Adjusting the volume

You can adjust the volume (0 to 40).

Press + to increase, and press - to decrease. Holding + increases the volume continuously to level 15.

#### **Touch screen operations**

To perform operations on the screen, you need to touch, touch and hold, flick or swipe to select an item, display a setting menu screen or change pages.

#### • Touch

Touch the screen gently to select an item on the screen.



#### • Touch and hold

Touch the screen and keep your finger in place until the display changes or a message is displayed.

#### • Flick

Slide your finger quickly to the left or right on the screen to change the page. You can scroll a list screen by flicking up/ down on the screen.

#### • Swipe

Slide your finger up or down on the screen to scroll the screen.



#### Monitor Touch Control:

You can also control playback by moving your finger on the touch panel as follows (for some sources, the monitor touch control function is not available).

Sliding the finger upward/downward:
 Equivalent to the operation of pressing + /
 (Media). Tuner Preset broadcast stations are switched.

- Sliding the finger leftward/rightward:
   Equivalent to the operation of pressing I<</li>
   / ►►I.
- Moving your finger clockwise or counterclockwise: Increases/decreases the volume.



#### Popup menu

#### 1 Press the FNC button.



- Popup menu appears.
- **2** Touch to display the popup menu.

#### KW-V850BT/ KW-V850BTM



#### KW-M750BT/ KW-M750BTM



#### The contents of the menu are as follows.

Номе	• Displays the HOME screen. (P.11)
DISP	<ul> <li>Switches between screens. The screen to be switched to depends on the <b>DISP Key</b> setting on the <b>User</b> <b>Interface</b> screen. (<i>P.53</i>).</li> <li>Touch and hold to turns the screen off.</li> </ul>
Phone	Displays the Hands Free screen. (P.46) When connecting as Apple CarPlay or Android Auto, it works as a phone provided in Apple CarPlay or Android Auto.

© Camera	Displays the view camera screen. (P.38)
Screen Adjust	<ul> <li>Displays the Screen Adjustment screen.</li> <li>(P.52)</li> </ul>
() Audio	Displays the Audio screen. (P.58)
<b></b>	<ul> <li>Touch to eject the disc and to close the popup menu.</li> <li>Touch and hold to forcibly eject the disc.</li> <li>To forcibly eject the disc, touch it for 2 seconds and then touch <b>Yes</b> after the message is displayed.</li> <li>KW-V850BT/ KW-V850BTM only</li> </ul>
×	Close the popup menu.     KW-M750BT/ KW-M750BTM only
1	• Short-cut buttons: The source changes to the one you have set with a short-cut. For the short-cut setting, refer to <b>Customize Short-cut buttons on HOME screen (P.14)</b> .

#### Turn off the screen

**1** Touch and hold **DISP** on the popup menu.



#### **HOME screen descriptions**

Most functions can be performed from the HOME screen.



1	• Short-cut playback source icons (P.13)
2	Current source information.     Touch to display the control screen of the current source.
3	<ul> <li>Information Window         <ul> <li>You can change the information window by touching (/).</li> <li>Touch the Information Window to display the detailed screen.</li> </ul> </li> </ul>
4	Displays the SETUP screen. (P.55)
5	Displays the source selection screen. (P.12)
6	<ul> <li>Touch to eject the disc.</li> <li>Touch and hold to forcibly ejects the disc.</li> <li>KW-V850BT/ KW-V850BTM only</li> </ul>

#### **Display the HOME screen**

#### 1 Press the FNC button.



#### 2 Touch 💼.



► HOME screen appears.

#### **Basic Operations**

## Source selection screen description

You can display icons of all playback sources and options on the source selection screen.



#### Select the playback source

#### 1 Press the FNC button.

> Popup menu appears.

#### 2 Touch 🚹.

► HOME screen appears.

### 3 Touch I.

From the screen, you can select the following sources and functions.

Apple CarPlay	<ul> <li>Apple CarPlay: Switches to the Apple CarPlay screen from the connected iPhone. (P.23)</li> <li>Android Auto: Switches to the Android Auto screen from the connected Android device. (P.24)</li> </ul>
Phone	Displays the Hands Free screen. ( <b>P.46</b> ) When connecting as Apple CarPlay or Android Auto, it works as a phone provided in Apple CarPlay or Android Auto.
A Tuner	Switches to the Radio broadcast.     (P.34)
BT Audio	Plays a Bluetooth audio player. (P.41)
Disc	• Plays a disc.*1 <b>(P.17)</b>
<b>I</b> iPod	• Plays an iPod/iPhone. <b>(P.31)</b>
USB	• Plays files on a USB device. <b>(P.28)</b>
Spotify	Switches to Spotify. (P.26)
AV-IN	Switches to an external component connected to the AV-IN input terminal. (P.39)
(i) Audio	Displays the Audio screen. (P.58)
AV Off	Turns off the AV source. (P.13)
<b>b</b> Power Off	• Turns off the unit. <b>(P.7)</b>

\*1 KW-V850BT/ KW-V850BTM only

## To select the playback source on the HOME screen



The 4 items displayed on the source selection screen with large icons are shown on the HOME screen.

You can change the items displayed on this area by customizing the source selection screen. (*P.14*)

## To select the playback source on the source control screen



Display source selection buttons by touching / or flicking left or right on the source control screen, then select a playback source.

#### To turn off the AV source

- 1 Press the FNC button.
  - > Popup menu appears.
- 2 Touch .> HOME screen appears.
- 3 Touch III.
- 4 Touch AV Off.



## Customize Short-cut buttons on HOME screen

You can arrange the positions of the source icons as you like.

#### 1 Press the FNC button.

- Popup menu appears.
- 2 Touch 👚
  - ➤ HOME screen appears.
- 3 Touch
- 4 Touch and hold the icon which you want to move in the customizing mode.
- **5** Drag the icon to the desired position.



## Source control screen descriptions

There are some functions which can be performed from most screens.

#### Indicators



#### Short-cut buttons

 0		Å	M	D	ħ
 _					

#### 1 All sources icon

Displays the source selection screen. (P.12)

#### 2 Secondary screen

- Image: The Secondary screen changes to another one every time you touch it. You can also change the Secondary screen by flicking left or right on the screen.
- Indicators: Displays the current source condition and so on.
- ATT: The attenuator is active.
- **DUAL**: The dual zone function is active.
- LOUD: The loudness control function is active.
- Short-cut buttons: The source changes to the one you have set with a short-cut. For the short-cut setting, refer to Customize Shortcut buttons on HOME screen (P.14).

#### 3 Content list

Displays the track/file/station/channel list.

#### 4 TEL 📶 🎟

Connected Bluetooth device information.

#### 5 Artwork & information

You can select whether to display an artwork and song information or only song information in more detail.



#### 6 Function panel

Touch the left side of the screen to display the function panel. Touch again to close the panel.

#### 7 HOME button

Displays the HOME screen. (P.11)

#### 8 Operation keys

You can operate the current source with these operation keys. The available functions are different depending on the source type.

#### List screen

There are some common function keys in the list screens of most sources.

1	2	6
Category List		(fr
Song Title1	Play	
	< Q A-7	
Song Title3	< A-2	
Song Title4	< 🖬 Top	•
Song Title5	< 🕇 Up	<b>X</b>
🛛 Sona Title6		لكان
	3 4	5

1

Displays the list type selection window.

2 1 1

Displays a music/movie file list.

#### 3 Text scroll

Scrolls the displayed text.

4 Play etc.

Keys with various functions are displayed here.

- Play : Plays all tracks in the folder containing the current track.
- **Q** A-Z : Jumps to the letter you entered (alphabetical search).
- Чтор Фир : Moves to the upper hierarchy level.

5 / V / X / Page scroll

You can change pages to display more items by pressing A/A.

• **I** / **I** : Displays the top or bottom page.

6 Return

Returns to the previous screen.

#### NOTE

• Depending on the current source or mode, some function key may not appear.

## **Information Window**

#### Photo Frame

You can display a slideshow of the image files stored in the USB memory on the HOME screen.

#### Acceptable Picture files

	Max. Picture size
JPEG (.jpg, .jpeg) *1	5,000 × 5,000
PNG (.png)	1,000 × 1,000
BMP (.bmp)	1,000 × 1,000

- This unit can only play back files which are less than 50 MB.
- The maximum number of files per device is 500.
- Picture files may not be played depending on their condition.
- \*1 A progressive format is not supported.

#### 🔳 Photo Frame

- 1 Press the FNC button.
  - Popup menu appears.
- **2** Touch **1**.
  - HOME screen appears.
- 3 Touch **《** / **》** in the Information Window area to select the photo frame.



#### Photo Frame Setup

Make settings related to display of the photo frame.

#### 1 Press the FNC button.

Popup menu appears.

2 Touch 💼.

HOME screen appears.

- 3 Touch .> SETUP screen appears.
- 4 Touch User Interface.



User Interface screen appears.

- **5** Touch **Information Window SETUP** in the User Interface screen.
- **6** Set each item as follows.
  - Photo Frame Determine whether to use the photo frame. "ON" (Default)/ "OFF"

Photo Frame SETUP

Make settings related to photo play display.

### 7 Touch

#### To Photo Frame Setup

- 1 Touch Photo Frame SETUP on the Information Window SETUP screen.
- **2** Set each item as follows.

#### Sort Order

Specify a file sorting criterion. "By Name(Ascending)"/ "By Name(Descending)"/ "By Date(Newest First)" (Default)/ "By Date(Oldest First)"

#### Slide Show Interval

Specify the slideshow interval. "5" (Default) to "30" seconds

#### Photo Frame is •••••

Display help topics about the photo frame.


3 Touch 🕤 .

### **Disc** (kw-v850bt/ kw-v850btm)

#### **Playing a disc**

#### 🔳 Insert a disc

#### 1 Insert the disc into the slot.



 The unit loads the disc and playback starts.

#### 🔳 Eject a disc

#### 1 Press the FNC button.

- > Popup menu appears.
- **2** Touch  $\blacktriangle$ .



When removing a disc, pull it horizontally.

#### NOTE

• This is not displayed on the popup menu screen of Apple CarPlay or Android Auto source. Change Apple CarPlay or Android Auto source to other one to display the popup menu screen.

#### **DVD/VCD Basic Operation**

Most functions can be controlled from the source control screen and playback screen.

#### NOTE

- The screen shot below is for DVD. It may be different from the one for VCD.
- 1 When the operation buttons are not displayed on the screen, touch 7 area.





#### Video screen



#### 1 Information display area

Displays the following information.

- Title #, Chapter #: DVD title and chapter number
- Track #/Scene #: VCD track or scene number. Scene # is displayed only when Playback control (PBC) is on.
- · Linear PCM, etc.: Audio format

- Hide : Hides the control screen.
- • Repeats the current content. Each time you touch the key, repeat modes are switched in the following sequence;

**DVD**: Chapter repeat ( **Q***w*), Title repeat ( **Q***m*), Repeat off ( **Q**)

VCD (PBC On): Does not repeat

VCD (PBC Off): Track repeat ( ), Repeat off

#### 2 Function panel

Touch the left side of the screen to display the function panel. Touch again to close the panel.

- E: Stops playback. Touching twice will play the disc from the beginning when you play it next time.
- Keep Stat-forwards or fast-backward the disc. Each time you touch the key, the speed changes. 2 times, 10 times.
- CDVD only): Plays in slow motion forward or backward.
- **SETUP** (DVD only): Touch to display the DVD SETUP screen. See **DVD Setup (P.22)**.
- MENU CTRL (DVD only): Touch to display the DVD-VIDEO disc menu control screen. See DVD Disc Menu Operation (P.21).
- **PBC** (VCD only): Touch to turn Playback control (PBC) on or off.
- Audio (VCD only): Touch to change audio output channels.

#### **3** Play mode indicator/ Playing time

- ▶, ▶>, ■, etc.: Current play mode indicator Meanings of the icons are as follows: ▶ (play),
   ▶ (fast forward), ◄
   (fast backward), ■
   (stop), ℝ (resume stop), ■ (pause), ▶ (slow playback), ◄I (slow reverse playback).
- For confirmation of current playing position. You can drag the circle left or right to change the playing position.

> 0.01.23 - 0.47.27

#### 4 Operation keys

• Image: Searches for the previous/next content.

Touch and hold to fast-forward or fast-backward the disc.

- ►II : Plays or pauses.
- 🌠 : Touch to attenuate/restore the sound.

#### 5 Indicator Items

• IN : Disc insertion status. White: A Disc is inside the unit. Orange: Disc player failure.

#### VCD

- 1chLL/2chLL: Identifies the left audio output of channel 1 or 2.
- 1chLR/2chLR: Identifies the monaural audio output of channel 1 or 2.
- 1chRR/2chRR: Identifies the right audio output of channel 1 or 2.
- 1chST/2chST: Identifies the stereo audio output of channel 1 or 2.
- LL: Identifies the left audio output.
- LR: Identifies the monaural audio output.
- **RR**: Identifies the right audio output.
- ST: Identifies the stereo audio output.
- **PBC** : The PBC function is on.
- VER1 : The VCD version is 1.
- VER2 : The VCD version is 2.

#### 6 Searching area

Touch to search for the next/previous content.

#### 7 Key display area

Touch to display the control screen.

#### 8 MENU CTRL (DVD only)

Touch to display the DVD-VIDEO disc menu control screen. See **DVD Disc Menu Operation** (**P.21**).

#### NOTE

- The control screen disappears when no operation is done for 5 seconds.
- If you use a remote control, you can jump directly to the desired image by entering the chapter number, scene number, play time, etc. (P.68).

#### Music CD/ Disc media Basic Operation

## Most functions can be controlled from the source control screen and playback screen.

#### NOTE

- In this manual, "Music CD" means a general CD which includes music tracks.
   "Disc media" means a CD/DVD disc which includes audio or video files.
- The screen shot below is for disc media. It may be different from the one for CD.



#### Open the drawer



#### **Close the drawer**



#### 1 CODEC / 🗘 / 🗯

- When a high-resolution source is played, its format information is displayed. (Disc media only)
- P : Repeats the current track/folder. Each time you touch the key, repeat mode switches in the following sequence;

Track/ File repeat ( 🔎 ), Folder repeat ( 🔎 ) (Disc media only), Repeat all ( 🔍 ) • Zandomly plays all tracks in current folder/disc. Each time you touch the key, random mode switches in the following sequence;

Track random ( 🚧 ) (Music CD only), Folder random ( 🚈 ) (Disc media only), Random off ( 🛫 )

#### 2 Track information

• Displays the information of the current track/ file.

Only a file name and a folder name are displayed if there is no tag information. (Disc media only)

• Touch to display the Folder List screen. See *File search Operation (P.20)*. (Disc media only)

#### **3** Play mode indicator/ Playing time

- ▶, ▶▶, etc.: Current play mode indicator Meanings of the icons are as follows: ▶ (play),
   ▶► (fast forward), ◄◄ (fast backward),
   ■ (pause).
- For confirmation of current playing position. You can drag the circle left or right to change the playing position. (Video file only)

0.47.27

#### 4 Operation keys

- Q (Disc media only) : Searches files. For details on search operation, see *File search Operation (P.20)*.
- Idd >>> : Searches for the previous/next content.

Touch and hold to fast-forward or fast-backward the disc.

- ►II : Plays or pauses.
- 🔊 : Touch to attenuate/restore the sound.

#### 5 Content list

- Touch the right side of the screen to display the Content list. Touch again to close the list.
- Displays the playing list. When you touch a track/file name on the list, playback will start.

#### 6 Artwork

- Displays/hides artwork area.
- The jacket of the currently playing file is displayed. (Disc media only)

#### 7 Function panel (Disc media only)

Touch the left side of the screen to display the function panel. Touch again to close the panel.

folder.

#### Disc

#### 8 Indicator Items

- IN : Disc insertion status. White: A Disc is inside the unit. Orange: Disc player failure.
- VIDEO: Identifies the video file.
- MUSIC : Identifies the music file.

#### Video screen



#### 9 File search area (Video file only)

Touch to search for the next/previous file.

#### 10 Key display area (Video file only)

Touch to display the control screen.

#### File search Operation (Disc media only)


#### You can search for a file according to hierarchy.

#### NOTE

• For operations in the list screen, see *List screen* (*P.15*).

#### 1 Touch Q.

- > Folder List screen appears.
- **2** Touch the desired folder.



- When you touch a folder its contents are displayed.
- 3 Touch the desired item in the content list.▶ Playback starts.

#### **DVD Disc Menu Operation**

You can set up some functions using the DVD-VIDEO disc menu.

**1** Touch the framed area during playback.



- > Menu Control screen appears.
- 2 Perform your desired operation as follows.



To display the top menu Touch **TOP**.\*

To display the menu Touch **MENU**.\*

■ To display the previous menu Touch **Return**.\*

**To enter selected item** Touch **Enter**.

■ To enable direct operation Touch **Highlight** to enter the highlight control mode (*P.21*).

To move the cursor Touch  $\blacktriangle$ ,  $\blacktriangledown$ ,  $\triangleleft$ ,  $\triangleright$ .

**To switch among subtitle languages** Touch **Subtitle**. Each time you touch this key, subtitle languages are switched.

■ To switch among audio languages Touch Audio. Each time you touch this key, audio languages are switched.

- **To switch among picture angles** Touch **Angle**. Each time you touch this key, picture angles are switched.
- \* These keys may not function depending on the disc.

#### Highlight control

Highlight control lets you control the DVD menu by touching the menu key directly on the screen.

- 1 Touch **Highlight** on the Menu Control screen.
- **2** Touch your desired item on the screen.



#### NOTE

• The highlight control function is cancelled automatically if you do not operate for a predetermined period of time.

#### **DVD** Setup

You can set up the DVD playback functions.

**1** Touch the framed area during playback.



**2** Touch **b** on the left side of the screen. Touch **SETUP**.



- > DVD SETUP screen appears.
- **3** Set each function as follows.



Menu Language / Subtitle Language / Audio Language See Language setup (P.22).

#### Dynamic Range Control

Sets the dynamic range.

Wide : The dynamic range is wide.

Normal: The dynamic range is normal.

**Dialog** (Default): Makes the total sound volume larger than the volumes in other modes. This is effective only when the Dolby Digital software is in use.

#### Screen Ratio

Sets the screen display mode.

16:9 (Default): Displays wide pictures.

- **4:3 LB**: Displays wide pictures in the Letter Box format (having black stripes at the top and bottom of screen).
- **4:3 PS**: Displays wide pictures in the Pan & Scan format (showing pictures cut at the right and left ends).

#### 🔳 Language setup

This setting is for the languages used for the menu, subtitle, and voice.

- 1 Touch the desired item; Menu Language, Subtitle Language, Audio Language.
  - Language Set screen appears.

#### **2** Select a language.

DVD	SETUP	Ś
Ma	Audio Language Set	
IVIE	Original	$\mathbf{X}$
Suk	English	
_	Español	
Au	Français	-
Dyn	Close	

#### For language codes, refer to **DVD** Language Codes (P.81).

Touch **Close** to set the entered language and return to the DVD SETUP screen.

#### NOTE

• To set the DVD's original language as the audio language, touch **Original**.

## APPS—Apple CarPlay/Android Auto™

#### Apple CarPlay Operation

Apple CarPlay is a smarter, safer way to use your iPhone in the car. Apple CarPlay takes the things you want to do with iPhone while driving and displays them on the screen of the product. You can get directions, make calls, send and receive messages, and listen to the music from iPhone while driving. You can also use Siri voice control to make it easier to operate iPhone.

For details about Apple CarPlay, visit https://apple.com/ios/carplay/.

#### Compatible iPhone devices

You can use Apple CarPlay with the following iPhone models.

- iPhone 7 Plus
- iPhone 6 Plus
  iPhone 6
- iPhone 7
  iPhone SE
- iPhone 5s
- iPhone 6s Plus
- iPhone 5c
- iPhone 6s
- iPhone 5

#### Connecting an iPhone

- 1 Connect your iPhone using KS-U62 via the USB (Black) terminal. (P.74) When an iPhone compatible with Apple CarPlay is connected to the USB (Black) terminal, the Bluetooth Hands-Free phone currently connected is disconnected. If the Bluetooth Hands-Free phone is being used,
  - disconnection will occur after ending the call.
- 2 Unlock your iPhone.
- Switching the Current Screen to the Apple CarPlay Screen When Connecting Your iPhone
  - Touch Apple CarPlay icon on the source selection screen. (P.12)
  - Touch the following connection message if the message appears.

Apple CarPlay is connected

#### NOTE

- The connection message appears when;
  - The iPhone you used previously is connected again.
  - The screen other than HOME and the source selection screen is displayed.
- The connection message is displayed for about 5 seconds.

#### Operation buttons and available Apps on the home screen of Apple CarPlay

You can use the Apps of the connected iPhone. The items displayed and the language used on the screen differ among the connected devices.

To enter the Apple CarPlay mode, touch **Apple CarPlay** icon on the source selection screen. (*P.12*)



### 1

- Displays the home screen of Apple CarPlay.
- Touch and hold to activate Siri.

#### 2 Application buttons

Starts the application.

#### 3 HOME

Exits the Apple CarPlay screen and displays the HOME screen.

#### To exit the Apple CarPlay screen

#### **1** Press the **FNC** button.

> Popup menu appears.

- **2** Touch 💼.
  - HOME screen appears.

#### 🔳 Use Siri

You can activate Siri.

#### **1** Press the **FNC** button for 1 second.



2 Talk to Siri.

#### To deactivate

1 Press the FNC button.

#### Switch to the Apple CarPlay screen while listening to another source

- 1 Press the FNC button.
  - Popup menu appears.
- 2 Touch DISP.



#### NOTE

- This operation is available when **DISP Key** is set to **Mirroring** on the **User Interface** screen. (P.53)
- When listening to another source with the Apple CarPlay screen displayed, playing music in the Apple CarPlay mode will switch the current source to the Apple CarPlay source.

#### Android Auto<sup>™</sup> Operation

Android Auto enables you to use the functions of your Android device convenient for driving. You can easily access route guidance, make calls, listen to music, and access convenient functions on the Android device while driving. For details about Android Auto, visit *https:// www.android.com/auto/* and *https://support. google.com/androidauto.* 

#### **Compatible Android devices**

You can use Android Auto with Android devices of Android version 5.0 (Lollipop) or later.

#### NOTE

 Android Auto may not be available on all devices and may not be available in all countries or regions.

#### • About the placement of smartphone

Install the smartphone connected as Android Auto device in the place where the unit can receive the GPS signals of the smartphone. When using Google Assistant, install the smartphone in the place where the smartphone easily catch a voice by the microphone.

#### NOTE

- Do not put the smartphone in a spot exposed to direct sunlight or near an air blowing out port of an air conditioner. The placement of the smartphone in such places can lead to malfunction or damage of your smartphone.
- Do not leave the smartphone in the vehicle.

#### Connect Android device

## 1 Connect an Android device via the USB terminal. (P.75)

To use the hands-free function, connect the Android device via Bluetooth.

When an Android device compatible with Android Auto is connected to the USB terminal, the device is connected via Bluetooth automatically, and the Bluetooth Hands-Free phone currently connected is disconnected. If the Bluetooth Hands-Free phone is being used, disconnection will occur after ending the call.


#### **2** Unlock your Android device.

#### Operation buttons and available Apps on the Android Auto screen

You can perform the operations of the Apps of the connected Android device.

The items displayed on the screen differ among the connected Android devices.

To enter the Android Auto mode, touch the **Android Auto** icon on the source selection screen. (P.12)



#### 1 Application/information buttons

Starts the application or displays information.

#### To exit the Android Auto screen


#### 1 Press the **FNC** button.

Popup menu appears.

#### **2** Touch 🛅

➤ HOME screen appears.

- Using voice control
- **1** Press the **FNC** button for 1 second.



#### To cancel

1 Press the FNC button.

#### Switch to the Android Auto screen while listening to another source

- 1 Press the FNC button.
  - > Popup menu appears.
- 2 Touch DISP.



#### NOTE

- This operation is available when **DISP Key** is set to **Mirroring** on the **User Interface** screen. (P.53)
- When listening to another source with the Android Auto screen displayed, playing music in the Android Auto mode will switch the current source to the Android Auto source.

#### **Spotify Operation**

You can listen to Spotify on this unit by controlling the application installed in the iPhone or Android.

To select the Spotify source, touch **Spotify** icon on the source selection screen. (P.12)

#### Preparation

- Install the latest version of the Spotify application "Spotify" on your iPhone or Android.
   iPhone: Search for "Spotify" in the Apple App Store to find and install the most current version.
   Android: Search for "Spotify" in Google play to find and install the most current version.
- iPhones are connected via either USB or Bluetooth.
- Android devices are connected via Bluetooth.
- To connect a smartphone via Bluetooth, register it as the Bluetooth device and do the App (SPP) profile setting for the connection beforehand. See Register the Bluetooth device (P.42) and Connect the Bluetooth device (P.43).



#### **Close the drawer**



#### 1 Artwork

- Displays/hides artwork area.
- Picture data is displayed if available from the current content.

#### 2 Playing time

• For confirmation of play time.

#### **3** Operation keys

- . 🔳 : Displays the Menu screen
- (19) : New radio station that relates to the artist of the currently being played song is selected and playback starts.
- K , K : Skips the current song.
- D , D : Plays or pauses the content of the current station.
- Saves the currently being played song to My Music.
- 💋 : Touch to attenuate/restore the sound.

#### 4 Content information

Displays the information on the current content being played.

#### 5 👎 / 🕩 / Ϙ / 😕


- IThumbs down to the current contents and skip to the next content.
- for : Registers the current content as a favorite content.
- 🖸 : Repeats the current song.
- Randomly plays all songs in the current playlist.

#### Selecting a track

#### 1 Touch 📃 .

Menu screen appears.

**2** Select the list type, then select a desired item.



#### To select the category and station

Touch the category and station name in the list.

#### Тор

Returns to the top of the list.

Returns to the previous list.

#### **About Spotify®**


#### Note

- Ensure you are logged in to your smartphone application. If you do not have an Spotify account, you can create one for free from your smartphone or at www.spotify.com.
- Because Spotify is a third-party service, the specifications are subject to change without prior notice. Accordingly, compatibility may be impaired or some or all of the services may become unavailable.
- Some functions of Spotify cannot be operated from this unit.
- For issues on using the application, contact Spotify at www.spotify.com.
- Establish an Internet connection.

## USB

#### **Connecting a USB device**

1 Connect the USB device with the USB cable. (P.74)



#### 2 Press the FNC button.

- Popup menu appears.
- 3 Touch 💼.
  - ► HOME screen appears.
- 4 Touch III.
- 5 Touch USB. (P.12)

#### Disconnect the USB device

- 1 Press the FNC button.
  - Popup menu appears.

#### **2** Touch **1**.

- ► HOME screen appears.
- **3** Touch a source other than **USB**.

#### 4 Detach the USB device.

#### Usable USB device

You can use a mass-storage-class USB device with this unit.

The word "USB device" appearing in this manual indicates a flash memory device.

#### • About the file system

The file system should be the one of the following.

#### NOTE

- Install the USB device in the place where it will not affect safe driving.
- You cannot connect a USB device via a USB hub and Multi Card Reader.
- Take backups of the audio files used with this unit. The files can be erased depending on the operating conditions of the USB device. We shall have no compensation for any damage arising from any erased data.

#### **USB Basic Operation**

Most functions can be controlled from the source control screen and playback screen.

#### **Control screen**



#### Open the drawer



#### Close the drawer



#### 1 CODEC / 오 / ≭

• When a high-resolution source is played, its format information is displayed.

- C : Repeats the current track/folder. Each time you touch the key, repeat modes are switched in the following sequence:
   File repeat ( Co ), Folder repeat ( C ), Repeat all ( Cut )

#### 2 Track information

- Displays the information on the current file. Only a file name and a folder name are displayed if there is no tag information.
- Touch to display the Category List screen. See *Category search (P.30)*.

#### **3** Play mode indicator/ Playing time

- ▶, ▶▶, etc.: Current play mode indicator Meanings of individual icons are as follows:
   ▶ (play), ▶▶ (fast forward), ◄◄ (fast backward), Ⅱ (pause).
- For confirmation of current playing position. You can drag the circle left or right to change the playing position. (Video file only)

0.47.27

#### 4 Operation keys

- Q : Searches track/file. For details on search operation, see *Search Operation (P.30)*.
- I >>> : Searches the previous/next track/ file.

Touch and hold to fast forward or fast backward.

- ►II : Plays or pauses.
- 💋 : Touch to attenuate/restore the sound.

#### 5 Content list

- Touch the right side of the screen to display the Content list. Touch again to close the list.
- Displays the playing list. When you touch a track/file name on the list, playback will start.

#### 6 Artwork

- Displays/hides artwork area.
- The jacket of the currently playing file is displayed.

#### 7 Function panel

Touch the left side of the screen to display the function panel. Touch again to close the panel.

folder.

#### · USB DEVICE CHANGE

Switches to another USB device when two USB devices are connected.

#### 8 Indicator Items

- VIDEO: Identifies the video file.
- **MUSIC**: Identifies the music file.

#### Video screen



#### 9 File search area (Video file only)

Touch to search for the next/previous file.

#### 10 Key display area (Video file only)

Touch to display the control screen.


#### **Search Operation**

You can search music or video files by the following operations.

- 1 Touch Q.
- **2** Touch  $\mathbf{\nabla}$ .



3 Select a list type.



#### NOTE

• For operations on the list screen, see *List screen* (*P.15*).

#### Category search

You can search for a file by selecting a category.

- **1** Touch **Category List**.
- 2 Select whether you search audio files or video files .
- **3** Touch the desired category.



 The list corresponding to your selection appears.

**4** Touch to select the desired item in the list. Repeat this step until you find the desired file.



You can search for a file of the same artist/ album/genre as that in the current track.

- 1 Touch Link Search.
- **2** Touch the desired tag type. You can select from artists, albums and genres.



- ► The list corresponding to your selection appears.
- **3** Touch the desired item in the content list.

#### Folder search

You can search for a file according to hierarchy.

- 1 Touch Folder List.
- **2** Touch the desired folder.



When you touch a folder its contents are displayed.

**3** Touch to select your desired item in the list. Repeat this step until you find the desired file.

## iPod/iPhone

#### Preparation

#### Connectable iPod/iPhone

## The following models can be connected to this unit.

Made for

- iPhone 7 Plus
- iPhone 7
- iPhone SE
- iPhone 6s Plus
- iPhone 6s
- iPhone 6 Plus
- iPhone 6
- iPhone 5s
- iPhone 5c
- iPhone 5
- iPod touch (6th generation)

#### NOTE

- Latest compatible list of iPod/iPhone. For details, see **www.jvc.net/cs/car/ipod/**.
- By connecting your iPod/iPhone to this unit with the iPod connection cable KS-U62 (optional accessory), you can supply power to your iPod/ iPhone as well as charge it while playing music. Note that the power of this unit must be held on.
- If you restart playback after connecting the iPod, the music that has been played by the iPod is played first.

#### Connect iPod/iPhone

#### Wired connection

#### Preparation

- Connect an iPod/iPhone with the KS-U62
   (optional accessory) while Apple CarPlay is not
   connected.
- With an Apple CarPlay-capable iPhone, turn off Apple CarPlay by operating the iPhone at functional setup before connecting iPhone. For details of the setup method, contact the manufacturer of the terminal.
- Plug the iPod/iPhone into the USB terminal with the KS-U62 (optional accessory).
- Only one iPod/iPhone can be connected.
- 1 Connect the iPod/iPhone using the KS-U62. (P.74)
- 2 Press the FNC button.
  - Popup menu appears.
- 3 Touch 1.
  - HOME screen appears.
- 4 Touch
- 5 Touch iPod. (P.12)
- To disconnect the iPod/iPhone connected with the cable:
- 1 Detach the iPod/iPhone.

#### **Bluetooth connection**

Pair the iPhone through Bluetooth.

#### Preparation

- To connect an iPhone via Bluetooth, register it as a Bluetooth device and do the profile setting for the connection beforehand. See **Register the Bluetooth device (P.42)** and **Connect the Bluetooth device (P.43)**.
- Connect an iPhone via Bluetooth while Apple CarPlay and an iPod/iPhone are not connected via USB.



#### Displays the information on the current file.

• Touch to display the Category List screen. See *Category search (P.33)*.

#### 2 Artwork

- Displays/hides artwork area.
- The jacket of the currently being played file is displayed.

#### **3** Play mode indicator/ Playing time

 ▶, ▶▶, etc.: Current play mode indicator Meanings of individual icons are as follows:
 ▶ (play), ▶▶ (fast forward), ◄◄ (fast backward), Ⅱ (pause).

#### 4 Operation keys

- Q : Searches for a track/file. For details on search operation, see *Search Operation* (*P.33*).
- I >>> : Searches for the previous/next track/file.

Touch and hold to fast forward or fast backward.

- ►II : Plays or pauses.
- 💋 : Touch to attenuate/restore the sound.

#### 5 Content list

- Touch the right side of the screen to display the Content list. Touch again to close the list.
- Displays the playing list. When you touch a track/file name on the list, playback will start.

#### 6 🖓 / 🗯

- Q : Repeats the current track/album. Each time you touch the key, repeat modes are switched in the following sequence: Song repeat ( Q ), All songs repeat ( Q ), Repeat off ( Q )
- Randomly plays all tracks in the current album. Each time you touch the key, random modes are switched in the following sequence: Song random ( 22), Random off ( 22)

#### 7 Indicator Items

• MUSIC : Identifies the music file.

#### **Search Operation**

You can search music files by the following operations.

- 1 Touch Q.
- **2** Touch  $\mathbf{\nabla}$ .



**3** Select a list type.




#### NOTE

• For operations on the list screen, see *List screen* (*P.15*).

#### Category search

You can search for a file by selecting a category.

- **1** Touch **Category List**.
- **2** Touch the desired category.



 The list corresponding to your selection appears.

**3** Touch to select the desired item in the list. Repeat this step until you find the desired file.

#### 🔳 Link search

You can search for a file of the same artist/ album/genre/composer as that in the current track.

- 1 Touch Link Search.
- 2 Touch the desired tag type. You can select from artists, albums, genres and composers.

Link Search 🔻		ς
Artists	▶ Play	
Albums		
🗸 Genres	<b>Q</b> , A-Z	
Composers	🖿 Тор	•
	tl Up	T

- The list corresponding to your selection appears.
- **3** Touch the desired item in the content list.

## Tuner

#### **Tuner Basic Operation**

Most functions can be controlled from the source control screen.

To enter Tuner source, touch **Tuner** icon in the source selection screen. (**P.12**)



#### 1 Information display

Displays the information of the current station: Frequency, PS name

P#: Preset number

#### 2 Seek mode

Switches the seek mode in the following sequence; **AUTO1**, **AUTO2**, **MANUAL**.

- **AUTO1** : Tunes in a station with good reception automatically.
- **AUTO2**: Tunes in stations in memory one after another.
- **MANUAL**: Switches to the next frequency manually.

#### **3** Band button

Switches the band (FM1/ FM2/ FM3, AM).

#### 4 Preset key

Recalls the memorized station.

When touched for 2 seconds, stores the current receiving station in memory.

#### 5 Operation keys

- Idd Interpretent in a station. The method of frequency switching can be changed (see 2 in table).
- **SSM** (FM only): Presets stations automatically. For details, see **Auto memory (P.35)**.
- isplays the Tuner SETUP screen. For details, see *Tuner Setup (P.36)*.
- 💋 : Touch to attenuates/restores the sound.

#### 6 PTY (FM only)

Searches a program by setting program type. For details, see **Search by program type (P.35)**.

#### 7 MONO (FM only)

Select the Monaural reception.

#### 8 TI (FM only)

Sets the traffic information mode on. For details, see *Traffic Information (P.36)*.

#### 9 Indicator Items

- **ST**: A stereo broadcast is being received.
- MONO: The forced monaural function is on.
- AF : The AF search function is on.
- **EON** : The Radio Data System station is sending EON.
- LOS : The Local Seek function is on.
- **NEWS**: News bulletin interruption is in progress.
- RDS: Indicates the state of the Radio Data System station when the AF function is on. White: Radio Data System is being received.
   Orange: Radio Data System is not being received.
- **TI** : Indicates the reception state of traffic information.

White: TP is being received. Orange: TP is not being received.

#### **Memory Operation**

#### Auto memory (FM only)

You can store stations with good reception in memory automatically.

**1** Touch **FM**.



2 Touch SSM.



**3** Touch Yes.



> Auto memory starts.

#### Manual memory

You can store the current receiving station in memory.

- **1** Touch desired band key.
- **2** Select a station you wish to store in memory.
- **3** Touch # (#:1-6) in which you want to store the station for 2 seconds until a beep sounds.

#### **Selecting Operation**

#### Preset select

You can list and select memorized station.

#### 1 Select a station from the list.



## Search by program type (FM only)

You can tune to a station with a specific program type when listening to FM.

1 Touch PTY.



- > PTY Search screen appears.
- **2** Select a program type from the list.
- **3** Touch Search.



You can search a station of the selected program type.

#### Traffic Information (FM only)

You can listen and watch the traffic information automatically when a traffic bulletin starts. However, this feature requires a Radio Data System that includes the TI information.


#### 1 Touch TI.



> Traffic information mode is set.

#### When the traffic bulletin starts

The Traffic Information screen appears automatically.



#### NOTE

- It is necessary to have Traffic Information function set to on in order to have the Traffic Information screen appear automatically.
- The volume setting during reception of traffic information is automatically stored. The next time the traffic information is received, this unit recalls the volume setting automatically.

#### **Tuner Setup**

You can set tuner related parameters.

1 Touch



Tuner SETUP screen appears.

#### **2** Set each item as follows.

#### NEWS

Sets a news bulletin interrupt time. Default is "OFF".

#### AF

When station reception is poor, automatically switches to the station that is broadcasting the same program over the same Radio Data System network. Default is "OFF".

#### Regional

Sets whether to switch to the station only in the specific region using the "AF" control. Default is "OFF".

#### LO.S (FM only)

Turns the Local Seek function on or off.

#### Auto TP Seek

When traffic information station reception is poor, automatically searches for a station that can be received better. Default is "ON".

#### Language Select

Selects a display language for the PTY function.

#### Aerial Control

Allows you to turn off the Radio Data System function to prevent the motor-driven antenna from extending. Default is "ON".

#### Area Setting (KW-V850BT/ KW-M750BT)

The tuner channel interval changes depending on the area you use this unit.

#### For Oceania sales area

Australia (Default): Select this when using in Australia countries. FM/AM intervals are set to 50 kHz/9 kHz.

US: Select this when using in North/ Central/South America. FM/AM intervals are set to 200 kHz/10 kHz.

**Europe**: Select this when using in any other areas. FM/AM intervals are set to 50 kHz/9 kHz.

#### Outside Oceania area

US: Select this when using in North/ Central/South America. FM/AM intervals are set to 200 kHz/10 kHz.

Others (Default): FM/AM intervals are set to 50 kHz/9 kHz.

# **Other External Components**

# View Camera

#### NOTE

- To connect a camera, see P.73.
- To use a rear view camera, a REVERSE lead connection is required. (P.72)
- If **Rear Camera Interruption** is active the camera screen is displayed when you shift the gear to the reverse (R) position.

# Display the camera screen

#### 1 Press the FNC button.

> Popup menu appears.

#### 2 Touch Camera.



> View camera screen appears.

#### **3** Adjust each item as follows.

To erase the caution message, touch the screen.



#### 1 Switching the View Camera \*1

Touch to change the front view camera and rear view camera.

#### 2 Camera off

Touch to exit the camera screen.

\*1 When the front camera and rear camera are connected with this unit.

# 🔳 Camera Setup

- Press the FNC button.Popup menu appears.
- 2 Touch 1.> HOME screen appears.
- **3** Touch **b**. > SETUP screen appears.
- 4 Touch Camera.



- > Camera screen appears.
- **5** Set each item as follows.

#### Rear Camera Interruption

**ON** (Default): Displays the picture from the rear view camera when you shift the gear to the reverse (R) position.

**OFF**: Select this when no camera is connected.

#### Parking Guidelines

You can display parking guidelines to enable easier parking when you shift the gear to the reverse (R) position. Default is "ON".

Guidelines SETUP

If you select **ON** for **Parking Guidelines**, you can adjust the parking guidelines. See **To** *adjust the parking guidelines* (P.39).

#### Front Camera \*2

**ON**: Select this when the front camera is connected.

**OFF** (Default): Select this when no camera is connected.

#### Front Camera Interruption \*2

If you select **ON** for **Front Camera**.

**10 sec**/ **15 sec** (Default)/ **20 sec**: The front camera screen is displayed when return the gear from the reverse (R) position.

#### OFF : Cancel.

\*2 KW-V850BT/ KW-V850BTM only

#### To adjust the parking guidelines

#### NOTE

- Install the rear view camera in the appropriate position according to the instruction manual supplied with the rear view camera.
- When adjusting the parking guidelines, make sure to apply the parking brake to prevent the car from moving.
- **1** Touch **Parking Guidelines** in the Camera screen and set to ON. (*P.38*)
- 2 Touch Guidelines SETUP on the Camera screen.
- **3** Adjust the parking guidelines by selecting the mark.



**4** Adjusting the position of the selected mark.



Make sure that lines (A) and (B) are horizontally parallel, and that lines (C) and (D) are of the same length.

#### NOTE

• Touch Initialise and then touch Yes to set all the marks to their initial default position.

# External audio/video players (AV-IN)

- 1 Connect an external component to the AV-IN input terminal. (P.73)
- 2 Select AV-IN as the source. (P.12)
- **3** Turn on the connected component and start playing the source.

# Using the external navigation unit (outside oceania area)

You can connect a navigation unit (commercially available) to the navigation input terminal so that you can view the navigation screen. **(P.73)** 

The navigation guidance comes out of the front speakers even when you are listening to an audio source.

#### Display the navigation screen

#### 1 Press the FNC button.

> Popup menu appears.

#### 2 Touch DISP.



> The navigation screen appears.

#### NOTE

Touch in on the popup menu screen to navigation screen.
 This operation is available when **DISP Key** is set

to NAV in the User Interface screen. (P.53)

# Navigation Setup

#### 1 Press the **FNC** button.

- Popup menu appears.
- **2** Touch **1**.
  - ► HOME screen appears.
- 3 Touch 🚺.
  - ➤ SETUP screen appears.

## 4 Touch Navigation.



► Navigation screen appears.

#### **5** Set each item as follows.



#### NAV Voice Volume

Adjusts the volume for voice guidance of the navigation system. Default is "24".

# TV tuner

# You can connect the TV tuner (commercially available) with this unit and watch TV.

#### Preparation

- When you use TV control function, connect the TV tuner (commercially available) and set 3rd Party TV Tuner Control in **AV Setup (P.57)** to ON.
- The TV tuner can be controlled with its supplied remote control through the remote sensor on the front panel of this unit.
- 1 Press the **FNC** button.
  - > Popup menu appears.
- 2 Touch <a>Touch</a>.► HOME screen appears.
- **3** Touch **#**.
- 4 Select TV as the source. (P.12)
- 5 Touch Key display area.





Hides the indicators and buttons. Touch Hide.

■ Change the channel. Touch CH▲, CH▼.

# **Bluetooth Control**

Using the Bluetooth function allows you to use various functions such as listening to the audio file and making/receiving a call.

# Information for using Bluetooth<sup>®</sup> devices

# 🚯 Bluetooth°

Bluetooth is a short-range wireless radio communication technology for mobile devices such as cell-phones, portable PCs, and other devices.

Bluetooth devices can be connected without cables and communication with each other.

#### NOTE

- While driving, do not perform complicated operations such as dialing numbers, using the phone book, etc. When you perform these operations, stop your car in a safe place.
- Some Bluetooth devices may not be connected to this unit depending on the Bluetooth version of the device.
- This unit may not work for some Bluetooth devices.
- Connecting conditions may vary depending on your environment.
- Some Bluetooth devices are disconnected when this unit is turned off.

# About the cell-phone and Bluetooth audio player

This unit conforms to the following Bluetooth specifications:

#### Version

Bluetooth Ver. 4.1

# Profiles

Cell-phone: HFP (V1.7) (Hands Free Profile) SPP (Serial Port Profile) PBAP (Phonebook Access Profile)

#### Audio player:

A2DP (Advanced Audio Distribution Profile) AVRCP (V1.6) (Audio/Video Remote Control Profile)

#### Sound codec

SBC, AAC

#### NOTE

- The units supporting the Bluetooth function have been certified for conformity with the Bluetooth Standard according to the procedure prescribed by Bluetooth SIG.
- However, it may be impossible for such units to communicate with your cell-phone depending on its type.

#### **Bluetooth Control**

# **Register the Bluetooth device**

It is necessary to register the Bluetooth audio player or cell-phone in this unit before using the Bluetooth function.

You can register up to 10 Bluetooth devices.

#### NOTE

- Up to 10 Bluetooth devices can be registered. If an attempt is made to register the 11th Bluetooth device, the Bluetooth device connected on the earliest date will be deleted to register the 11th one.
- This unit is compatible with the Apple Easy Pairing function. When an iPod touch or iPhone is connected to this unit, an authentication dialog appears. Performing operation for authentication on this unit or iOS smartphone registers the smartphone as a Bluetooth device.
- Search for the unit ("KW-V\*\*\*\*"/"KW-M\*\*\*\*") from your smartphone/cellphone.

Complete steps 1 to 4 within 30 seconds.

- **2** Operate your smartphone/cell-phone according to the displayed messages.
  - Confirm the request both on the smartphone/cell-phone.



#### Input the PIN Code in your smartphone/cell-phone.

PIN Code is set to "0000" as the default.



**3** Select the function you want to use.



HFP Hands Free1 / Hands Free2 / No Connection.

Select the hands-free number to connect.

#### A2DP/SPP Audio/App

Select if you want to use the audio player app in your smartphone over A2DP, and the other apps in your smartphone over SPP.

#### PBAP Phonebook DL

Select if you want to transfer your phonebook data.

#### 4 Touch Yes.

When data transmission and connection have completed, the Bluetooth connection icon appears on the screen.

# **Bluetooth Setup**

#### 1 Press the FNC button.

> Popup menu appears.

2 Touch 💼



- HOME screen appears.
- 3 Touch



- SETUP screen appears.
- **4** Touch **Bluetooth**.




- Bluetooth Setup screen appears.
   See the following section for each setting.
- Connect the Bluetooth device (P.43)
- Change the device name (P.44)
- Change the PIN Code (P.44)

# Connect the Bluetooth device

1 Touch Select Device on the Bluetooth Setup screen.



**2** Touch the name of the device you want to connect.



> Profile select screen appears.

#### NOTE

• If the icon is lighted, it means that the unit will use that device.

#### **3** Set each profile as follows.



#### TEL (HFP) 1 , TEL (HFP) 2

Select when the device is connected with the unit as hands-free phone 1 or 2.


#### Audio (A2DP)/App (SPP)

Select to interwork with an application installed in a smartphone or to use as an audio player.


#### 4 Touch Close.

# To delete the registered Bluetooth device

1 Touch Delete.



**2** Touch the device name to check.



# 

Selects all Bluetooth devices.

■ □ All Clears all check marks

#### **3** Touch **Delete**.

> Confirmation message appears.

4 Touch Yes.

## English | 43



- 1 Touch **Device Name** on the Bluetooth Setup screen.
  - > Change Device Name screen appears.
- **2** Touch and hold
- **3** Input the device name.



4 Touch Enter.

# Change the PIN Code

- 1 Touch **PIN Code** on the Bluetooth Setup screen.
  - ➤ Change PIN Code screen appears.
- **2** Touch and hold **5**.
- 3 Input the PIN Code.




4 Touch SET.

# Playing the Bluetooth Audio Device

Most functions can be controlled from the source control screen.

To select Bluetooth source, touch **BT Audio** icon on the source selection screen. (P.12)





#### 1 Artwork

Displays/hides artwork area.

#### 2 Play mode indicator/ Playing time

▶, II : Current play mode indicator

Meanings of individual icons are as follows:

▶ (play), ▶▶ (fast forward), ◄◄ (fast backward),
 II (pause), ■ (stop).

#### 3 Operation keys \*

- Q : Searches for a file. See *File search* (*P.46*).
- Image: Searches for the previous/next content.

Touch and hold to fast forward or fast backward.

- ►: Plays.
- ∎: Pauses.
- 💭 : Displays the Bluetooth Setup screen.
- 💋 : Touch to attenuate/restore the sound.

#### 4 JVC Streaming DJ

Bluetooth audio devices can be switched easily to play music. See *JVC Streaming DJ (P.45)*.

#### 5 🖓 / 🗶 \*

 : Repeats the current track/folder. Each time you touch the key, repeat modes are switched in the following sequence:
 File repeat ( ), Folder repeat ( ), All

songs repeat ( 🖓 ), Repeat off ( 🖓 )

Randomly plays all tracks in the current folder. Each time you touch the key, random modes are switched in the following sequence:
 Folder random ( א ), All random ( א ),

#### 6 Information display \*

- Displays the name of track information.
- Connected device name.
- \* These items appear only when the audio player which supports AVRCP profile is connected.

#### NOTE

- The operation buttons, indications and information displayed on the screen differ depending on the connected device.
- If the operation keys do not appear, operate from the player.
- Depending on your cell-phone or audio player, sound may be heard and controlled but text information may not appear.
- If the volume is too low, raise it on your cellphone or audio player.

# JVC Streaming DJ

Up to five Bluetooth audio device can be connected and switched easily to play music.

# 1 Touch 🛄.

- ► A list of registered devices is displayed.
- 2 Touch i of device name you want to connect.
  - Touching *I* displays the Bluetooth device connection setup screen. (*P.43*)
  - Touching ∭ on the left of the connected device ( ►) disconnects this device.

JVC St	tream	ing DJ	1/5	ţ
-Bii	Play	Device Name		
53		Device Name1		_
BIJ		Device Name2		• •
BIJ		Device Name3		
DII		Device Name4		•
				Y

- Device used normally.
- 📾 : Device used for JVC Streaming DJ.
- 3 Touch ► (white) on the left of the name of the device to be played.

(white) changes to (Blue) and starts playback.

JVC S	tream	ing DJ	3/5	¢
Dii	Play	Device Name		
53		Device Name1		_
D		Device Name2		
DII		Device Name3		
<b>D</b> ]]		Device Name4		•
				Y

- 🕞 (Gray) : Not connected.
- 🗩 (White) : Connected.
- 🕞 (Blue) : During playback.




#### **Bluetooth Control**

#### NOTE

- If a connected Bluetooth audio device is operated to play music, connections are switched.
- When a Bluetooth source is switched to another one, its settings are deleted and the connection is restored to the connection before source switching.

## File search

- 1 Touch Q.
- **2** Touch the desired file or folder.



When you touch a folder its contents are displayed.

Touch the desired item in the content list.
 Plavback starts.

#### NOTE

• For operations in the list screen, see *List screen* (*P.15*).

# Using the Hands-Free Unit

You can use the telephone function by connecting the Bluetooth telephone to this unit.

#### NOTE

 While Apple CarPlay or Android Auto is connected, the Bluetooth Hands-Free function and two Bluetooth devices connections cannot be used. Only the Apple CarPlay or Android Auto Hands-Free function can be used.

## 🔳 Make a call

- 1 Press the **FNC** button.
  - Popup menu appears.

#### 2 Touch Phone.



➤ Hands Free screen appears.

#### NOTE

- If your cell-phone supports PBAP, you can display the phone book and call lists onto the touch panel screen when the cell-phone is connected.
  - Phone book: up to 1000 entries
  - Up to 50 entries including dialed calls, received calls, and missed calls

#### **3** Select a dialing method.



- Call using call records
- 🖭 : Call using the phonebook
- ★: Call using the preset number
- 📅 : Call by entering a phone number

#### • Select the cell-phone to use

When you connect two cell-phones

1) Touch Device Name1 Device Name2 to select the phone you want to use.

#### Bluetooth Setup

1) Touch . Bluetooth Setup screen appears.

#### Voice Recognition

1) Touch 🔮 . **(P.48)** 

#### NOTE

- Status icons such as battery and antenna icons may differ from those displayed on the cellphone.
- Setting the cell-phone in the private mode can disable the hands-free function.

# Call using call records



**2** Select the phone number from the list.



## Call using the phonebook

- 1 Touch 🕮
- 2 Touch Q A-Z
- **3** Select the initial.



• Characters with no corresponding name will not appear.

- A first character with an accent character such as "ü" can be searched for with a non-accent character "u". A character with an accent character in a sentence cannot be searched for.
- 4 Select the person you want to call from the list.

		EL 1 (1111)	<b>~</b>
¢0	Name1	Ā	
	Name2		±⊡
$\star$	Name3		۲ <b>Ш</b>
12	Name4	•	<b>Q</b> A-Z
* #	Name5	T	\$‡
			"" <u>F</u>

**5** Select the phone number from the list.

Ph	one book Detail	4
æ	Name Phone number1	Ā
	Name Phone number2	
	Name Phone number3	
	Name Phone number4	•
L	Name Phone number5	T
	Traine.	,

#### NOTE

 You can sort the phone numbers in the list by last name or first name. For details, see *Hands-Free* Setup (P.51).

## Call using the preset number

# 1 Touch

**2** Touch the name or phone number.

×	Device Name1 Devi	ce Name2	Υ
6	Name1 (Home)	Name5	
	0123456789012	Name6	Edit
X	Hame3 (Mobile phone)	🖬 Name7	
* #	Name4 (Office)	Dame8	<b>₩</b> []
			ッ)을

#### Call by entering a phone number

- 1 Touch \*#
- 2 Enter a phone number with number keys.



3 Touch

## Voice Recognition

You can access the voice recognition function of the cell-phone connected to this unit. You can search the cell-phone phonebook by voice. (The functionality depends on the cell-phone.)

**1** Press the **FNC** button for 1 second.



➤ Voice Recognition screen appears.

#### 2 Start speaking.

#### NOTE

• You can use the voice recognition function by touching on the Hands Free screen.

# Receive a call

1 Touch to answer a phone call or to reject an incoming call.



#### NOTE

• While monitoring the picture from the view camera, this screen does not appear even if a call comes in.

#### To end call

1 While talking, touch <u></u>

# Operations during a call



- Adjust the volume of your voice
- 1) Touch Speech Quality.
- 2) Touch ◀ or ▶ for Microphone Level.



#### Adjust the receiver volume

Press the – or + button.



#### Mute your voice

Touch 🕅 to mute or not to mute your voice.

#### Output the dial tone

Touch **DTMF** to display the tone input screen. You can send tones by touching desired keys on the screen.

#### Switching between speaking voice output destinations

Touching **1 1 b a** each time switches speaking voice output destinations between the cell-phone and the speaker.

#### Call-waiting

When you receive a new call while talking on the phone, you can answer the newly received call by touching . The current call is put on hold.

Each time you touch **S**, the caller will change to the other one.

When you touch a, the current call will end to be switched to the call waiting on hold.

#### To close the Hands-Free popup screen

Touching  $\times$  to close the Hands-Free popup screen. To display it again, touch  $\bigvee_{n=1}^{\infty}$  after pressing the **FNC** button.

# Phone number preset

You can register frequently used phone numbers in this unit.



#### 2 Touch Edit.

	Device Name1 Device	te Name2	Ś
<b>%</b>	Name1 (Home)	Name5	
	0123456789012	Name6	Edit
*	Name3 (Mobile phone)	🖬 Name7	
* #	Name4 (Office)	🔓 Name8	<b>\$</b> []
			까물

#### **3** Select where to preset.

	Edit Preset Dial		ξı
ſ	🏚 Name1 (Home)	Name5	
	0123456789012	No Preset	
	Name3 (Mobile phone)	No Preset	
	Name4 (Office)	No Preset	Delete all

#### Delete all

To delete all preset numbers, touch **Delete** all and then touch **OK** on the confirmation screen.

#### 4 Select how to preset.



#### Add number from phonebook

Select the number to preset from the phonebook. See *Call using the phonebook* (*P.47*).

#### Add number direct

Enter the telephone number directly and touch **SET**. See *Call by entering a phone number (P.48)*.

#### Delete

To delete a preset number, touch **Delete** and then touch **OK** on the confirmation screen.

### Phonebook transfer

You can transfer phonebook data from your Bluetooth smartphone using PBAP.



	Device Name1	Device Name2	TEL Y.I (IIII	Ϋ́
l'e	Name1			
	Name2			
+	Name3			
	Name4			<b>Q</b> A-Z

> Phonebook data transfer starts.

#### NOTE

- If the Phonebook contains more than 1000 entries, Phonebook data cannot be transferred.
- If no Phonebook has been downloaded, touching Download Phonebook Now will start downloading the Phonebook.

#### Phonebook deletion

- 1 Touch 🖆 🛄 .
- 2 Touch the name to check.

Delete Phonebook		ς
Name1	Delete	Ŧ
Name2		
Name3	M All	
Name4		•
Name5	<b>Q</b> A-Z	T

#### 🗖 🗹 Ali

Checks all boxes.

#### 

Clears all check marks.

#### **3** Touch **Delete**.

> Confirmation message appears.

4 Touch OK.

# **Hands-Free Setup**

You can make various settings for the Hands-Free function.

#### **1** Press the **FNC** button.

> Popup menu appears.

## 2 Touch 💼



- ► HOME screen appears.
- 3 Touch



➤ SETUP screen appears.

#### 4 Touch Bluetooth.



> Bluetooth Setup screen appears.

#### **5** Touch **TEL SETUP**.

➤ TEL SETUP screen appears.

#### **6** Set each function as follows.



#### Bluetooth HF/Audio

Select the speakers to output the sound from the cell-phone (such as phone call voice and ringing tone) and Bluetooth audio player.

- Front: Outputs sound from the front speakers.
- **All** (Default): Outputs sound from all speakers.

#### Auto Response\*

Set the automatic response time to pick-up an incoming call.

- **OFF** (Default): Turns off the Automatic response function.
- 1/ 5/ 10/ 15/ 20/ 25/ 30: Sets the ringing time (second).

#### Auto Pairing

When set to "ON", the Apple Auto Pairing function is turned on to automatically register the iPod touch or iPhone connected to this unit.

- **ON** (Default): Turns on the Apple Auto Pairing function.
- **OFF**: Turns off the Apple Auto Pairing function.

#### Sort Order

Set how to sort the data in the cell-phone phonebook.

First : Sorts data by the first name.

Last (Default): Sorts data by the last name.

#### Echo Cancel Level

Adjust the level of echo cancellation. Default is "0".

#### Noise Reduction Level

Reduce the noise generated in the surrounding environment without changing the microphone volume. Use this function when the voice of caller is not clear. Default is "0".

\* Either the auto response time set on this unit or the time set on the cell-phone, whichever is shorter takes effect.

#### 7 Touch OK.

TEL SETUP		ок	ς
Bluetooth HF/Audio	Front	All	-

# Setup

# **Monitor Screen Setup**

You can adjust the image quality of video, menu screen, etc.


#### 1 Press the FNC button.

- ▶ Popup menu appears.
- 2 Touch Screen Adjust.



> Screen Adjustment screen appears.

#### **3** Adjust each setting as follows.



#### Backlight / Contrast / Black / Brightness / Colour / Tint

Adjust each setting.

#### 

Select a screen mode.

**Full** : Changes the aspect ratio of video and displays video fully on the screen.

Normal: Displays video at the ratio of 4:3.

#### Auto:

DVD, VCD and disc media: 16:9 video is displayed in the Full mode and 4:3 video is displayed in the Regular mode.

USB device: Displays video fully (vertically or horizontally) with no ratio change.

#### NOTE

• Settings to adjust vary depending on the current source.

# System Setup

1 Press the FNC button.

> Popup menu appears.

**2** Touch **1**.



- ➤ HOME screen appears.
- 3 Touch





See the following section for each setting.

- Set up AV (P.57)
- Set up display (P.55)
- Set up the user interface (P.53)
- Set up camera (P.38)
- Set up special (P.55)
- Set up Bluetooth (P.42)
- Set up security (P.8)

# **User Interface Setup**

You can setup user interface parameters.

- **1** Press the **FNC** button.
  - > Popup menu appears.
- **2** Touch 🛅.
  - ► HOME screen appears.
- 3 Touch .
  - SETUP screen appears.
- 4 Touch User Interface.



➤ User Interface screen appears.

5 Set each parameter as follows.

#### Steering Remote Controller

Sets the desired function in the steering remote controller. See *Learning function of steering remote (P.54)*.

#### Beep

Turn the key touch tone on or off. Default is "ON".

#### Information Window SETUP

Set up the Information window displayed on the HOME screen. (**P.16**)

#### Monitor Touch Control Effect

Determine whether to show the trace of finger under monitor touch control. **(P.10)** "ON" (Default)/ "OFF"

#### Language Select

Select a language.

#### Touch Panel Adjust

Adjust the sensing position of the touch panel. (P.54)

#### Time Format

Select the time display format. "12-Hour" (Default)/ "24-Hour"

#### Clock

**RDS-SYNC** (Default): Synchronizes the clock time with the RDS.

Manual : Set the clock manually.

# Time Zone

Select the time zone.

#### Clock Adjust

If you select **Manual** for Clock, adjust the date and time manually. (**P.53**)

#### DISP Key

Select the source screen displayed when in the popup menu screen is pressed.

- **OFF** : Displays the control screen of the current source.
- Mirroring (Default): Switches to the App screen from the connected iPhone/ Android device or to the Apple CarPlay screen from the connected iPhone when the button is pressed. (*P.23*)
- NAV: Switches to the navigation screen from the connected navigation unit by pressing the button. (**P.39**) (outside oceania area)

# Adjust the date and time manually

- 1 Touch **Clock** on the User Interface screen.
- 2 Select Manual.
- **3** Touch **Time Zone** on the User Interface screen.
- 4 Select the time zone.
- 5 Touch Clock Adjust on the User Interface screen.
- 6 Adjust the date, then adjust the time.



7 Touch Set.



- 1 Touch Touch Panel Adjust on the User Interface screen.
  - ➤ Touch Panel Adjust screen appears.
- 2 Follow the instruction on the screen and long touch the center of each ①.

Touch Pane	l Adjust		2 🕀
	Cancel	Reset	

#### NOTE

- To cancel the touch panel adjustment, touch **Cancel**.
- To reset it to the default, touch Reset.

# Learning function of steering remote

This function is available only when your vehicle is equipped with the electrical steering remote controller.

If your steering remote controller is not compliant, learning may not be completed and error message may appear.

- 1 Touch Steering Remote Controller in the User Interface screen.
  - Steering Remote Controller Setting screen appears.
- 2 Press and hold the steering remote controller button

#### NOTE

 You can have the unit learned all buttons at a time. In that case, press the all buttons one at a time and after pressing all of them, touch Learning completed in Steering Remote Controller Setting screen. However, new functions cannot be learned after this operation. **3** Touch the function you want to set.



**4** Repeat steps 2 and 3 as necessary.

Ste	Steering Remote Controller Setting						
Preparing for learning. Please wait without pressing any steering remote control key.							
ATT VOL- VOL-							
				Learni initialisa		Learning completed	

#### 5 Touch Learning completed.

#### NOTE

- When changing the function already learned, press and hold the button you want to change in step 2 and then touch to select the changed function from the function list.
- Confirm the contents of the settable function on the function list. You cannot edit the function list.
- To initialize the contents, touch Learning initialisation of Steering Remote Controller in User Interface screen. After you touch Initialise, a confirmation message appears. Follow the message and complete the operation.

# **Special Setup**

You can setup special parameters.

#### 1 Press the FNC button.

- Popup menu appears.
- **2** Touch **1**.
  - ► HOME screen appears.

# 3 Touch 🚺.

> SETUP screen appears.

#### 4 Touch Special.



#### ➤ Special screen appears.

#### **5** Set each parameter as follows.

#### DEMO

Select the demonstration mode. Default is "ON".

#### Software Information

Confirm the software version of this unit. (P.55)

#### Open Source Licenses

Display the open source licenses.

#### Initialise

Touch **Initialise** and then touch **Yes** to set all the settings to the initial default settings.

Audio SETUP Memory is not initialized.

# Software Information

You can confirm the software version of this unit.

# **1** Touch **Software Information** in the Special screen.

#### **2** Confirm the software version.



#### NOTE

• For how to update the software, see the relevant update procedure manual which comes with the software.

# Display Setup

#### 1 Press the FNC button.

- > Popup menu appears.
- **2** Touch 🛅.
  - ► HOME screen appears.
- **3** Touch **5**. > SETUP screen appears.
- 4 Touch Display.



> Display screen appears.

#### 5 Set each parameter as follows.

#### Dimmer

Select the dimmer mode.

**OFF**: Does not dim the display and buttons. **ON**: Dims the display and buttons.

**SYNC** (Default): Turns the dimmer function on or off when the vehicle light control switch is turned on or off.

#### OSD Clock


Select if you want to display the clock while watching DVD video, etc. "ON" (Default)/ "OFF"

#### Wallpaper Customize

You can change the wallpaper image or color. (**P.56**)

#### Viewing Angle

If it is hard to see the image on the screen evenly, adjust the viewing angle. The smaller the (negative) value, the more whitish the image on the screen looks. "0" (Default)/ "-1"/ "-2"/ "-3"



- 1 Touch Wallpaper Customize on the Display screen.
- 2 Select an image.



- \*1 Select a wallpaper color in advance.
- \*<sup>2</sup> Select an original image in advance.

#### To select wallpaper color

- **1** Touch **Wallpaper Colour** on the Wallpaper Customize screen.
- 2 Select a wallpaper color.



**3** Touch .

#### To register an original color

You can register your original color.

- 1 Touch User on the Wallpaper Colour screen.
- **2** Touch Adjust.
- **3** Use and + to adjust each color value.





#### To register an original image

You can load an image from the connected USB device and set it as the wallpaper image. Before starting this procedure, it is necessary to connect the device which has the image to load.

- **1** Touch **User1 Select** on the Wallpaper Customize screen.
- **2** Select the image to load.



## **3** Touch Enter.



The selected image is loaded and the display returns to the Wallpaper Customize screen.

#### NOTE

- Touching rotates the image counterclockwise.
- Touching rotates the image clockwise.
- Picture files: JPEG (.jpg, .jpeg), PNG (.png), BMP (.bmp)

# **AV Setup**

You can set AV parameters.

#### **1** Press the **FNC** button.

- Popup menu appears.
- **2** Touch **1**.
  - ► HOME screen appears.
- 3 Touch 🚺.
  - ➤ SETUP screen appears.
- 4 Touch AV.



► AV screen appears.

#### 5 Set each parameter as follows.

#### TV Tuner Control

Sets when connecting the TV tuner to AV INPUT.(**P.40**)

- **ON**: Set to ON when connecting the 3rd party TV tuner. AV-IN Name is set to TV. If you connect the TV tuner made by DOS and watch TV, you can perform some simple operations by touching the screen of this unit.
- **OFF** (Default): Set to OFF when not connecting the 3rd party TV tuner.

#### AV-OUT

You can select an AV source to be output from the AV OUTPUT port.

OFF, AV-IN, DISC (KW-V850BT/ KW-V850BTM only), USB, or iPod

- You cannot select iPod if it is connected via Bluetooth.
- If you select iPod as the main source, you cannot select DISC (Music CD/ Disc media) or USB as the AV output source.
- If you select USB as the main source, you cannot select DISC (Music CD/ Disc media) or iPod as the AV output source.
- If you select DISC (Music CD/ Disc media) as the main source, you cannot select USB or iPod as the AV output source.

 If you select Spotify, Bluetooth audio, Apple CarPlay or Android Auto as the main source, you cannot select DISC (Music CD/ Disc media), USB or iPod as the AV output source.

#### Driving Position

Select the driving position (left or right). "Left"/ "Right" (Default)

# **Controlling Audio**

You can adjust various settings such as audio balance or subwoofer level.

#### 1 Press the FNC button.

- > Popup menu appears.
- 2 Touch Audio.



See the following section for each setting.

- Set up speaker / X'over (P.59)
- Controlling equalizer / subwoofer level (P.61)
- Set listening position / DTA (P.64)
- Controlling general audio (Fader / Balance) (**P.61**)
- Set volume offset (P.62)
- Performing zone control (P.62)
- Set sound effect (P.63)
- Memory/recall the audio settings (P.66)

# 3-way speaker system setup

Select the appropriate crossover network mode for the speaker system used (2-way or 3-way speaker system).

- 1 Press the FNC button.
  - > Popup menu appears.
- 2 Touch 抗
  - ➤ HOME screen appears.
- 3 Touch .> Source selection screen appears.
- 4 Touch AV Off.
- **5** Press the **FNC** (①) button and the (②) button for 1 second at the same time.



- Speaker system select screen appears.
- **6** Select the crossover network mode.

X'over Network	÷
Switching the X'over Network mode setting. Please confirm the speaker wiring and select the mode. Speaker damage may occur with the incorrect setting.	
2way 3way	

► A confirmation screen appears.

## 7 Touch Yes.

#### NOTE

- When the 3-way speaker system is selected, the following functions are disabled.
  - Front focus of Listening Position / DTA
  - Fader for Controlling General Audio
  - Zone Control
  - Selection of the speakers to output sound from the cell-phone of Bluetooth HF/Audio
  - Beep for User Interface Setup
- Connecting 3-way speakers with the 2-way mode selected can break the speakers.

# Speaker / X'over setup

#### **1** Press the **FNC** button.

Popup menu appears.

#### 2 Touch Audio.

➤ Audio screen appears.

#### **3** Touch **Speaker** / X'over.



#### 4 Select a car type.

# You can select the car type and speaker network, etc.

When you select your car type, the Delay Time Alignment is activated automatically (for timing adjustment of sound output for each channel) to have the highest surround effects.



**5** Touch the speaker (①) you wish to adjust and set each parameter (②) as follows.



#### Speaker

You can select a speaker type and its size to get the best sound effects.

When the speaker type and size are selected, the speaker crossover network is set automatically.

#### Location (Only for Front, Rear)

Select the speaker position you have installed.

#### Tweeter (Only for Front)

You can set up the tweeter when you are selecting front speakers. None, Small, Medium, Large

#### X'over\*

Display the speaker crossover setup screen. You can adjust the crossover frequency that was set automatically when you selected the speaker type.

For details, see **Crossover network setup** (P.60)

\* Only when "Speaker" is set to a mode other than "None".

When Speaker network is set to 3-way:

# Speaker Select Car Type Car Type Compact Speaker Speaker Medium Medium X'over

#### NOTE

- For how to switch to the 3-way speaker system, see 3-way speaker system setup (P.58).
   Connecting 3-way speakers with the 2-way mode selected can break the speakers.
- Select "None" if you have no speakers.

#### English 59

# Crossover network setup

You can set the crossover frequency of speakers.

#### 1 Touch X'over.



#### **2** Touch the speaker to set up.



#### 3 Set each parameter as follows.



#### HPF FREQ

High Pass Filter adjustment. (When Front or Rear is selected on the Speaker Select screen)

#### LPF FREQ

Low Pass Filter adjustment. (When Subwoofer is selected on the Speaker Select screen)

#### Slope \*1

Set a crossover slope.

#### Gain

Adjust the gain of the front speaker, rear speaker, or subwoofer.

#### TW Gain \*2

Adjust the tweeter level. (When Front is selected on the Speaker Select screen)


#### Phase Inversion

Set the phase of subwoofer output.

Check **Phase Inversion** to shift the phase 180 degrees. (When Subwoofer is selected on the Speaker Select screen)

- \*1 Only when "LPF FREQ"/"HPF FREQ" is set to a mode other than "Through" in **X'over**.
- \*<sup>2</sup> Only when "Tweeter" is set to "Small", "Medium", "Large" in **Speaker Setup**.

#### When Speaker network is set to 3-way:



#### FREQ (High Pass)

High Pass Filter adjustment.

#### HPF FREQ, LPF FREQ (Band Pass)

Band Pass Filter adjustment. (When Mid Range Speaker is selected on the Speaker Select screen)

#### FREQ (Low Pass)

Low Pass Filter adjustment. (When Woofer is selected on the Speaker Select screen)

#### Slope \*1 \*2

Set a crossover slope.

#### 📕 Gain

Set the gain of each speaker.

#### Phase Inversion

Set the phase of tweeter, mid range, and woofer output.

Check **Phase Inversion** to shift the phase 180 degrees.

#### \*1 Only when "LPF FREQ"/"HPF FREQ" (Band Pass) is set to a mode other than "Through" in X'over.

\*<sup>2</sup> Only when "FREQ" (Low Pass) is set to a mode other than "Through" in **X'over**.

#### NOTE

 For how to switch to the 3-way speaker system, see **3-way speaker system setup (P.58)**.
 Connecting 3-way speakers with the 2-way mode selected can break the speakers.

# **Controlling General Audio**

#### **1** Press the **FNC** button.

Popup menu appears.

#### 2 Touch Audio.

> Audio screen appears.

#### **3** Touch Fader / Balance.



#### 4 Set each parameter as follows.



#### Fader / Balance

Adjust the volume balance around the touched area.

 $\blacktriangleleft$  and  $\blacktriangleright$  adjust the right and left volume balance.

 $\blacktriangle$  and  $\blacktriangledown$  adjust the front and rear volume balance.

#### Center

Clear the adjustment.

# **Equalizer Control**

You can adjust equalizer by selecting the optimized setting for each category.

#### 1 Press the FNC button.

> Popup menu appears.

#### **2** Touch Audio.

- > Audio screen appears.
- 3 Touch EQ / SW Level.



**4** Touch the screen and set the Graphic Equalizer as desired.



#### Gain level (area in dotted frame)

Adjust the gain level by touching each frequency bar.

You can select a frequency bar and adjust its level by  $\blacktriangle$ ,  $\blacktriangledown$ .

#### Preset Select

Display the screen for selecting the preset equalizer curve. **(P.61)** 

#### Memory

Saves the adjusted equalizer curve as "User1" to "User4". (**P.62**)

#### Initialise

Initialize (flatten) the current EQ curve.

#### ALL SRC

Apply the adjusted equalizer curve to all sources. Touch **ALL SRC** and then touch **OK** on the confirmation screen.

#### **Bass EXT** (Bass Extend Settings)

When turned on, the frequencies lower than 62.5 Hz is set to the same gain level (62.5 Hz).

#### SW Level

Adjust the subwoofer volume. This setting is not available when Subwoofer is set to "None". See **Speaker / X'over setup (P.59)**.

# Recall the EQ curve

# 1 Touch Preset Select.

**2** Select an EQ curve.



#### **Controlling Audio**

#### NOTE

• **iPod** is available only for the iPod source and it is connected via USB.

# Save the EQ curve

- **1** Adjust the EQ curve.
- **2** Touch **Memory**.

#### **3** Select where to save.



# **Volume Offset**

Finely adjust the volume of the current source to minimize the difference in volume between different sources.

#### **1** Press the **FNC** button.

> Popup menu appears.

#### **2** Touch Audio.

> Audio screen appears.

#### **3** Touch **Volume Offset**.



**4** Touch + or - to adjust the level.



#### Initialise

Returns to the initial settings.

#### NOTE

 If you have increased the volume first, then reduce the volume using "Volume Offset".
 Switching the current source to another source suddenly may output extremely loud sound.

# **Zone Control**

You can select different sources for front and rear positions in the vehicle.

- **1** Press the **FNC** button.
  - > Popup menu appears.

#### 2 Touch Audio.

> Audio screen appears.

#### **3** Touch **Zone Control**.



> Zone Control screen appears.

#### 4 Touch Zone Select.

Zone Control		<b>←</b>
Zone Select	Single Zone	×
Front Source	Tuner	•
	OFF	•
Rear VOL .	15	¥

#### 5 Touch Dual Zone.



#### **6** Set each source as follows.

Zone Control		ς
Zone Select	Dual Zone	×
Front Source	Tuner	•
Rear Source	USB	-
Rear VOL .	15	Ŧ

#### Zone Select

Touch **Single Zone** to turn off the dual zone function.

Front Source, Rear Source

Select an audio source for each.

#### Rear VOL.

Adjust the rear source volume.

#### NOTE

- When the rear speaker sound is switched, the audio source that is output at the AV OUTPUT terminal is also switched to the same source.
- When the dual zone function is set to on, the following functions are not available.
  - Output from the subwoofer
  - Subwoofer Level/ Bass Boost (P.63)
  - Equalizer Control/ Sound Effect/ Listening Position (**P.61, 63, 64**)
  - Speaker Setup **(P.59)**
  - High-resolution Sound Source File Playback
- You cannot select iPod as the Rear Source if it is connected via Bluetooth.
- If you select iPod as the Front Source, you cannot select DISC (Music CD/ Disc media) or USB as the Rear Source.
- If you select USB as the Front Source, you cannot select DISC (Music CD/ Disc media) or iPod as the Rear Source.
- If you select DISC (Music CD/ Disc media) as the Front Source, you cannot select USB or iPod as the Rear Source.
- If you select Spotify, Bluetooth audio, Apple CarPlay or Android Auto as the Front Source, you cannot select DISC (Music CD/ Disc media), USB or iPod as the Rear Source.

# Sound Effect

You can set sound effects.

- **1** Press the **FNC** button.
  - > Popup menu appears.
- 2 Touch Audio.
  - > Audio screen appears.

#### **3** Touch **Sound Effect**.



#### 4 Set each parameter as follows.



#### Bass Boost

Set the amount of bass boost "OFF"/"1"/"2"/ "3".

#### Loudness

Set the amount of boost of low and high tones. "OFF", "Low", "High"

#### Volume Link EQ

Reduce the driving noise by boosting specific frequencies in the audio signal. "OFF", "ON"

#### Space Enhancement

Select the feeling of sound space enhancement.

"OFF"/ "Small"/ "Medium"/ "Large".

This setting is not available for the Tuner source.

#### K2

Turn ON/OFF the K2 function. Technology to extrapolate and supplement with proprietary algorithm, the highfrequency range that is cut off when encoding.

#### Sound Response

Virtually make the sound more realistic using the Digital Signal Processor (DSP) system. Select the level from "OFF"/"1"/"2"/"3".

#### Sound Lift

You can adjust the height of speakers virtually to suit your listening position. "OFF"/ "Low"/ "Middle"/ "High".

# **Listening Position / DTA**

Listening Position / DTA allows you to improve the sound field depending on the position of the seat you sit.

Listening Position / DTA allows you to set "Listening Position" and "Front Focus". You cannot set both at the same time.

#### 1 Press the FNC button.

> Popup menu appears.

#### 2 Touch Audio.

Audio screen appears.

#### 3 Touch Position / DTA.



- Set up Listening Position (P.64)
- Set up Front Focus (P.65)

## Listening Position

Adjust the sound delay time so that the sounds from different speakers arrive at the listener sitting on the selected seat at the same time.

- 1 Touch Listening Position on the Position / DTA screen.
- 2 Select a listening position from Front R (Right front), Front L (Left front), Front All (All front), and All.



#### **Position DTA control**

You can fine-adjust your listening position.

- 1 Touch Adjust.
- 2 Touch Delay.

3 Touch ◀ or ► to adjust the delay time of the selected speaker.



- 4 Touch Level.
- 5 Touch ◀ or ► to adjust the sound level of the selected speaker.



#### NOTE

• To initialize the Delay and Level settings, touch **Initialise** and **Yes** on the confirmation screen.

## Front Focus

You can focus the imaginary sound image on the front of the selected seat.

- Touch Front Focus in the Position / DTA screen.
- 2 Select a front focus position.

For **Front All** and **All**, select Priority L or R depending on which side you want to put the imaginary sound image.



# Front Focus fine adjustment

- 1 Touch Adjust.
- **2** Touch **Delay**.
- **3** Set each parameter as follows.



#### Sound Image LR (Front)

Focus the sound image on the front of front seats.

#### Sound Image LR (Rear)

Focus the sound image on the front of rear seats.

#### Size of the Virtual Sound Field

Adjust the size of sound image to meet your taste. If the sound image is shifted from the front, move it back by **Sound Image LR** (Front) or **Sound Image LR (Rear)**.

#### Subwoofer Delay

Adjust the delay time of subwoofer sound.

- 4 Touch Level.
- **5** Touch **◄** or **▶** to adjust the sound level of the selected speaker.



#### NOTE

• To initialize the Delay and Level settings, touch **Initialise** and **Yes** on the confirmation screen.

#### **Controlling Audio**

# **Audio Setup memory**

Audio Control settings can be memorized. The memorized settings can be recalled at any time.

#### 1 Press the FNC button.

> Popup menu appears.

#### 2 Touch Audio.

> Audio screen appears.

## **3** Touch Audio Memory.



#### SETUP Memory

Lock or unlock the Audio SETUP Memory/ Recall/Clear.

#### Audio SETUP Memory

Memorize the current audio settings.

 Speaker / X'over, EQ / SW Level (User Preset, SW Level), Position / DTA, Fader / Balance, Sound Effect (**P.58**)

#### Audio SETUP Recall

Recall the memorized audio setting.

#### Audio SETUP Clear

Clear the Audio SETUP Memory and the currently memorized audio settings.

# **Remote control**

This unit can be operated using the remote control.

For Oceania sales area, the remote control is the optional accessory (RM-RK258).

# **WARNING**

• Do not ingest the battery, Chemical Burn Hazard

The remote control supplied with this product contains a coin / button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.

Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

# **A** CAUTION

- Put the remote control in a place where it will not move during braking or other operations.
   A dangerous situation could result, if the remote control falls down and gets wedged under the pedals while driving.
- Do not leave the battery near fire or under direct sunlight. A fire, explosion or excessive heat generation may result.
- Do not recharge, short, break up or heat the battery or place it in an open fire. Such actions may cause the battery to leak fluid. If spilled fluid comes in contact with your eyes or on clothing, immediately rinse with water and consult a physician.
- Danger of explosion if Lithium battery is incorrectly replaced. Replace only with the same or equivalent type.

## Removing the battery sheet (outside Oceania area)

Pull the battery sheet out from the remote controller to activate the battery.



# Changing the battery of the remote controller



- Use a commercially available button battery (CR2025).
- Insert the battery with the + and poles aligned properly.
- If the effectiveness of the remote controller decreases, replace the battery.

# Functions of the Remote control Buttons



#### Remote control

Key Name	Function
SRC	Switches to the source to be played. In hands-free mode, hangs up the phone.
VOL + -	Adjusts the volume.
ATT	Lowers the volume when pressed once. Restores the previous volume when pressed twice.
DISP	Switches the screen between the current source from the connected iPhone/Android.
FM/▲ AM/▼	Selects the folder to be played. For the tuner source, selects FM/ AM band to be received. For the DVD/VCD source, selects the title to be played.
	Selects the track or file to be played. For the tuner source, switches to broadcast stations received by the unit. For the DVD/VCD source, selects the chapter/scene/track to be played.
ANGLE	Not used.
C.	When a call comes in, answers the call.
DIRECT	Switches to the direct search mode. For details on the direct search mode, see <b>Direct search mode (P.68)</b> .
ASPECT	Changes the aspect ratio. • To confirm the current aspect ratio setting, operate on the touch panel. (P.52)
Numeric Keypad	Allows you to enter the number to search in the direct search mode. For details on the direct search mode, see <b>Direct search mode (P.68)</b> .
CLR	During DVD/VCD source, deletes a character while in direct search mode.
ENT	Performs the selected function.

# Direct search mode

Using the remote control, you can jump directly to the desired file, track chapter, etc. by entering the number corresponding to the content.

#### NOTE

• This operation cannot be performed for the USB device and iPod.

# **1** Press the **SRC** button several times until the desired content appears.

The available contents are different depending on the source type.

**DVD \*1** Title number/Chapter number

■ VCD 1.X and 2.X (PBC OFF) \*1 Track number

■ VCD 2.X (PBC ON) \*1 Scene number/Track number

■ Music CD \*1 Track number

**Tuner** Frequency value

- **2** Press the **DIRECT** button.
- **3** Enter the number of the content you want to play using the numeric keypad.
- For DVD or VCD, music CD, press the ENTER button.
   For Tuner, press the I ◄< or ►►I button.</li>
  - The content corresponding to the number you entered is played.

\*1 KW-V850BT/ KW-V850BTM only

# **Connection/Installation**

# **Before Installation**

Before installation of this unit, please note the following precautions.

# A WARNINGS

- If you connect the ignition wire (red) and the battery wire (yellow) to the car chassis (ground), you may cause a short circuit, that in turn may start a fire. Always connect those wires to the power source running through the fuse box.
- Do not cut out the fuse from the ignition wire (red) and the battery wire (yellow). The power supply must be connected to the wires via the fuse.

# **A** CAUTION


 Install this unit in the console of your vehicle.
 Do not touch the metal part of this unit during and shortly after the use of the unit. Metal part such as the heat sink and enclosure become hot.

# NOTE

- Mounting and wiring this product requires skills and experience. For best safety, leave the mounting and wiring work to professionals.
- Make sure to ground the unit to a negative 12V DC power supply.
- Do not install the unit in a spot exposed to direct sunlight or excessive heat or humidity. Also avoid places with too much dust or the possibility of water splashing.
- Do not use your own screws. Use only the screws provided. If you use the wrong screws, you could damage the unit.
- If the power is not turned ON ("There is an error in the speaker wiring. Please check the connections." is displayed), the speaker wire may have a short-circuit or touched the chassis of the vehicle and the protection function may have been activated. Therefore, the speaker wire should be checked.
- If your car's ignition does not have an ACC position, connect the ignition wires to a power source that can be turned on and off with the

ignition key. If you connect the ignition wire to a power source with a constant voltage supply, such as with battery wires, the battery may be drained.


- If the console has a lid, make sure to install the unit so that the front panel will not hit the lid when closing and opening.
- If the fuse blows, first make sure the wires aren't touching to cause a short circuit, then replace the old fuse with one with the same rating.
- Insulate unconnected wires with vinyl tape or other similar material. To prevent a short circuit, do not remove the caps on the ends of the unconnected wires or the terminals.
- Connect the speaker wires correctly to the terminals to which they correspond. The unit may be damaged or fail to work if you share the ⊖ wires or ground them to any metal part in the car.
- When only two speakers are being connected to the system, connect the connectors either to both the front output terminals or to both the rear output terminals (do not mix front and rear). For example, if you connect the ⊕ connector of the left speaker to a front output terminal, do not connect the ⊖ connector to a rear output terminal.
- After the unit is installed, check whether the brake lamps, blinkers, wipers, etc. on the car are working properly.
- Mount the unit so that the mounting angle is 30° or less.
- This unit has the cooling fan to decrease the internal temperature. Do not mount the unit in a place where the cooling fan of the unit is blocked. Blocking these openings will inhibit the cooling of the internal temperature and result in malfunction.



Cooling fan


#### **Connection/Installation**

- Do not press hard on the panel surface when installing the unit to the vehicle. Otherwise scars, damage, or failure may result.
- Reception may drop if there are metal objects near the Bluetooth antenna.



Bluetooth antenna unit


# Supplied accessories for installation

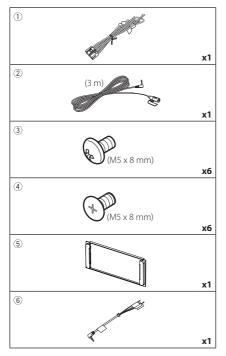

# Installation procedure

- To prevent a short circuit, remove the key from the ignition and disconnect the ⊖ terminal of the battery.
- 2) Make the proper input and output wire connections for each unit.
- 3) Connect the speaker wires of the wiring harness.
- 4) Connect the wiring harness wires in the following order; ground, battery, ignition.
- 5) Connect the wiring harness connector to the unit.
- 6) Install the unit in your car.
- 7) Reconnect the  $\bigcirc$  terminal of the battery.
- 8) Perform the Initial Setup. See *Initial setup (P.7)*.

# Installing the unit




#### NOTE

• Make sure that the unit is installed securely in place. If the unit is unstable, it may malfunction (eg, the sound may skip).


# 🔳 Trim plate

1) Attach accessory (5) to the unit.




# Microphone unit

- 1) Check the installation position of the microphone (accessory ②).
- 2) Clean the installation surface.
- 3) Remove the separator of the microphone (accessory (2)), and stick the microphone to the place shown below.
- Wire the microphone cable up to the unit with it secured at several positions using tape or other desired method.
- 5) Adjust the direction of the microphone (accessory ②) to the driver.




Fix a cable with a commercial item of tape.

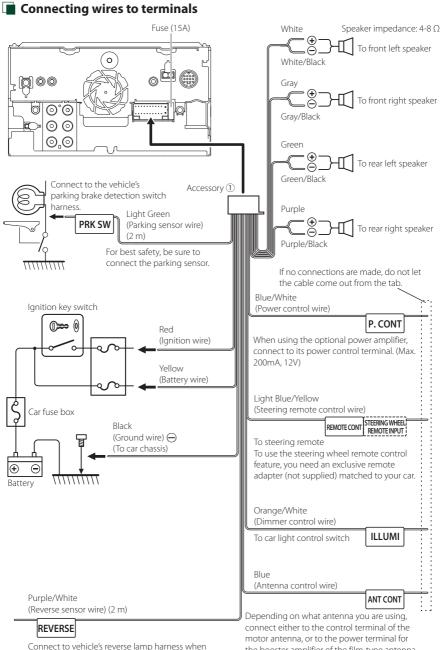

motor antenna, or to the power terminal for the booster amplifier of the film-type antenna. (Max. 300mA, 12V)


## 3-way speaker system setup

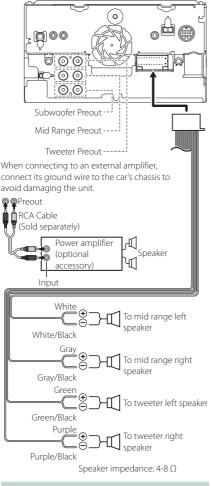


#### NOTE

- For speaker system setup, see 3-way speaker system setup (P.58).
- For speaker setup and crossover setup, see Speaker / X'over setup (P.59).
- For how to connect speaker wires to terminals other than speaker terminals and Preout terminals, see Connecting the system and external components (P.73) and Connecting wires to terminals (P.72).

Connecting the system and external components

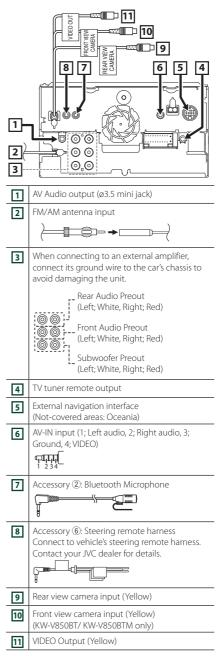


## Connecting a USB device



- USB maximum power supply current : DC 5 V == 1.5 A
   Cold constraints
- <sup>[2]</sup> Sold separately


## Connecting an iPod/iPhone

#### Lightning connector

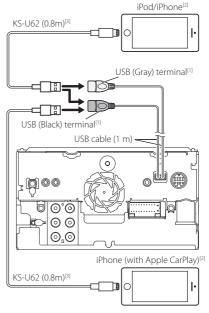

- <sup>(1)</sup> USB maximum power supply current : DC 5 V === 1.5 A
- <sup>[2]</sup> Sold separately
- <sup>[3]</sup> Optional accessory

# Connecting an Android smartphone

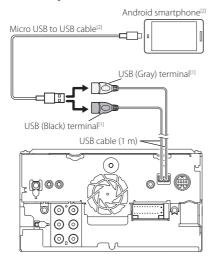

<sup>[1]</sup> USB maximum power supply current : DC 5 V === 1.5 A

<sup>[2]</sup> Sold separately

# Troubleshooting

# **Problems and Solutions**

# If any trouble occurs, first check the following table for possible problems.

#### NOTE

- Some functions of this unit may be disabled by some settings made on this unit.
- What might seem to be a malfunction in your unit may just be the result of slight misoperation or miswiring.

# About settings

- Cannot set up the subwoofer.
- Cannot set up subwoofer phase.
- No output from the subwoofer.
- Cannot set up the low pass filter.
- Cannot set up the high pass filter.

Subwoofer is not set to on.

 Set the subwoofer to on. See Speaker / X'over setup (P.59).

The dual zone function is enabled.

- Set the dual zone function to off. See Zone Control (P.62).
- Cannot select the output destination of the subsource in the dual zone.
- Cannot adjust the volume of the rear speakers.

The dual zone function is disabled.

- Set the dual zone function to on. See Zone Control (P.62).
- Cannot set up the equalizer.

#### Cannot set up the crossover network.

The dual zone function is enabled.

 Set the dual zone function to off. See Zone Control (P.62).

## About audio operations

#### Radio reception is poor.

The car antenna is not extended.

> Pull out the antenna all the way.

The antenna control wire is not connected.

 Connect the wire correctly. See Connecting the system and external components (P.73).

#### Cannot select a folder.

The random play function is enabled.

Turn off the random function.

#### Cannot perform repeat play during VCD playback.

The PBC function is enabled.

➤ Turn off the PBC function.

# The specified disc does not play, but another one plays instead.

The disc is quite dirty.

 Clean the disc. See Precautions on handling discs (P.4).

The disc is severely scratched.

Try another disc instead.

# The sound skips when an audio file is being played.

The disc is scratched or dirty.

Clean the disc. See Precautions on handling discs (P.4).

The recording condition is bad.

> Record the file again or use another disc.

Others

#### The Touch Sensor Tone doesn't sound.

The preout jack is being used.

 The Touch Sensor Tone cannot be output from the preout jack.

# **Error Messages**

When you fail to operate the unit correctly, the cause of the failure appears as the message on the screen.

# There is an error in the speaker wiring. Please check the connections.

Protective circuit has been activated because a speaker cord has shorted or it has come in contact with the car chassis.

 Wire or insulate the speaker cord as appropriate and turn the power off and on again.

#### Hot Error

When the internal temperature of this unit rises to 60°C or more, the protection circuit is activated and you may not be able to operate the unit.

 Use the unit again after reducing the temperature of the unit.

#### Mecha Error

The disc player is malfunctioning.

 Eject the disc and try inserting it again. Contact the JVC dealer if this indicator continues blinking or the disc cannot be ejected.

#### Disc Error

An unplayable disc is inserted.

 Change the disc. See Playable Media and Files (P.78).

#### **Read Error**

The disc is quite dirty.

 Clean the disc. See Precautions on handling discs (P.4).

Disc is upside down.

➤ Load the disc with the labeled side up.

#### **Region Code Error**

The disc you wanted to play has a region code that cannot be played with this unit.

 See *Region Codes in the World (P.80)* or try another disc.

#### Error 07-67

The unit is not operating correctly due to some reason or other.

 Turn the power off and on again. If the "Error 07–67" message does not disappear, contact your nearest JVC dealer.

#### No Device (USB device)

The USB device is selected as a source although no USB device is connected.

 Change the source to any source other than USB/ iPod. Connect a USB device, and change the source to USB again.

#### Disconnected (iPod, Bluetooth audio player)

The iPod/Bluetooth audio player is selected as a source although no iPod/Bluetooth audio player is connected.

 Change the source to any source other than iPod/ Bluetooth. Connect an iPod/Bluetooth audio player, and change the source to iPod/Bluetooth again.

#### No Media file

The connected USB device contains no playable audio file. Media was played that doesn't have data recorded that the unit can play.

 See *Playable Media and Files (P.78)* and try another USB device.

#### USB device over current status detected.

The connected USB device is rated a current capacity higher than the allowable limit.

- Check the USB device. Some trouble may have occurred to the connected USB device.
- Change the source to any source other than USB. Remove the USB device.

# **Playable Media and Files**

You can play various kinds of media and files on this unit.

## List of playable discs (KW-V850BT/ KW-V850BTM)

1	Disc types / Standard	Support	Remark
DVD	DVD Video	0	
	DVD Audio	×	
	DVD-VR	×	
	DVD-R*1	0	<ul> <li>MP3/WMA/AAC/WAV/FLAC/Vorbis/MPEG1/MPEG2/ MPEG4/H.264/WMV/MKV playback</li> <li>Multi-border/Multisession playback (Playback depends on authoring conditions)</li> </ul>
	DVD-RW	0	
	DVD+R	0	
	DVD+RW	0	
	DVD-R DL (Dual layer)	0	Only video format
	DVD+R DL (Double layer)	0	
	DVD-RAM	×	
CD	Music CD*1	0	
	CD-ROM	0	MP3/ WMA/ AAC/ WAV/ FLAC/ Vorbis playback
	CD-R	0	Multisession is supported.
	CD-RW	0	Packet write is not supported.
	DTS-CD	×	
	Video CD (VCD)	0	
	Super video CD	×	
	Photo CD	×	
	CD-EXTRA		Only music CD session can be played.
	HDCD		Normal music CD sound quality
	CCCD	×	
Others	Dualdisc	×	
	Super audio CD		Only CD layer can be played.

O : Playback is possible.

 $\triangle$  : Playback is partly possible.

× : Playback is impossible.

## Use of DualDisc

When playing a "DualDisc" on this unit, the surface of the disc that is not played may be scratched while the disc is inserted or ejected. Since the music CD surface does not conform to the CD standard, playback may be impossible.

(A "DualDisc" is a disc with one surface containing DVD standard signals and the other surface containing music CD signals.) \*1 Incompatible with 8 cm (3 inch) discs.

## About disc format

The disc format should be the one of the following.

- ISO 9660 Level 1/2
- Joliet
- Romeo
- Long file name

## About files

The following audio and video files are supported.

#### Playable Audio files

	Format	Bit rate	Sampling frequency	Bit count
AAC-LC (.m4a)	MPEG2/4 AAC LC HE-AAC(V1,V2)	8 – 320kbps, VBR	16 – 48 kHz	16 bit
MP3 (.mp3)	MPEG 1/2 Audio Layer 3	8 – 320kbps, VBR	16 – 48 kHz	16 bit
WMA (.wma)	Windows Media Audio Standard L3 profile (Version 7,8,9)	8 – 320kbps	16 – 48 kHz	16 bit
Linear PCM (WAVE) (.wav)	RIFF waveform Audio Format	-	16 – 48 kHz (Disc), 16 – 192 kHz (USB)	16/ 24 bit
FLAC (.flac)	flac	-	16 – 48 kHz (Disc), 16 – 192 kHz (USB)	16/ 24 bit
Vorbis (.ogg)	vorbis	VBR	16 – 48 kHz	16 bit

• If music of normal CD and other playback systems are recorded in the same disc, only the playback system recorded at the first setout is played.

- WMA and AAC files with DRM cannot be played.
- Although the audio files complies with the standards listed above, they may not be played depending on the types or conditions of media or device.
- This unit supports playback of High-Resolution Audio files. It is recommended that a car audio system should be configured with all High-Resolution Audio compatible products from player to speaker to enjoy its high quality sound.

#### Max. bit rate Audio format Profile Max. Picture size 352 × 240, 352 × 288 MPEG-1 (.mpg, .mpeg) 1.5 Mbps MPEG Audio Laver 2 MPEG-2 (.mpg, .mpeg) MP@ML 720 × 480, 720 × 576 8 Mbps MPEG Audio Layer 2 H.264/MPEG-4 AVC Baseline Profile, 1920 × 1080 (30 fps) 8 Mbps MP3, AAC (.mp4, .m4v, .avi, .flv, .f4v) Main Profile MPEG-4 (.mp4, .avi) Advanced Simple MP3, AAC 1920 × 1080 (30 fps) 8 Mbps Profile WMV (.wmv) Main Profile 1920 × 1080 (30 fps) 8 Mbps WMA MKV (.mkv) MP3, AAC, WMA, Vorbis, Video format follows H.264/MPEG-4 AVC, MPEG-4, WMV

#### Acceptable Video files

• This unit can only play back files which are smaller than 4 GB.

#### Limitation on structure of file and folder

	Disc media	USB device
Maximum number of folder layers	8	8
Maximum number of files (per folder)	999	999
Maximum number of folders (per folder)	5000	9999
Maximum number of folders (per device)	5000	Unlimited


· You can enter a folder name and file name with 255 or fewer single-byte characters.

• Files in the folder whose folder name begins with a dot (.) cannot be played.

FLAC

# **Region Codes in the World**

The DVD players are given a region code according to the country or area it is marketed, as shown in the following map.

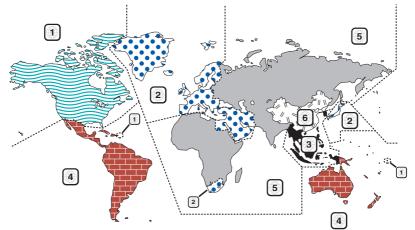

#### DVD disc marks



Indicates a region number. The discs with this mark can be played with any DVD player.



Indicates the number of audio languages recorded. Up to 8 languages can be recorded in a movie. You can select a favorite language.



Indicates the number of subtitled languages recorded. Up to 32 languages can be recorded.



If a DVD disc has scenes shot from multiple angles, you can select a favorite angle.



Indicates the type of screen for the image. The left mark indicates that a wide image picture (16:9) is displayed on a standard TV set screen (4:3) with a black band at both the top and bottom of the screen (letter box).

### Operation regulatory marks

With this DVD, some functions of this unit such as the play function may be restricted depending on the location where the DVD is playing. In this case, the following marks will appear on the screen. For more information, refer to the disc manual.



#### Discs with limited period of use

Do not leave discs with a limited period of use in this unit. If you load an already expired disc, you may not be able to remove it from this unit.

# DVD Language Codes

Code	Language
aa	Afar
ab	Abkhazian
af	Afrikaans
am	Amharic
ar	Arabic
as	Assamese
ay	Aymara Azerbaijani
az	· · · · · · · · · · · · · · · · · · ·
ba	Bashkir
be	Byelorussian
bg	Bulgarian
bh	Bihari
bi	Bislama
bn	Bengali, Bangla
bo	Tibetan
br	Breton
са	Catalan
со	Corsican
CS	Czech
су	Welsh
da	Danish
de	German
dz	Bhutani
el	Greek
en	English
eo	Esperanto
es	Spanish
et	Estonian
eu	Basque
fa	Persian
fi	Finnish
fj	Fiji
fo	Faroese
fr	French
fy	Frisian
ga	Irish
gd	Scots Gaelic
gl	Galician
gn	Guarani
gu	Gujarati
ha	Hausa
he	Hebrew
hi	Hindi
hr	Croatian
hu	Hungarian
hy	Armenian
чу	

Code	Language
ia	Interlingua
ie	Interlingue
ik	Inupiak
id	Indonesian
is	Icelandic
it	Italian
ja	Japanese
jv	Javanese
ka	Georgian
kk	Kazakh
kl	Greenlandic
km	Cambodian
kn	Kannada
ko	Korean
ks	Kashmiri
ku	Kurdish
ky	Kirghiz
la	Latin
lb	Luxembourgish
In	Lingala
lo	Laotian
lt	Lithuanian
lv	Latvian, Lettish
mg	Malagasy
mi	Maori
mk	Macedonian
ml	Malayalam
mn	Mongolian
mo	Moldavian
mr	Marathi
ms	Malay
mt	Maltese
my	Burmese
na	Nauru
ne	Nepali
nl	Dutch
no	Norwegian
oc	Occitan
om	(Afan) Oromo
or	Oriya
pa	Punjabi Polish
pl	Pashto, Pushto
ps	
pt	Portuguese
qu	Quechua Phaoto Romanco
rm	Rhaeto-Romance

Code	Language
rn	Kirundi
ro	Romanian
ru	Russian
rw	Kinyarwanda
sa	Sanskrit
sd	Sindhi
sg	Sangho
sh	Serbo-Croatian
si	Singhalese
sk	Slovak
sl	Slovenian
sm	Samoan
sn	Shona
so	Somali
sq	Albanian
sr	Serbian
SS	Siswati
st	Sesotho
su	Sundanese
SV	Swedish
SW	Swahili
ta	Tamil
te	Telugu
tg	Tajik
th	Thai
ti	Tigrinya
tk	Turkmen
tl	Tagalog
tn	Setswana
to	Tongan
tr	Turkish
ts	Tsonga
tt	Tatar
tw	Twi
uk	Ukrainian
ur	Urdu
uz	Uzbek
vi	Vietnamese
VO	Volapuk
wo	Wolof
xh	Xhosa
уо	Yoruba
zh	Chinese
zu	Zulu
	1

# Specifications

#### Monitor section

Picture Size : 6.75 inches (diagonal) wide : 151.8 mm (W) × 79.68 mm (H)

Display System : TN LCD panel

Drive System :TFT active matrix system

Number of Pixels : 1,152,000 (800H × 480V × RGB)

Effective Pixels : 99.99 %

Pixel Arrangement : RGB striped arrangement

Back Lighting

: LED

#### DVD player section (KW-V850BT/ KW-V850BTM)

#### D/A Converter

: 24/ 32 bit

#### Audio Decoder

: Linear PCM/ Dolby Audio/ MP3/ WMA/ AAC/ WAV/ FLAC/ Vorbis

Video Decoder

: MPEG1/ MPEG2/ MPEG4/ WMV/ H.264/ MKV

#### Wow & Flutter

: Below Measurable Limit

#### Frequency Response

- 96 kHz : 20 44,000 Hz
- 48 kHz : 20 22,000 Hz
- 44.1 kHz : 20 20,000 Hz

#### Total Harmonic Distortion

: 0.0001 % (1 kHz)

#### S/N Ratio (dB)

: 90.5 dB

#### Dynamic Range

: 89 dB

#### Disc Format

: DVD-Video/ VIDEO-CD/ CD-DA/ DVD-R/DVD-RW/ DVD+R/+RW

#### Quantifying Bit Number

: 16/ 20/ 24 bit

#### USB interface section

#### USB Standard

: USB 2.0 High Speed

File System : FAT 16/ 32, exFAT, NTFS

Maximum Power Supply Current : DC 5 V = 1.5 A  $\times$  2

D/A Converter : 24/ 32 bit

Audio Decoder

: MP3/ WMA/ AAC/ WAV/ FLAC/ Vorbis

#### Video Decoder

: MPEG1/ MPEG2/ MPEG4/ WMV/ H.264/ MKV

#### Frequency Response

KW-M750BT/ KW-M750BTM

- 192 kHz : 20 88,000 Hz
- 96 kHz: 20 44,000 Hz
- 48 kHz : 20 22,000 Hz
- 44.1 kHz : 20 20,000 Hz

#### Total Harmonic Distortion

KW-M750BT/ KW-M750BTM : 0.0001 % (1 kHz)

#### S/N Ratio (dB)

KW-M750BT/ KW-M750BTM : 98.5 dB

#### Dynamic Range

KW-M750BT/ KW-M750BTM : 89 dB

#### Bluetooth section

Technology

: Bluetooth Ver.4.1

Frequency : 2.402 – 2.480 GHz

Output Power : +4dBm (MAX), 0dBm (AVE), Power Class2

Maximum Communication range : Line of sight approx. 10m (32.8 ft)

Audio Codec : SBC/ AAC

: SBC/ AA

#### Profile (Multi Profile support)

• HFP (V1.7) (Hands Free Profile)

- SPP (Serial Port Profile)
- A2DP (Advanced Audio Distribution Profile)
- AVRCP (V1.6) (Audio/Video Remote Control Profile)
- PBAP (Phonebook Access Profile)

#### FM tuner section

Frequency Range (step) : 87.5 MHz – 108.0 MHz (50 kHz)

Usable Sensitivity (S/N : 30 dB) : 9.3 dBf (0.8  $\mu V/$  75  $\Omega)$ 

Quieting Sensitivity (S/N : 46 dB) : 15.2 dBf (1.6  $\mu\text{V}/$  75  $\Omega\text{)}$ 

Frequency Response : 30 Hz – 15 kHz

S/N Ratio (dB) : 75 dB (MONO)

Selectivity (± 400 kHz) : Over 80 dB

Stereo Separation : 45 dB (1 kHz)

#### AM tuner section

#### Frequency Range (step)

KW-V850BT/ KW-M750BT (for asia sales area): 531 kHz – 1611 kHz (9 kHz) KW-M750BT (for oceania sales area): 531 kHz – 1701 kHz (9 kHz) KW-V850BTM/ KW-M750BTM: 531 kHz – 1602 kHz (9 kHz)

#### Usable Sensitivity

: 28 dBµ (25 µV)

#### Video section

Color System of External Video Input : NTSC/ PAL

External Video Input Level (RCA jacks) : 1 Vp-p/ 75  $\Omega$ 

External Video Input Level (mini jack) : 1 Vp-p/ 75  $\Omega$ 

External Audio Max Input Level (mini jack) : 2 V/ 25  $k\Omega$ 

Video Output Level (RCA jacks) : 1 Vp-p/ 75  $\Omega$ 

Audio Output Level (mini jack) : 1.2 V/ 10 k $\Omega$ 

#### Audio section

Maximum Power (Front & Rear) :  $50 W \times 4$ 

Typical Power Output (Front & Rear) Full Bandwidth Power (at less than 1% THD) : 22 W × 4

Output frequency band : 20 – 88,000 Hz

**Preout Level (V)** : 4 V/ 10 kΩ

Preout Impedance :  $\leq 600 \Omega$ 

Speaker Impedance : 4 – 8 Ω

#### Graphics equalizer

Band: 13 Band Frequency (BAND1 – 13) : 62.5/ 100/ 160/ 250/ 400/ 630/ 1k/ 1.6k/ 2.5k/ 4k/ 6.3k/ 10k/ 16k Hz

#### Gain

:-9/-8/-7/-6/-5/-4/-3/-2/-1/0/1/2/3/4/5/6/7/8/9 dB

#### 2-way X'Over

High pass filter

Frequency: Through, 30/ 40/ 50/ 60/ 70/ 80/ 90/ 100/ 120/ 150/ 180/ 220/ 250 Hz Slope: -6/-12/-18/-24 dB/Oct.

Gain: -8/-7/-6/-5/-4/-3/-2/-1/0 dB

#### Low pass filter

Frequency: 30/ 40/ 50/ 60/ 70/ 80/ 90/ 100/ 120/ 150/ 180/ 220/ 250 Hz, Through Slope: -6/-12/-18/-24 dB/Oct. Gain: -8/-7/-6/-5/-4/-3/-2/-1/0 dB

#### 3-way X'Over

High pass filter

Frequency: 250/ 300/ 1k/ 1.6k/ 2.5k/ 4k/ 5k/ 6.3k/ 8k/ 10k/ 12.5k Hz

Slope: -12/-18/-24 dB/Oct. Gain: -8/ -7/ -6/ -5/ -4/ -3/ -2/ -1/ 0 dB

#### Band pass filter

Frequency: Through, 50/ 60/ 70/ 80/ 90/ 100/ 120/ 150/ 180/ 220/ 250/ 300 Hz 250/ 300/ 1k/ 1.6k/ 2.5k/ 4k/ 5k/ 6.3k/ 8k Hz, Through Slope: -12/-18/-24 dB/Oct. Gain: -8/ -7/ -6/ -5/ -4/ -3/ -2/ -1/ 0 dB Low pass filter Frequency: 30/ 40/ 50/ 60/ 70/ 80/ 90/ 100/ 120/ 150/ Hz, Through Slope: -12/-18/-24 dB/Oct. Gain: -8/ -7/ -6/ -5/ -4/ -3/ -2/ -1/ 0 dB

#### General

#### **Operating Voltage**

: 12V DC car battery

#### Maximum Current Consumption

KW-V850BT/ KW-V850BTM : 15 A KW-M750BT/ KW-M750BTM : 10 A

Installation Dimensions (W  $\times$  H  $\times$  D)

: 178 × 100 × 155 mm

Operational Temperature Range : -10 °C - +60 °C

#### Weight

KW-V850BT/ KW-V850BTM : 2.1 kg KW-M750BT/ KW-M750BTM : 1.7 kg

#### NOTE

 Although the effective pixels for the liquid crystal panel is given as 99.99% or more, 0.01% of pixels may not light or may light incorrectly.

Specifications are subject to change without prior notice.

# About this Unit

#### Copyrights

- The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by JVC KENWOOD Corporation is under license. Other trademarks and trade names are those of their respective owners.
- Manufactured under license from Dolby Laboratories.
   Dolby, Dolby Audio and the double-D symbol are trademarks of Dolby Laboratories.
- : Source is a trademark of DVD Format/Logo Licensing Corporation registered in the U.S., Japan and other countries.
- This item incorporates copy protection technology that is protected by U.S. patents and other intellectual property rights of Rovi Corporation. Reverse engineering and disassembly are prohibited.
- Microsoft and Windows Media are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- This software is based in part on the work of the independent JPEG Group.
- The "AAC" logo is a trademark of Dolby Laboratories.
- Use of the Made for Apple badge means that an accessory has been designed to connect specifically to the Apple product(s) identified in the badge, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with an Apple product may affect wireless performance.
- Apple, iPhone, iPod, iPod touch, and Lightning are trademarks of Apple Inc., registered in the U.S. and other countries.
- Apple, Siri, Apple CarPlay and Apple CarPlay logo are trademarks of Apple Inc., registered in the U.S. and other countries.
- SPOTIFY and the Spotify logo are among the registered trademarks of Spotify AB.
- Android, Android Auto, Google Play and other marks are trademarks of Google LLC.
- This product includes FontAvenue<sup>®</sup> fonts licenced by NEC Corporation.FontAvenue is a registered trademark of NEC Corporation.

# FontAvenue

 This product includes "Ubiquitous QuickBoot TM" technology developed by Ubiquitous Corp. Ubiquitous QuickBoot TM is a trademark of Ubiquitous Corp. Copyright© 2017 Ubiquitous Corp. All rights reserved.

Ubiquitous

- THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i)ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ('AVC VIDEO') AND/OR (ij)DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, LLC. SEE <u>HTTP://WWW.MPEGLA.COM</u>
- THIS PRODUCT IS LICENSED UNDER THE MPEG-4 VISUAL PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER FOR (;) ENCODING VIDEO IN COMPLIANCE WITH THE MPEG-4 VISUAL STANDARD ("MPEG-4 VIDEO") AND/OR (jj) DECODING MPEG-4 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED BY MPEG LA TO PROVIDE MPEG-4 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE, ADDITIONAL INFORMATION INCLUDING THAT RELATING TO PROMOTIONAL, INTERNAL AND COMMERCIAL USES AND LICENSING MAY BE OBTAINED FROM MPEG LA, LLC. SEE HTTP:// WWW.MPEGLA.COM.
- THIS PRODUCT IS LICENSED UNDER THE VC-1 PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE VC-1 STANDARD ("VC-1 VIDEO") AND/OR (ii) DECODE VC-1 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE VC-1 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, LL.C. SEE <u>HTTP://WWW.MPEGLA.COM</u>

• libFLAC

Copyright (C) 2000-2009 Josh Coalson Copyright (C) 2011-2013 Xiph.Org Foundation Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/ or other materials provided with the distribution.
- Neither the name of the Xiph.org Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

libvorbis

Copyright (c) 2002-2008 Xiph.org Foundation Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/ or other materials provided with the distribution.
- Neither the name of the Xiph.org Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES: LOSS OF USE, DATA, OR PROFITS: OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

libogg

Copyright (c) 2002, Xiph.org Foundation Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/ or other materials provided with the distribution.

 Neither the name of the Xiph.org Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#### The marking of products using lasers (KW-V850BT/ KW-V850BTM)

# CLASS 1 LASER PRODUCT

The label is attached to the chassis/case and says that the component uses laser beams that have been classified as Class 1. It means that the unit is utilizing laser beams that are of a weaker class. There is no danger of hazardous radiation outside the unit.

#### מידע בדבר השלכה לאשפה של ציוד חשמלי ואלקטרוני ישן וכן סוללות (רלוונטי למדינות שמשתמשות במערכת איסוף אשפה מופרדת).

לא ניתן להשליך מוצרים וסוללות עם הסימון (פח אשפה עם X עליו) כאשפה ביתית רגילה.

יש למחזר ציוד חשמלי ואלקטרוני ישן וכן סוללות במתקן המסוגל לטפל בפריטים כאלה ובתוצרי הלוואי שלהם. צרו קשר עם הרשות המקומית לקבלת פרטים אודות מתקן המיחזור הקרוב אליכם. מיחזור והשלכה לאשפה נאותים יעזרו לשמר משאבים ולמנוע השפעות שליליות על בריאותנו ועל הסביבה.

שימו לב: הסימון Pb שמתחת לסימון עבור סוללות מציין שהסוללה מכילה עופרת.



Eski Elektrik ve Elektronik Ekipmanların İmha Edilmesi Hakkında Bilgi (ayrı atık toplama sistemlerini kullanan ülkeleri için uygulanabilir)



Sembollü (üzerinde çarpı işareti olan çöp kutusu) ürünler ev atıkları olarak atılamaz. Eski elektrik ve elektronik ekipmanlar, bu ürünleri ve ürün atıklarını geri dönüştürebilecek bir tesiste değerlendirilmelidir. Yaşadığınız bölgeye en yakın geri dönüşüm tesisinin yerini öğrenmek için yerel makamlara müracaat edin. Uygun geri dönüşüm ve atık imha yöntemi sağlığımız ve çevremiz üzerindeki zararlı etkileri önlerken kaynakların korunmasına da yardımcı olacaktır.

#### For KW-V850BTM and KW-M750BTM

# CE

Declaration of Conformity with regard to the RE Directive 2014/53/EU Declaration of Conformity with regard to the RoHS Directive 2011/65/EU Manufacturer:

JVC KENWOOD Corporation 3-12, Moriyacho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0022, JAPAN

#### EU Representative:

JVCKENWOOD Europe B.V. Amsterdamseweg 37, 1422 AC UITHOORN, THE NETHERLANDS

#### English

Hereby, JVC KENWOOD declares that the radio equipment KW-V850BTM/ KW-M750BTM is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

#### Türkçe

Burada, JVC KENWOOD KW-V850BTM/ KW-M750BTM radyo ekipmanının 2014/53/AB Direktifine uygun olduğunu bildirir. AB uyumluluk deklarasyonunun tam metni aşağıdaki internet adresinde mevcuttur.

#### URL: http://www.jvc.net/cs/car/eudoc/

#### For Turkey

Bu ürün 28300 sayılı Resmi Gazete'de yayımlanan Atik Elektrikli ve Elektronik Eşyalarin Kontrolü Yönetmeliğe uygun olarak üretilmiştir.

