



JETHRO Phone SC000418

Quick Start Guide

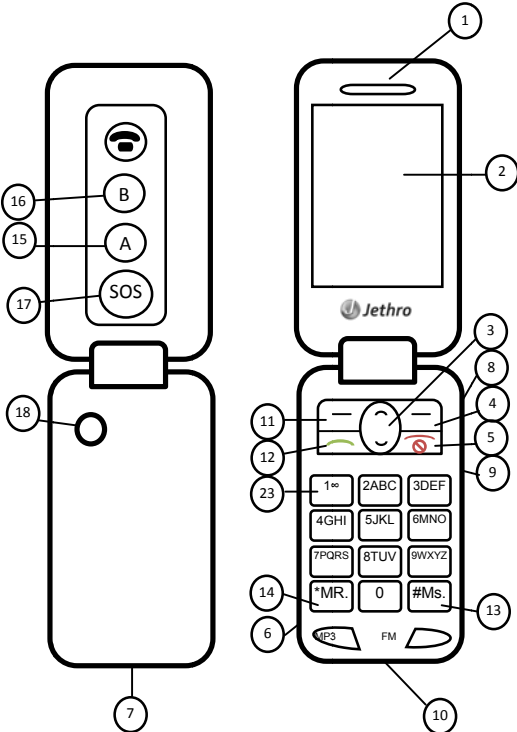

1. Earpiece
2. Display
3. Arrow button
4. Right selection button
5. End call/Power on/off
6. Flash
7. Charging socket
8. Headset socket
9. Volume control
10. Microphone
11. Left selection button
12. Call button
13. Speed dial
14. Speed dial
15. Speed dial
16. Speed dial
17. Assistance button
18. Camera lens
19. Charger
20. USB cable
21. Lanyard
22. Headphone
23. Voice Mail

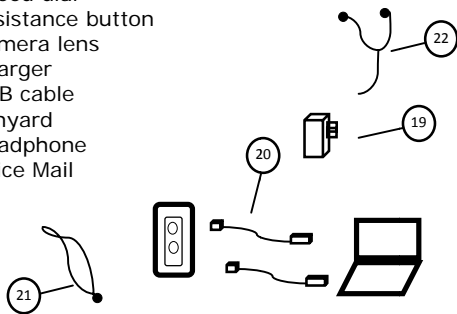

1

Getting Started

Charging

WARNING

Only use batteries, charger and accessories that have been approved for use with this particular model. Connecting other accessories may be dangerous and may invalidate the phone's type approval and guarantee.

When the battery is running low displayed and warning signal is heard. To charge the battery, connect the AC power adapter to a wall socket and to the charging socket on the phone.

Important!


Turn off the phone and disconnect the charger before removing the battery cover.

Installing SIM card, memory card and battery

The SIM and memory card holders are located inside the battery compartment.

1. Remove the battery cover and the battery if it is already installed.
2. Optional: Insert the memory card into the slot under the SIM card holder. Make sure that the memory card contacts are facing inwards and push the card, until you hear a click. Take care not to scratch or bend the contacts on the card. To remove or Replace the card, push the card in until you hear a click and then pull the card out.
3. Insert the SIM card by gently sliding it into the holder. Make sure that the SIM card's contacts

4. are facing inwards and that the cut off corner is pointing upwards. Take care not to scratch or bend the contacts on the SIM card.
4. Insert the battery by sliding it into the battery compartment with the contacts facing downwards to the left.
5. Replace the battery cover.



- 1
- 2
- 3
- 4
- 5

Important!

Use only compatible memory cards for use with this device. Compatible card type: microSD, microSDHC. Incompatible cards may damage the card and the device and corrupt data stored on the card. Memory cards are sold separately.


Dual SIMs

A Dual SIM mobile phone is one which holds two SIM cards. JETHRO mobile phone will allow to contain two SIM cards, and to switch from one to the other as required. You can simply put two SIM cards into one phone and use them for different purposes. (Example: Husband and wife can keep separate numbers but share the same phone, or you can use the same phone for both business and personal numbers without getting an extra phone, etc)

2

Getting Started



Turning phone on & off

Press and hold the red button  on the phone to turn it on/off. It takes several seconds so keep holding until you hear the sound.

Changing the time and date

Press **Menu**, scroll to **Settings** and press **OK**, scroll to **Phone Settings** and press **OK**, and choose **Time and Date**.

Making a call

1. Enter the phone number.
2. Press  to start the call.
3. Press  to end the call.

Note!








There is no dial tone. Simply have the phone turned on and it is ready for use.

Getting Started

Call log

Received, missed, and dialed calls are saved in a combined call log. 20 calls of each type can be stored in the log. For multiple calls related to the same number, only the most recent call is saved.

Retrieving and dialing

1. Press .
2. Use  /  to scroll through the call log
 -  Received call
 -  Dialed call
 -  Missed call
3. Press  to dial the highlighted number.

Lock Screen on and off

1. Press **Menu** and scroll to **Settings** and press **OK**.
2. Select **Security Settings** and press **OK**.
3. Select **Phone Lock** and select **ON**(or **OFF**).




Tip:

SOS function will not trigger by accident when phone lock is on.

Receiving a call

To answer an incoming call when the flip is closed, open the flip.

If the flip is already open, or if open to answer is set to **Off**:

1. Press  to answer, or press **Silent** to switch off the ring signal and then **Reject** to reject the call (busy signal).
Alternately, press  to reject the call directly.
2. Press  to end the call.


Tip:

Press and hold **+** or **-** to temporarily switch off the ring signal without opening the flip.

Volume control

Use the side buttons **+** / **-** to adjust the sound volume. The volume level is indicated on the display. When a call is in progress, the volume control adjusts the earpiece volume. When the phone is ringing, the volume control adjusts the ringer volume.




Selection buttons

The selection buttons have  multiple functions. The current button function is shown above the selection button on the display.


Using Phonebook


The phonebook can store 350 (100 entries on phone and 250 entries on SIM card) entries with 2 phone numbers in each entry.

Creating a phonebook entry







1. Press **Menu**, scroll to **Phonebook** and press **OK**.
2. Select **New contact** and press **OK**.
3. Enter a **Name**, **Number**, **Birthday**, **Email** for the contact. Delete with **Clear**.
4. Use  /  to select Mobile, Home, enter the phone number(s) including area code.
5. Press **Done** and choose **Yes** to save the contact.
6. Press  to return to standby.

Tip:

Press  to choose in between upper case, lower case, and numerals.



Press  choose special character

Deleting entries in Phonebook

Menu  **Phonebook**  **Contact**  **roll to desired entry**  **Options**  **Delete**  **Yes**.



Using Phonebook

Making a call from the phonebook

1. Press **Names** to open the phone book.
2. Use / to scroll through the phonebook, or quick search by pressing the key corresponding to the first letter of the entry.
3. Press **Options** and select **Call** to dial the highlighted entry, or press **Back**.

Creating SOS entry (In Case of Emergency)

First responders can access additional information such as medical information from the victim's phone in case of emergency. In the event of a trauma, it is critical to have this information as early as possible to increase the chances of survival. All fields are optional, but the more information provided the better.




1. Press **Menu**, Scroll to **SOS Settings** and press **OK**.
2. Use / to scroll the list of entries.
3. Press edit to add or edit information in each entry. Delete with **Clear**. Press **OK** to save.

TIP:

Press and hold the **SOS** key will trigger the siren for 10 Seconds

Camera

To get sharp photos, wipe the lens clean with a dry cloth.


1. Press **Menu**, scroll to **Multimedia** and choose **Camera**.
2. Press  to take photo,
3. Use / to zoom in and out.
4. Press **Options** and **Back** (If you do not make any selection the picture is saved).


Messages

Creating and sending text messages

1. Press **Menu**, scroll to **Messages** and press **OK**.
2. Select **Writemessage** and press **OK**.
3. Type your message, press **Send**.
4. Type the phone number and press **OK**.
Alternately, press **Search** to select a recipient from contacts and press **OK**.

Tip:


Press  to choose in between upper case, lower case, and numerals.

Press  to choose special character

Reading an incoming message

When you receive a message while your phone is on, the screen will display it. Press **Read** to read the message.

SOS/911 Calls

A long as the phone is switched on, it is always possible to place an SOS call by entering the main local emergency number for your present location followed by .

Most networks accept calls to emergency numbers without a valid SIM card. Contact your service provider for more information.

Note!

Sometimes an emergency call cannot be placed due to network, environment or interference issues.

Assistance Button

The Assistance button allows easy access to contact your predefined help numbers (Number list) Should you need help.

Call Settings

Calling waiting and forwarding

1. Press **Settings**, scroll to **CallSetting** and press **OK**.
2. Select **SIM1 Call Setting** (or **SIM2 Calling Setting**) and press **OK**.
3. Select **Calling Waiting** and press **OK**.
4. Select **Activate** and press **OK**.

Call forwarding



Settings → **Call Setting** → **SIM1 Calling Setting** (or **SIM2 Calling Setting**) → **Call Forwarding**.



Open to Answer

1. Press **Setting**, scroll to **User Profiles** and press **OK**.
2. Select **General** (or **other profile**) and press **Option**.
3. Select **Customize** and press **OK**.
4. Select **Answer Mode** and press **OK**.
5. Check off **Cover answer** and Check on **Any Key**.

Entering Text

Press a numerical key repeatedly until desired character is shown. Wait a few seconds before entering the next character.

Press ***** for a list of special characters. Select the desired character with  /  and press **OK** to enter it.

Use the  /  to move the cursor within the text.

Press **#** to cycle upper case, lower case and numerals.

Entering phone numbers

For international calls, always use + before the country code for best operation.

Other Call Options

Voice mail

The voice mailbox can be called by pressing and holding **1**

Speed dial

The numerical buttons **A** and **B** and **#** and *****, and numerical keys **2** - **9** can be used for speed dialing.

Adding speed dial numbers

Menu \Rightarrow Phone book \Rightarrow Speed dial

Bluetooth®

You can connect wireless to other Bluetooth compatible devices such as headset.

Menu \Rightarrow Settings \Rightarrow BluetoothOk \Rightarrow

Custom Settings

Silent mode

Use **Silent** to silence your ring tones.

Press and hold **+** or **=** to temporarily switch off the ring signal without opening the flip.

Changing Ringtones

You can select different ring tones. Follow this sequence to reach customization.

Menu \Rightarrow Settings \Rightarrow User Profiles \Rightarrow General(or other profile) \Rightarrow Tone Settings.

Wallpaper

You can select different display backgrounds.

Menu \Rightarrow Settings \Rightarrow Phone Settings \Rightarrow Display

7

Useful Tools

Alarm

Use the Alarm feature to set wake-up call or help you keep track of an important time

Organizer

Use the organizer to store tasks to help you keep track of important events.

Note!

These functions will work even when the phone is switched off.

Calculator

The calculator can perform basic math operations.

Image viewer

View your saved images and detailed information about files, e.g. date, size, copyright.

FM Radio

Listen to local FM radio station

Audio Player

Play MP3 music from memory card.

8

JETHRO and its affiliates, licensees and retailers assume no responsibility for any damage or loss resulting from the use of this guide. JETHRO and its affiliates, licensees and retailers assume no responsibility for any loss or claims by third parties that may arise through the use of this software. JETHRO and its affiliates, licensees and retailers assume no responsibility for any damage or loss caused by deletion of data as a result of malfunction, dead battery, or repairs. Be sure to make backup copies of all important data on other media to protect against data loss.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, UNDER NO CIRCUMSTANCES SHALL JETHRO OR ANY OF ITS AFFILIATES, LICENSEES AND RETAILERS BE RESPONSIBLE FOR ANY LOSS OF DATA OR INCOME OR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES HOWSOEVER CAUSED. THE CONTENTS OF THIS DOCUMENT ARE PROVIDED "AS IS." EXCEPT AS REQUIRED BY APPLICABLE LAW. NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE MADE IN RELATION TO THE ACCURACY, RELIABILITY, OR CONTENTS OF THIS DOCUMENT. JETHRO RESERVES THE RIGHT TO REVISE THIS DOCUMENT OR WITHDRAW IT AT ANY TIME WITHOUT PRIOR NOTICE.

⚠ CAUTION

The unit and accessories can contain small parts. Keep all of the equipment out of the reach of small children. The mains adapter is the disconnect device between the product and mains power. The mains socket outlet must be close to the equipment and easily accessible.

Network services and costs

Your device is approved for use on the GSM 850/900/1800/1900 MHz networks. To use the device, You need a subscription with a service provider. Using network services may result in traffic costs. Some product features require support from the network, and you may need to subscribe to them.

Operating environment

Follow the rules and laws that apply wherever you are, and always turn off the unit whenever its use is prohibited or can cause interference or hazards. Only use the unit in its normal user position.

This unit complies with guidelines for radiation when it is used either in a normal position against your ear, or when it is at least 1.5 cm from your body. If the unit is carried close to your body in a case, belt holder or other holder, these holders should not contain any metal, and the product should be placed at the distance from your body specified above. Make sure that the distance instructions above are followed until the transfer is complete.

Parts of the unit are magnetic. The unit can attract metal objects. Do not keep credit cards or other magnetic media near the unit. There is a risk that information stored on them can be erased.

FCC/Industry Canada notice

This device complies with part 15 of the FCC Rules and Industry Canada license-exempt RSS stand(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules/Canadian ICES-003. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The FCC or Industry Canada can require you to stop using your unit if such interference cannot be eliminated. JETHRO has not approved any changes or modifications to this device by user. Any changes or modifications could void the user's authority to operate the equipment.

Medical units

The use of equipment that transmits radio signals, for example, mobile phones, can interfere with insufficiently protected medical equipment. Consult a doctor or the manufacturer of the equipment to determine if it has adequate protection against external radio signals, or if you have any questions. If notices have been put up at health care facilities instructing you to turn off the unit while you are there, you should comply. Hospitals and other health care facilities sometimes use equipment that can be sensitive to external radio signals.

Pacemakers

The Health Industry Manufacturers Association recommends that a minimum separation of 6 inch be maintained between a handheld wireless phone and a pacemaker to avoid potential interference with the pacemaker. Persons with pacemakers:

- Should always keep the phone more than 6 inch. from their pacemaker when the phone is turned on.
- Should not carry the phone in a breast pocket.
- Should use the ear opposite the pacemaker to minimize the potential for interference.

If you have any reason to suspect that interference is taking place, turn the phone off immediately.

Safety Instructions

Areas with explosion risk

Always turn off the unit when you are in an area where there is a risk of explosion. Follow all signs and instructions. There is a risk of explosion in places that include areas where are normally requested to turn off your car engine. In these areas, sparks can cause explosion or fire which can lead to personal injury or even death.

Turn of the unit at filling stations and any other place that has fuel pumps and auto repair facilitates.

Follow the restrictions that apply to the use of radio equipment near places where fuel is stored and sold, chemical factories and places where blasting is in progress.

Areas with risk for explosion are often – but not always – clearly marked. This also applies to below decks on ships; the transport or storage of chemicals; vehicles that use liquid fuel (such as propane or butane); areas where the air contains chemicals or particles, such as grain, dust or metal powder.

Protect your hearing



WARNING

Excessive exposure to loud sounds can cause hearing damage. Exposure to loud sounds while driving may distract your attention and cause an accident. Listen to a headset at moderate level, and do not hold the device near your ear when loudspeaker is in use.

Emergency calls

Important!

Mobile phones use radio signals, the mobile phone network, the terrestrial network and use-programmed functions. This means that connection cannot be guaranteed in all circumstances. Therefore, never reply only on a mobile phone for very important calls such as medical emergencies.

Vehicles

Radio signals can affect electronic systems in motor vehicles (for example, electronic fuel injection, ABS brakes, automatic cruise control, air bag system) that have been incorrectly installed or are inadequately protected. Contact the manufacturer or its representative for more information about your vehicle or any additional equipment.

Do not keep or transport flammable liquids, gases or explosives together with the unit or its accessories. For vehicles equipped with air bags: Remember that air bags fill with air with considerable force.

Do not place objects, including fixed or portable radio equipment in the area above the airbag or the area where it might expand. Serious injuries may be caused if the mobile phone equipment is incorrectly installed and the airbag fills with air.

It is prohibited to use the unit in flight. Turn off the unit before you aboard a plane. Using wireless telecom units inside a plane can pose risks to air safety and interfere with telecommunications. It may also be illegal.

11

Safety Instructions

Driving safely

Adapted from CTIA – The wireless Association®

WARNING

Use of this unit alone or with head phones (even if used only in one ear) while driving a motor vehicle or riding a bicycle is dangerous and is illegal in some areas, and the user should not engage in such conduct. Driving while operating a mobile phone is distracting and could cause serious injury or death.

If you decide to use this unit while driving or riding a bicycle, keep in mind the following guidelines:

- **Give full attention to driving and to the road.**
Using a mobile device while driving may be distracting. If you find it disruptive or distracting while operating any type of vehicle, riding a bicycle, or performing any activity that requires you full attention, pull off the road and park before making or answering a call if driving conditions required.
- **Get to know your phone and its features such as phonebook, call memory, and speakerphone.**
These features help you to place your call without taking your attention off the road. See the applicable portion of the user's guide for more information.
- **Use a hands free device.**
Add an extra layer of convenience and safety to your unit with one of the many hands-free accessories available. Use of a headset or other hands-free devices may be legally required. Several states have in recent years passed laws making it unlawful to operate a motor vehicle while talking on a wireless phone without use of headset, speakerphone, or other hands-free device.
County and municipal ordinances may also limit or ban wireless conversations for automobile drivers. You should therefore check the status of such laws

in your area and in locations to which you travel by car, whether or not you otherwise follow the preferred safety practice of routinely using a hands-free device. For SMS text messaging, it is a recommended safety practice that you never send or view received text messages while driving; in California, and likely other states in the future, SMS messaging by a driver is also a legal violation.

- **Position phone within easy reach.**
Keep your eyes on the road. If you get an incoming call at an inconvenient time, let your voice mail answer it for you.
- **Assess the traffic before dialing, or place calls when you are not moving or before pulling into traffic.**
Try to plan calls when your car will be stationary. Never dial, send SMS text messages, or enter other text while you are driving. Driving while operating a mobile phone is distracting and could cause serious injury or death.
- **Let the person you are speaking with know you are driving.**
If necessary, suspend the call in heavy traffic or hazardous weather conditions. Driving in rain, sleet, snow, ice, fog, and even heavy traffic can be hazardous.
- **Do not take notes, look up phone numbers, or perform any other activities that require you attention while driving.**
Jotting down a to-do list or flipping through your address book takes attention away from your primary responsibility, driving safely.
- **Do not engage in stressful or emotional conversations that may be distracting.**
Make people you are talking with aware you are driving and suspend conversations that have the potential to divert your attention from the road.

12

Safety Instructions

RF exposure information (SAR)

This model phone meets the government's requirements for exposure to radio waves. This phone is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government and by the Canadian regulatory authorities. The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC and by the Canadian regulatory authorities is 1.6W/kg. *Tests for SAR are conducted using standard operating positions accepted by the FCC and Industry Canada with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to wireless base station antenna, the lower the power output.

The highest SAR value for the model phone as reported to the FCC when tested for use at the ear is 0.561W/kg and when worn on the body, as described in this user guide, is 0.614W/kg (Body-worn measurements differ among phone models, depending upon available enhancements and FCC requirements.) While there may be differences between the SAR levels of various phones and a various positions, they all meet the government requirement.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines.

SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/ea/fccid> after searching on

**FCC ID:
2AAWJSC000418**

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and the positions the handset a minimum of 5/8 inch (1.5 cm) from the body. Use of other enhancements may not ensure compliance with FCC RF exposure guidelines. If you do not use a body-worn accessory and are not holding the phone at the ear, position the handset a minimum of 5/8 inch (1.5 cm) from your body when the phone is switched on. *In the United States and Canada, the SAR limit for mobile phones used by public is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. SAR values may vary depending on national reporting requirements and the network band.

IC Radiation Exposure Statement

This EUT is compliance with SAR for general population/uncontrolled exposure limits in IC RSS-102 and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528 and IEC62009. This equipment should be installed and operated with minimum distance 1.5cm between the radiator and your body. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

13

TTY compatibility


This unit does not support TTY signaling. If you intend to connect a TTY to the unit, this unit should not be purchased and, if already purchased, it should be returned for a refund.

Care and Maintenance

Your unit is a technically advanced product and should be treated with the greatest care. Negligence may void the warranty.

- Protect the unit from moisture. Rain/snowfall, moisture and all types of liquid can contain substances that corrode the electronic circuits. If the unit gets wet, you should remove the battery and allow the unit to dry completely before you replace it.
- Do not use or keep the unit in dusty, dirty environments. The unit's moving parts and electronic components can be damaged.
- Do not keep the unit in warm places. High temperatures can reduce the lifespan for electronic equipment, damage batteries and distort or melt certain plastics.
- Do not keep the unit in cold places. When the unit warms up to normal temperature, condensation can form on the inside which can damage the electronic circuits.
- Do not try to open the unit in any other way than that which is indicated here.
- Do not drop the unit. Do not knock or shake it either. If it is treated roughly the circuits and precision mechanics can be broken.
- Do not use strong chemicals to clean the unit
- Maintain the battery and phone during operation between 0 °C - 40°C. If the phone and battery become too warm or too cold, the phone and battery may not work temporarily, even if the battery is fully charged. Subjecting the phone and battery to excessive temperatures can create a safety hazard resulting in fire, explosion or other hazards.
- Do not disassemble or open crush, bend or deform, puncture or shred.

14

<p style="text-align: center;">Care and Maintenance</p> <ul style="list-style-type: none"> • Do not modify or remanufacture, attempt to insert foreign objects into the battery, immerse or expose to water or other liquids, expose to fire, explosion or other hazard. • Only use the battery for the system for which it is specified. • Only use the battery with a charging system that has been qualified with the system per IEEE-std-1725-2006. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazard. • Do not short circuit a battery or allow metallic conductive objects to contact battery terminals. • Replace the battery only with another battery that has been qualified with the system per this standard, IEEE-std-1725-2006. Use of an unqualified battery may present a risk of fire, explosion, leakage or other hazard. • Promptly dispose of used batteries in accordance with local regulations. • Battery usage by children should be supervised. • Avoid dropping the phone or battery. If the phone or battery is dropped, especially on a hard surface, and the user suspects damage, take it to a service center for inspection. • Improper battery use may result in fire, explosion or other hazard. <p>The advice above applies to the unit, battery, mains adapter and other accessories. If the phone is not working as it should, please contact the place of purchase for service. Don't forget the receipt or a copy of the invoice.</p>	<p style="text-align: center;">Warranty and technical data</p> <p>This product is guaranteed for a period of 12 months from the date of purchase. In the unlikely event of a fault occurring during this period, please contact the place of purchase. Proof of purchase is required for any service or support needed during the guarantee period.</p> <p>This guarantee will not apply to a fault cause by an accident or a similar incident or damage, liquid ingress, negligence, abnormal or improper usage, non-maintenance or any other circumstances on the user's part. Furthermore, this guarantee will not apply to any fault caused by a thunderstorm or any other voltage fluctuations. As a matter of precaution, we recommend disconnecting the charger during a thunderstorm.</p> <p>Except as required by applicable law, batteries are consumables and are not included in any guarantee.</p> <p>This guarantee does not apply if batteries other than JETHRO original Batteries are used.</p> <p>EXCEPT FOR THE WARRANTY EXPRESSLY SET FORTH HEREIN, JETHRO DISCLAIMS AND EXCLUDES ALL REPRESENTATIONS, WARRANTIES AND CONDITIONS, WHETHER WRITTEN OR ORAL, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE WITH RESPECT TO THE UNIT AND ELEMENTS OR ACCESSORIES THEREOF, INCLUDING, BUT NOT LIMITED TO, WITHOUT LIMITATION, IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, DURABILITY, QUALITY OR FITNESS FOR PARTICULAR PURPOSE, INCLUDING ANY AND ALL WARRANTIES AND CONDITIONS FOUND IN APPLICABLE LEGISLATION.</p>
<p>Battery disposal and recycling information</p> <p>When the battery in this unit has reached the end of its useful life, please dispose of it according to your local environmental laws and regulations. For information about recycling cell phone batteries, go to http://www.rbrc.org</p>  <p>The symbol means that according to local laws and regulations your product should be disposed of separately from household waste. When the battery in this unit has reached the end of its useful life, take it to a collection point designated by local authorities. Some collection points accept products for free. The separate collection and recycling of your unit will help conserve natural resources and ensure that it is recycled in a manner that protects human health and environment.</p>	<p>Specifications</p> <p>Network: GSM 850/900/1800/1900 MHz</p> <p>Dimensions: 115mmx50mmx13mm</p> <p>Weight: 60g</p> <p>Battery: 3.7V / 1000 mAh Li-ion battery</p> <p>©2013 JETHRO. All right reserved. Bluetooth® is a registered trademark of Bluetooth SIG, inc.</p> <p>FCC ID: 2AAWJSC000418 IC: 11350A-SC000418</p> <p>JETHRO SC000418 English QSG Version 1.0</p>

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada.

Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.