

## 1.6 User Manual




Thank you for purchasing the KT-9078 Bluetooth speaker.  
We hope you enjoy it! This instruction manual will get you started to use the speaker.

### KT-9078 Bluetooth speaker

The KT-9078 speaker employs with the newest Bluetooth wireless technology to connect to Bluetooth devices , such as mobile phones, Tablets, notebooks etc.

### Product overview

- 1 USB charging jack
- 2 AUX in jack
- 3 LED indicator
- 4 Microphone
- 5 VOL+/- buttons
- 6 Power button /Power/Pairing/Pick up call(Multi-function) button

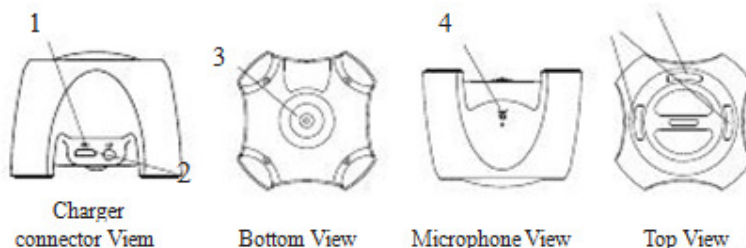

### What your KT-9078 speaker can do

- Listening music from connected bluetooth device
- Answer calls
- End calls
- Reject calls

**Package Content**

Please ensure the following items are included in the package before your purchase:

1. KT-9078 speaker
2. Product User Guide
3. USB Cable
4. AUX Cable

**Getting Started**

You should follow three steps before using your speaker

1. Charge your speaker
2. Turn your speaker on
3. Pair your speaker to your Bluetooth devices

**Charge your speaker**

- a. Plug one end of the USB cord to USB 2.0 port of a computer/notebook device and the other end to the Bluetooth speaker
- b. While charging, LED is lighted red; when turned blue, the speaker is fully charged.
- c. Make sure that your speaker is charged before you start using it.
- d. When the LED flashes with beep, it indicates the battery level is low, please charge it.
- e. Charging in a -10 to +40°C temperature range environment.
- f. Charging time: around 3.5 hours.

**Turn your speaker on and off**

- a. Power on your speaker and connect to last 'paired' device. Press power/answer/end button for 2-3 seconds, blue LED will flash 3 times with a beep, and then the Blue

LED will flash quickly. After that, the speaker will automatically connect to last paired Bluetooth device (if the device is also on and within 10 meters range). And the Blue LED will be flashing for 2 seconds. Power will be on if speaker does not connect to any device for 4~5 minutes

- b. Power on your speaker Press power/answer/end button for 5 seconds, RED LED will be on and then on with 2 beep sound.

### **Pairing with your Bluetooth device**

- a. Enter Pairing mode Press power/answer/end button 4~5 seconds, speaker will beep once and Blue / Red LED will alternately flash for 0.5 second each repeatedly
- b. Enable bluetooth function on your phone or the other device
- c. Search for new Bluetooth device until KT-9078 appears in the 'searched Bluetooth device list'.
- d. Select KT-9078.
- e. Enter the passcode 0000 to pair and connect the speaker to your device, the pairing is successful and the Blue LED is flashing every 5 - 6 seconds.
- f. If pairing is unsuccessful after some time, the speaker will automatically enter standby mode (blue LED flashes quickly), but you will not be able to use the speaker, please follow the above steps for re-pairing.

### **Call handling**

When you receive a call, you hear a ringing tone through the speaker. To answer the call, press the answer key lightly. To reject an incoming call, press and hold the answer key for 2 to 3 seconds until you hear a beep and let go. To end a call, press the answer key lightly, or wait for the other party to hang up.

### **Volume Control**

Press the button "+" to increase the volume, a bee alert sounds when volume reach maximum level;  
Press the button "-" to decrease the volume.

**AUX in**

Connect any MP3 player by using 3.5mm cable .(included)

**Care and maintenance**

Your speaker is a product of superior design and craftsmanship, should be treated with care , below recommendations will help you protect your warranty coverage.

- Keep all accessories out of the reach of children.
  - Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that will corrode electronic circuits. If your device does get wet, allow it to dry completely.
  - Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
  - Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
  - Do not store the device in cold areas. When returns to normal temperature, moisture can damage electronic circuit boards.
  - Do not attempt to open the device.
  - Do not drop, knock, or shake the device. Rough handling may break circuit boards and the mechanism .
  - Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
  - Do not paint the device. Paint can clog the moving parts and may cause function ine ective .
- A warning that batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like.

All of the above recommendations apply equally to your device, battery, charger. If any device does not work properly,

take it to the nearest authorized service facility for service.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) this device may not cause harmful interference, and (2) this device must accept any interference received , including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Product specifications

Product Model	KT-9078
Bluetooth Specification	Version 3.0
Frequency Bandwidth	2.4GHz~2.4835GHz, ISM Band
Operating distance	10 meter (Line-of-sight)
Talk time / Standby time	6 hours / 160 hours
Speaker output	2W
Supported Bluetooth profile	A2DP, HFP
Battery Capacity	420mAh
USB charged	charged by USB cable.
Weight	100g
Size / Dimension	Diameter 73.2mm, Height 54.3mm
Safety Certification	CE



Please Recycle



Contains Li-Ion Battery.

Do not dispose in trash

CE RoHS



Copyright© 2013  
All Rights Reserved  
Manual Edition 1.0 Feb., 2013