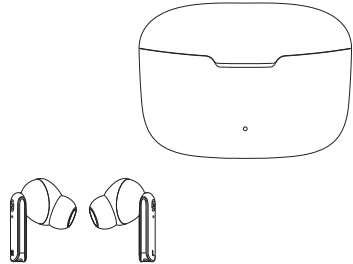
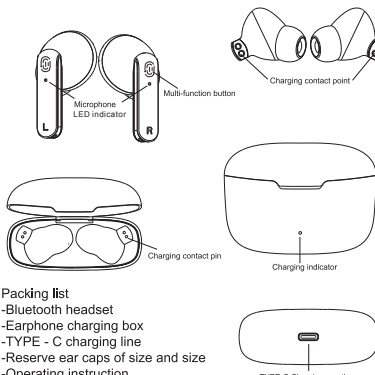


| | | | | | | |
|--|---|--|---|--|--|---|
| <p>TRUE WIRELESS EARBUDS</p>  <p>Operating instruction</p> | <p>Product Diagram</p>  <p>Packing list</p> <ul style="list-style-type: none">-Bluetooth headset-Earphone charging box-TYPE - C charging line-Reserve ear caps of size and size-Operating instruction | <p>Product specification</p> <p>Product model :MA-3675</p> <p>Bluetooth version: Bluetooth V5.0+BR+EDR</p> <p>Battery specification:Headset 3.7V/40mA;Charging box3.7V/250mA</p> <p>Sensitivity: 98dBm</p> <p>Distance: ≥ 10M</p> <p>Playing time: > 9H</p> <p>Talk time: > 9H</p> <p>Standby time: 50H</p> <p>Charge time: 1.5H</p> | <p>Function Operation Instructions</p> <p>1、POWER ON</p> <p>Take the earphone out of the charging box and start it automatically or press the earphone function button for 3 seconds to start it.</p> <p>2、POWER OFF</p> <p>Put the earphone into the charging case, the earphone will shut down automatically or press the function button for 3 seconds.</p> <p>3、Play/Pause</p> <p>In the music playing state, click the headset multi-function button to pause the playback, and then click the multi-function button to play the music</p> | <p>5. Switch song</p> <p>Press the left multifunction button to switch to the last song, and long press the right multifunction button to switch to the next song.</p> <p>6. Telephone answering</p> <p>When the phone calls, click the headset multi-function button to answer the call.</p> <p>7. Hang up the phone</p> <p>When you are talking on your mobile phone, click the multi-function button of your headset to hang up the call.</p> <p>8. Refuse to answer the phone</p> <p>When the phone calls, long press the headset multi-function button for 2 seconds to reject the call.</p> <p>9. When playing music, press the multi-function key to start Siri function.</p> <p>10. Low power prompt: when the battery of Bluetooth headset is low, the warning tone of low power is played once every 30 seconds until the headset is power off.</p> <p>Bluetooth Pairing</p> <p>1. Take it out of the charging chamber or press the left and right earphone multi-function keys for 3 seconds to start the machine until the red and blue lights flash alternately and enter the search auto pairing state. Meanwhile, the left and right earphones flash alternately continuously. After pairing successfully,the ear will play the pairing success prompt tone, and the blue prompt light will flash slowly.</p> | <p>2. Start the Bluetooth function of the mobile phone or other devices. If it is an Android mobile phone device, please click the "search for Bluetooth devices" option. If it is a 10s mobile phone or device, it will automatically search for devices; When the model of the Bluetooth headset is found "TEM002", click to enter pairing; When the pairing is successful, the left and right earphones will sound a successful connection tone at the same time, and the blue indicator light of the left and right earphones will turn to slow flash, and enter the connection standby mode.</p> <p>3. The two earphones can also be paired with the mobile phone separately. The operation method can be carried out according to the operation method in step 2 above.</p> <p>Charging operation</p> <p>Charge the charging box; Plug one end of the type-C charging cable into the charging port of the charging box, and the other end into the charging adapter to charge the charging box. When charging, the red light on the charging box will flash, and the full charged red light will be on for a long time.</p> <p>2. Charging the earphone: put the earphone into the charging box to charge automatically. When charging, the indicator light of the earphone will be blue for a long time, and it will off when it is fully charged; The indicator light of the charging box is blue. When the headset is fully charged, The blue indicator of charging box is off.</p> | <p>Precautions</p> <p>1. Please charge in a safe environment. When charging the charging box, when the charging indicator light is full, please separate the charging box from the type-C charging wire as soon as possible, So as not to charge the charging box for a long time and cause damage to the charging box.</p> <p>2. When playing music and answering the phone, please adjust the music to the appropriate volume to avoid hearing loss caused by long-term volume state.</p> |
| <p>FCC STATEMENT :</p> <p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:This device may not cause harmful interference, andThis device must accept any interference received, including interference that may cause undesired operation.Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> | <p>Reorient or relocate the receiving antenna.</p> <p>Increase the separation between the equipment and receiver.</p> <p>Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.Consult the dealer or an experienced radio/TV technician for help.RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</p> | | | | | |