

Bluetooth Headphone

SBKO 4.0 C1 USER MANUAL

SILVER CREST

FCC ID: 2AJ90-SBKO40C1

Table of contents

- 1 Introduction 1
- 2 Package content 1
- 3 Connection diagram 2
- 4 The way to change earhook 2
- 5 How to use 2
 - 5.1 General functions 2
 - 5.2 Pairing to mobile phone 4
 - 5.3 Charging your device 5
- 6 Technology specification 6
- 7 After-sales service and support 6
- 8 FAQ 7
- 9 WARNING 8

1

C5 USER MANUAL

1.Introduction

Thank you for choosing the Stereo Ear Buds. This manual will help you operate the Ear Buds, but you should first familiarize yourself with the Bluetooth functionality of your mobile phone or other devices before using the Ear Buds.

Safety Rules

- 1\ Please follow the rules depicted in this manual closely to ensure your safety. Before using this Ear Buds, we would strongly encourage you to read through this user manual.
- 2\ Be more wary of any edges, uneven surfaces, metal parts, accessories and its packaging so as to prevent any possible injury or damage.
- 3\ Do not modify, repair or dismantle this Ear Buds. Doing so may result in fires, electric shocks, complete breakdown of this Ear Buds, etc. All of which, are not covered under warranty.
- 4\ Do not use any diluents or volatile liquid to clean the Ear Buds
- 5\ Do not use the Ear Buds in a hazardous location.

2.package content




- 1X Wireless Ear Buds C5
- 1X USB Charger cable
- 1X User Manual

1

C5 USER MANUAL

3.Connection Diagram

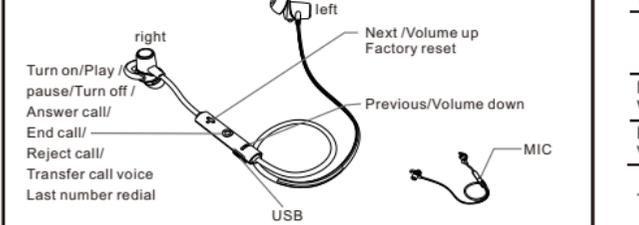

4.The way to change earhook



5.How to use

5.1.General Functions

Desired Result	Required Action
Turn on	Press the "Ⓞ" button for 3 seconds when the device is off. (Red LED slowly flashes and a tone voice beeps)
Enter the pairing mode	When the device is off, Press the "Ⓞ" button for 6 seconds. (Blue LED and Red LED quickly flash alternately with two beep tone voice).
Pairing	In pairing Mode use a Bluetooth function mobile phone or other Bluetooth Master Device and to perform pairing action (detail refer to the chapter about pairing)

2

C5 USER MANUAL

Desired Result	Required Action
Play / pause	Short click "Ⓞ" to play when the device is pausing and short click "Ⓞ" to pause when the device is playing.
Next / Volume up	Short press the "+" button for Next music Long press the "+" button for Volume up
Previous / Volume down	Short press the "-" button for Previous music Long press the "-" button for Volume down
Turn off	Press the "Ⓞ" button for 3 seconds when the device is on. (A tone voice beep and all LED is off)
Low battery warning	The Red LED flash
Charging	Plug the charger to port of the device. (Red LED is on)
Answer call	Short Press the "Ⓞ" button while a call coming
End call	Short Press the "Ⓞ" button while on going call
Transfer call voice	Double Press the "Ⓞ" button to transfer the call voice between the mobile phone and device while on going call
Reject call	Press the "Ⓞ" button for 1~2 seconds to reject call when the call is ringing
Battery power indication	Battery status will be shown on the top right corner of the phone screen after connected. (Only support iphone, iPad)
Enable/Disable Multipoint	Short press the "Ⓞ" button to enable Multipoint at pairing mode Double press the "Ⓞ" button to disable the Multipoint at pairing mode

3

C5 USER MANUAL

Desired Result	Required Action
Factory reset	Long press "+" button for 6 seconds at pairing mode to clear the paired device list.
Last number redial	Double click "Ⓞ" button on connect state.

5.2.Pairing to Mobile phone or other device

To use your Ear Buds , you must first pair your Ear Buds with a phone or a computer. Once your Ear Buds is paired to a specific mobile phone, they will remain paired and automatically recognize each other whenever they are within range.

Pairing to a phone and Entertainment:

- Turn on your phone and ensure its Bluetooth function is activated
- Turn on the Ear Buds go to the pairing mode.
- Search your Bluetooth devices on your phone by following the phone's instructions. Refer to your phone's user manual for more information.
- After a few second the phone will list the device as a discover device. Select it and follow your phone instruction to select this pairing.
- Then your phone will request a passkey or PIN, enter 0000 as your PIN or passkey.
- Your phone will confirm the pairing, and then press Yes/Ok.
- Finally, select to connect with device from your phone.
- You can play music; watch TV/movie and play game with your phone, then you can hear all the sound or music form the device. Also you can control the player by operating the device. Example, volume up and next music.

4

C5 USER MANUAL

Pairing to a computer and Entertainment:

- If there is no Bluetooth function supported by your computer, a Bluetooth adapter is necessary. Fix the adapter with your computer and ensure its Bluetooth function is activated.

- Turn on the device and go to the paring mode.
- Open the Bluetooth software (such as BlueSoleil) installed on your computer, and selects "Search your Bluetooth devices" function. Refer to user manual of the Bluetooth software for more information.
- After a few second the " device name" will list in Bluetooth software of your computer as a discover device.
- Select this icon and click right button of mouse to select "pairing" item, then select "connect with audio device" with same operation.
- Open your media player to play music, watch TV/move and play game, then all the sound will be playback on your device.

5.3.Charging your device

The device is convenient to connect to AC charger or a USB charger with Micro USB port marked with. Make sure that your device is full charged for at least 6 hours before initial use. Insert one terminal of your charger to AC main or USB port of PC and other terminal to Micro USB. While charging, the red LED light constantly. When charging is completed, the indicator LED turns red to blue.



5

C5 USER MANUAL

Warning:

- You must select a qualified charger from a regular manufacturer.
- You must charge the Ear Buds if it has been not used for more than 12 months.
- Please don't use the USB charger on any other phone jack device

6.Technical specification

Parameter	Value
Bluetooth Specification	Bluetooth 4.1
Bluetooth Profile	HFP1.6/A2DP1.2/AVRCP1.4/HSP1.2
RF Range	10 m
Frequency Response	180Hz-20KHz
Receiver Output	10mW
Signal-To-Noise	≥90dB
Distortion	≤3.0%
Playback Time	About 5.5 Hours
Charging Time	About 80 min
Dimension(L×W×H)	661.4X24X29.5mm
Weight	15. 5g

7.After-sales service and support

If your device is not performing as it should, please take it to your local service providers or dealer for service.

6

C5 USER MANUAL

8.FAQ

- 1\ Why is there no power even when the Ear Buds is power on?
Ans: Ensure the battery is being charged up to 6 hours for first time using. The LED is lighted when it starts charging.
- 2\ There is no sound when playback.
Ans: Check the connection between your device with phone or computer, if the connection is not established, please reconnect again. Make sure the Ear Buds is paired and connected with your target phone or other master device.
- 3\ How can I know the Ear Buds has been fully charged?
Ans: When the indicator LED turns red to blue when it is charging, it has been fully charged.
- 4\ Why the Ear Buds cannot connect with second phone?
Ans: Please set the Ear Buds to multipoint mode. Connect the Ear Buds to phone A, Once again enter to pairing mode (phone one, will disconnect), and connect the Ear Buds to phone B. and then use phone A paired device list to reconnect to the Ear Buds .

7

C5 USER MANUAL

WARNING: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

- MEASURES:**
- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

FCC RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

8