



CE 0168 

P/N : MMBB0359315 (1.0) H

LG ELECTRONICS INC.

GW620 User Guide

ENGLISH

GW620 User Guide



Bluetooth QD ID B015891



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

This handset is not recommended for blind disability person due to touch screen keypad.



GW620 User Guide

Congratulations on your purchase of the advanced and compact GW620 phone by LG, designed to operate with the latest digital mobile communication technology.

Contents

Getting to know your phone...7	Adjusting call volume..... 34
Open view9	Making a second call..... 34
Installing the SIM and battery 11	Turning on DTMF..... 34
Charging your phone..... 14	Call settings..... 35
Memory card 15	Using call forwarding..... 35
Your home screen 17	Using call barring 35
Touch screen tips..... 17	Additional call setting..... 36
Touch screen 18	Network operators..... 36
Opening Applications..... 19	Contacts 37
Proximity sensor 19	Searching for a contact 37
Set default Home setting 20	Adding a new contact 37
Set Home theme..... 20	Favorite Contacts..... 38
LG Home 22	Creating a group..... 38
Getting back to your previous application..... 23	Other contact options 38
Android Home..... 24	Messaging 39
Communication 25	Messaging..... 39
Multimedia 26	Sending a message..... 39
Utilities 27	Entering text..... 40
Google..... 28	Show key mode 40
Downloads..... 29	T9 predictive 41
Viewing the status bar 30	Abc manual 41
Calls 32	Qwerty Keypad 41
Making a call 32	Setting up your email 43
Calling your contacts 32	Sending an email using your new account..... 44
Answering and rejecting a call .. 32	Retrieving your email..... 44
In-call options..... 33	Changing your email settings ... 44
	Threaded box..... 45

Contents

Using smiley	46	Changing the video image size	61
Changing your SMS settings ...	46	Choosing a color effect	62
Changing your MMS settings..	46	Watching your saved videos ...	62
Changing your other settings ...	47	Your photos and videos.....	63
SNS	47	Viewing your photos and videos	63
Moxier Mail	48	Using zoom when viewing a video or photo.....	63
Moxier Sync	50	Adjusting the volume when viewing a video	63
Camera.....	51	Setting a photo as wallpaper ..	63
Getting to know the viewfinder	51	Editing your photos.....	63
Taking a quick photo	52	Rotating your photo.....	64
Once you've taken the photo ...	52	Adding text to a photo.....	64
Using the flash.....	53	Adding an effect to a photo ...	65
Adjusting the exposure.....	53	Cropping a photo.....	65
Adjusting the zoom.....	53	Tuning your photo	65
Taking a continuous shot	54	Adding Frame	66
Using the advanced settings...54		Adding clipart.....	66
Changing the image size.....	56	Using drawpad.....	66
Choosing a colour effect.....	57	Adding stamp	66
Viewing your saved photos	57	Resizing.....	66
Video camera.....	58	Editing your videos.....	66
Getting to know the viewfinder	58	Trimming the length of the video	67
Shooting a quick video	59	Selecting Transition style.....	67
After shooting a video.....	59	Adding a subtitle	67
Adjusting the exposure.....	60		
Using the advanced settings...60			

Adding edit effect	68	Google Applications	79
Grabbing a Frame.....	68	Google Maps.....	79
Adding a dubbling to your video	68	Market	79
Multimedia.....	69	Gmail.....	79
Timeline view.....	70	Google Talk	80
My images options menu.....	70	Adding an event to your calendar	80
Sending a photo	70	Changing your default calendar view.....	80
Sending a video	70	Utilities	81
Using an image	70	Setting your alarm	81
Creating a slide show.....	71	Using your calculator	81
Checking your photo	71	Quickoffice.....	82
Media Player	71	Voice recorder.....	82
Setting a ringtone	72	Recording a sound or voice.....	82
Video editor.....	72	Sending the voice recording...	83
Storyboard	72	The web	84
Music Movie	73	Browser	84
Auto cut	74	Accessing the web	84
Playing a game.....	75	Using web tool bar.....	84
Transferring files using USB mass storage	75	Using options.....	85
Music.....	76	Adding and accessing bookmarks.....	85
Playing a song	76	Changing web browser settings.....	86
Using the radio.....	77	Using your phone as a modem.	86
Searching for stations	77		
Resetting channels	77		
Listening to the radio.....	78		

Contents

Settings	87
Wireless Controls	87
Call settings	87
Sound & display	87
Data synchronization	88
Security & location	88
SIM card lock	88
Visible passwords	88
Applications	89
SD card & Phone storage	89
Date & time	89
Locale & text	89
About phone	89
DivX VOD registration	89
Wi-Fi	90
Software Update	92
Accessories	93
Guidelines for safe and efficient use	96
Trouble Shooting	102

Getting to know your phone

Stereo earphone connector



Power /Lock key

Turns the phone on/off.

Earpiece

Sensor window

Back key


- Press once to return to the previous screen.

Menu key

Press this key to check what options are available in that applications.

Home Key

Go to Home screen.

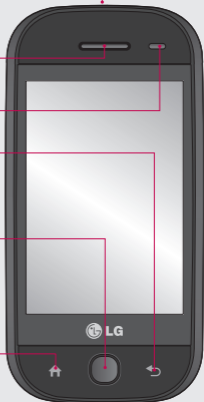

WARNING: Putting a heavy object on the phone or sitting on it can damage its LCD and touch screen functionality.

Do not cover the protection film on proximity sensor of LCD. It can be caused the malfunction of sensor.

Getting to know your phone



Charger, Data cable (USB cable)

TIP: Before connecting the USB cable, wait until the phone has powered up and has registered on the network.

Volume keys

- **When the screen is idle:** key tone volume.
- **During a call:** earpiece volume.
- **When playing a track:** controls volume continuously.



SD Card Cap


Music Key

- Go to Music directly.

Camera key

- Go to the camera menu directly by pressing and holding the key.

Open view

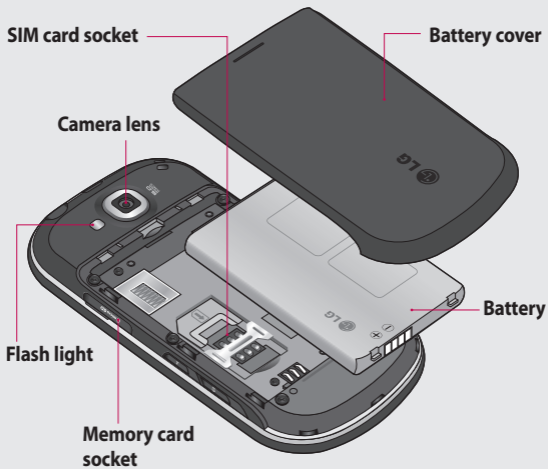

Open view



Control key

- Enters symbolic character or certain number

Change the text input mode

(capital/ small)

Symbol key

- Enters symbolic character

Enter key

Clear key

- Clears a character each time it is pressed. Hold the key down to clear all input.


Space key

- Use to enter a space when editing.

Installing the SIM and battery


1 Remove the battery cover

Use your thumbnail to open the battery release button on the bottom of the phone and lift off the battery cover.

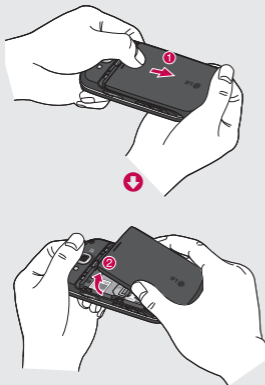

2 Remove the battery

Hold the top edge of the battery and lift it away from the battery compartment.




⚠ WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

Installing the SIM and battery


3 Install the SIM card

Slide the SIM card into the SIM card holder. Make sure the gold contact area on the card is facing downwards. To remove the SIM card, gently push it until it clicks. Gently pull it out.

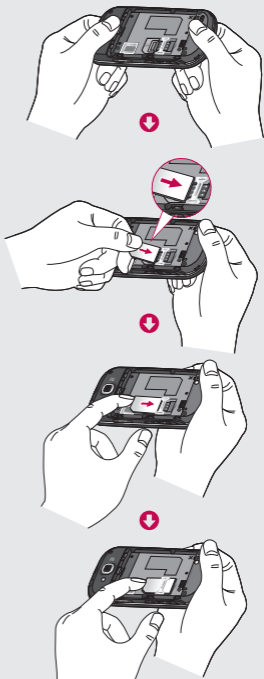


4 Install the battery


Insert the top of the battery into the top edge of the battery compartment first. Ensure that the battery contacts align with the phone's terminals. Press the bottom of the battery down until it clips into place.




Charging your phone

Slide back the cover of the charger connector on the side of your GW620. Insert the charger and plug it into a mains electricity socket. Your GW620 must be charged fully until you can see .

NOTE: The battery must be fully charged initially to improve battery lifetime.



NOTE: GW620 has an internal antenna. Be careful not to scratch or damage this rear part as it will cause loss of performance.




Memory card

Installing a memory card

You can expand the available memory space on your phone by using a memory card.

NOTE: A memory card is an optional accessory.

Slide the memory card into the slot at the top, until it clicks into place. Make sure the gold contact area is facing downwards.

 **WARNING:** Slide into the memory card to the slot, otherwise, the card can be damaged.

NOTE: You need to insert SD memory card to take photo and video. Photos and Videos only will be saved to SD Memory card. Also You can only download files from Web with SD memory card inserted.

NOTE: When you remove SD memory card from GW620, Choose Settings - SD card & Phone storage. Touch Unmount SD card for safe removal.



Memory card

Formatting the memory card

Your memory card may already be formatted. If it isn't, you will need to format it before you can start to use it.

NOTE: All files get deleted while formatting.

- 1 Select **settings**.
- 2 Scroll and touch **SD card & phone storage**, then scroll and select **Format SD card**.
- 3 Touch **Format SD card** and then confirm your choice.
- 4 Enter the password, if one has been set. The card will then be formatted and ready to use.

NOTE: If there is existing content on your memory card, the folder structure may be different after formatting since all files will have been deleted.

Your home screen

From this screen you can access menu options, make a call, view the status of your phone and much more.


Touch screen tips

The home screen is also a great place to get used to using the touch screen.

To select an item, touch the centre of the icon.


- Do not to press too hard; the touchscreen is sensitive enough to pick up on a light, firm touch.
- Use the tip of your finger to touch the option you require. Be careful not to touch any other keys.
- When the screen light is off, either press the power key or press the Menu key twice.
- Whenever your GW620 is not in use, it will return to the lock screen.


Unlocking the screen

When the screen is locked, either press the Menu key twice or touch and hold the  on the touch screen to return the home screen.

Your home screen

Annunciator


Touch and hold status bar part on the screen, drag  down. At here you can check WiFi and Bluetooth status and other notifications.




Touch screen

The controls on the GW620 touch screen change dynamically, depending on the task you are carrying out. On some screens, you can scroll up and down, or flick left to right.

Flicking left & Right

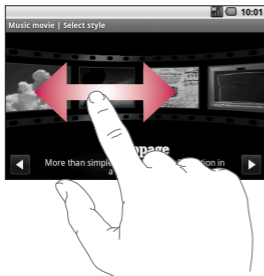

Flicking up & Down

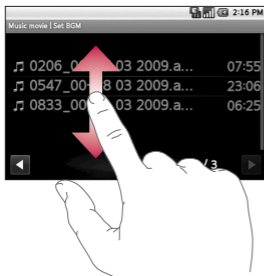

Opening Applications


To open any Application, simply touch its icon.

Proximity sensor

When receiving and making calls, this sensor automatically turns the backlighting off and locks the touch keypad by sensing objects when the phone is near the ear. This makes the battery life last longer and prevents the touch keypad from malfunctioning through automatic key locking during calls. Users, therefore, do not have the inconvenience of unlocking the phone when searching the phonebook during calls.

Your home screen

Set default Home setting


GW620 has Android Home and LG Home. You can set other Home as default setting. After you set a default Home screen, whenever you touch  it will go back to the default one.

If you want to change default home setting, choose Home screen selector from menu.

Set Home theme

From Home screen, press Menu key and select **Set Home theme**. Choose from Default and Appet. Select Wallpaper + Icon or Icon only so you can leave current wallpaper and change Icon only.



If you select Appet and Wallpaper + Icon, it will show you a completely different styles of wallpaper and icons.



You can add some icons on the Home screen.

To add shortcuts on the Home screen,

From Android Home : From menu, Long touch a icon and it will be added on the Home screen

From LG Home : From Menu, long touch a icon and draw it to  . To remove newly added shortcuts from the Home screen, long touch the icon and draw it to  .

You can move icon to other group, simply touch and hold the icon and draw it to other group. Also you can change group name. Touch and hold the group name and enter new name. Press Menu key then you can add other groups up to 6. Select **Reset** groups if you want to turn it as default groups.




Your home screen

LG Home

Quick keys

The quick keys on your home screen provide easy, one-touch access to the functions you use the most.



Touch to bring up the touch dialling pad, which lets you make a call. Enter the number and touch **Call**.



Touch to open your contacts. To search for the number you want to call: Enter the name of the contact using the touchpad. You can also create new contacts and edit existing ones.





Touch to access the **Messaging** menu. From here you can create a new SMS.



Touch to open the full Top menu.

Long click the home screen and you will see four available options





You can add Shortcuts, Widgets, Folders or Wallpaper, on the Home screen. For example, select Folders and choose New folder. You will see a new folder on the Home screen. To delete it, long touch the folder and draw it to  .

If you select Wallpapers, you can set wallpaper from Gallery or Wallpaper gallery.

NOTE: Android Home and LG Home provide this function.

Getting back to your previous application

Touch and hold  , the screen will show you a pop up with applications you used recently.





Your home screen

Android Home












You can use Google search on your homescreen




Touch , then you can see the whole menu.









Communication

Icon	Description
	Touch to access Browser.
	Touch to open your contacts. You can also create new contacts and edit existing ones.
	Touch to bring up the touch dialling pad, which lets you make a call.
	Touch to access the Email menu. You can check your received Email and create new Email.
	Touch to keep and manage your favorite contacts.
	Touch to access the Message menu. From here you can create a new SMS or MMS.
	Easily check and manage your Social Network Communities.
	Touch to conveniently access Exchange protocol features.
	Provides 2way sync with Exchange server.
	Check your tasks categorized in detail.
	Manage your calendar enabled 2 way sync with Exchange Calendar.







Your home screen

Icon	Description
	Touch to manage and options and settings for all Moxier Mail, Contacts, Calendar and Tasks.

Multimedia







Icon	Description
	Touch to open your camera viewfinder.
	Touch to listen to the radio
	To collect, organise and sort picture and video files of a memory card.
	Touch to open Media Player
	Touch to enter the Music menu directly.
	Touch to edit your video files.

Utilities

Icon	Description
	Touch to access the Alarm menu directly
	Touch to perform basic arithmetic calculations such as addition, subtraction, multiplication and division.
	Touch to access Quickoffice.
	Touch to record voice memos or other audio files.
	Touch to choose your default Home setting.
	Touch to adjust General settings of your GW620.


Your home screen

Google

Icon	Description
	To keep track of your appointments and creates meeting requests.
	Use Google's web-based email service on your phone.
	Touch to access Google maps, you can search locations and directions.
	Use Google's IM program and communicate with other people.
	Touch to access Android Market. You can access Applications, Games, Search and My downloads folder.
	Use online video streaming service that allows you to review videos uploaded by others.

Downloads

At this category, the applications you downloaded from Market and other newly installed applications will be added.

Icon	Description
	Touch to Install a Java game and application.

Your home screen

Viewing the status bar

The status bar uses different icons to show conditions such as signal strength, new messages and battery life as well as whether Bluetooth or data connections is active.











Below is a table which explains the meaning of icons you're likely to see in the status bar.



[Status bar]

Icon	Description
	No SIM card
	Signal null
	Wi-fi is on
	Wired headset
	Call forward
	Call hold


Icon	Description
	Speaker phone
	Call mute
	Missed call
	Bluetooth on
	Bluetooth connected
	system warning
	Alarm
	New voicemail
	Flight mode
	Silent
	Vibrate
	No SD card
	Battery fully charged
	Battery is charging


Icon	Description
	Data in
	Data out
	Data in and out
	USB to PC
	Download
	Upload
	GPS is acquiring
	GPS is on
	Service message
	Setting message

Calls



TIP! Press the power key to lock the touchscreen to prevent calls being made by mistake.

Making a call

- 1 Touch  to open the keypad.
- 2 Type in the number on the keypad. To delete a digit, press the backspace button.
- 3 Touch Call to make the call.
- 4 To end the call, touch End call.

TIP! To enter + in order to make international calls hold down . On the Qwerty keypad, press and hold 0 key.

Calling your contacts


- 1 Touch  to open your **Contacts**.
- 2 Scroll through the contact list or enter the first letter(s) of the contact you want to call by touching .
- 3 From the list, touch the contact you want to call and select the number to use if there is more than one for that contact.


Answering and rejecting a call


When your phone rings, press the [Accept] button to answer. Press the [Reject] button to reject button an incoming call.


TIP! When phone rings, press volume up or down key if you want to switch it to silent ringer mode.


In-call options




 - Touch to open a numerical keypad for typing in numbers, e.g. when dialling call centres or other automated telephone services.

 **Swap calls** : To change between the calls

 **Merge calls** : To merge two lines

 **Add call** : Choose to add another person to the call

 **Transfer call** : Connect the two calls online and quit the user's call.

Bluetooth - Call audio transfer to bluetooth

Speaker - Touch to turn the speaker phone on.

Mute - Touch to turn the microphone off so the person you are talking to cannot hear you.




Hold - Touch to put a call on hold.

Calls

Adjusting call volume

To adjust the volume during a call, use the up and down button on the left side of the phone.


Making a second call

- 1 During your initial call, press Menu key and touch  . Then, select the number you want to call.
- 2 Call the number or search your contacts.
- 3 Touch [Call] button to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and put on hold.
- 5 Touch  to toggle between calls. Or touch  to make a conference call.
- 6 To end active calls press [End call]. If there is no active call, it will end Hold call. To end all calls at the same time, touch End call.



NOTE: You will be charged for each call you make.

Turning on DTMF

DTMF lets you use numerical commands to navigate within automated calls. DTMF default is set to off.

To turn it on, touch  .

Viewing your call logs

From the home screen, touch  or  then choose Call log. View a complete list of all dialed, received and missed calls and voice calls.

TIP! Press Menu and touch Clear call log to delete all the recorded items.

TIP! Touch any single call log entry to view the date, time and duration of the call.

Call settings

Select **Fixed dial number** to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code, which is available from your operator. Only numbers within the fixed dial list can be called from your phone.

Using call forwarding

- 1 Choose **Settings**. Choose **Call settings**.
- 2 Touch **Call forwarding**.
- 3 Choose from Always forward or Forward when busy or Forward when unanswered or Forward when unreachable.
- 4 Enter the number to forward to.

NOTE: Divert calls will incur charges. Please contact your network operator for details.

Using call barring

- 1 Choose **Settings**. Choose **Call settings**.
- 2 Touch **Call barring**.
- 3 Choose any or all of the five options:
 - All outgoing**
 - Outgoing international**
 - Outgoing international calls except home country**
 - All incoming**
 - Incoming when abroad**
- 4 Enter the call barring password. Please check with your network operator about this service.

Call cost - Check last call meter and All call meter. or Set call cost and limit.

Call duration- check the duration of your call.

Calls

Additional call setting

1 Choose **Settings**. Choose **Call settings**.

2 Touch Additional call settings.
This lets you change the following settings:

Caller ID - Use default operator settings to display my number in outgoing calls

Call waiting - During a call, notify the user of incoming calls.

Voice clarity - Remove noise and make reception clearer.

Network operators


Search networks and Select automatically.

Contacts

Searching for a contact



There are two ways to search for a contact:

From the home screen


- 1 From the home screen, touch  to open your **Contacts**. Touch **Search contacts** and enter the contact name using the key pad.

TIP! You can search by group by touching the Contacts tab at the top of the screen and selecting **Groups**. This will bring up a list of all your groups.

From the main menu

- 1 Touch , then touch  on the Communication tab.
- 2 Touch **Search contacts**.

Adding a new contact

- 1 From the home screen, touch , then touch .
- 2 If you want to add a picture to the new contact, touch . You can use a saved pictures or take a new picture.
- 3 Enter the first and last name of your new contact.
- 4 Enter up numbers and assign a type to each of them, choosing between **Mobile**, **Home**, **Work** and others.
- 5 Add email addresses. You can assign each email address as Home, Work and Other.
- 6 Also you can enter Social network ID, Chat address, Website, Postal addresses and Organizations.
- 7 Assign the contact to Starred in Android or set as New group.


Contacts

- 8 You can also add a **Birthday** and a notes, Ringtone.
- 9 Touch **Done** to save the contact.



TIP! You can create customised groups for your contacts. See **Creating a group**.

Favorite Contacts

You can assign a frequently-called contact.

- 1 From the home screen touch . Touch Add contact.
- 2 Assign your favorite contacts from the contact list.
- 3 You can call, send message or edit the favorite contacts.

Creating a group

- 1 From the home screen, touch  and then touch **Groups**.
- 2 Touch  Enter a name for the new group You can set a ringtone for newly created group.

- 3 Touch **Done** to save the group.

NOTE: If you delete a group, the contacts assigned to that group will not be lost. They will remain in your contacts.

Other contact options

Press Menu key then you can see options like Search, New contact, Delete contacts, Send message, Edit sync groups, SIM contacts. If you choose Import contacts, GW620 will import contacts from your SIM card.


NOTE: To check SIM contact, press Menu key from Contact screen and select SIM contacts. Touch the contact to copy it to phone.. Touch and hold to import or delete the contact. If you want to edit the SIM contact, copy it to phone, edit and copy it to SIM again.

Messaging


Messaging

Your GW620 combines SMS, MMS into one intuitive, easy-to-use menu.

There are two ways of entering the messaging centre:


- 1 From the home screen, touch  or , then scroll to **Messaging** on the Communication tab.


Sending a message

- 1 Touch  then **New message** to open a blank message.
- 2 Touch **To** to enter the recipient's number, or open your contacts. You can add multiple contacts. When you are finished, touch the message box below to start composing the message text.
- 3 After entering the text, you can send the SMS by touching the send button on top of the message.

TIP! You will be charged for a text message for every person you send the message to.

- 4 Press Menu key to Call, Add subject, Attach, Insert smiley Discard thread, All threads and Add to Contacts.

 **WARNING:** The 160-character limit may vary from country to country depending on how the SMS is coded.

 **WARNING:** If an image, video or audio file is added to an SMS it will be automatically converted to an MMS, and you will be charged accordingly.


NOTE: When you get SMS during the call, no alert will be heard but notification will be shown in indicator area.

Messaging



Entering text


Keypad.



 Touch to turn on T9 predictive texting.


Touch to change the writing language.


 Tap to change between the number, symbol and text keypads. Touch and hold  then you will see Editor settings, Writing language, Input Method and User dictionary.

Use  to scroll through the different keyboards in each text entry mode (e.g. capital or lower case letters).

To enter a space touch .

Show key mode


To input a special letter, Touch and hold , choose Writing language. Select the language you want to input.

For example, choose Français, and return back to entering text mode. Touch and hold , you will see the special letters on the screen.



NOTE: If you changed LG IME setting, (Settings Locale & text - Text settings) this Show key mode is not available and you can only input special letter on the qwerty keypad.

T9 predictive

In T9 mode, you will see  .

T9 mode uses a built-in dictionary to recognise your words based on the key sequences you touch. Simply touch the number key associated with the letter you want to enter, and the dictionary will predict the word you want to use.

For example, press 8, 3, 5, 3, 7, 4, 6, 6 to write 'telephone'.

Abc manual

In Abc mode you have to touch the key repeatedly to enter a letter. For example, to write 'hello', touch 4 twice, 3 twice, 5 three times, 5 three more times, then 6 three times.

Qwerty Keypad







Text input mode using the Qwerty Keypad

When you are required to enter text, for example when writing a message, the keypad will default to ABC mode. If you are entering a number, for example when making a call, the keypad number keys will default to numbers. In ABC mode you can enter numbers by first pressing the number you require.







Press Menu to check which options are available. You can search contacts, add subject, attach files, Insert smiley, discard and check all threads.

Messaging

You can pop up LG IME setting







- 1 Press  once and press .
- 2 Or press  twice continuously and press .
- 3 Or press and hold  and press  together

You can pop up symbol pop up.

- 1 Press  once and press .
- 2 Or press  twice continuously and press .
- 3 Or press and hold  and press  together.




You can input symbol on the key pad

For example, to input @,

- 1 Press  and press .
- 2 Or press  twice continuously and press .
- 3 Or press and hold  and press .

NOTE: Some fields may allow only one text input mode (e.g. telephone number in Address Book fields).

When you input capital letter

- 1 To input one capital letter, press .
- 2 To input capital letters continuously, press  twice .
- 3 To go back to normal input mode, press  again

When you input a letter with accent

When you select French or Spanish as text entry language, you can input French or Spanish special character (ex : ä).

From the Qwerty Keypad, in order to input special characters, press and hold the corresponding alphabet character key.

After the corresponding alphabet character is removed, press the same key repetitively until you can see the special character you want to input.

For example

To input “ä”, press and hold “a” key.

After “a” character is erased, press “a” key repetitively until “ä” is displayed on the screen. You can input special characters by pressing it continuously.

Setting up your email

You can keep in touch on the move by using your GW620 to send emails. It's quick and simple to set up a POP3 or IMAP4 email account.

- 1 Touch **Email** on the Communication tab.
- 2 If the email account is not set up, start the email set up wizard.

TIP! If an email account is already set up, the wizard is not activated automatically.

Messaging

Sending an email using your new account

- 1 Touch **Email** on the Communication tab, then touch New message to open a new blank message.
- 2 Enter the recipient's address and write your message. You can also attach images, videos, audio files and document file types.
- 3 Touch Send to send your email.

TIP! During an active Wi-Fi connection, emails are sent and received via Wi-Fi.

Retrieving your email

You can automatically or manually check your account for new email.

See 'Change your email settings' to check automatically.

To check manually:

- 1 Touch then Email.

- 2 Touch the account you want to use then.
- 3 Choose Refresh and your GW620 will connect to your email account and retrieve your new messages.

Changing your email settings

You can change your email settings based on your own preferences.

- 1 Touch Email. In the menu, there is an option - Account settings.
- 2 Select **Email**.
- 3 You can alter the following settings:
 - Account name** - Name your email account name.
 - Your name** - Enter your name to be displayed for outgoing mail.
 - Email address** - Your email address.

Email check frequency - Time interval to be check for new emails automatically.

Truncate messages at- downloading options for retrieving.

Number of email to display - number of email to be displayed in email list.

Manimum receive size limit - Maximum size can be downloaded.

Maximum send size limit - Maximun size can be sent out.

Priority - setting email priority : High, Normal, Low.

Signature - Create signature to be added on composing body.

Default account - indicate outgoing mails will use this account' SMTP.

Email notification - New email notification on indication area once this set.

Select ringtone - notification sound for new email notification.


Vibrate - option to enable/disable for new email notification.

Incoming settings - Server information for POP4/IMAP4 server.

Outgoing settings - Server information for SMTP server.

Threaded box

Messages(SMS, MMS) exchanged with another party can be displayed in chronological order so that you can conveniently see an overview of your conversation.

NOTE: When you send MMS, it will have no delivery report but show you  icon.

Messaging


Using smiley

Liven up your messages using smiley.

When writing a new message, press Menu key and choose Insert smilely.

Changing your SMS settings

Your GW620 message settings are pre-defined, so you can send messages immediately. These settings can be changed based on your preferences.

Touch  and press **Menu key**.

Delivery report - Activate to receive confirmation that your messages have been delivered.

Manage SIM card messages



- Manage messages stored on your SIM card.

Validity period - Choose how long your messages are stored at the message centre.

Text message centre - Enter the details of your message centre.

Changing your MMS settings

Your GW620 message settings are pre-defined, so you can send messages immediately. These settings can be changed based on your preferences.

Touch  and press **Menu key**. Touch .

You can make changes to the following:

Delivery report - Choose to request a delivery report.

Read report - Choose to request a read report for each message you send.

Auto - retrieve - Activate to retrieve messages automatically.

Roaming auto-retrieve -

Activate to retrieve messages while roaming.

Set Priority - Choose the priority level of your MMS.

Validity period - Choose how long your message is stored at the message centre.

Creation mode

RESTRICTED: In this mode, the MMS Client device shall only create and send messages with content belonging to the Core MM Content Domain.

WARNING: In this mode, the MMS Client device shall guide the user to create and send messages with content belonging to the Core MM Content Domain. This guidance is implemented through warning dialogs.

FREE: In this mode, the MMS Client may allow the user to add any content to the message.

Changing your other settings

Scroll to **Message settings** on the Settings tab then:

Info. Service settings - Choose whether to receive or block information service message(Cell broadcast message), view or edit

channels to receive information service message. Also Choose languages of information service message.

Service message - Choose whether to receive or block service messages.

Notification settings - Activate to display message notification in status bar. Also select ringtone and activate vibrate when notified a new message.

SNS

You can manage your Social Network Settings on GW620. You can view your friends' updates and also update your own Facebook status.

Select SNS and touch Add account.

Add communities from Facebook, Bebo and Twitter.

Messaging

Home

Log in and you will see your friend's status update. Input your comment about new status or check others.

Profile

Press Menu key then you will see five options like Edit status, Upload Photo, Go to Facebook, Refresh and Info Details.

You can upload the photo by touching Upload Photo. Choose from Camera or Gallery and input some comment.

Friends

You can see all your friends in SNS and view their Profile, Photo and Wall.

You can go to a friend's community website, send SN message or save profile as contact.

Message

It will show all your SNS message.

From the SNS first page, you can change the update time setting. Press Menu key and select Update setting.

Moxier Mail

Moxier Mail is a push mail client for Android™ using Microsoft® Exchange ActiveSync® protocol with Exchange server 2003 and 2007.

Also it provides convenient UI, secure environment with SSL support, HTML e-mail with Microsoft® Exchange server 2007

From the welcome screen, press next to proceed.

Enter your corporate e-mail address, user ID and a password.

NOTE: If your information is incorrect, you will get an error message. please try again by entering the correct information. If you get the error message

again, please contact your server administrator for more information.

- **Moxier Mail**

Moxier Mail provides convenient access to all exchange protocol features. You will see emails are organized in the timely manner.

Press Menu key and use options you need.

When you create a new message, search and enter recipients by using Global Address list (GAL) & Exchange Contacts/Google Contacts list. Go to Menu and add Cc/Bcc if necessary. Adjust priority or attach files. You can reply or forward email. Adjust Send settings or Other settings if necessary. Each application provides direct access to

Moxier Sync. From the application's Settings, press Menu then Go to Moxier Sync button to go directly.

- **Moxier Contacts**

Moxier Contacts provide 2-way sync with the Exchange server. Touch and hold a contact, Delete contact, Edit contact, Call, Send SMS, Send e-mail option will appear. To add a new contact, press Menu key and select New contact.

- **Moxier Tasks**

Task list shows the details such as the bound dates, task priority and the title. List also distinguishes tasks in progress, delayed (in red) and completed.

Messaging

- **Moxier Calendar**

Moxier Calendar enables 2-way sync with the Exchange Calendar with New, Folders, Edit and Delete options. You can change the view mode or add a new event. When accepting the meeting invitation, it automatically adds the meeting as an event in the Event List.

Moxier Sync

Moxier Sync is a sync manager providing options for sync and settings for all Moxier Mail, Contacts, Calendar and Tasks.

Press Menu key and check options.

- **Sync now**

Syncs only checked applications in Sync options.

- **Report logs**

Moves to the compose window containing the error logs.

- **Legal notice**

Check legal notice.

- **Help**


Takes you to the www.moxier.com FAQ website.

- **About**

Displays information on current Moxier Mail.

Camera

Getting to know the viewfinder



Back - Touch here to return to the menu map.

Camera mode - Shows whether the camera is in video or photo mode, and can also be used to take photos.

Gallery - Touch this icon to view the gallery.

Settings - Touch this icon to open the settings menu. See Using the advanced settings on page 54 for details.

Macro - Switch this on to take close up shots.

Flash status - Set flash light mode to Auto, Always off or Always on.

Exposure - See Adjusting the Exposure on page 53.

Zoom - zoom in or zoom out.

Note You need to insert a Memory card first to take a picture. Without inserting a memory card, you will not be able to save the picture you had taken. GW620 will support up to 32GB.

TIP! You can close all the shortcut options to give a clearer viewfinder screen. Just touch the centre of the viewfinder once. To recall the options, touch the screen again.

Camera

Taking a quick photo

- 1 Press and hold down the camera key on the right side of the phone.
- 2 Holding the phone horizontally, point the lens towards the subject you want to take a picture of.
- 3 Press the capture button lightly and a focus box will appear in the centre of the viewfinder screen.
- 4 Position the phone so you can see the photo subject in the focus box.
- 5 When the focus box turns green, the camera has focused on your subject.
- 6 Press the capture button and hold it down.

TIP! Face Tracking

This automatically detects and focuses on human faces to help you take clearer pictures.

Once you've taken the photo

Your captured photo will appear on the screen.


Send Touch to send the photo as a **Email, Gmail, Messaging, My e-mail** and **etc.**

NOTE: Additional cost may occur when MMS are downloaded when roaming.


Set as Touch to use the image as wallpaper.


Rename Touch to edit the name of the selected picture.

Edit Touch to edit the image using various tools.

 Touch to return to the previous menu.


 Touch to delete the image.

 Touch to take another photo immediately. Your current photo will be saved.

 Touch to view a gallery of your saved photos.

Using the flash




The default flash setting is auto, but there are other options.

- 1 Select  from the left side of the viewfinder to enter the flash sub-menu.
- 2 There are three flash options:
Auto - Your camera will assess the light available for a good picture and use the flash as necessary.
On - The camera will always flash.
Off - The camera will never flash. This is useful if you want to save battery power.
- 3 When you touch the option you want, the flash menu will automatically close, allowing you to take a picture immediately.


- 4 The flash status icon in the viewfinder will change, based on the new flash mode.

Adjusting the exposure

The exposure defines the difference between light and dark areas in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.


- 1 Touch .
- 2 Slide the contrast indicator along the bar towards  for a lower exposure and hazier image or towards  for a higher exposure and a sharper image.

Adjusting the zoom


You can also zoom in or zoom out. Touch  and adjust the zoom.

Camera

Taking a continuous shot

- 1 From the viewfinder, touch  to open all advanced settings options and select **Shot mode** and **Continuous shot**.
- 2 Position the subject in the viewfinder and press the capture button as if taking a normal photo.
- 3 The camera will take shots in quick succession.

Using the advanced settings

From the viewfinder, touch  to open all advanced settings options.

You can change the camera setting by scrolling the wheel. After selecting the option, touch the Back key.

Image size - Change the size of the photo to save memory space.

Image quality - Choose between **Super fine**, **Fine** and **Normal**. The finer the quality, the sharper the photo. However, the file size will increase as a result, which means you'll be able to store fewer photos in your memory.

White balance - Choose between **Auto**, **Incandescent**, **Sunny**, **Fluorescent** and **Cloudy**.

Shot mode - Choose the normal continuous shot, Beauty shot, Frame shot or Auto panorama.

Timer - The self-timer allows you to set a delay after the shutter is pressed. Select **Off**, **3 seconds**, **5 seconds** or **10 seconds**. This is ideal if you want to be included in a photo.

ISO - The ISO rating determines the sensitivity of the camera's light sensor. The higher the ISO, the more sensitive the camera will be. This is useful in darker conditions when you can not use the flash. Select the ISO value from **Auto, 100, 200** and **400**.

Scene mode - Choose from Auto, Portrait, Landscape, Sports and Night.

Colour effect - Choose a colour tone to use on your new photo.

Focus - Choose between Auto and Manual.

Face - Select the way the camera will focus. Choose between **None, Tracking,** or **Smile shot.**

- **None** - Automatically adjust the focus for a clear, sharp image.
- **Tracking** - Your camera can automatically identify face and have another rectangular for better focus.

- **Smile shot** - Turn smart lighting On or Off. Shot automatically when person or people smile.

Show captured image -

Choose On to check the picture you took immediately.

Grid screen - Choose between **Off, 2x2 grid** or **3x3 grid.**

Shutter sound - Select one of the four shutter sounds.

Geo-tagging - Activate to use your phone's location based services. Take pictures wherever you are and tag them with the location. If you upload tagged pictures to a blog that supports Geo-tagging, you can see the pictures displayed on a map.

NOTE: This function is only available when GPS is active.

Hide icons - Choose the camera settings icons to be hidden manually or automatically.

Reset - Restore all camera default settings.


Camera

TIP! When you exit the camera all settings will return to their defaults, except image size and image quality. Any non-default settings will need to be reset, such as colour tone and ISO. Check these before you take your next photo.

TIP! The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality you will see a preview of the image change behind the settings menu.

Changing the image size

The more pixels, the larger the file, which means the files take up more memory space. If you want to store more pictures on your phone, you can change the resolution to make the files smaller.


- 1 Using the viewfinder, touch  .
- 2 Select **Image size** from the Preview menu.
- 3 Select a pixel value from the six options. (**5Mega, 3Mega, 2Mega, 1Mega, VGA, QVGA**)

Choosing a color effect

- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Color effect** from the Preview menu.
- 3 There are ten color tone options: **Normal, Black & White, Sepia, Negative, Sketch, Emboss, Red, Green, Aqua** and **Solarize**.
- 4 Once you've made your selection, the colour tone menu can be closed by selecting the Back key. You are then ready to take a picture.


TIP! You can change a picture taken in colour to black and white or sepia, but you cannot change a picture taken in black and white or sepia to colour.

Viewing your saved photos

- 1 You can access your saved photos from within the camera mode. Just touch  and your gallery will appear on the screen.

Video camera

Getting to know the viewfinder



Back - Touch here to return to the home screen.

Start recording

Gallery - Touch this icon to view the gallery.

Settings - Touch this icon to open the settings menu. See Using the advanced settings on page 60 for details.


Flash status - Set or turn off the flash.

Exposure - See Adjusting the Exposure on page 60.

Zoom - Zoom in or zoom out.

TIP! You can close all shortcut options to give a clearer viewfinder screen. Just touch the centre of the viewfinder once. To recall the options, touch the screen again.

Shooting a quick video

- 1 Press and hold down the camera key on the right side of the phone.
- 2 Then, switch to .
- 3 The video camera's viewfinder will appear on the screen.
- 4 Holding the phone horizontally, point the lens towards the subject of the video.
- 5 Press the capture button once to start recording.
- 6 **REC** will appear at the bottom of the viewfinder with a timer showing the length of the video.
- 7 Touch  on the screen to stop recording.

After shooting a video

A still image representing your video will appear on the screen.


Send Touch to send the photo as a **Email**, gmail, Messaging, My e-mail, YouTube and etc.


NOTE: Additional cost may occur when MMS are downloaded when roaming.


Play Touch to play the video.

Rename Touch to edit the name of the selected picture.


Edit Touch to use the image as wallpaper.

 Touch to return to the previous menu.

 Touch to delete the video you have just made, and confirm by touching **Yes**. The viewfinder will reappear.




 Touch to shoot another video immediately. Your current video will be saved.

Video camera

 Touch to view the saved videos and pictures gallery.

Adjusting the exposure

The exposure defines the difference between light and dark areas in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

- 1 Touch .
- 2 Slide the exposure indicator along the bar, towards  for a lower exposure and fuzzier image, or towards  for a higher contrast and sharper image.

Using the advanced settings

Using the viewfinder, touch **Settings** to open all the advanced settings options.

You can adjust the video camera setting by scrolling the wheel. After selecting the option, touch the Back key.

Size - Change the size of the video to save memory space. See **Changing the video image size** on page 61.

Scene - Choose between **Normal** or **Night**.

Colour effect - Choose a colour tone to use on your new view.

White balance - The white balance ensures any white parts of your video are realistic. To enable your camera to adjust the white balance correctly, you may need to determine the light conditions. Choose between **Auto**, **Incandescent**, **Sunny**, **Fluorescent** or **Cloudy**.

Duration - Set a duration limit for your video. Choose between **Normal** and **MMS** to limit the maximum size to send as an MMS.

TIP! If you choose MMS duration, choosing a lower image quality will enable you to shoot a longer video.

Voice - Choose Mute to record a video without sound.

Hide icons - Select whether to hide the icons on the camera menu automatically or manually.

Reset - Reset all the video camera settings.

Changing the video image size

The more pixels, the larger the file size, which means the files take up more memory space. If you want to store more videos on your phone, you can change the video resolution to make the files smaller.

- 1 Using the viewfinder, touch .
- 2 Select **Video size** from the Preview menu.
- 3 Select a pixel value:
320x240 - Smaller image size, and therefore a smaller file size. This is ideal for saving memory space.
176x144 - Smallest image size and therefore the smallest file size.
- 4 Touch  button to return to the viewfinder.


Video camera

Choosing a color effect

- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Colour effect** from the Preview menu.
- 3 There are colour tone options, **Normal, Black & White, Sepia, Negative, Sketch, Emboss, Red, Green, Aqua** and **Solarize**.
- 4 Touch the colour tone you want to use.


TIP! You can change a video shot in colour to black and white or sepia, but you cannot change a video shot in black and white or sepia to colour.

Watching your saved videos

- 1 In the viewfinder, touch .
- 2 Your gallery will appear on the screen.
- 3 Touch a video once to bring it to the front of the gallery. It starts to play automatically.


Your photos and videos

Viewing your photos and videos

- 1 Touch  on the camera preview screen.
- 2 Your gallery will appear on the screen.
- 3 Touch the video or photo to open it fully.

TIP! Flick left or right to view other photos or videos.

Using zoom when viewing a video or photo

When viewing photos or videos, you can zoom in and out by .

Adjusting the volume when viewing a video

To adjust the volume of a video while it is playing, use the volume keys on the left side of the phone.

Setting a photo as wallpaper

- 1 Touch the photo you want to set as wallpaper to open it.

- 2 Touch the screen to open the options menu.
- 3 Touch **Use as** and touch Set Wallpaper.
- 4 The screen will switch to portrait mode.

Editing your photos

You can do lots of great things to your photos to change them, add to them or liven them up.

- 1 Open the photo you want to edit and Press Menu key.
- 2 Touch Edit to alter your photo:



Rotate & Flip - Rotate or flip your photo for fun or better view.





Crop - Crop your photo. Choose a square area and move your finger across the screen to select the area.





Tuning - This helps to adjust a picture taken using automatic colour, brightness etc.


Your photos and videos

 **Effect** - Touch to apply the effect options to a photo.


 **Frame** - You can add frames on the the photo.


 **Text** - Adding text on a picture.


 **Clipart** - You can add some clipart on the photo.

 **Drawpad** - Draw something on your photo, freehand. Select the line thickness from the four options, then the colour you want to use.





 **Stamp** - Decorate your photo with stamps. Choose from the different stamps and touch your photo where you want to place them.

 **Resize** - Resize your photo.


 Save the changes you made to the photos.

 Erase the editing you have done to the photo.



Rotating your photo

-  Choose to rotate 90 CCW
-  Choose to rotate 90 CW
-  Choose to flip vertically
-  Choose to flip horizontally.


Adding text to a photo

- From the editing screen, touch .
- Select the color of the speech and choose one of the speech bubble shapes.
- Enter your text using the keypad and touch **OK**.
- Move the text by touching it and sliding it to where you want it.









Adding an effect to a photo

- 1 From the editing screen, touch .
- 2 You can apply any of the various options to the photo
- 3 To undo an effect simply touch .

Cropping a photo





- 1 From the editing screen, touch .
- 2 Choose the shape you want to use to crop the picture.
- 3 Drag the box over the area you want to crop. The selected part will be moved by dragging.
- 4 When you are finished with your selection, touch **Done**.

Tuning your photo





- 1 From the editing screen, touch .
- Use tuning toolbar and adjust your photo's tuning as you like.
- 1  Choose to adjust the tuning settings automatically.
 - 2  Choose to compare Before & After tuning.
 - 3  Adjust brightness & Contrast of the photo.
 - 4  Choose to adjust highlights and shadows.
 - 5  Balance the colour of your photo.
 - 6  Choose to adjust saturation of your photo.
 - 7  Adjust your photo sharpness.
 - 8  Denoise.

Your photos and videos




Adding Frame

- 1 From the editing screen, touch .
- 2 Touch  or  to choose a frame.
- 3 Touch  to check whole frame.




Adding clipart

- 1 Touch  from editing screen.
- 2 Touch  and select a clipart.
- 3 Adjust the size of clipart.
- 4 You can rotate clipart using , .


Using drawpad

- 1 Touch  from editing screen.
- 2 Touch  to select shape.
- 3 Also set colour and thickness.
- 4 You can erase the drawing you added using .

Adding stamp

- 1 Touch  from editing screen.
- 2 Touch  to see which stamps are available.
- 3 Touch screen to the place you want to add stamp on the photo.
- 4 You can adjust colour using .





Resizing

- 1 Touch  from editing screen.
- 2 Scroll the bar to resize the photo.



Editing your videos

The video editing features are available for MPEG4 types.



Trimming the length of the video

- 1 Select **Edit** and choose .
- 2 Touch  and set the new start and end points touching  again.
- 3 Touch **Done** or, alternatively, touch  to return to the gallery and discard the changes.

Selecting Transition style


- 1 Select a transition style, and touch  to preview.
- 2 Touch  and drag the bar to adjust the duration time
- 3 Touch **Done** to save the transition. Touch **Apply** only to apply the current selected transition. Choose **Apply to all** to apply the current selected transition to all video files in the Story board.

Adding a subtitle

- 1 Open the video you want to edit.
- 2 Select **Edit** and select  to input subtitles on the video.
- 3 Touch  and pause playback for setting the start point for text appearance.
- 4 Touch **Start** and choose the text styles. Enter your text using the keypad and select **Done**.
- 5 Touch the area of the screen you want the text to appear and touch **Done**.
- 6 Touch **Save**. Replace the existing file or save as a new file.
- 7 Repeat these steps to add more text.



Your photos and videos

Adding edit effect


- 1 Open the video you want to edit.
- 2 Select **Edit** and select .
- 3 Select an effect you want to add on the photo.

Grabbing a Frame

You can capture a picture from the video.


- 1 Open the video you want to edit.
- 2 Select **Edit** and select .
- 3 Play the the video and touch  to capture the scene you want while the video is playing.
- 4 The frame is saved to the phone as a still image file.

Adding a dubbling to your video

- 1 Open the video you want to edit.
- 2 Select **Edit** and choose .
- 3 Touch  The My sounds folder will open. Choose the track you want to add to your video.
- 4 The original audio track on your video will be erased.
- 5 If the audio is shorter than the video, choose whether to play it **Once** or to **Repeat** it.
- 6 Replace the existing file or save as a new file.
- 7 Or you can record new file and insert live dubbling by touch .
- 8 Touch Done to save the current dubbling.


Multimedia


You can store multimedia files to a memory card so you have easy access to all your image and video files.


To access the Multimedia menu, touch  select **Gallery** from Multimedia tab. You can open a list of catalog bar that store all your multimedia files.


Note Please make sure you install a memory card on to the phone to save photo and access to all your pictures. Without a memory card, the phone will not show any photo or video at all.


There are five catalog bar as below.

All : Show all your pictures and videos.

Favorite : If you long touch a photo or video, the option screen will appear, select Favorite for the photo you want to keep as favorites. This Favorite bar will show your favorite photos and videos.

Video : Show you all your videos

Tagging : Like favorite bar, you can tag some photos and this bar show your tagged photos and videos.

People : From camera, if you set Setting-Face-Tracking and take photo, that will go to People bar. You can give new nick name to the person of the photo. Or connect from contacts to match the photo with the contact.

Multimedia

Timeline view

GW620 Gallery provides timeline view of your photos and videos. From the left side of the screen, the date you had taken photos will be displayed from old to new. If you select a specific date, all the photos you had taken that day will be grouped in white background.

My images options menu

Select a photo and long touch to check what options are available.

Sending a photo

- 1 To send a photo just long touch a photo you want.
- 2 Select Share. Choose from Email or Messaging.
- 3 If you choose **Message** or **Email**, your video will be attached to a message and you can write and send the message as normal.

Sending a video

- 1 To send a video just long touch a video you want.
- 2 Select Share. Choose from Email or Messaging. If you choose **Message** or **Email**, your video will be attached to a message and you can write and send the message as normal.

Using an image

You can choose images to use as wallpapers or even to identify a caller.

- 1 Long touch a photo and select Set as.
- 2 Choose between Wallpaper and Picture ID.

Creating a slide show

If you want to view all the images on your phone, you can create a slide show to save you having to open and close each individual image.

- 1 Long touch a photo and select **Slide show**.

Checking your photo

You can check photo's detail information like Name, date, Tome, Desolution, Size, Type and Tag.

- 1 Long touch a photo and select **Detail**.

Media Player

The **Media Player** folder shows a list of videos you have downloaded or recorded on your phone.

Watching a video

- 1 Select **Media Player** on the Multimedia tab.
- 2 Select a video to play.

TIP! GW620 supports both DivX video format playback to ensure greater content availability.

Press Menu key and select Music. You can play songs, categorize songs by Album and Artist or create a Playlist.


Multimedia

Setting a ringtone






There are three options.


- 1 Lone key a music file from Music list or Media player, select Use as and set as ringtone from pop up options.
- 2 Recorde a voice memo using Voice recorder and set as ringtone.
- 3 Select from Settings - Sound & display -Phone ringtone.


Video editor


- 1 Touch  then select **Video editor**.


Storyboard

- 1  Set BGM-Choose to add music into the storyboard or change the sound.
- 2  Import files- Choose to add media files into the storyboard. You can add up to 32 media files.
- 3  Clip manager - Choose to manage the added media files. when no media file was added, the button is disabled.
- 4  Preview- Preview the video file you made.
- 5  Save- Save the video file you made.
- 6  Add text- Choose to add a text frame into story board.


You need to touch  first to edit the video.

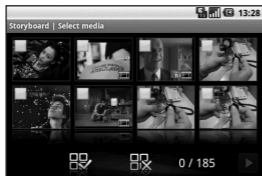

 - Touch to mark all the files, but the maximum is 32 files.

 - Touch to unmark all the files


25/32 - It shows selected file number

 Touch to go to the next step.


Music Movie




1 Flip left and right to check the various style. For Music Movie, you can select only photos.


 - Go back to the Video editorv screen.


D - Show the style name and the description of it.


 - Preview the style.


 - Touch to select the Select photos.





Multimedia

- 2 After you selected photos, touch  and proceed to the next step.

 - Touch to toggle to random mode.

 - Touch to toggle to original mode.




 - Touch to toggle to view mode.

- 3 Touch  to select all the photos and touch .
- 4 Select the music and set it as the background music.
- 5 Add movie title using qwerty key pad and save it.
- 6 Touch  to play the complete video file.
- 7 Touch  to save the video file you made.

Auto cut

There are three types style templates, Portrait, Landscape and Motion object.



- 1 Touch  and select a video. Go to the next step.
- 2 Touch  to preview the video file.
- 3 Touch  to save the file.

Playing a game

- 1 GW620 provides some default games. You can download games from Market.
- 2 Touch Launch button to launch a game or an application.

NOTE: Additional cost may occur when using this service if you download games or application with charge.

NOTE: Java game and application installation are only possible through Web.

Transferring files using USB mass storage


To transfer file using UMS:

- 1 Connect GW620 with PC using USB cable.
- 2 Choose Settings - SD card & phone storage - activate Mass storage only.
- 3 From the status bar, drag USB icon.
- 4 Choose USB connected and Mount.
- 5 You can check mass storage contents from PC and transfer files.

NOTE: You need to install SD card first. Without SD card, you can not use USB mass storage.

Multimedia

Music

Your LG GW620 has a built-in music player that lets you play all your favourite tracks. To access the music player, touch  . From here, you can access a number of folders:





Artists - Browse your music collection by artist.

Albums - Browse your music collection by album.

Songs - Contains all the songs you have on your phone.

Playlists - Contains the playlists you have created.

Playing a song

- 1 Select **Music** from the Multimedia tab.
- 2 Touch **Songs**.
- 3 Select the song you want to play.
- 4 Touch  to pause the song.
- 5 Touch  to skip to the next song.
- 6 Touch  to go back to the first part of the song. Touch  to go back to the previous song.

To change the volume while listening to music, press up and down volume key on the left side of the phone.

Long touch any song from the list. It will show you Play, Add to playlist, Use as phone ringtone, Delete and Search as options.

NOTE: The copyright of music files can be protected in international treaties and national copyright laws. Therefore, it may be necessary to

obtain a permission or a license to reproduce or copy music. In some countries national law prohibits private copying of copyrighted material. Before downloading or copying the file, please check the national legislation of the applicable country concerning the use of such material.

Using the radio

Your LG GW620 has an built-in FM radio feature so you can tune into your favourite stations and listen on the move.

NOTE: You will need to attach your headphones to listen to the radio. Insert them into the headphone socket.

Searching for stations

You can tune your phone to radio stations by searching for them manually or automatically. They will then be saved to specific channel numbers, so you don't have to keep re-tuning.

You can store up to 48 channels on your phone.

To tune automatically

- 1 Select **FM radio**.
- 2 Press Menu key.
- 3 Touch **Auto scan** then **Yes**. The stations found will be allocated to channel numbers in your phone by selecting **Set**, **Skip** and **Stop**.

NOTE: You can also manually tune to a station by using the wheel displayed next to the radio frequency.

Resetting channels

- 1 Select **FM radio**.
- 2 Choose **Auto scan** to reset the current channel or choose **Reset all channels** to reset all of the channels. If you reset all of the channels, each channel will return to the starting 87.5Mhz frequency.

Multimedia

Listening to the radio

- 1 Select **FM radio**.
- 2 Touch the channel number of the station you would like to listen to.

TIP! To improve radio reception, extend the headset cord, which functions as the radio aerial.

Warning! If you connect the headset not specifically made for it to the phone, the radio reception can be interfered.

Google Applications

- 1 Set up a Google account first. Enter your user name and password.
- 2 After sign in, Contacts, email and calendar on your Google account will automatically synchronize with GW620.

Google Maps

You can check your current location, traffic situation and receive directions to your destination. GW620 needs to be connected Wi-Fi or 3G/GPRS.

NOTE: The Google Maps does not cover all cities nor all countries.

NOTE: While viewing a Street View of a location, press MENU and then touch **Compass mode** to turn Compass mode on.

Market

From Market, you can download useful applications and games. If you install applications and games from Market, you will see those from GW620 menu.

You can send comments about an application or flag it if you find it incompatible with GW620.

- 1 Select a category to Browse its contents.
- 2 Choose an application you want to install.

NOTE: When you want to finish the game, use Home key or Back key. You will return to standby screen. Or use menu key from the game.

Gmail

Gmail is configured when you first set up your phone. Depending on your synchronization settings, Gmail on your phone is automatically synchronized with your Gmail account on the web. The Inbox conversations list is your default Gmail view.

Google Applications

Press Menu key and touch Refresh to send or receive new emails and to synchronize your emails with your Gmail account on the web.

Google Talk

Google Talk is Google's instant messaging program. It lets you communicate with other people who also use Google Talk.

Adding an event to your calendar

- 1 Select **Calendar**.
- 2 You need to create a Google account first to use Calendar.
- 3 Select the date to which you want to add an event.
- 4 Press Menu key and touch New event.
- 5 Touch What and enter the event name. Check the date and enter the time you want your event to begin. You can enter the time and date the event finishes in the lower date and time boxes


- 6 Also touch Where and enter the location.
- 7 If you would like to add a note to your event, touch **Description** and type in the details.
- 8 If you want to repeat the alarm, set Repetition and set reminders if necessary.
- 9 Touch **Save** to save the event in the calendar. A coloured square in the calendar will mark all days that have saved events, and an alarm will sound at the event start time, to help you staying organised.

Changing your default calendar view

- 1 Select **Calendar** on the Google tab. Press Menu key.
- 2 Touch You can select the calendar view for 1 day, a week or a month.

Utilities

Setting your alarm

- 1 Select **Alarm Clock**.
- 2 If you want add a new alarm, touch **Add alarm**. There are some preset alarms, you can activate one of them.
- 3 Touch to Turn on alarm and Set the time you would like the alarm to sound. After you set the time, GW620 will let you know how much time is left for alarm to start.
- 4 Choose a ringtone and turn on Vibrate if you want. set the repeat.
The icons indicate the weekday you select.
- 5 You can name the alarm by choosing Label.
- 6 When Alarm start, you can snooze it for 10 minutes or dismiss it.
- 7 Touch  and return to the first alarm screen.

- 8 Touch and hold the clock on the screen, and you will see different types of clock. You can choose one of them
- 9 You can delete all alarms by pressing central menu key and Delete Alarm, All alarm screen displayed and select manually by touch and then press Delete Alarm at the top.

Using your calculator

- 1 Select **Calculator** on the Utilities tab.
- 2 Touch the number keys to enter numbers.
- 3 For simple calculations, touch the function you require (+, -, x or ÷), followed by =.
- 4 For more complex calculations, Press Menu key and touch Advanced panel and choose between **sin, cos, tan, log, etc..**

Utilities

Quickoffice



You can manage and view document files . Available files are pdf, doc, txt, xls and zip file.


- 1 Choose Memory card . You can see the files and folder list.
- 2 If you choose Recent documents, it will show you files you recently viewed.
- 3 Touch and hold any file, it will show Rename, Properties and Delete options.
- 4 Choose a file and press Menu key to open Open, Register, update, Properties and About options. According to file type, there are more options.
pdf : Go to page, Fit page, Fit width
doc/txt : Search
xls : Worksheet - Choose between Summary view and Full view.

Voice recorder

Use your voice recorder to record voice memos or other audio files.

Recording a sound or voice

- 1 Touch **Voice recorder**.
- 2 Touch **Record**.
- 3 Touch  to begin recording.
- 4 Touch  to end recording.



- 5 Touch **Use as** to set as **phone ringtone**.

Sending the voice recording

- 1 Once you have finished recording, you can send the audio clip by touching **Share**.
- 2 The recording will be added to the message which you can write and send it as normal.

The web

Browser

Browser gives you a fast, full-colour world of games, music, news, sport, entertainment and loads more, straight to your mobile phone. Wherever you are and whatever you're into.







Accessing the web

- 1 Select **Browser** on the Communication tab.
- 2 You will move to web site.

NOTE: You will incur extra cost by connecting to these services and downloading content. Check data charges with your network provider.


Using web tool bar

Touch  to open the toolbar.

- 1 Touch  to refresh the web page.
- 2 Touch  to go forward one page.
- 3 Touch  to go backward one page.
- 4 Touch  to Add/Show Bookmark, Show history and Show most visited site.
- 5 Touch  to open another web site with new window.
- 6 Touch  to change browser settings.


Using options


Press Menu key to check options

 **Go** - Enter web address and go to that page

 **Exit** - Close Browser.

 **Find on page.** - Mark all letter you input

 **Select text** - Touch and line the sentences you want to copy. You can paste it every input box.



 **Downloads** - Show download history

 **More**

- **Bookmarks** - Add/Show Bookmark, Show history and Show most visited site.
- **Window overview** - Show all your open windows.
- **Page info** - Show page information.
- **Share page** - Send page by Email or Messaging.
- **Setting** - Set browser settings.



Adding and accessing bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 Select **Browser** on the Communication tab.
- 2 Select menu, select More and Bookmarks or Touch  using web tool bar Icon . A list of your Bookmarks will appear on the screen.
- 3 Select Add Bookmarks and Enter a name for the bookmark followed by its URL.
- 4 Press OK button. Your Bookmark will now appear in the bookmark list.
- 5 To access the bookmark simply touch the bookmark You will be connected to the bookmark.

The web

Changing web browser settings


Select menu, select More and Settings or Touch  using web tool bar Icon .

You can change page layout (ex Text size, text encoding), change home page, control cache and cookie settings, security settings, and advanced settings.

Using your phone as a modem

Your GW620 can be used as a modem for your PC. You can do this via the USB cable.

Settings

Press Menu key and select settings. Or Touch  from Menu.

Wireless Controls

At here, you can manage Wi-Fi and Bluetooth. Also **set airplane mode** and **mobile networks**.

Wi-Fi – Turn on Wi-Fi

Wi-Fi settings – Set Network notification or add Wi-Fi network.

Bluetooth – Turn on Bluetooth.

Bluetooth settings - Set device Name & **Discoverable**, Scan for other devices.

Mobile networks – Set options for roaming ,network and APNs.

Airplane mode – After set Airplane mode, all wireless connection will be disabled.

NOTE: “Wi-Fi Sleep Policy” is not included. When the phone goes to screen lock, Wi-Fi is turned off. When screen on, it is also turned on automatically. This is to reduce power consumption.

But , if some applications receive data through Wi-Fi, Wi-Fi will not be turned off even after phone screen is locked.

Call settings

Set up voicemail and set other call settings.

Please see Call settings.

Sound & display

Silent mode – All sounds except media & alarms.

Sound settings

Silent mode – Turn on to set all sounds except media & alarms are silenced.

Ringer volume - Set volume for incoming calls and other notifications.

Media volume - Set volume for music and videos.

Phone ringtone - Set your default Incoming call ringtone.

Phone vibrate – Set vibrate for incoming calls.

Settings

Notification ringtone – Set default notification ringtone.

Audible touch tones – Set to sound when you use dial pad.

Audible selection – Set to sound when you make screen selection.

Vibration feedback – Set to use vibration feedback.

SD card notification- Disable SD card notification sounds.

Display settings

Orientation – Set to switch orientation automatically when you rotate phone.

Animation - Set to show animation when you open or close windows.

Luminance Sensor Mode - Touch to turn Luminance Sensor Mode on.

Brightness - Adjust the brightness of the screen after you turn off Luminance Sensor Mode.

Screen timeout - Set the time for screen timeout.

Data synchronization

Select which applications are synchronized.

Security & location

My location sources

Use wireless networks

– See locations using wireless networks.

Enable GPS satellites – Default setting to accurate to street level when locating.

Screen unlock pattern

Set unlock pattern to secure your phone

SIM card lock

Set up SIM card lock or change SIM PIN

Visible passwords

Show you the password while you type

Applications

You can manage applications and set up quick launch shortcuts.

Unknown sources – Default setting to install of non-Market applications.

Quick launch – Set keyboard shortcuts to launch applications. Choose to check default quick launch and set other quick launch.

Manage applications - Manage and remove of installed applications.

Development – Set options for application development like USB debugging, Stay awake, and Allow mock locations.

SD card & Phone storage

USB connection mode – Mass storage only.

SD card – Check total space, Available space. Also touch Unmount the SD card for safe removal. Format the SD card if

necessary.

Internal phone storage – Check Available space . Choose Factory data reset if you want to delete all data from the phone.

Date & time

Set date, time and time zone & formats.

Locale & text

Set local language and region, text input and auto-correction options.

About phone

View legal info and check phone status and its Software version.

DivX VOD registration

Generate a DivX VOD registration code.

Please visit <<http://vod.divx.com/>> for registration and technical support.

Wi-Fi

Wireless Manager allows you to manage Internet connections per Wi-Fi (Wireless LAN) on your device. It allows the phone to connect to local wireless networks, or access the Internet wirelessly. Wi-Fi is faster and has a greater range than Bluetooth wireless technology and can be used for fast emailing and Internet browsing.

NOTE: The GW620 supports WEP, WPA-PSK/2 security. If your Wi-Fi service provider or network administrator sets encryption for network security, fill in the key in the pop-up window. If encryption is not set, this pop-up window will not be shown. You can obtain the key from your Wi-Fi service provider or network administrator.

1. How to set up Wi-Fi

- 1 Touch Wi-Fi from the Settings tab and turn Wi-Fi on
- 2 AP (Access Point) Search
 - Searches which AP it can connect to.
- 3 AP Connect
 - Connects to the desired AP from the AP search list.
 - If the AP is security type WEP or WPA-PSK/2, enter the security key.

2. Wi-Fi network profile support

- 1 Wi-Fi profile support (how to connect to a frequently-used AP or Hidden AP)
 - 1) If the AP does not appear in the search list, you can connect to it by saving it as a profile.

- 2) Saving the frequently-used AP as a profile makes it easier to enter the Security key when connecting to an AP with that Security type.
- 3) If the AP does not support DHCP, you can connect to the AP using a static IP address.

2 Description of each field in the Wi-Fi profile.

- 1) Network name: SSID (ID)
- 2) Security type: WEP, WPA-PSK/2 support.
- 3) Security key: saves the security key.
- 4) IP/DNS setting: this allows you to set to Automatic or Static depending on whether the AP supports DHCP.
For Static, enter the field value of the IP address and DNS server to use with the static IP address when connecting.

3 How to save the Wi-Fi profile

- 1) Select Add Wi-Fi network menu in the bottom of Wi-Fi networks, then enter SSID and Security type.
- 2) After connecting to an AP with this Security type, the profile will be saved automatically.

3. How to obtain MAC-address

For setting up a connection in some wireless networks with MAC filter you may need to enter the MAC address of your GW620 into the router.

- 1 User can find MAC address in the following UI
- 2 Settings > Wireless controls > Wi-Fi settings > Menu > Advanced > MAC address

Software Update

Software Update


LG Mobile Phone Software Update Program

For more information on installing and using this program, please visit <http://update.lgmobile.com>.

This feature allows you to update your software to the latest version quickly and conveniently over the Internet without needing to visit our service centre.

As the mobile phone software update program requires your full attention throughout the update process, please make sure you check all instructions and notes that appear at each step before moving on to the next step. Please note that removing the USB data communication cable or batteries during the update may seriously damage your mobile phone. As the manufacturer takes no responsibility for loss of data

during the update process, you are advised to back up any important information in advance for safekeeping.

DivX Mobile 

ABOUT DIVX VIDEO: DivX® is a digital video format created by DivX, Inc. This is an official DivX Certified device that plays DivX video. Visit www.divx.com for more information and software tools to convert your files into DivX video.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play DivX Video-on-Demand (VOD) content. To generate the registration code, locate the DivX VOD section in the device setup menu. Go to vod.divx.com with this code to complete the registration process and learn more about DivX VOD.

DivX Certified to play DivX® video up to 320x240

Accessories

There are a variety of accessories available for your mobile phone, which may be sold separately. You can select these options according to your personal communication requirements. Consult your local dealer for availability. **(Items described below may be optional.)**

Charger



Data cable

Connect your GW620 and PC.



Battery



Stereo headset



User Guide

Learn more about your GW620.



NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may vary in different regions.

Accessories

DivX VOD registration

Generate a DivX VOD registration code.

Please visit <<http://vod.divx.com/>> for registration and technical support.

Ambient Temperatures

Max: +55°C (discharging),
+45°C (charging)

Min: -10°C

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc. LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

GSM 850 / E-GSM 900 / DCS 1800 / PCS 1900 Quad Band and WCDMA Terminal Equipment

Model Name

GW620

Trade Name

LG

CE 0168 !

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1
EN 301 489-17 V1.2.1, EN 301 489-19 V1.2.1, EN 301 489-24 V1.4.1
EN 301 511 V9.0.2
EN 301 908-1 V3.2.1 EN 301 908-2 V3.2.1,
EN 300 328 V1.7.1
EN 50360:2001/EN62209-1:2006
EN 60950-1 : 2001

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Forsyth House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Issued Date

Seung Hyoun, Ji / Director

11,Nov, 2009

Signature of representative

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information This mobile phone model GW620 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.

- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.819 W/kg (10g) and when worn on the body is 1.07 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.

Guidelines for safe and efficient use

- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.

- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.

Guidelines for safe and efficient use

- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off or activate flight mode before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.

- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.

Trouble Shooting

This chapter lists some problems you might encounter while using your phone. Some problems require you to call your service provider, but most are easy for you to correct yourself.

Message	Possible causes	Possible Solutions
SIM error	There is no SIM card in the phone or it is inserted incorrectly.	Make sure the SIM card is correctly inserted.
No network connection	Signal weak Outside GSM network area	Move towards a window or into an open area. Check the service provider coverage map.
Codes do not match	To change a security code, you will need to confirm the new code by entering it again.	Contact your Service Provider.
Function cannot be set	Not supported by Service Provider, or registration required	Contact your Service Provider.
Calls not available	Dialling error New SIM card inserted Charge limit reached	New network not authorised. Check for new restrictions. Contact Service Provider or reset limit with PIN 2.

Message	Possible causes	Possible Solutions
Phone cannot be switched on	On/Off key not pressed long enough	Press the On/Off key down for at least two seconds.
	Battery empty	Keep charger attached for a longer time.
	Battery contacts dirty	Clean the contacts.
Charging error	Battery totally empty	Charge battery.
	Temperature out of range	Make sure the ambient temperature is right, wait for a while, and then charge again.
	Contact problem	Check the power supply and connection to the phone. Check the battery contacts and clean them if necessary.
	No mains voltage	Plug in to a different socket or check the voltage.
	Charger defective	If the charger does not warm up, replace it.
	Wrong charger	Only use original LG accessories.
Battery defective	Replace battery.	
Phone loses network	Signal too weak	Reconnection to another service provider is automatic.

Trouble Shooting

Message	Possible causes	Possible Solutions
Number not permitted	The Fixed dial number function is on.	Check settings.
The screen does not turn on when I receive a call.	Proximity sensor problem	The proximity sensor is detecting an obstacle in front of the screen and turns off the screen to avoid accidental keypresses. Make sure that the area around the proximity sensor is clean and perform a calibration of the sensor. (Please refer to page 100 for more information)

LG Mobile



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

	SERVICE
	1800-180-9999*
<small>*MTNL / BSNL</small>	39-01-0909**
<small>**Prefix STD Code</small>	

BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL 233-234 Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 51	079	4004013 / 14
2	Asansol	LGEIL Block-E Ist Floor, P.C Chattarjee Market, Rambandhu Tala, GT Road (E) Asansol - 713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL 302 CIDCO No 3, Opp Hotel Ramgiri, Jalna Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL No. 914, 2nd Floor, Sri Venkateshwara Complex, Opp. ISP Petrol Bunk, 80th Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13A Vignes Warehouse Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0795	4062900 / 3092938 / 3995904
6	Bhubaneswar	LGEIL Plot No.02 1st Flr. Bagaji Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65510501 - 04
9	Cochin	LGEIL, 401/270, Vasudeva Buildings, T.D. Road, Ernakulam Cochin - 682011	0484	3269743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sangarur Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	2699411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rajnagar Ghaziabad - 201001	0120	9811354152 / 3 / 64 / 85
14	Goa	LGEIL, Plot No-D-3M0-4, Rego Baug, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294959 / 3294799
15	Gurgaon	LGEIL, II nd Flr A Block, Centre Point Bldg, Sushant Lok, PH, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272867 / 4047460
16	Guwahati	LGEIL, Shantiner Bhawan, C K Agarwal Path, Chenikuri, Guwahati - 781003	0361	2663865 / 2666959 / 2665583 / 2669894
17	Hubli	LGEIL, 603/B, Raii Nagar Road, Behind Renuka Petrol Pump, Golur Road, Hubli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No.54, Pulla Reddy Building, Vikarampuri Main Road Kharkhana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rd flr, 304 Bansri Trade Centre 581/5 M.G.Road, Indore - 452003	0731	4049523 / 24 / 40822157
20	Jaipur	LGEIL, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	5111118 / 5113028 / 5105302
21	Jalandhar	LGEIL, Village Khajuria Near Hawali Restaurant, Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502867 / 506025 / 502868
22	Jammu	LGEIL, Plot No. -52 Yard No. 6, Transport Nagar, Narwal, Jammu - 180006	0191	2477420 / 2477419 / 2474386 / 2474384
23	Jodhpur	LGEIL, Z21-A/212-B/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 302
24	Kolkata	LGEIL, 1, Ho-Chi-Min-Sarani, 6th Floor, Metro Towers, Kolkata - 700071	033	22883250 / 51 / 52
25	Kundli	LGEIL, Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli - Sonapat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kuri, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande Near Badowal Railway Station Opp ferozpur Road Ludhiana	0161	2804413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J B Nagar, Andheri Kuria Road, Andheri (E) Mumbai - 400059	022	2635282 - 2897
29	Nagpur	LGEIL, Sa, Road No. 13, Behind Martic Workshop, MIDC Hinga, Nagpur - 440016	07104	2361200 / 235122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bandar Bageecha, Near Samrat Hotel, Patna - 800001.	0612	3209156
31	Pune	LGEIL, 105/106, Premium Point, GMI Road, Opp Modern High School, IIIrd Floor, Shivaji Marg, Pune - 411005	020	66030100 / 732
32	Rajpur	LGEIL, Nathani Compound, Shyam Nagar, Katora Talab, Rajpur (C.G)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294026 / 2331815 / 3090429
34	Surat	LGEIL 1001-1004, Acon Plaza, IInd Flr, Anand Mahal Road, Behind Bhulka Bhawan School Adajan, Surat - 395000	0261	2730982 / 83 / 84
35	Thane	LGEIL, Gali Shop No - 296/207, 2nd Floor, Sai Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghodbunder Road, Thane(West) - 400607	022	25472633 / 2637
36	Varanasi	LGEIL, Pama Complex, DUW, Lahartara Road Shivdaspur, Manduadih, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-21-7, Ratanambada Street, Prajapati Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2407203 / 87
38	Warangal	LGEIL HOUSE NO. 1-9-589/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506011 (WARANGAL)	0870	2551453

Dealer name with Stamp Dealer address

IMEI No. Date of sale Serial no.

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

UNITED INDIA INSURANCE CO. LTD.
D.O.-VI, 5th floor Skylark Building, 60 Nehru Palace,
New Delhi-110019

TO

UNITED INDIA INSURANCE CO. LTD.

DATE...../...../.....

D.O.-VI, 5th Floor Skylark
Building,60 Nehru Palace,
New Delhi-110019

Dear Sir,

RE: Loss of mobile phone no.:

MAKEMODEL

This is to inform that my mobile phone has been lost due to theft on
.....at.....FIR/DD entry has been lodged
with Police Station. I am enclosing the Claim
Form cum Bill along with required documents for settlement of the claims.

Thanking you

Yours Sincerely,

Signature of the Insured

Name

CLAIM FORM CUM CLAIM BILL

To be filled in by the ultimate consumer

Name

Present Address

Tel. No.

Make & Model of the Handset

Invoice No. Date of Purchase

Dealer Name

Address

Tel. No.

IMEI No.

Date of Theft Time

Place of Theft

Details of Theft

FIR No./DD No. Date

Police Station

Amount Claimed

Block the SIM Card within 3 days YES NO

DATE

PLACE

SIGNATURE OF CUSTOMER

TERMS AND CONDITIONS:

POLICY COVERAGE

1. Theft coverage of LG GSM HANDSET for one year from the date of purchase/invoice only. No other loss covered.
2. Offer applicable on all purchases made from 1st April 2009 to 31st March 2010 under policy No. 040600/46/09/39/00000002. Dt: 01/04/09 to 31/03/2010
3. Only theft registered under section 379 IPC or theft reported under Daily Dairy with Police FIR is covered.
4. Reimbursement will be subject to following depreciation/ deduction on the invoice value from date of purchase:

Handset upto 3 months old	-10%
More than 3 months upto 6 months	-15%
More than 6 months upto 9 months	-25%
More than 9 months upto 12 months	-35%

CLAIM PROCESSING DOCUMENTS

In the event of handset loss, the buyer should follow the understated procedure:

- a) (i) Lodge FIR under Section 379 IPC or theft to be entered in Daily Dairy with the Police Station in whose jurisdiction the theft occurred within 24 hours of occurrence of the same.
- (ii) Block the SIM Card with your service provider within 3 days.
- (iii) Send information to the insurance company within 7 days of the loss.
- b) Documents required:
- (i) Original Invoice & Cash Memo.
- (ii) Original certified copy of DD/FIR u/s 379 by the police authority.
- (iii) Translation of vernacular documents in English/Hindi.
- (iv) Complete claim Form cum Bill and Discharge Voucher.

These documents should be sent to the Policy Issuing Office within 7 days of the loss by regd. post/courier. All document to be submitted in English/Hindi language. The company reserves the right to call for any other necessary document in addition to the documents listed above.

Subject to all the conditions being fulfilled, claim will be settled within 15 days of our receipt of the above documents.

Deduction of Rs. 350/- will be applicable towards accessories.

Note: In case the handset cost is more than Rs. 20,000/-, a survey is required. Contact nearest office of United India Insurance Co. Ltd. for survey.

For any future queries assistance related to the policy exclusion and claim settlement you may write to United India Insurance Co. Ltd., D.O.-VI, 5th Floor Skylark Building, 60 Nehru Palace, New Delhi -110019. Tel. no. 011-26439984, 26452631. Fax no: 011-26413031.



DISCHARGE VOUCHER

Received from United India Insurance Co. Ltd. under Policy No. in full and final discharge of our claim, the sum of (in words) Rs.

Signature of Insured /Customer
across revenue stamp

Affix Re.1 revenue stamp

Date:

Place:

SERVICE CENTER LIST

	SERVICE
 <small>*MTNL / BSNL **Prefix STD Code</small>	1800-180-9999* 39-01-0909**

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	McMohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	McKiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-535201	9346398838	McRavi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mc Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no:2, mahalakshmi road, Armoor - 503224	9392622038	McSrinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	McB.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	McSiva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17& 18 Banam Plaza, Munthavari Centec Chirala-525155	326000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	McGopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	McSahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	McShiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	DoorNo:238-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	McDiwaker
Andhra Pradesh	Guduvada	Kanakadurga-commanactions	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Guduvada	9394220688	McKumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	McSuman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	McSatyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazuragar/ Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.VA Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.E.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, # 12-2-825, S.G.M. Mall, Mehdiapatnam, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilukh Nagar Main Road, Hyderabad- 5000060	66109604	Mr.A.Venket nariyan reddy
Andhra Pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346449323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Anusya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circle, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamal Buildings, Begumpet, Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Chenoy Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagtial	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtial	9391535335	Mr.Hari
Andhra Pradesh	Jangaon	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mr. Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangalana Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Makarampura, Near Circus Grounds, Karimnagar	9391552223	Mr. Cheakradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wya Road, Khammam-507002	9396698866	Mr. Baskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	Mr. Niaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KLIPPAM-517425	9391862436	Mr. Sagar
Andhra Pradesh	Kurmool	R K LG CDMA	Shop no:26, 27, First floor, UCON Plaza, Kurmool-518001	220201	Mr. G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadapuram, Machilipatnam	9347741777	Mr. Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	Mr. Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	Mr. Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Mancherial-504208	9394552223	Mr. Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door no:1-3-77/5, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr. Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No -5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr. Venkateswar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr. Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet, Near S.B.I ATM Narasaraopet	224136	Mr. Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	McRajesh
Andhra Pradesh	Nellore	Tirumala Electronics	Shop No. 26, 1st Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore	3290339	McPratap
Andhra Pradesh	Nimal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	McMahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65, Shop no 1, 1 st floor, H.M.H.V Complex, Beside Bus Stand, Nizamabad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejasri Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	McSasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	McNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	McSiva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3, Gandhi Road, Opp Karur Vysya Bank, Produttur	9347251806	McRavi Kumar
Andhra Pradesh	Rajamundry	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Damai Pet Main Road, Rajahmundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syyedia complex, bustand road, Rayachoty	9346209881	McRaju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (LIP Stairs) Municipal Office Road, Railpet, Repalle-522265	9396222993	McSridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bunglow, Main Road, Sangareddy-502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	McSai
Andhra Pradesh	Shad Nagar	Sri Cana Electronics	Shop No : 2, Khaja Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddpet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, . OPP-CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103, (A.P)	9392511064	Mc Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp.Electrical Office, Ground Floor, Shop No.10 & 11, GT Road, Srikakulam	324577	McKiran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Srikalahasti 517644	9390044399	Mc Sahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mc: S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri Haripriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupati-517501	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46, Svs Temple Street, Labbipet, Vijayawada	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Saphagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	Mr.PVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarika Nagar, Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z.P Office, Railway Station Raod, Vizayanagaram.	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Comex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhawan, Sridevi Theatre Road, Hanamkonda, Warangal-506001	2552223	Mr.L.Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alpur, Zaheerabad.Pin-502220	316143	Mr.Abhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Panbazar, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	NLS Avenue, Rangirkhari, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printronic Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	Mr.Himansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	Mr.Kundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharapur, Bihar Sharif, Nalanda Dist. Bihar.	9334048037	Mr.Amit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-25, Hathwa Market, Chapra, Dist: Saran-841413 Bihar.	9334295605	McJyant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	McAbhinav Kumar Verma
Bihar	Gaya	Louls Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	McPankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	N:Kanhoulmaka.no.2, Kachisarai Road, Muzafarpur.	9304410745	McSanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowing Canal Road, Patna	9334027706	McMohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	McSanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	McMithlesh Kumar
Bihar	Patna	Synergy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	McVikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr:PCJHA, NH-31, Purnea-854326	9304166633	McAmit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	McAbhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Sarguja, Pin-497001	240427	McRishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, CE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mc Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mc Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mc Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9304401485	Mc Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9977217776	Mc Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhayee Services	SHOP NO 5, BELOW SBI STATE BANK OF INDIA, KAMPTEE LINE, RAJNANDGAON.	324200	Mc Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikai Cama Place, New Delhi-110066	65477740	Mc Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mc Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	32575507	Mr. Ravi Kant Gupta
Delhi	New Delhi	Comexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Anvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, GDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Fl, Corner Mritk, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05,CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA,	2736100	Mr.CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Da. No. A53 Opp to Hotel Manashanti Dadavaidya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadija
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar -364001	3296222	Mr. P D Jala/ Sandeep Patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr. Vasant Meparani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr. K.J.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj Patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradha", Park Colony, Motor House, Near axis Bank, PN.Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresh Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapir, Navsari-396445	324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahal Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp.New Fountain, N.oid R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Chhangela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr. Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road, Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dharmesh Patel
Gujarat	Surenranagar	Nihaal Computer Services	94 Old Housing Bord Opp Muni. Scool No.13, Surendranagar.	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mr. Avishek Suhassaria
Gujrat	Anand	Zainee Mobile	2nd Floor, Limbawala Complex, Nr: CPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Haryana	Ambala	Bee Ess Air Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr. Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kaja's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mr.Sukhveer Sairi
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mr.Bharat Bhusan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mr.Deepak
Haryana	Hissar	Pamami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mr.Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr.Mahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	McDavender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipli Road, Kurukshetra, Haryana-	9354165077	McVijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, Rewari/Road Narnaul	9355375351	McNaveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	McHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	McPankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	McGaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhota Ram Chowk, Rohtak-124001	247242	McM.Madaan
Haryana	Sisa	Sisa Communication	168, Huda Complex, Old Bus Stand, Sisa	329591	McRajindera
Haryana	Sonapat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonapat, Haryana-138001	3290889	McVipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mc Harsh/Mc. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	McDeepak
Himachal Pradesh	Mandi	V.M.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	McM Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	McRavi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	McRajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	McSandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	McVikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2436814	Mc.Dixit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Polowiew, srinagar	2459549	McWasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	McRakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Mr.Dewashish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr.Mahesh Sharma
Jharkhand	Dhanbad	Nimala Entreprises	Ground Floor, Muskan Complex, N-Subhash Chowk, Dhanbad.	9334027583	Mr.Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	Mr.Sanjay Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt. pugmill road, N:Kallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Prasad Electronics	N:Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	Mr.Rajo/ Saritha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	Mr.Abhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr.Piyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road, Ranchi.	3205400	Mr.Sanjeet, Mr.Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	Mr.Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	Mr.R.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 459\2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Mr.Vishwanath
Karnataka	Bangalore	Ascent Communication	No.113, St Johns Church road, Bangalore - 560005	32914856	Mr.Kumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRILAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11th Main, 4th Block Jayanagar, Bangalore-560010	32710202	Mr.Prasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	Mr.Rajo Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	Mr.Umri Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	Mr.Mohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	Mr.Krishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Bhadravati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	McNagabushan
Karnataka	Bhatkal	Vijay Communication	Hussain Complex Bunder road Bhatkal - 581320	300027	McVittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	McRavi Halhali
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mc.S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11 th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mc.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor, BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mc.Vardharaj
Karnataka	Chikmagalur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmagalur - 577101	9341013183	Mc.Prem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	Mc.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, Pj. Extension, Davangere-577002	325444	Mc.Sujay
Karnataka	Gokak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Gokak - 591307	9343441777	Mc.Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mc.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	9343566658	Mc.Vidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mc.Raghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	Mc.Mahendar
Karnataka	Hunsur	Sriam Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	Mc.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshwara Hospital, TB Road Kadur	9341033310	Mc.R.Ananda Murthy
Karnataka	Kanakapura	Sumakh Communications	Harshitha Complex, Budkere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mc.R.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Mc.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No.384, Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Mc.Nithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	Mc.D.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinor Road, Madikeri	9343837555	Mr.Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavama Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Mr.Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	Mr.Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	Mr.Narasimhu
Karnataka	Ranibenur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranibenur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theaters, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	321311	Mr. Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Chertalli	9388910703	Mr.Mahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	Mr.Manoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	Mr.Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.C.Road, Cochin-15	2359511	Mr.Jaimon Joseph
Kerala	Irinjialakkuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJIALAKKUDA - 680121	3291515	Mr.Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mr.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPEYIAPARA BHAWAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandeep
Kerala	Kannur	Sahar Communications	5B-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	Mr.Ajai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	Mr.Ratish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	Mr.Mr.Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollam-691001	2760647	Mr.Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Valfayvila Building, Near Marthoma Girls High School, Pulamon PO, Kottarakkara	3298191	Mr.Suresh
Kerala	Kottayam	Svm Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	Mr.Rajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikkode	2722222 / 3243745	Mr.Mukundan
Kerala	Kunnankulam	Y Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnankulam.	320009	Mr.Vijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr.Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA-690101	3293340	Mr.Biji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	Mr.Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	Mr.Khaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223132	Mr.M.V.Francis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Mr.Aneesh M A
Kerala	Thripurayar	Nice Mobiles	382J, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thripurayar	3240400	Mr.TPSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC25/326, N.P.Tower Gunvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	Mr.Santom Kalloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkeriel Complex, Bus stand Road, Valiyakavala, Vaikom	326616	Mr.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Japarakash Chowk, Kothi Bazac, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Aajja
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neersaj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shitu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, NiCentral Bank, Guna-473001	329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	Mr.Praadeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP. LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr. Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Akilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	I T Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gunanak Road, Katni	406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2250089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	Mr.Gaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	Mr.T C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar O/E, NEEEMUCH (M.P)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYIA, REWA ROAD	416455	Mr.Ajay Sukhamani
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Station, Freeganj, Ujjain	2515995 / 253999	Mr.Anurag Chhajlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOLUPATI, KARANJA-414001	2326267	Mr Aril Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-444601	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr. Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, 'TAPADIYA SUPAR' MARKET, NIRALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akardi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Depur Bus stand, Aga rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railtoil, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	Kachare Lane Islampur, Distt Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TellUs Associates	Shop No 16, 'G' Wing 1st Floor, Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Mr. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahamgaon Road, Kopergaon, Dist Ahmednagar	9373295009	Mr.Mahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no. 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	Mr.Mayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Panjabi lane, Borivali (W), Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hg. Society, Near Bandra Rly. Str., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chhatkoper (E), Mumbai - 400 077.	40111264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apna Bazar, Nehru Road, Malund (West), Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside forest office Nr. Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENUKA NAGAR, WADALA NAKA, DAWRKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	6514304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dakc	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr. Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kelkar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	Mr.Pawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr.Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Paramani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. G. S. Joshi Banglow, Opp. B.Ed Collage, Rajwada, Sangli. Tq. Miraj, Dist:- Sangli.	2327601 / 09372107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr. Mahesh Shirinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Mahalmal Talao, Edulji Road, Charai, Thane (W) 400602.	32130222	Mr. Paresb
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	Mr.Ornikar
Maharashtra	Kalyan	Sky Lark Associates	Shop:1, 'K' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr. Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAI, BHIWANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinyak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, PP Marg., Virar (West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Opticals, Soshalst Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Meghalaya	Shilong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazat Near gundicha mandir, Angul-759122	329207	Mr Tapas Sahu
Orissa	Balasore	Raghnath It Solutions	Azimabad, Proof Road, Balasore.-756001	329267	Mr.Sujit Kr Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr:Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291,Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Bisra Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Sandeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda-151005	2239500	Mr.Ashok Kakria
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr.Pawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	Mr.Makesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	Mr.Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	Mr.Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	Mr.Arun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	Mr.Rohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Monia chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurent 4X International, 583 L, Model Town, Ludhiana	3244190	Mr.Amit Shahi and mcvimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLIAT PIN NO - 152107	9316940003	Mr.Ramesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt. College, Malerkotla-148023	253899	Mr.Rohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and exise office Mandi Gobindgarh	326896	Mr.Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316173009	Mr.Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	Mr.Girish Garg
Punjab	Nawashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	Mr.Narender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr.Mr. Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	Mr.Navdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Corneet Office, Phagwara-144401	461321 / 9888005339	Mr.Mangalsh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	Mr.Johny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	Mr.Amit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Garg Laboutry	505648	Mr.Vaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO - 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Crain Market, Cinema Road Sirhind City-140406	500726	Mr.Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	Mr.Aziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarh-312001	325933	Mr.Abbhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	Mr.Anup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	Mr.Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatnagan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	Mr.Dhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	Mr.Abbhishek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhaliyaChowaha Jodhpur-342003	3291214	Mr.Pratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	Mr.Shatrunghn
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Paliwal market, Gumanpura, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	Mr.Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	McVjender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	Mr.Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Mr.Cajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	Mr.Abhishek
Rajasthan	Shriganganagar	Telecare Servecies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329320	Mr.Saurav Chakravarthy
Rajasthan	Udaipur	Shree Telelink	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram -627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231395	Mr.Mr.P.Gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arni - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUNKOTTAI-626101	222552	Mr. R. Boominathan
Tamilnadu	Attur	V.R. Net	VRNet, Dr.Arumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthiyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	MrNicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	Mr.Palini
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	Mr.Kartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHY'S, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.PStreet, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road (West), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mc.Uthaman
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE- 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	Mc.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mc.Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mc. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kacherry medu, gobichettipalam	225598	Mc.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mc.Shanmugam
Tamilnadu	Kalkkuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mc. Munugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), PSK. Street, Kancheepuram-631 501	9345636900	Mc.Damodaran
Tamilnadu	Karaikal	Shree Harini Cellular Service	OPP TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAikal-609602	320544	Mc. K. Selvaganapathy
Tamilnadu	Karaikudi	Sitiyes Electronics	10 A / 3, Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mc. S. Veerapandiyian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	Mc.Jyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBakonam- 612001,	2401123 / 3290303	Mc. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thhallakulam, Madurai-625002	4360995	Mr. Gana
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road. Namakkal - 637001	329304	Mr. R. Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO-302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	Mr.Anul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkan Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No.21, 3rd CROSS STREET, Annanagar, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	Mr.Ku.G.Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	Mr.M.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	McBasker/ McKarthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sier Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	McYasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPP.TO.WATER TANK, SIVAKASI-626123	223283	McB.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	McPalani/ McRanjith
Tamilnadu	Tenkasi	Airtone	1 / 17, KMSS complex, west masi street, Tenkasi. 627811	227980	McMNagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007 South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	McZiauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	McLakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	McMahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	McSekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801 / 3290339	McErkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	McSunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	McU.B. Bala Murali
Tamilnadu	Tiruvannur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvannur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600529	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	McKrishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	McKennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thuluva vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr Sentamarai Kannan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, Cl. Road, Vaniyambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pillar Koil, Gandhinagar, Vellore - 632006	2240800	Mr.Ganaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruj Road, VILLUPURAM	222936	Mr.Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	420160	Mr Karrupuswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G. Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	Mr.Ankur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	T7, Vikram Arcade, Railway Road, Aligarh - 202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mr. Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Moz, JPNagar AMROHA-244221	9319075289	Mr.Arun bhargav
Uttar Pradesh	Azamgarh	Rajasthan	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Tribhok Nath Jalaan
Uttar Pradesh	Badun	Customer Care Services	Plaza Market 1st Floor Near Chantaghar sixroad Badun.	9319697938	Mr. Nazim
Uttar Pradesh	Bala	Sankatha Communications	Mall Godam road D.S. Npandey Clinic Chowk Bala-277001. UP	9307637850	Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kumar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mr Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotel, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	MrKislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	MrPratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MIN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AM, Bulandshahr	9358011688	Mr Taurik Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9335226799	Mc.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Mc.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mc.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhaganj, Faizabad	395744	Mc.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AWAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mc.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAJURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mc.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mc.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (Cdi)	C-83, Rajnagar District Center (RDC), Ghaziabad	3292011	Mc.Anil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	Mc.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bungalow, Gorakhpur - 273001	9336410222	Mc. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpuri, Gorakhpur	3250395	Mc.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Ghaziabad - 388001	9219659957	Mc.Rajkumar Kanooja
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHIRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mc.Gaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mc.Suneeet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Mc.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mc.Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mc.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Divot Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr.Sunil Divot
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr.Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	McVinay Agawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319666000	Mr.Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GUJRDARSHAN BUILDING, KACHEHRI ROAD, LAKHIMPUR KHERI, LAKHIMPUR -262701	9335038258	Mr.Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr.Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	Mr.Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	McVinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr.Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (I.P)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Atithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	Mr.Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Coicap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr.Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	Mr.Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP- LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	McNitin
Uttar Pradesh	Moradabad	Bharya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	McVivek Kumar Singh
Uttar Pradesh	Mugalasari	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	McVibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaffarnagar-251001	9412210142	Mr Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt, Muzaffarnagar-251001	3294447	McManohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpara Main Road)	4312715	McKailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mc M A Jillani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	McRajesh Aggarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raebareilly	9336005741	McVikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	McRajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	McPankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	McRajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Muncpal Market, Sitapur	9936819899	McSanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	McSachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	McVishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabi, Varanasi-221001	9335407000	McSujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathiyatra Crossing, Varansi Pin 221010	9335418998	McRakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mc S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	McVinod
Uttaranchal	Haldwani	Faideal Agencies	1st Floor, Naimital Road, Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	McAjay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mc Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	935900000	McAjay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar Dehradun Road, Roorkee-247667.	326510	Mc Manish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Naruddin Road, Assansol-713301	2207719	Mr.Syed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	Mr.Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 C.T Road, East End, Burdwan -713103.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane .Benachity , Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digitronix	Holding no -25, PO Khanjanachak, PS Durgachak, Haldia, Dist- East Medinipur-721602	277277 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhutnath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudiram Ram Market, Kharagpur Shop No-53. Pin -721305	324056	Mr.Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	32943176	Mr.Anun Surana
West Bengal	Kolkata	Friends Communication	32(B) Barasat Road, N/L 15 no railgate, PO-nonachandanpukur, PS- Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	25921263	Mr.Anup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jakson Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Hardutrai Chamaria Road, Howrah- 711001	32950383	Mr.PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdala Place, Kolkata - 700019	24401923	Mr.Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, Krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR WOMENS COLLEGE ROAD, MALDA-752101	9434345486	Mr.UTPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	VII- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI YIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr .Amar Nath Malick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) ,Bashirhat Dist, North 24pgs, Pin-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIA - 723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, siliguri-734001	6450515	Mr.Snojoy Dutta

	SERVICE
	1800-180-9999*
<small>**MTNL / BSNL **Prefix STD Code</small>	39-01-0909**

