



## Components




### 01. Equil Jot

- a. Pen
- b. Receiver




### 02. Receiver – Front

- c. Power LED
- d. Bluetooth LED
- e. Receiver clip
- f. Receiver power button




### 03. Receiver – Back

- g. Bluetooth switch button  
(to connect to iOS devices or Mac/PC)
- h. Receiver reset button




### 04. Pen

- i. Pen tip
- j. Pen power button
- k. LED



### 05. Cradle

- l. Pen lid ejector
- m. Pen lid



### 06. Cradle – Inside (with receiver removed)

- n. Pen refill




### 07. Cradle – Side

- o. Charging socket
- p. Pen lead ejector



### 08. Charging Cable



### 09. Manual



### 10. Warranty Card

## Caution

### 1. Pen Pressure Re-calibration

When the pen is still writing on the App screen even if the pen is off from the paper, it might be caused by the environments such as temperatures. In this case, please follow the below direction. Press and hold the pen button for about 6 seconds until the pen LED blinks 3 times, then release the button.

### 2. Below are environments that can cause malfunctions and you should be avoid:

- a. Where there is strong metallic sound (e.g. coins)
- b. Directly underneath air-conditioners/heaters
- c. Directly underneath certain fluorescent lights
- d. Immediately after the device undergoes a significant temperature change
- e. Where humidity is high (e.g. bathroom)

is not in use.


- 3. Built-in batteries might be totally discharged upon purchase – the cradle & the pen, as a set, needs to be charged when it's completely charged within 2 hours; up to 8-hour working time)

## Bluetooth Connection <Pairing>

### 1. Turning on the Receiver


Make sure to fully charge the Equil Jot before use [How to charge: place both the Pen and the Receiver into the Cradle and connect the Charging socket (07-o) with the Charging cable (08)].

The Power LED (02-c) automatically turns on when the Receiver is removed from the cradle and the Bluetooth LED (02-d) is slowly blinking. You can also use the Receiver power button (02-f) to turn the receiver on.

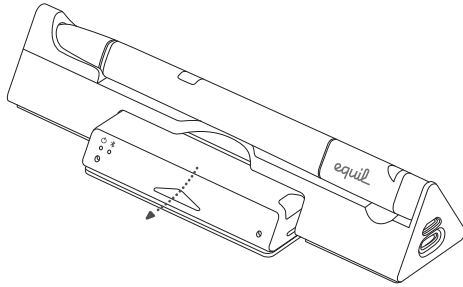

### 2. Bluetooth Pairing

Click the Receiver power button (02-f) to turn off the power. Make sure the power is off, keep holding the Receiver power button (02-f), and wait until the Bluetooth LED (02-d) is blinking fast (approx. 5 times /sec.). Then go to the device that you wish to pair with to find 'Setting' → 'Bluetooth' → 'Equil-\*\*\*\*\*' to connect. When pairing is completed, the Bluetooth LED (02-d) starts to blink slowly (approx. once ever 2 sec.) again.



### 3. Ready to Use

If pairing is completed, the Bluetooth LED (02-d) should be always on while the designated application ( "app" ) is running.


#### Notice!

- ※ Once paired, Equil Jot and your device are automatically connected when the Receiver power button (02-f) is on. When there are 2 or more devices within the range of Bluetooth use, however, the Bluetooth setting of the previously used one should be turned off, and Steps 1, 2, and 3 of Bluetooth connection repeated.
- ※ Ensuring proper position of the Bluetooth Switch Button (03-g)  
Make sure the button is switched towards iOS side when using Bluetooth on iPhone/iPad/iPod and Mac/PC side when using Macbooks or PCs.
- ※ When the pen tip is pressured more than 1 minute, the pen power will be down.
- ※ When batteries are low, green LED on receiver and LED on pen will continuously be blinking.


## How to Use

When you wish to pair your device through Bluetooth for the first time, refer to the page on the left to connect. Once paired, the Equil Jot and your device are automatically connected as soon as the Receiver is on (only if you use 1 device. If 2 or more, refer to the 'Notice!')


### 1. Place the Receiver on the top of the paper.




<good example>



<bad example>



(not available to use within a 2-cm radius)



2. Go to the app store to download the designated app  
(The app 'Equil' is available on the app store).


At the moment the app 'Ultra Note' and 'Sketch' are available and there are more to come.  
If you wish to use the app on Macbook / MacPro / Windows, go to [www.myequil.com](http://www.myequil.com) to download the relevant apps.

3. Make sure the Bluetooth LED (02-d) on the Receiver is on after running the app.
4. Make sure the LED (04-k) is blinking (white light) and the Pen tip (04-i) makes little ultrasonic sound whenever you press the Pen power button (04-j). If you cannot hear the sound, you should check the charging status of the Equil Jot.
5. Have Fun !


## Key Feature

### 1. Gesture Functions


Remove the pen from the paper and hover above the paper to perform certain actions, including:



a. Double click the pen button



b. Draw a circle counter clockwise in the air while keep holding the button



c. Draw a circle clockwise in the air while keep holding the button

※ Different apps features different gesture functions – check out our app tutorial for more details.  
(App → Setting → Tutorial)

### 2. Other functions

Cloud function, photoshop convertible function, and many other functions to come – check out our app tutorial. (App → Setting → Tutorial)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technical for help.
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technical for help.

**WARNING:** *This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.*

This device complies with Part 15 of the FCC's Rules. Operation is subject to the following two Conditions:

1. This device may not cause harmful interference, and
2. This device must accept ant interference received, including interference that may cause undesirable operation.

Hereby, **PNF Co.,Ltd.** declares that this **IPBT-200** is in compliance with the essential requirements and other relevant provisions of directive 1999/5/EC.

**CAUTION : RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.**