

## Pairing

### ■ Pairing


To use Ear Buds first time, you must pairing Ear Bud with mobile phone or player. Once your Ear Buds is paired with other devices, they will remain paired and automatically recognize each other.

#### 【First time to use】

1. Turn on Bluetooth function of your mobile phone.
2. Long press Button of Master(L) for power on.
3. Select "NUARL NT01B" in discovered device list of the phone.

#### 【Re-pairing or Pairing with second mobile phone】


1. Turn on Bluetooth function of your mobile phone.
2. Press Button of Master(L) for 7 seconds, orange and white LED will quickly flash.
3. Select "NUARL NT01B" in discovered device list of the phone.

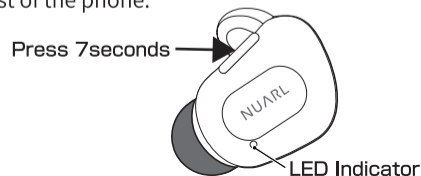

## Charging Case

### ■ Charge Internal Battery


Insert USB type A connector of USB Charge Cable to USB AC charger or USB port of PC, and insert Micro USB connector to USB port of Charging Case.



Battery Indicator	Remaining
☀ ● ● ●	1~25%
○ ☀ ● ●	25~50%
○ ○ ☀ ●	50~75%
○ ○ ○ ☀	75~100%

### ■ Charge EarBuds

Put the Ear Buds into Charging case and close the lid. While charging, the Orange LED light constantly. When charging is completed, the LED will turn off.



### ■ Auto Power ON/OFF

Put the Ear Buds into Charging Case and Close the lid, Ear Buds power OFF automatically.

When open the lid then Ear buds power ON automatically.

※When Case battery is low, this function does not work.

## Button Operation

		Master(L)	Slave(R)
Power	ON	Long press L and R	
	OFF	Long press L or R	
Music	Play	1 Click	-
	Pause	1 Click	-
	Next Track	2Click	-
	Previous Track	3Click	-
Phone	Answer Call	1 Click	-
	Hang Up	1 Click	-
	Reject Call	Long press	-
Volume	Volume Up	-	2Click
	Volume Down	-	1 Click
Pairing	Pairing Mode	Press 7Seconds from Power OFF	-
L/R Paring	L/R Paring	2Click	2Click
Voice Command	Start	Press 1Seconds	-
Slave Battery Check	Check	-	Press 1Second

## Meaning of LED

	Master(L)	Slave(R)
Power ON	White 1 Second	
Power OFF	Orange 1Second	
Slave Battery	-	Over 60% : Orange 3times 30~60%: Orange 2times Under 30% : Orange 1time
No connection	White 2times each 5Seconds	
Connected	White 1time each 7Seconds	
Calling	White 2times each 3Seconds	White 1time each 7Seconds
Incaoming Call	White 2times each 3Seconds	White 1time each 7Seconds
Talking	White 1time each 7Seconds	White 1time each 7Seconds
Pairing	Flashing White and Orange	White 1time each 7Seconds

## Frequently Asked Questions

Q) I can only hear from the left side during a phone call.

A) During a phone call, only the left side will be active.

Q) The bluetooth connection has dropped.

A) Please delete 「NUARL NT01」 from your bluetooth menu and pairing with your device again.

A) Please use the left earbud during pairing.

Q) The pairing between L and R earbud has dropped.

A) Switch off both earbuds and switch on them again.

A) Please try to do L/R pairing.

Q) The sensitivity of the microphone is bad.

A) Please ensure your ear loop is not covering the microphone.

Q) When I place the earbud in the case, it won't turn off itself.

When I get the earbud out from the case it won't turn on.

A) While the case's power is low, the automatic on off function will not be active. Please turn on/off it manually.

Q) The case has run out of charges.

A) The case will discharge itself, please recharge the case regularly.


Q) I want to know about warranty and repair in outside of Japan.

A) Please contact your retail shop.


## Specification

Product Specification	
Driver	Dynamic type $\phi$ 6mm
Frequency Response	20~20,000Hz
Microphone	Omni-direction /CVC Noise Canceling
Bluetooth Specification	Version5.0/Class2/Multi-Pairing(8)
BluetoothProfile	A2DP, HFP, HSP, AVRCP
Bluetooth Codec	AAC,SBC
Battery	Earbuds:DC3.7V/60mAh Li-Po Battery Charger Case: DC3.7V/500mAh LiPo Battery
Continuous Play time (Max)	5 hour
Continuous Talk time (Max)	6 hour
Charging Time (Min)	1.5hour
Operation Temperature	5~50°C
Waterproof Level	IPX4
Accessories	Earpieces (Fitting Type): L/M/S, Earpieces (Plugin Type): L/M/S, Ear-loop: L/S, Charger Case, Charging USB cable, Pouch, User's guide

## 各部位名稱

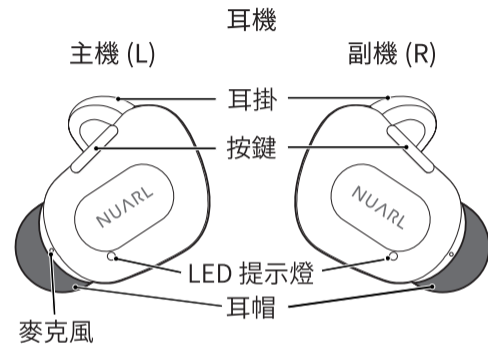

※請選用自己佩戴舒適的耳帽，耳掛來裝在耳機上使用




密合型耳帽 (半透明)



深入型耳帽 (黑色)

## 充電盒

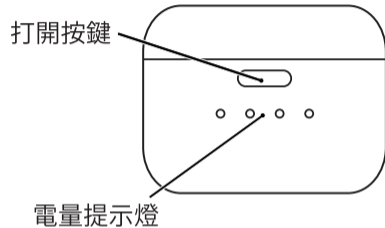

### 附屬



## USB充電線



## 使用前的準備

### ■充電

USB 充電線的 USB 連接器插入 PC 機 USB 接口或 USB 充電器，微型 USB 接插入充電盒的 USB 充電口。  
耳機放入充電盒併蓋上蓋子。  
充電時，橙色 LED 燈點燈。充電完成後，LED 會熄滅。



### ■電源 ON/OFF

耳機電源打開的狀態下，裝上耳機並關閉蓋子，耳機電源就關閉了。  
另外，打開充電盒蓋，耳機電源自動打開。

※時電量低，這個功能不工作。

## 耳機配對

### ■ 耳機配對


初次使用耳機時，需要與手機進行配對。  
一旦配對成功之後，以後只需要電源打開，耳機就會自動與手機連接。

#### 【耳機初次使用時】

1. 打開手機的設置，並把藍牙功能打開
2. 長按主機 (L) 的按鍵電源打開，此時 LED 燈會橙白色交替閃燈
3. 手機的藍牙自動搜索並出現「NUARL NT01B」
4. 選擇「NUARL NT01B」，手機與耳機連接完成

#### 【再次配對連接 / 與第二台手機的配對連接】



1. 打開手機的設置，並把藍牙功能打開
2. 耳機在關機的狀態下，長按主機 (L) 的按鍵 7 秒，LED 燈變成橙白色交替閃燈
3. 手機的藍牙自動搜索並出現「NUARL NT01B」
4. 選擇「NUARL NT01B」，手機與耳機連接完成



## 充電盒的功能

### ■ 充電

USB 充電線的 USB 連接器插入 PC 機 USB 接口或 USB 充電器，微型 USB 接插入充電盒的 USB 充電口。



電量提示燈	電池余量
☀ ● ● ●	1~25%
○ ☀ ● ●	25~50%
○ ○ ☀ ●	50~75%
○ ○ ○ ☀	75~100%

### ■ 耳機充電

耳機放入充電盒併蓋上蓋子。  
充電時，橙色 LED 燈點燈。充電完成後，LED 會熄滅。



LED 提示燈  
( 橙色 : 充電中 )

### ■ 自動 ON/OFF

耳機電源打開的狀態下，裝上耳機並關閉蓋子，耳機電源就關閉了。  
另外，打開充電盒蓋，耳機電源自動打開。

※時電量低，這個功能不工作。

## 操作方法

		母機(L)	子機(R)
電源	電源ON	L和R長按	
	電源OFF	L或R長按	
音樂	播放	單擊	-
	暫停	單擊	-
	下一曲	雙擊	-
	上一曲	三擊	-
電話	接聽電話	有時來電單擊	-
	通話終了	通話中單擊	-
	來電拒聽	有時來電長按	-
音量	音量加	-	雙擊
	音量減	-	單擊
耳機配對	配對	耳機在關機的狀態下長按7秒	-
L/R耳機配對	L/R配對	雙擊	雙擊
語音命令(Siri)	起動	長按1秒, 放手	-
子機電池余量	表示	-	長按1秒, 放手

## LED 表示

		母機(L)	子機(R)
電源ON		白色 1 秒亮燈	
電源OFF		橙色 1 秒亮燈	
子機電池余量	-		60%以上: 橙色閃3次 30~60%: 橙色閃2次 30%以下: 橙色閃1次
未連接待機		白色每5秒閃二次	
接續中		白色每7秒閃一次	
電話撥號		白色每3秒閃二次	白色每7秒閃一次
接聽電話		白色每3秒閃二次	白色每7秒閃一次
通話中		白色每7秒閃一次	白色每7秒閃一次
耳機配對		白橙交替閃	白色每7秒閃一次

## 常問問題

Q)和播放設備的連接中斷了。

A)在播放設備的藍芽選單中刪除本機器,並重新進行配對。

A)重新配對時,請使用母機(左側)進行配對。

Q)左右兩邊的耳機沒有連接在一起。

A)關閉左右兩邊的耳機,再重新啟動耳機。

A)重新配對左右兩邊的耳機。

Q)話筒的靈敏度不好。

A)調整耳環的位置確保沒有擋住話筒的收音孔。

Q)把耳機放入收納盒時沒有自動切斷電源/從收納盒取出時沒有自動連接播放設備。

A)收納盒的電量不足時,自動關閉。自動連接功能將不能正常運作。請手動開啟動及關閉耳機。

Q)收納盒的電力在沒有使用的情況沒電了。

A)收納盒會自然放電,請定期進行充電確保耳機正常運作。

Q)想知道有關日本國外的保證及維修等售後服務詳情。

A)請聯繫你購買耳機的零售商。

## 規格

產品規格	
喇叭	動圈式φ6mm (HDSS採用)
頻率回應	20~20,000Hz
麥克風	全方向/搭載CVC降噪
藍牙功能	Version5.0/Class2/Multi Pairing(8)対応
支持協議	A2DP, HFP, HSP, AVRCP
支持解碼	AAC,SBC
電源	本体:DC3.7V/60mAh 鋰離子聚合物電池 充電盒 DC3.7V/500mAh 鋰離子聚合物電池
連續播放時間 (最長)	約5小時
連續通話時間 (最長)	約6小時
充電時間 (最長)	約1.5小時
使用溫度範圍	5~50°C
耐水性能	相當IPX4
飾品	耳帽(密合型): L/M/S, 耳帽(深入型): L/M/S, 耳掛: L/S 充電盒, USB充電線, 便攜軟包, 使用說明書