

100mm

135mm



User Manual



ANC BT8 ANC Bluetooth Headphone

Product description

This headphone adopts unique ergonomic design to optimize mechanical pressure and to provide long-term wearing comfort. Advanced active noise cancelling technology has provided high-fidelity sound quality with outstanding bass response and clean clear highs. It gives you a enjoyable and outstanding sound quality for your general listening pleasure in different places .


Package Contents

BT8 headphone / 1
Thank you card / 1
Manual / 1
USB cable / 1
AUX cable / 1


Parameter

Wireless connections: Bluetooth 4.1 class2
Sensitivity: 110dB
Unit diameter: 40mm
Frequency response: 20Hz-20kHz
Product Impedance: 16 Ohm
Distortion: <1% at 1000Hz
battery capacity: 420mAh
Standby time: ANC on:15hrs , ANC off:22hrs , AUX connect:35hrs
A N C: 15dB 200Hz
Transmission distance: >10Meter

Features

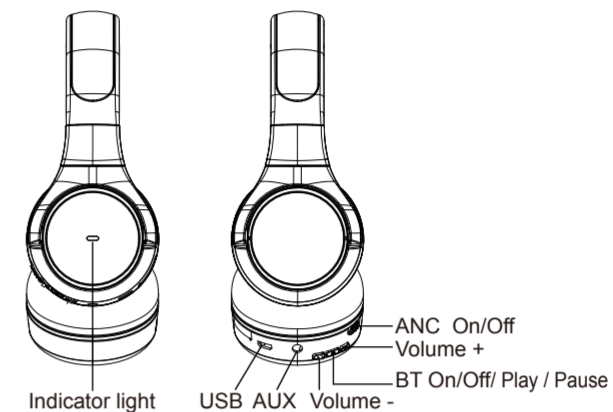

AUX/USB Connection

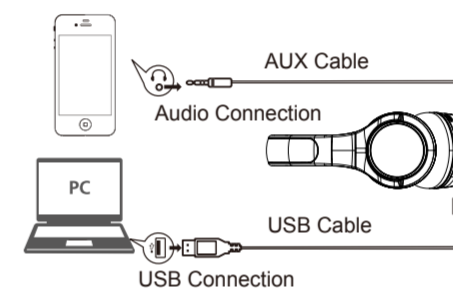

Bluetooth Connection

Bluetooth connection

1. Long press the button "BT" for 2 seconds to enter bluetooth mode.
2. Please turn on your bluetooth on your device and search "BT8 ANC" to connect to the headphone. You can hear the beep if connected successfully.

Line-in Connection

1. Insert the audio line into your device, you can enjoy music now. No matter you turn on/off the BT or ANC on the headphones.
2. ANC can work for Line-in mode.

ANC function

1. After bluetooth connection is finished, turn on/off the ANC by pushing ANC button. The headphone is in ANC mode.
2. You can feel ANC effect when playing music.

Battery Precaution

The device can be powered by a build-in rechargeable lithium battery. Please charge the battery for at least 2 hours before your use it for the first time.

- The battery can only be charged under the supervision of adults.
- The battery can only be charged by the supplied cable. Improper charging may damage the battery or the device.
- Please do not attempt to open the rechargeable battery or battery pack. There are no serviceable parts inside.
- Keep the battery out of reach from children. If swallowed, please consult physician immediately.
- Do not dispose the battery in a fire as it may cause explosion.
- Battery may explode if damaged. Please dispose it according to local regulation.

Function/Operation Instruction

| Button | Operation | State/Mode | Function /Change state | LED light |
|------------|-------------------------|-------------------------------------|--|--|
| | Charging | Power off | Charging | Red |
| | Full charge | Power off | Full charge | Blue |
| | Low battery | BT mode | Low Power Alarm | Red light flashes every 60 seconds Low battery "beep" |
| ANC button | Up | | ANC On | Green |
| | Down | | ANC Off | Green light OFF |
| BT button | Long Press 2 seconds | Power off | Power on/ BT matching mode | Blue/Red light flashes alternately |
| BT button | Long Press 2 seconds | Power off/No paired device | Power on/ BT not connected | Blue/Red light flashes alternately |
| BT button | Long Press 2 seconds | Power off/Save the connected device | Power on/ BT connected | Blue light flashes every 5 seconds |
| BT button | Long Press 5 seconds | Power on | Power off | Red light is on for 1 second |
| BT button | Short Press | Listening to music | Play | N/A |
| BT button | Short Press | Listening to music | Pause | N/A |
| + | Short Press | Listening to music | Volume + | N/A |
| | Long Press | Listening to music | Next song | N/A |
| - | Short Press | Listening to music | Volume - | N/A |
| | Long Press | Listening to music | Previous song | N/A |
| BT button | CLICK | The phone rings | Answer the phone call | N/A |
| BT button | Double-click | The phone rings | Refuse the phone call | N/A |
| BT button | CLICK | On the phone | Hang up | N/A |
| BT button | Double-click | On the phone | Switch between phone speaker and headphone | N/A |
| BT button | Long Press for 1 second | On the phone | Call Hold | N/A |
| BT button | Long Press for 1 second | On the phone | Cancel Call Hold | N/A |

| Button | Operation | State/Mode | Function /Change state | LED light |
|--------|--|---|---------------------------------------|--|
| + | Long Press | Phone Call | Volume + | N/A |
| | Short Press | Phone Call | Volume + | N/A |
| - | Long Press | Phone Call | Volume - | N/A |
| | Short Press | Phone Call | Volume - | N/A |
| | Insert the 3.5mm audio cable into the headphone | Bluetooth ON | Bluetooth OFF/Enter line-in mode | Red light is ON for 1 second |
| | NAME: BT8 ANC Enter Matching Mode | Power on/ Connecting | Matching Mode | Blue/Red light flash alternately |
| | Power on Automatically connects to the paired devices | Synchronous cell phone volume adjusting | BT is off automatically when charging | |
| | Matching for five minutes / Not connected | Synchronous cell phone battery display | Headphone is off automatically | Low Power Alarm Voltage: 3.8 V Automatic Shutdown Voltage: 3V |

Product care

This device is designed to be light, compact and durable. As an electronic device it must be treated carefully. Putting unnecessary pressure on it or striking the device against other objects may cause damage. To avoid damage to your device, please

- Do not drop, crush, bend or apply excessive force to the device.
- Do not expose your device to moisture, extreme or prolonged heat, cold, humidity, or other adverse conditions. Avoid storing it in damp, humid or wet places, as it is not waterproof.
- Clean the unit with a soft cloth or damp chamois leather. Never use solvents.
- The Unit can only be opened by qualified personnel.
- This device contains magnets. Keep magnetic field sensitive products such as credit cards and video screen away from this device to avoid damage or malfunction.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ▶ -Reorient or relocate the receiving antenna.
- ▶ -Increase the separation between the equipment and receiver.
- ▶ -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ▶ -Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.