



# MP BT-200 Lightweight Bluetooth® Over-the-Ear Headphones



P/N 33397

## User's Manual

# CONTENTS

SAFETY WARNINGS AND GUIDELINES.....	3
FEATURES .....	4
CUSTOMER SERVICE.....	5
PACKAGE CONTENTS.....	5
PRODUCT OVERVIEW.....	6
OPERATION.....	9
Power.....	9
Charging.....	10
Pairing and Connecting .....	10
Volume Control.....	11
Audio Playback.....	12
Phone Calls.....	12
SPECIFICATIONS.....	14
TECHNICAL SUPPORT.....	<b>Error! Bookmark not defined.</b>
REGULATORY COMPLIANCE.....	15
Notice for FCC.....	15
Radio Notice for FCC.....	16

## **SAFETY WARNINGS AND GUIDELINES**

Please read this entire manual before using this device, paying extra attention to these safety warnings and guidelines. Please keep this manual in a safe place for future reference.

- This device is intended for indoor use only.
- Do not expose this device to water or moisture of any kind. Do not place drinks or other containers with moisture on or near the device. If moisture does get in or on the device, immediately unplug it from the power outlet and allow it to fully dry before reapplying power.
- Charge the battery before first use and at least once every three months.
- Do not allow the battery to fully drain. Charge the battery as soon as the low battery indicator appears. Draining the battery can damage its ability to hold a full charge.
- Clean using a soft, dry cloth only. Do not use chemical cleaners, solvents, or detergents. For stubborn deposits, moisten the cloth with warm water.
- This device has no user serviceable parts. Do not attempt to open, service, or modify this device.

- This device contains a Lithium-ion battery. Dispose of this device only in accordance with local, state, or federal regulations for electronic waste.
- To prevent potential hearing damage, do not listen to these headphones at high volume levels for extended periods of time.
- Stop using these headphones immediately if you hear a ringing in your ears.

## FEATURES

- 20Hz ~ 20kHz frequency response
- 102dB  $\pm$ 3dB @1kHz sensitivity
- Up to 25 hours music/talk time
- 32 ohms nominal impedance
- Uses the Qualcomm® CSR8635 Bluetooth® chipset
- Complies with the Bluetooth 4.1 specification
- Features the Headset Profile (HSP), Hands-Free Profile (HFP), Advanced Audio Distribution Profile (A2DP), Audio/Video Remote Control Profile (AVRCP), and Device ID Profile (DIP) Bluetooth profiles

## CUSTOMER SERVICE


The Monoprice Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problem with your order, please give us an opportunity to make it right. You can contact a Monoprice Customer Service representative through the Live Chat link on our website **[www.monoprice.com](http://www.monoprice.com)** during normal business hours (Mon-Fri: 5am-7pm PT, Sat-Sun: 9am-6pm PT) or via email at **[support@monoprice.com](mailto:support@monoprice.com)**

## PACKAGE CONTENTS

Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact Monoprice Customer Service for a replacement.

- 1x Bluetooth® Over-the-Ear Headphones
- 1x Micro USB Charging Cable
- 1x 3.5mm Stereo Audio Cable
- 1x User's Manual

# PRODUCT OVERVIEW

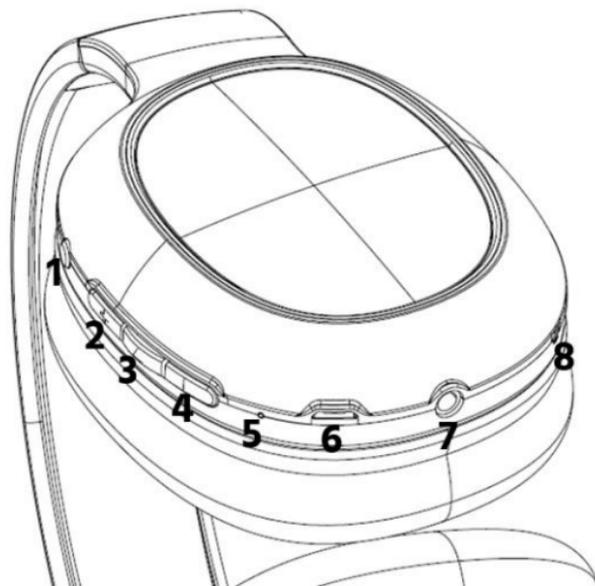

## 1. Power/Pairing Button:

- Press and hold the button for 3 seconds to power the headphone on or off.
- With the headphones powered off, press and hold the button for at least 5 seconds to power the headphones on and enter pairing mode.

## 2. **Volume Up Button:**

- Momentarily press the button to increase the volume level.
- Press and hold the button to advance to the beginning of the next track.

## 3. **Multifunction Button:**

- With the headphones powered on, press the button to play or pause audio playback.
- Momentarily press the button when an incoming call is received to answer the call.
- Momentarily press the button while a call is in progress to terminate the call.
- When an incoming call is detected, press and hold the button for 1 second to refuse the call.
- While a call is in progress, press and hold the button for 1 second to switch between using the phone and headphones.
- If a call is in progress and a second incoming call is detected, double press the button to put the first call on hold and answer the second call.
- If a call is in progress and a second incoming call is detected, press and hold the button for 1 second to refuse the second call.

- If two calls are in progress, double press the button to switch between the calls.

#### 4. **Volume Down Button:**

- Momentarily press the button to decrease the volume level.
- Press and hold the button to go back to the beginning of the previous track.

#### 5. **LED Indicator:**

- The LED blinks red once each 5 seconds when the battery is low and needs charging. Charge the battery as soon as this indication occurs.
- The LED illuminates red while charging is in progress.
- The LED illuminates blue when charging is complete.
- The LED illuminates blinks blue once each 5 seconds when connected to a device.
- The LED blinks blue rapidly when in pairing mode.
- The LED blinks blue once each 1 second while a call is in progress.
- The LED blinks red and blue alternately two times when the pairing list is cleared.

- The LED briefly illuminates red then turn off when the headphones are turned off.
6. **Micro USB Charging Port:**
    - Use the included USB charging cable to connect the headphones to a USB power source (not included) for charging.
  7. **Auxiliary Audio Input:**
    - Use the included 3.5mm audio cable to physically connect the headphones to an audio source (e.g., headphone output of a smartphone).
  8. **Microphone:**
    - The microphone allows you to speak during phone calls.

## OPERATION

### Power

- With the headphones powered off, press and hold the **Power/Pairing (1)** button for 3 seconds to turn them on. The **LED Indicator (5)** will illuminate blue for 2 seconds.
- With the headphones powered on, press and hold the **Power/Pairing (1)** button for 3 seconds to turn them off. The **LED Indicator (5)** will briefly illuminate red.

- If the headphones are powered on and no connection has been made for 2 minutes, the headphones will automatically turn off. The **LED Indicator (5)** will briefly illuminate red and the headphones will say **power off**.

## Charging

- If the headphones are powered on and the battery charge level is low, the **LED Indicator (5)** will blink red once every 5 seconds to indicate the low battery state. Immediately connect to a USB power source to charge the headphones.
- While charging is in progress, the **LED Indicator (5)** will illuminate red.
- When charging is complete, the **LED Indicator (5)** will illuminate blue.

## Pairing and Connecting

- With the headphones powered off, press and hold the **Power/Pairing (1)** button for 5 seconds to turn them on and enter pairing mode. The **LED Indicator (5)** will blink blue rapidly, indicating it is in normal pairing mode.

- While the headphones are in pairing mode, open your phone's Bluetooth® settings, then search for and select the **BT-200** entry. If prompted for a pass code, enter **0000** (four zeros).
- When the headphones are connected with a device, simultaneously press and hold the **Volume Up (2)** and **Volume Down (4)** buttons for 3 seconds to disconnect the device and enter pairing mode.
- When the headphones are powered on and the last device they were paired with is available, they will automatically reconnect with the device.
- When the headphones are powered on and the last device they were paired with is not available, the headphones will automatically enter pairing mode.
- If the headphones are powered on and no device is connected, press and hold the **Power/Pairing (1)** and **Volume Up (2)** buttons to clear the pairing list and enter pairing mode.

## Volume Control

- Momentarily press the **Volume Up (2)** button to increase the volume level. If the volume is already at the maximum level, the headphones will beep each time the button is pressed.

- Momentarily press the **Volume Down (4)** button decrease the volume level.

## Audio Playback

- Momentarily press the **Multifunction (3)** button to play or pause audio.
- During audio playback, press and hold the **Volume Up (2)** button for 1 second to skip ahead to the next track.
- During audio playback, press and hold the **Volume Down (4)** button for 1 second to skip back to the previous track.

## Phone Calls

- When an incoming call is detected the headphones will play a ringtone.
- When an incoming call is detected, momentarily press the **Multifunction (3)** button to answer the call. The **LED Indicator (5)** will blink blue each 1 second while the call is in progress.
- When an incoming call is detected, press and hold the **Multifunction (3)** button for 1 second to reject the incoming call.
- If a call is in progress, momentarily press the **Multifunction (3)** button to terminate the call.

- If a call is in progress, press and hold the **Multifunction (3)** button for 1 second to switch between using the headphones or the phone to talk and listen.
- If a call is in progress and a second incoming call is detected, double press the **Multifunction (3)** button to put the current call on hold and answer the second call.
- If a call is in progress and a second incoming call is detected, press and hold the **Multifunction (3)** button for 1 second to refuse the second call.
- If two calls are in progress, double press the Multifunction (3) button to switch between the calls.

## TECHNICAL SUPPORT

Monoprice is pleased to provide free, live, online technical support to assist you with any questions you may have about installation, setup, troubleshooting, or product recommendations. If you ever need assistance with your new product, please come online to talk to one of our friendly and knowledgeable Tech Support Associates. Technical support is available through the online chat button on our website **[www.monoprice.com](http://www.monoprice.com)** during regular business hours, 7 days a week. You can also get assistance through email by sending a message to **[tech@monoprice.com](mailto:tech@monoprice.com)**

## SPECIFICATIONS

Model	33397
Driver Type	40mm with neodymium magnets
Frequency Response	20Hz ~ 20kHz
Sensitivity	102dB $\pm$ 3dB @1kHz
Nominal Impedance	32 ohms $\pm$ 15% @1kHz
Bluetooth® Chipset	Qualcomm® CSR8635
Bluetooth Version	4.1
Supported Bluetooth Profiles	HSP, HFP, A2DP, AVRCP, DIP
Bluetooth Pairing Name	BT-200
Battery Type	500mAh Lithium-ion
Charging Time	About 2 hours
Music/Talk Time	Up to 25 hours
Dimensions	(80 x 15 x 19 mm)
Weight	

# REGULATORY COMPLIANCE

## Notice for FCC



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Monoprice's authorization may result in the equipment no longer complying with FCC requirements for Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged

to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **Radio Notice for FCC**

### **Caution**

This FCC Part 15 radio device operates on a non-interference basis with other devices operating at this frequency. Any changes or modification to said product not expressly approved by Monoprice, including the use of non-approved antennas, could void the user's authority to operate this device.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

*The Bluetooth® word mark and logos are registered trademarks of Bluetooth SIG, Inc.*

*Qualcomm® is a trademark of Qualcomm Incorporated, registered in the United States and other countries.*